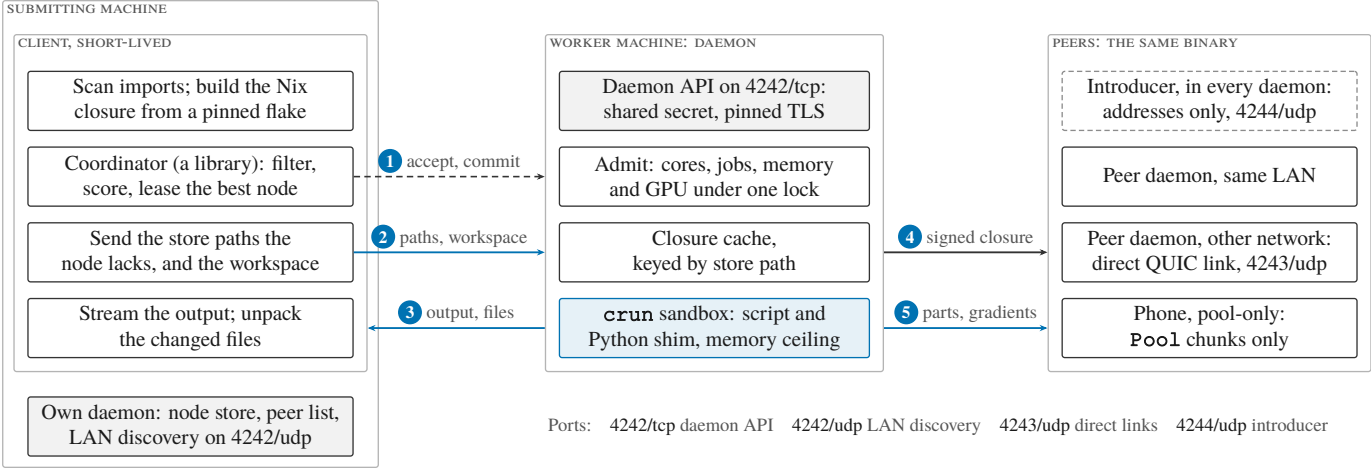
SUBMITTING MACHINE
CLIENT, SHORT-LIVED
Scan imports; build the Nix closure from a pinned flake
Coordinator (a library): filter, score, lease the best node
Send the store paths the node lacks, and the workspace
Stream the output; unpack the changed files
Own daemon: node store, peer list, LAN discovery on 4242/udp
1 accept, commit
2 paths, workspace
3 output, files
WORKER MACHINE: DAEMON
Daemon API on 4242/tcp: shared secret, pinned TLS
Admit: cores, jobs, memory and GPU under one lock
Closure cache, keyed by store path
crun sandbox: script and Python shim, memory ceiling
4 signed closure
5 parts, gradients
PEERS: THE SAME BINARY
Introducer, in every daemon: addresses only, 4244/udp
Peer daemon, same LAN
Peer daemon, other network: direct QUIC link, 4243/udp
Phone, pool-only: Pool chunks only
Ports: 4242/tcp daemon API 4242/udp LAN discovery 4243/udp direct links 4244/udp introducer