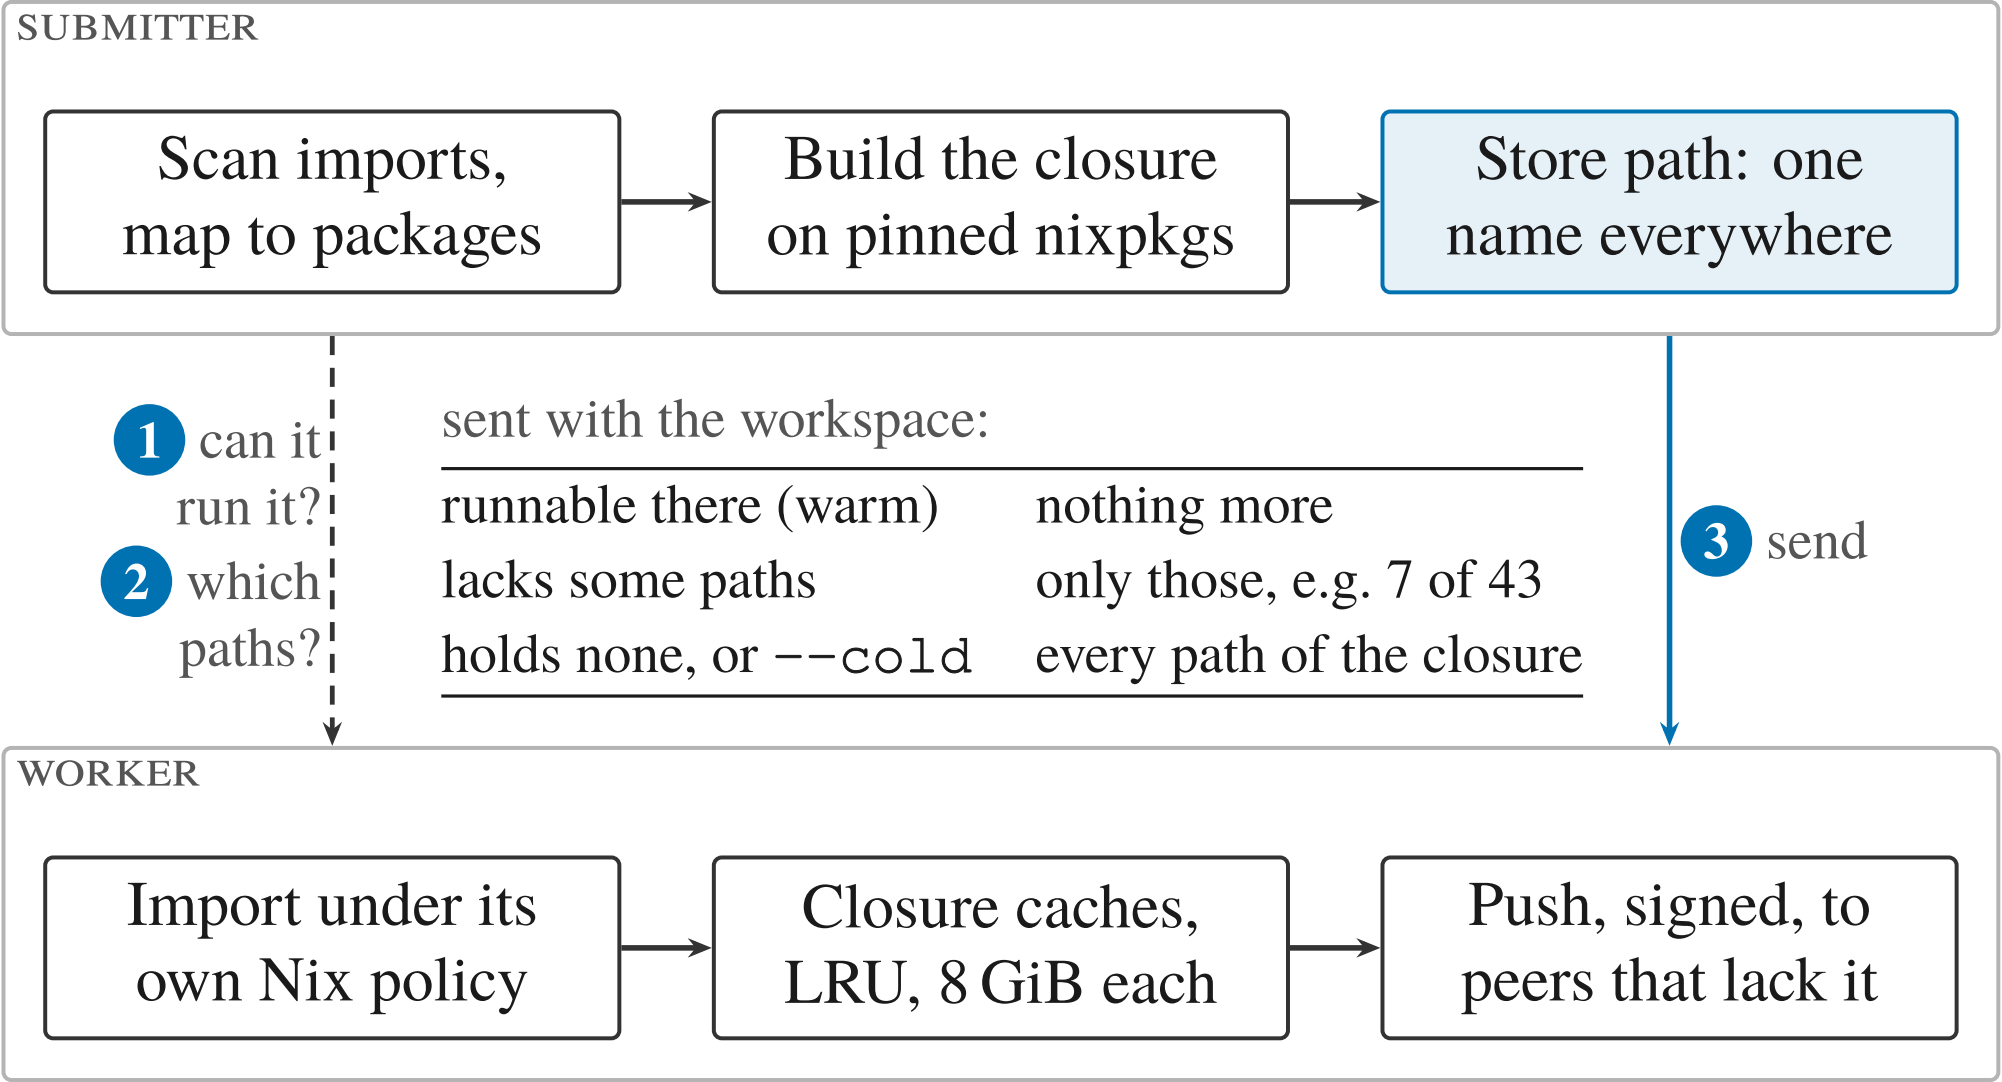
SUBMITTER
Scan imports, map to packages
Build the closure on pinned nixpkgs
Store path: one name everywhere
1 can it run it?
2 which paths?
sent with the workspace:
runnable there (warm)
nothing more
lacks some paths
only those, e.g. 7 of 43
holds none, or --cold
every path of the closure
3 send
WORKER
Import under its own Nix policy
Closure caches, LRU, 8 GiB each
Push, signed, to peers that lack it