


## AWS-Solution-Architect-Associate Dumps

### Amazon AWS Certified Solutions Architect - Associate

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>

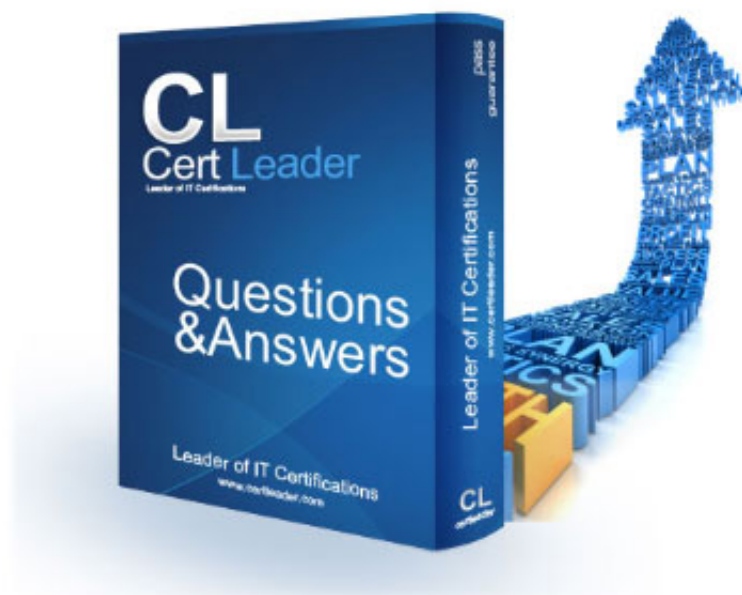

**NEW QUESTION 1**

In the context of AWS support, why must an EC2 instance be unreachable for 20 minutes rather than allowing customers to open tickets immediately?

- A. Because most reachability issues are resolved by automated processes in less than 20 minutes
- B. Because all EC2 instances are unreachable for 20 minutes every day when AWS does routine maintenance
- C. Because all EC2 instances are unreachable for 20 minutes when first launched
- D. Because of all the reasons listed here

**Answer:** A

**Explanation:**

An EC2 instance must be unreachable for 20 minutes before opening a ticket, because most reachability issues are resolved by automated processes in less than 20 minutes and will not require any action on the part of the customer. If the instance is still unreachable after this time frame has passed, then you should open a case with support.

Reference: <https://aws.amazon.com/premiumsupport/faqs/>

**NEW QUESTION 2**

One of the criteria for a new deployment is that the customer wants to use AWS Storage Gateway. However you are not sure whether you should use gateway-cached volumes or gateway-stored volumes or even what the differences are. Which statement below best describes those differences?

- A. Gateway-cached lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- B. Gateway-stored enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.
- C. Gateway-cached is free whilst gateway-stored is not.
- D. Gateway-cached is up to 10 times faster than gateway-stored.
- E. Gateway-stored lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- F. Gateway-cached enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.

**Answer:** A

**Explanation:**

Volume gateways provide cloud-backed storage volumes that you can mount as Internet Small Computer System Interface (iSCSI) devices from your on-premises application servers. The gateway supports the following volume configurations:

Gateway-cached volumes — You store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally.

Gateway-cached volumes offer a substantial cost savings on primary storage and minimize the need to scale your storage on-premises. You also retain low-latency access to your frequently accessed data.

Gateway-stored volumes — If you need low-latency access to your entire data set, you can configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3. This configuration provides durable and inexpensive off-site backups that you can recover to your local data center or Amazon EC2. For example, if you need replacement capacity for disaster recovery, you can recover the backups to Amazon EC2.

Reference: <http://docs.aws.amazon.com/storagegateway/latest/userguide/volume-gateway.html>

**NEW QUESTION 3**

A user is launching an EC2 instance in the US East region. Which of the below mentioned options is recommended by AWS with respect to the selection of the availability zone?

- A. Always select the AZ while launching an instance
- B. Always select the US-East-1-a zone for HA
- C. Do not select the AZ; instead let AWS select the AZ
- D. The user can never select the availability zone while launching an instance

**Answer:** C

**Explanation:**

When launching an instance with EC2, AWS recommends not to select the availability zone (AZ). AWS specifies that the default Availability Zone should be accepted. This is because it enables AWS to select the best Availability Zone based on the system health and available capacity. If the user launches additional instances, only then an Availability Zone should be specified. This is to specify the same or different AZ from the running instances.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-regions-availability-zones.html>

**NEW QUESTION 4**

What is a placement group in Amazon EC2?

- A. It is a group of EC2 instances within a single Availability Zone.
- B. It is the edge location of your web content.
- C. It is the AWS region where you run the EC2 instance of your web content.
- D. It is a group used to span multiple Availability Zones

**Answer:** A

**Explanation:**

A placement group is a logical grouping of instances within a single Availability Zone. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

**NEW QUESTION 5**

Your supervisor has asked you to build a simple file synchronization service for your department. He doesn't want to spend too much money and he wants to be notified of any changes to files by email. What do you think would be the best Amazon service to use for the email solution?

- A. Amazon SES
- B. Amazon CloudSearch
- C. Amazon SWF
- D. Amazon AppStream

**Answer:** A

**Explanation:**

File change notifications can be sent via email to users following the resource with Amazon Simple Email Service (Amazon SES), an easy-to-use, cost-effective email solution.

Reference: [http://media.amazonwebservices.com/architecturecenter/AWS\\_ac\\_ra\\_filesync\\_08.pdf](http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_filesync_08.pdf)

**NEW QUESTION 6**

Does DynamoDB support in-place atomic updates?

- A. Yes
- B. No
- C. It does support in-place non-atomic updates
- D. It is not defined

**Answer:** A

**Explanation:**

DynamoDB supports in-place atomic updates.

Reference:

<http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/WorkingWithItems.html#WorkingWithItems.AtomicCounters>

**NEW QUESTION 7**

Your manager has just given you access to multiple VPN connections that someone else has recently set up between all your company's offices. She needs you to make sure that the communication between the VPNs is secure. Which of the following services would be best for providing a low-cost hub-and-spoke model for primary or backup connectivity between these remote offices?

- A. Amazon CloudFront
- B. AWS Direct Connect
- C. AWS CloudHSM
- D. AWS VPN CloudHub

**Answer:** D

**Explanation:**

If you have multiple VPN connections, you can provide secure communication between sites using the AWS VPN CloudHub. The VPN CloudHub operates on a simple hub-and-spoke model that you can use with or without a VPC. This design is suitable for customers with multiple branch offices and existing Internet connections who would like to implement a convenient, potentially low-cost hub-and-spoke model for primary or backup connectivity between these remote offices.

Reference: [http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN\\_CloudHub.html](http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN_CloudHub.html)

**NEW QUESTION 8**

Amazon EC2 provides a . It is an HTTP or HTTPS request that uses the HTTP verbs GET or POST.

- A. web database
- B. .net framework
- C. Query API
- D. C library

**Answer:** C

**Explanation:**

Amazon EC2 provides a Query API. These requests are HTTP or HTTPS requests that use the HTTP verbs GET or POST and a Query parameter named Action.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/APIReference/making-api-requests.html>

**NEW QUESTION 9**

In Amazon AWS, which of the following statements is true of key pairs?

- A. Key pairs are used only for Amazon SDKs.
- B. Key pairs are used only for Amazon EC2 and Amazon CloudFront.
- C. Key pairs are used only for Elastic Load Balancing and AWS IAM.
- D. Key pairs are used for all Amazon service

**Answer:** B

**Explanation:**

Key pairs consist of a public and private key, where you use the private key to create a digital signature, and then AWS uses the corresponding public key to validate the signature. Key pairs are used only for Amazon EC2 and Amazon CloudFront.

Reference: <http://docs.aws.amazon.com/general/latest/gr/aws-sec-cred-types.html>

**NEW QUESTION 10**

Does Amazon DynamoDB support both increment and decrement atomic operations?

- A. Only increment, since decrement are inherently impossible with DynamoDB's data model.
- B. No, neither increment nor decrement operations.
- C. Yes, both increment and decrement operations.
- D. Only decrement, since increment are inherently impossible with DynamoDB's data mode

**Answer:** C

**Explanation:**

Amazon DynamoDB supports increment and decrement atomic operations.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/APISummary.html>

**NEW QUESTION 10**

An organization has three separate AWS accounts, one each for development, testing, and production. The organization wants the testing team to have access to certain AWS resources in the production account. How can the organization achieve this?

- A. It is not possible to access resources of one account with another account.
- B. Create the IAM roles with cross account access.
- C. Create the IAM user in a test account, and allow it access to the production environment with the IAM policy.
- D. Create the IAM users with cross account acces

**Answer:** B

**Explanation:**

An organization has multiple AWS accounts to isolate a development environment from a testing or production environment. At times the users from one account need to access resources in the other account, such as promoting an update from the development environment to the production environment. In this case the IAM role with cross account access will provide a solution. Cross account access lets one account share access to their resources with users in the other AWS accounts.

Reference: [http://media.amazonwebservices.com/AWS\\_Security\\_Best\\_Practices.pdf](http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf)

**NEW QUESTION 15**

You need to import several hundred megabytes of data from a local Oracle database to an Amazon RDS DB instance. What does AWS recommend you use to accomplish this?

- A. Oracle export/import utilities
- B. Oracle SQL Developer
- C. Oracle Data Pump
- D. DBMS\_FILE\_TRANSFER

**Answer:** C

**Explanation:**

How you import data into an Amazon RDS DB instance depends on the amount of data you have and the number and variety of database objects in your database.

For example, you can use Oracle SQL Developer to import a simple, 20 MB database; you want to use Oracle Data Pump to import complex databases or databases that are several hundred megabytes or several terabytes in size.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Oracle.Procedural.Importing.html>

**NEW QUESTION 17**

You need to migrate a large amount of data into the cloud that you have stored on a hard disk and you decide that the best way to accomplish this is with AWS Import/Export and you mail the hard disk to AWS. Which of the following statements is incorrect in regards to AWS Import/Export?

- A. It can export from Amazon S3
- B. It can Import to Amazon Glacier
- C. It can export from Amazon Glacier.
- D. It can Import to Amazon EBS

**Answer:** C

**Explanation:**

AWS Import/Export supports: Import to Amazon S3

Export from Amazon S3 Import to Amazon EBS Import to Amazon Glacier

AWS Import/Export does not currently support export from Amazon EBS or Amazon Glacier. Reference:

<https://docs.aws.amazon.com/AWSImportExport/latest/DG/whatisdisk.html>

**NEW QUESTION 22**

You are in the process of creating a Route 53 DNS failover to direct traffic to two EC2 zones. Obviously, if one fails, you would like Route 53 to direct traffic to the other region. Each region has an ELB with some instances being distributed. What is the best way for you to configure the Route 53 health check?

- A. Route 53 doesn't support ELB with an internal health check. You need to create your own Route 53 health check of the ELB
- B. Route 53 natively supports ELB with an internal health chec
- C. Turn "Evaluate target health" off and "Associate with Health Check" on and R53 will use the ELB's internal health check.
- D. Route 53 doesn't support ELB with an internal health chec
- E. You need to associate your resource record set for the ELB with your own health check
- F. Route 53 natively supports ELB with an internal health chec
- G. Turn "Evaluate target health" on and "Associate with Health Check" off and R53 will use the ELB's internal health check.

**Answer:** D

**Explanation:**

With DNS Failover, Amazon Route 53 can help detect an outage of your website and redirect your end users to alternate locations where your application is operating properly. When you enable this feature, Route 53 uses health checks-regularly making Internet requests to your application's endpoints from multiple locations around the world-to determine whether each endpoint of your application is up or down.

To enable DNS Failover for an ELB endpoint, create an Alias record pointing to the ELB and set the "Evaluate Target Health" parameter to true. Route 53 creates and manages the health checks for your ELB automatically. You do not need to create your own Route 53 health check of the ELB. You also do not need to associate your resource record set for the ELB with your own health check, because Route 53 automatically associates it with the health checks that Route 53 manages on your behalf. The ELB health check will also inherit the health of your backend instances behind that ELB.

Reference:

<http://aws.amazon.com/about-aws/whats-new/2013/05/30/amazon-route-53-adds-elb-integration-for-dns-failover/>

### NEW QUESTION 23

Which of the following is true of Amazon EC2 security group?

- A. You can modify the outbound rules for EC2-Classic.
- B. You can modify the rules for a security group only if the security group controls the traffic for just one instance.
- C. You can modify the rules for a security group only when a new instance is created.
- D. You can modify the rules for a security group at any time.

**Answer: D**

#### Explanation:

A security group acts as a virtual firewall that controls the traffic for one or more instances. When you launch an instance, you associate one or more security groups with the instance. You add rules to each security group that allow traffic to or from its associated instances. You can modify the rules for a security group at any time; the new rules are automatically applied to all instances that are associated with the security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

### NEW QUESTION 25

An Elastic IP address (EIP) is a static IP address designed for dynamic cloud computing. With an EIP, you can mask the failure of an instance or software by rapidly remapping the address to another instance in your account. Your EIP is associated with your AWS account, not a particular EC2 instance, and it remains associated with your account until you choose to explicitly release it. By default how many EIPs is each AWS account limited to on a per region basis?

- A. 1
- B. 5
- C. Unlimited
- D. 10

**Answer: B**

#### Explanation:

By default, all AWS accounts are limited to 5 Elastic IP addresses per region for each AWS account, because public (IPv4) Internet addresses are a scarce public resource. AWS strongly encourages you to use an EIP primarily for load balancing use cases, and use DNS hostnames for all other inter-node communication. If you feel your architecture warrants additional EIPs, you would need to complete the Amazon EC2 Elastic IP Address Request Form and give reasons as to your need for additional addresses. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/elastic-ip-addresses-eip.html#using-instance-addressing-limit>

### NEW QUESTION 28

In Amazon EC2, partial instance-hours are billed .

- A. per second used in the hour
- B. per minute used
- C. by combining partial segments into full hours
- D. as full hours

**Answer: D**

#### Explanation:

Partial instance-hours are billed to the next hour. Reference: <http://aws.amazon.com/ec2/faqs/>

### NEW QUESTION 29

In EC2, what happens to the data in an instance store if an instance reboots (either intentionally or unintentionally)?

- A. Data is deleted from the instance store for security reasons.
- B. Data persists in the instance store.
- C. Data is partially present in the instance store.
- D. Data in the instance store will be lost.

**Answer: B**

#### Explanation:

The data in an instance store persists only during the lifetime of its associated instance. If an instance reboots (intentionally or unintentionally), data in the instance store persists. However, data on instance store volumes is lost under the following circumstances.

Failure of an underlying drive

Stopping an Amazon EBS-backed instance Terminating an instance

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/InstanceStorage.html>

### NEW QUESTION 32

Can you specify the security group that you created for a VPC when you launch an instance in EC2-Classic?



- A. No, you can specify the security group created for EC2-Classic when you launch a VPC instance.  
B. No  
C. Yes  
D. No, you can specify the security group created for EC2-Classic to a non-VPC based instance onl

**Answer:** B

**Explanation:**

If you're using EC2-Classic, you must use security groups created specifically for EC2-Classic. When you launch an instance in EC2-Classic, you must specify a security group in the same region as the instance. You can't specify a security group that you created for a VPC when you launch an instance in EC2-Classic.

Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-network-security.html#ec2-classic-security-groups>

**NEW QUESTION 33**

You are checking the workload on some of your General Purpose (SSD) and Provisioned IOPS (SSD) volumes and it seems that the I/O latency is higher than you require. You should probably check the to make sure that your application is not trying to drive more IOPS than you have provisioned.

- A. Amount of IOPS that are available  
B. Acknowledgement from the storage subsystem  
C. Average queue length  
D. Time it takes for the I/O operation to complete

**Answer:** C

**Explanation:**

In EBS workload demand plays an important role in getting the most out of your General Purpose (SSD) and Provisioned IOPS (SSD) volumes. In order for your volumes to deliver the amount of IOPS that are available, they need to have enough I/O requests sent to them. There is a relationship between the demand on the volumes, the amount of IOPS that are available to them, and the latency of the request (the amount of time it takes for the I/O operation to complete).

Latency is the true end-to-end client time of an I/O operation; in other words, when the client sends a IO, how long does it take to get an acknowledgement from the storage subsystem that the IO read or write is complete.

If your I/O latency is higher than you require, check your average queue length to make sure that your application is not trying to drive more IOPS than you have provisioned. You can maintain high IOPS while keeping latency down by maintaining a low average queue length (which is achieved by provisioning more IOPS for your volume).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-workload-demand.html>

**NEW QUESTION 37**

Which of the below mentioned options is not available when an instance is launched by Auto Scaling with EC2 Classic?

- A. Public IP  
B. Elastic IP  
C. Private DNS  
D. Private IP

**Answer:** B

**Explanation:**

Auto Scaling supports both EC2 classic and EC2-VPC. When an instance is launched as a part of EC2 classic, it will have the public IP and DNS as well as the private IP and DNS.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/GettingStartedTutorial.html>

**NEW QUESTION 41**

Much of your company's data does not need to be accessed often, and can take several hours for retrieval time, so it's stored on Amazon Glacier. However someone within your organization has expressed concerns that his data is more sensitive than the other data, and is wondering whether the high level of encryption that he knows is on S3 is also used on the much cheaper Glacier service. Which of the following statements would be most applicable in regards to this concern?

- A. There is no encryption on Amazon Glacier, that's why it is cheaper.  
B. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3 but you can change it to AES-256 if you are willing to pay more.  
C. Amazon Glacier automatically encrypts the data using AES-256, the same as Amazon S3.  
D. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3.

**Answer:** C

**Explanation:**

Like Amazon S3, the Amazon Glacier service provides low-cost, secure, and durable storage. But where S3 is designed for rapid retrieval, Glacier is meant to be used as an archival service for data that is not accessed often, and for which retrieval times of several hours are suitable.

Amazon Glacier automatically encrypts the data using AES-256 and stores it durably in an immutable form. Amazon Glacier is designed to provide average annual durability of 99.999999999% for an archive. It stores each archive in multiple facilities and multiple devices. Unlike traditional systems which can require laborious data verification and manual repair, Glacier performs regular, systematic data integrity checks, and is built to be automatically self-healing.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

**NEW QUESTION 46**

Your EBS volumes do not seem to be performing as expected and your team leader has requested you look into improving their performance. Which of the following is not a true statement relating to the performance of your EBS volumes?

- A. Frequent snapshots provide a higher level of data durability and they will not degrade the performance of your application while the snapshot is in progress.

- B. General Purpose (SSD) and Provisioned IOPS (SSD) volumes have a throughput limit of 128 MB/s per volume.
- C. There is a relationship between the maximum performance of your EBS volumes, the amount of I/O you are drMng to them, and the amount of time it takes for each transaction to complete.
- D. There is a 5 to 50 percent reduction in IOPS when you first access each block of data on a newly created or restored EBS volume

**Answer:** A

**Explanation:**

Several factors can affect the performance of Amazon EBS volumes, such as instance configuration, I/O characteristics, workload demand, and storage configuration.

Frequent snapshots provide a higher level of data durability, but they may slightly degrade the performance of your application while the snapshot is in progress. This trade off becomes critical when you have data that changes rapidly. Whenever possible, plan for snapshots to occur during off-peak times in order to minimize workload impact.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/EBSPerformance.html>

**NEW QUESTION 51**

You've created your first load balancer and have registered your EC2 instances with the load balancer. Elastic Load Balancing routinely performs health checks on all the registered EC2 instances and automatically distributes all incoming requests to the DNS name of your load balancer across your registered, healthy EC2 instances. By default, the load balancer uses the \_ protocol for checking the health of your instances.

- A. HTTPS
- B. HTTP
- C. ICMP
- D. IPv6

**Answer:** B

**Explanation:**

In Elastic Load Balancing a health configuration uses information such as protocol, ping port, ping path (URL), response timeout period, and health check interval to determine the health state of the instances registered with the load balancer.

Currently, HTTP on port 80 is the default health check. Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/TerminologyandKeyConcepts.html>

**NEW QUESTION 55**

In Amazon EC2 Container Service, are other container types supported?

- A. Yes, EC2 Container Service supports any container service you need.
- B. Yes, EC2 Container Service also supports Microsoft container service.
- C. No, Docker is the only container platform supported by EC2 Container Service presently.
- D. Yes, EC2 Container Service supports Microsoft container service and Openstac

**Answer:** C

**Explanation:**

In Amazon EC2 Container Service, Docker is the only container platform supported by EC2 Container Service presently.

Reference: <http://aws.amazon.com/ecs/faqs/>

**NEW QUESTION 59**

is a fast, filexible, fully managed push messaging service.

- A. Amazon SNS
- B. Amazon SES
- C. Amazon SQS
- D. Amazon FPS

**Answer:** A

**Explanation:**

Amazon Simple Notification Service (Amazon SNS) is a fast, filexible, fully managed push messaging service. Amazon SNS makes it simple and cost-effective to push to mobile devices such as iPhone, iPad, Android, Kindle Fire, and internet connected smart devices, as well as pushing to other distributed services.

Reference: [http://aws.amazon.com/sns/?nc1=h\\_I2\\_as](http://aws.amazon.com/sns/?nc1=h_I2_as)

**NEW QUESTION 64**

As AWS grows, most of your clients' main concerns seem to be about security, especially when all of their competitors also seem to be using AWS. One of your clients asks you whether having a competitor who hosts their EC2 instances on the same physical host would make it easier for the competitor to hack into the client's data. Which of the following statements would be the best choice to put your client's mind at rest?

- A. Different instances running on the same physical machine are isolated from each other via a 256-bit Advanced Encryption Standard (AES-256).
- B. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor and via a 256-bit Advanced Encryption Standard (AES-256).
- C. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor.
- D. Different instances running on the same physical machine are isolated from each other via IAM permissions.

**Answer:** C

**Explanation:**

Amazon Elastic Compute Cloud (EC2) is a key component in Amazon's Infrastructure as a Service (IaaS), providing resizable computing capacity using server instances in AWS's data centers. Amazon EC2 is designed to make web-scale computing easier by enabling you to obtain and configure capacity with minimal

friction.

You create and launch instances, which are collections of platform hardware and software. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor.

Amazon is active in the Xen community, which provides awareness of the latest developments. In addition, the AWS firewall resides within the hypervisor layer, between the physical network interface and the instance's virtual interface. All packets must pass through this layer, thus an instance's neighbors have no more access to that instance than any other host on the Internet and can be treated as if they are on separate physical hosts. The physical RAM is separated using similar mechanisms.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

#### NEW QUESTION 69

In Amazon RDS, security groups are ideally used to:

- A. Define maintenance period for database engines
- B. Launch Amazon RDS instances in a subnet
- C. Create, describe, modify, and delete DB instances
- D. Control what IP addresses or EC2 instances can connect to your databases on a DB instance

**Answer: D**

#### Explanation:

In Amazon RDS, security groups are used to control what IP addresses or EC2 instances can connect to your databases on a DB instance.

When you first create a DB instance, its firewall prevents any database access except through rules specified by an associated security group.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/UsingWithRDS.html>

#### NEW QUESTION 74

You have just been given a scope for a new client who has an enormous amount of data (petabytes) that he constantly needs analysed. Currently he is paying a huge amount of money for a data warehousing company to do this for him and is wondering if AWS can provide a cheaper solution. Do you think AWS has a solution for this?

- A. Ye
- B. Amazon SimpleDB
- C. N
- D. Not presently
- E. Ye
- F. Amazon Redshift
- G. Ye
- H. Your choice of relational AMLs on Amazon EC2 and EBS

**Answer: C**

#### Explanation:

Amazon Redshift is a fast, fully managed, petabyte-scale data warehouse service that makes it simple and cost-effective to efficiently analyze all your data using your existing business intelligence tools. You can start small for just \$0.25 per hour with no commitments or upfront costs and scale to a petabyte or more for \$1,000 per terabyte per year, less than a tenth of most other data warehousing solutions. Amazon Redshift delivers fast query performance by using columnar storage technology to improve I/O efficiency and parallelizing queries across multiple nodes. Redshift uses standard PostgreSQL JDBC and ODBC drivers, allowing you to use a wide range of familiar SQL clients. Data load speed scales linearly with cluster size, with integrations to Amazon S3, Amazon DynamoDB, Amazon Elastic MapReduce, Amazon Kinesis or any SSH-enabled host.

Reference: [https://aws.amazon.com/running\\_databases/#redshift\\_anchor](https://aws.amazon.com/running_databases/#redshift_anchor)

#### NEW QUESTION 77

A user has launched 10 EC2 instances inside a placement group. Which of the below mentioned statements is true with respect to the placement group?

- A. All instances must be in the same AZ
- B. All instances can be across multiple regions
- C. The placement group cannot have more than 5 instances
- D. All instances must be in the same region

**Answer: A**

#### Explanation:

A placement group is a logical grouping of EC2 instances within a single Availability Zone. Using placement groups enables applications to participate in a low-latency, 10 Gbps network. Placement groups are recommended for applications that benefit from low network latency, high network throughput or both.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

#### NEW QUESTION 78

You are architecting an auto-scalable batch processing system using video processing pipelines and Amazon Simple Queue Service (Amazon SQS) for a customer. You are unsure of the limitations of SQS and need to find out. What do you think is a correct statement about the limitations of Amazon SQS?

- A. It supports an unlimited number of queues but a limited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 weeks.
- B. It supports an unlimited number of queues and unlimited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 days.
- C. It supports an unlimited number of queues but a limited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 days.
- D. It supports an unlimited number of queues and unlimited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 weeks.

**Answer: B**



**Explanation:**

Amazon Simple Queue Service (Amazon SQS) is a messaging queue service that handles message or workflows between other components in a system. Amazon SQS supports an unlimited number of queues and unlimited number of messages per queue for each user. Please be aware that Amazon SQS automatically deletes messages that have been in the queue for more than 4 days.

Reference: <http://aws.amazon.com/documentation/sqs/>

**NEW QUESTION 80**

An online gaming site asked you if you can deploy a database that is a fast, highly scalable NoSQL database service in AWS for a new site that he wants to build. Which database should you recommend?

- A. Amazon DynamoDB
- B. Amazon RDS
- C. Amazon Redshift
- D. Amazon SimpleDB

**Answer:** A

**Explanation:**

Amazon DynamoDB is ideal for database applications that require very low latency and predictable performance at any scale but don't need complex querying capabilities like joins or transactions. Amazon DynamoDB is a fully-managed NoSQL database service that offers high performance, predictable throughput and low cost. It is easy to set up, operate, and scale.

With Amazon DynamoDB, you can start small, specify the throughput and storage you need, and easily scale your capacity requirements on the fly. Amazon DynamoDB automatically partitions data over a number of servers to meet your request capacity. In addition, DynamoDB automatically replicates your data synchronously across multiple Availability Zones within an AWS Region to ensure high-availability and data durability.

Reference: [https://aws.amazon.com/running\\_databases/#dynamodb\\_anchor](https://aws.amazon.com/running_databases/#dynamodb_anchor)

**NEW QUESTION 81**

You have been doing a lot of testing of your VPC Network by deliberately failing EC2 instances to test whether instances are failing over properly. Your customer who will be paying the AWS bill for all this asks you if he being charged for all these instances. You try to explain to him how the billing works on EC2 instances to the best of your knowledge. What would be an appropriate response to give to the customer in regards to this?

- A. Billing commences when Amazon EC2 AM instance is completely up and billing ends as soon as the instance starts to shutdown.
- B. Billing only commences only after 1 hour of uptime and billing ends when the instance terminates.
- C. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends when the instance shuts down.
- D. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends as soon as the instance starts to shutdown.

**Answer:** C

**Explanation:**

Billing commences when Amazon EC2 initiates the boot sequence of an AM instance. Billing ends when the instance shuts down, which could occur through a web services command, by running "shutdown -h", or through instance failure.

Reference: <http://aws.amazon.com/ec2/faqs/#Billing>

**NEW QUESTION 85**

Once again your customers are concerned about the security of their sensitive data and with their latest enquiry ask about what happens to old storage devices on AWS. What would be the best answer to this QUESTION ?

- A. AWS reformats the disks and uses them again.
- B. AWS uses the techniques detailed in DoD 5220.22-M to destroy data as part of the decommissioning process.
- C. AWS uses their own proprietary software to destroy data as part of the decommissioning process.
- D. AWS uses a 3rd party security organization to destroy data as part of the decommissioning process

**Answer:** B

**Explanation:**

When a storage device has reached the end of its useful life, AWS procedures include a decommissioning process that is designed to prevent customer data from being exposed to unauthorized individuals.

AWS uses the techniques detailed in DoD 5220.22-M ("National Industrial Security Program Operating Manual ") or NIST 800-88 ("Guidelines for Media Sanitization") to destroy data as part of the decommissioning process.

All decommissioned magnetic storage devices are degaussed and physically destroyed in accordance with industry-standard practices.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

**NEW QUESTION 88**

A customer enquires about whether all his data is secure on AWS and is especially concerned about Elastic Map Reduce (EMR) so you need to inform him of some of the security features in place for AWS. Which of the below statements would be an incorrect response to your customers enquiry?

- A. Amazon EMR customers can choose to send data to Amazon S3 using the HTTPS protocol for secure transmission.
- B. Amazon S3 provides authentication mechanisms to ensure that stored data is secured against unauthorized access.
- C. Every packet sent in the AWS network uses Internet Protocol Security (IPsec).
- D. Customers may encrypt the input data before they upload it to Amazon S3.

**Answer:** C

**Explanation:**

Amazon S3 provides authentication mechanisms to ensure that stored data is secured against unauthorized access. Unless the customer who is uploading the data specifies otherwise, only that customer can access the data. Amazon EMR customers can also choose to send data to Amazon S3

using the HTTPS protocol for secure transmission. In addition, Amazon EMR always uses HTTPS to send data between Amazon S3 and Amazon EC2. For added

security, customers may encrypt the input data before they upload it to Amazon S3 (using any common data compression tool); they then need to add a decryption step to the beginning of their cluster when Amazon EMR fetches the data from Amazon S3. Reference: <https://aws.amazon.com/elasticmapreduce/faqs/>

**NEW QUESTION 91**

What does the following policy for Amazon EC2 do?

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

- A. Allow users to use actions that start with "Describe" over all the EC2 resources.
- B. Share an AMI with a partner
- C. Share an AMI within the account
- D. Allow a group to only be able to describe, run, stop, start, and terminate instances

**Answer:** A

**Explanation:**

You can use IAM policies to control the actions that your users can perform against your EC2 resources. For instance, a policy with the following statement will allow users to perform actions whose name start with "Describe" against all your EC2 resources.

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

**NEW QUESTION 94**

What does Amazon DynamoDB provide?

- A. A predictable and scalable MySQL database
- B. A fast and reliable PL/SQL database cluster
- C. A standalone Cassandra database, managed by Amazon Web Services
- D. A fast, highly scalable managed NoSQL database service

**Answer:** D

**Explanation:**

Amazon DynamoDB is a managed NoSQL database service offered by Amazon. It automatically manages tasks like scalability for you while it provides high availability and durability for your data, allowing you to concentrate in other aspects of your application.

Reference: check link - [https://aws.amazon.com/running\\_databases/](https://aws.amazon.com/running_databases/)

**NEW QUESTION 96**

You need to measure the performance of your EBS volumes as they seem to be under performing. You have come up with a measurement of 1,024 KB I/O but your colleague tells you that EBS volume performance is measured in IOPS. How many IOPS is equal to 1,024 KB I/O?

- A. 16
- B. 256
- C. 8
- D. 4

**Answer:** D

**Explanation:**

Several factors can affect the performance of Amazon EBS volumes, such as instance configuration, I/O characteristics, workload demand, and storage configuration.

IOPS are input/output operations per second. Amazon EBS measures each I/O operation per second

(that is 256 KB or smaller) as one IOPS. I/O operations that are larger than 256 KB are counted in 256 KB capacity units.

For example, a 1,024 KB I/O operation would count as 4 IOPS.

When you provision a 4,000 IOPS volume and attach it to an EBS-optimized instance that can provide the necessary bandwidth, you can transfer up to 4,000 chunks of data per second (provided that the I/O does not exceed the 128 MB/s per volume throughput limit of General Purpose (SSD) and Provisioned IOPS (SSD) volumes).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/EBSPerformance.html>

**NEW QUESTION 98**

Having set up a website to automatically be redirected to a backup website if it fails, you realize that there are different types of failovers that are possible. You need all your resources to be available the majority of the time. Using Amazon Route 53 which configuration would best suit this requirement?

- A. Active-active failover.
- B. Non
- C. Route 53 can't failover.
- D. Active-passive failover.
- E. Active-active-passive and other mixed configuration

**Answer:** A

**Explanation:**

You can set up a variety of failover configurations using Amazon Route 53 alias: weighted, latency, geolocation routing, and failover resource record sets.

Active-active failover: Use this failover configuration when you want all of your resources to be available the majority of the time. When a resource becomes unavailable, Amazon Route 53 can detect that it's unhealthy and stop including it when responding to queries.

Active-passive failover: Use this failover configuration when you want a primary group of resources to be available the majority of the time and you want a secondary group of resources to be on standby in case all of the primary resources become unavailable. When responding to queries, Amazon Route 53 includes only the healthy primary resources. If all of the primary resources are unhealthy, Amazon Route 53 begins to include only the healthy secondary resources in response to DNS queries.

Active-active-passive and other mixed configurations: You can combine alias and non-alias resource record sets to produce a variety of Amazon Route 53 behaviors.

Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/dns-failover.html>

#### NEW QUESTION 102

You decide that you need to create a number of Auto Scaling groups to try and save some money as you have noticed that at certain times most of your EC2 instances are not being used. By default, what is the maximum number of Auto Scaling groups that AWS will allow you to create?

- A. 12
- B. Unlimited
- C. 20
- D. 2

**Answer:** C

#### Explanation:

Auto Scaling is an AWS service that allows you to increase or decrease the number of EC2 instances within your application's architecture. With Auto Scaling, you create collections of EC2 instances, called Auto Scaling groups. You can create these groups from scratch, or from existing EC2 instances that are already in production.

Reference: [http://docs.aws.amazon.com/general/latest/gr/aws\\_service\\_limits.html#limits\\_autoscaling](http://docs.aws.amazon.com/general/latest/gr/aws_service_limits.html#limits_autoscaling)

#### NEW QUESTION 105

A user needs to run a batch process which runs for 10 minutes. This will only be run once, or at maximum twice, in the next month, so the processes will be temporary only. The process needs 15 X-Large instances. The process downloads the code from S3 on each instance when it is launched, and then generates a temporary log file. Once the instance is terminated, all the data will be lost. Which of the below mentioned pricing models should the user choose in this case?

- A. Spot instance.
- B. Reserved instance.
- C. On-demand instance.
- D. EBS optimized instance

**Answer:** A

#### Explanation:

In Amazon Web Services, the spot instance is useful when the user wants to run a process temporarily. The spot instance can terminate the instance if the other user outbids the existing bid. In this case all storage is temporary and the data is not required to be persistent. Thus, the spot instance is a good option to save money.

Reference: <http://aws.amazon.com/ec2/purchasing-options/spot-instances/>

#### NEW QUESTION 108

A user has configured ELB with two EBS backed EC2 instances. The user is trying to understand the DNS access and IP support for ELB. Which of the below mentioned statements may not help the user understand the IP mechanism supported by ELB?

- A. The client can connect over IPV4 or IPV6 using Dualstack
- B. Communication between the load balancer and back-end instances is always through IPV4
- C. ELB DNS supports both IPV4 and IPV6
- D. The ELB supports either IPV4 or IPV6 but not both

**Answer:** D

#### Explanation:

Elastic Load Balancing supports both Internet Protocol version 6 (IPv6) and Internet Protocol version 4 (IPv4). Clients can connect to the user's load balancer using either IPv4 or IPv6 (in EC2-Classic) DNS. However, communication between the load balancer and its back-end instances uses only IPv4. The user can use the Dualstack-prefixed DNS name to enable IPv6 support for communications between the client and the load balancers. Thus, the clients are able to access the load balancer using either IPv4 or IPv6 as their individual connectivity needs dictate.

Reference: <http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/UserScenariosForEC2.html>

#### NEW QUESTION 109

After setting up several database instances in Amazon Relational Database Service (Amazon RDS) you decide that you need to track the performance and health of your databases. How can you do this?

- A. Subscribe to Amazon RDS events to be notified when changes occur with a DB instance, DB snapshot, DB parameter group, or DB security group.
- B. Use the free Amazon CloudWatch service to monitor the performance and health of a DB instance.
- C. All of the items listed will track the performance and health of a database.
- D. View, download, or watch database log files using the Amazon RDS console or Amazon RDS API
- E. You can also query some database log files that are loaded into database tables.

**Answer:** C

#### Explanation:

Amazon Relational Database Service (Amazon RDS) is a web service that makes it easier to set up, operate, and scale a relational database in the cloud. It provides cost-efficient, resizable capacity for an industry-standard relational database and manages common database administration tasks.

There are several ways you can track the performance and health of a database or a DB instance. You can:

Use the free Amazon CloudWatch service to monitor the performance and health of a DB instance. Subscribe to Amazon RDS events to be notified when changes occur with a DB instance, DB snapshot, DB parameter group, or DB security group.

View, download, or watch database log files using the Amazon RDS console or Amazon RDS APIs. You can also query some database log files that are loaded into database tables.

Use the AWS CloudTrail service to record AWS calls made by your AWS account. The calls are recorded in log files and stored in an Amazon S3 bucket.

Reference: [http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP\\_Monitoring.html](http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_Monitoring.html)

#### NEW QUESTION 111

A user has created a subnet in VPC and launched an EC2 instance within it. The user has not selected the option to assign the IP address while launching the instance. The user has 3 elastic IPs and is trying to assign one of the Elastic IPs to the VPC instance from the console. The console does not show any instance in the IP assignment screen. What is a possible reason that the instance is unavailable in the assigned IP console?

- A. The IP address may be attached to one of the instances
- B. The IP address belongs to a different zone than the subnet zone
- C. The user has not created an internet gateway
- D. The IP addresses belong to EC2 Classic; so they cannot be assigned to VPC

**Answer:** D

#### Explanation:

A Virtual Private Cloud (VPC) is a virtual network dedicated to the user's AWS account. A user can create a subnet with VPC and launch instances inside that subnet. When the user is launching an instance he needs to select an option which attaches a public IP to the instance. If the user has not selected the option to attach the public IP then it will only have a private IP when launched. If the user wants to connect to an instance from the internet he should create an elastic IP with VPC. If the elastic IP is a part of EC2 Classic it cannot be assigned to a VPC instance.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/GettingStartedGuide/LaunchInstance.html>

#### NEW QUESTION 114

A user is aware that a huge download is occurring on his instance. He has already set the Auto Scaling policy to increase the instance count when the network I/O increases beyond a certain limit. How can the user ensure that this temporary event does not result in scaling?

- A. The network I/O are not affected during data download
- B. The policy cannot be set on the network I/O
- C. There is no way the user can stop scaling as it is already configured
- D. Suspend scaling

**Answer:** D

#### Explanation:

The user may want to stop the automated scaling processes on the Auto Scaling groups either to perform manual operations or during emergency situations. To perform this, the user can suspend one or more scaling processes at any time. Once it is completed, the user can resume all the suspended processes.

Reference: [http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/AS\\_Concepts.html](http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/AS_Concepts.html)

#### NEW QUESTION 118

Select a true statement about Amazon EC2 Security Groups (EC2-Classic).

- A. After you launch an instance in EC2-Classic, you can't change its security groups.
- B. After you launch an instance in EC2-Classic, you can change its security groups only once.
- C. After you launch an instance in EC2-Classic, you can only add rules to a security group.
- D. After you launch an instance in EC2-Classic, you cannot add or remove rules from a security group

**Answer:** A

#### Explanation:

After you launch an instance in EC2-Classic, you can't change its security groups. However, you can add rules to or remove rules from a security group, and those changes are automatically applied to all instances that are associated with the security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

#### NEW QUESTION 123

An accountant asks you to design a small VPC network for him and, due to the nature of his business, just needs something where the workload on the network will be low, and dynamic data will be accessed infrequently. Being an accountant, low cost is also a major factor. Which EBS volume type would best suit his requirements?

- A. Magnetic
- B. Any, as they all perform the same and cost the same.
- C. General Purpose (SSD)
- D. Magnetic or Provisioned IOPS (SSD)

**Answer:** A

#### Explanation:

You can choose between three EBS volume types to best meet the needs of their workloads: General Purpose (SSD), Provisioned IOPS (SSD), and Magnetic. General Purpose (SSD) is the new, SSD-backed, general purpose EBS volume type that we recommend as the default choice for customers. General Purpose (SSD) volumes are suitable for a broad range of workloads, including small to medium sized databases, development and test environments, and boot volumes. Provisioned IOPS (SSD) volumes offer storage with consistent and low-latency performance, and are designed for I/O intensive applications such as large relational or NoSQL databases. Magnetic volumes provide the lowest cost per gigabyte of all EBS volume types. Magnetic volumes are ideal for workloads where data is accessed infrequently, and applications where the lowest storage cost is important.

Reference: <https://aws.amazon.com/ec2/faqs/>



**NEW QUESTION 125**

Which of the following strategies can be used to control access to your Amazon EC2 instances?

- A. DB security groups
- B. IAM policies
- C. None of these
- D. EC2 security groups

**Answer:** D

**Explanation:**

IAM policies allow you to specify what actions your IAM users are allowed to perform against your EC2 Instances. However, when it comes to access control, security groups are what you need in order to define and control the way you want your instances to be accessed, and whether or not certain kind of communications are allowed or not.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

**NEW QUESTION 130**

You have just set up a large site for a client which involved a huge database which you set up with Amazon RDS to run as a Multi-AZ deployment. You now start to worry about what will happen if the database instance fails. Which statement best describes how this database will function if there is a database failure?

- A. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- B. Your database will not resume operation without manual administrative intervention.
- C. Updates to your DB Instance are asynchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- D. Updates to your DB Instance are synchronously replicated across S3 to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

**Answer:** A

**Explanation:**

Amazon Relational Database Service (Amazon RDS) is a managed service that makes it easy to set up, operate, and scale a relational database in the cloud. It provides cost-efficient and resizable capacity, while managing time-consuming database administration tasks, freeing you up to focus on your applications and business.

When you create or modify your DB Instance to run as a Multi-AZ deployment, Amazon RDS automatically provisions and maintains a synchronous "standby" replica in a different Availability Zone. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

During certain types of planned maintenance, or in the unlikely event of DB Instance failure or Availability Zone failure, Amazon RDS will automatically failover to the standby so that you can resume database writes and reads as soon as the standby is promoted. Since the name record for your DB Instance remains the same, your application can resume database operation without the need for manual administrative intervention. With Multi-AZ deployments, replication is transparent: you do not interact directly with the standby, and it cannot be used to serve read traffic. If you are using Amazon RDS for MySQL and are looking to scale read traffic beyond the capacity constraints of a single DB Instance, you can deploy one or more Read Replicas.

Reference: <http://aws.amazon.com/rds/faqs/>

**NEW QUESTION 134**

You are signed in as root user on your account but there is an Amazon S3 bucket under your account that you cannot access. What is a possible reason for this?

- A. An IAM user assigned a bucket policy to an Amazon S3 bucket and didn't specify the root user as a principal
- B. The S3 bucket is full.
- C. The S3 bucket has reached the maximum number of objects allowed.
- D. You are in the wrong availability zone

**Answer:** A

**Explanation:**

With IAM, you can centrally manage users, security credentials such as access keys, and permissions that control which AWS resources users can access.

In some cases, you might have an IAM user with full access to IAM and Amazon S3. If the IAM user assigns a bucket policy to an Amazon S3 bucket and doesn't specify the root user as a principal, the root user is denied access to that bucket. However, as the root user, you can still access the bucket by modifying the bucket policy to allow root user access.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#testing2>

**NEW QUESTION 137**

A user is observing the EC2 CPU utilization metric on CloudWatch. The user has observed some interesting patterns while filtering over the 1 week period for a particular hour. The user wants to zoom that data point to a more granular period. How can the user do that easily with CloudWatch?

- A. The user can zoom a particular period by selecting that period with the mouse and then releasing the mouse
- B. The user can zoom a particular period by specifying the aggregation data for that period
- C. The user can zoom a particular period by double clicking on that period with the mouse
- D. The user can zoom a particular period by specifying the period in the Time Range

**Answer:** A

**Explanation:**

Amazon CloudWatch provides the functionality to graph the metric data generated either by the AWS services or the custom metric to make it easier for the user to analyse. The AWS CloudWatch console provides the option to change the granularity of a graph and zoom in to see data over a shorter time period. To zoom, the user has to click in the graph details pane, drag on the graph area for selection, and then release the mouse button.

Reference: [http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/zoom\\_in\\_on\\_graph.html](http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/zoom_in_on_graph.html)

**NEW QUESTION 142**

A user has set up the CloudWatch alarm on the CPU utilization metric at 50%, with a time interval of 5 minutes and 10 periods to monitor. What will be the state of the alarm at the end of 90 minutes, if the CPU utilization is constant at 80%?

- A. ALERT
- B. ALARM
- C. OK
- D. INSUFFICIENT\_DATA

**Answer: B**

**Explanation:**

In this case the alarm watches a metric every 5 minutes for 10 intervals. Thus, it needs at least 50 minutes to come to the "OK" state.

Till then it will be in the INSUFFICIENT\_DATA state.

Since 90 minutes have passed and CPU utilization is at 80% constant, the state of alarm will be "ALARM". Reference:

<http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/AlarmThatSendsEmail.html>

**NEW QUESTION 145**

You need to set up security for your VPC and you know that Amazon VPC provides two features that you can use to increase security for your VPC: security groups and network access control lists (ACLs). You have already looked into security groups and you are now trying to understand ACLs. Which statement below is incorrect in relation to ACLs?

- A. Supports allow rules and deny rules.
- B. Is stateful: Return traffic is automatically allowed, regardless of any rules.
- C. Processes rules in number order when deciding whether to allow traffic.
- D. Operates at the subnet level (second layer of defense).

**Answer: B**

**Explanation:**

Amazon VPC provides two features that you can use to increase security for your VPC:

Security groups—Act as a firewall for associated Amazon EC2 instances, controlling both inbound and outbound traffic at the instance level

Network access control lists (ACLs)—Act as a firewall for associated subnets, controlling both inbound and outbound traffic at the subnet level

Security groups are stateful: (Return traffic is automatically allowed, regardless of any rules) Network ACLs are stateless: (Return traffic must be explicitly allowed by rules)

Reference: [http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC\\_Security.html](http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Security.html)

**NEW QUESTION 147**

A user comes to you and wants access to Amazon CloudWatch but only wants to monitor a specific LoadBalancer. Is it possible to give him access to a specific set of instances or a specific LoadBalancer?

- A. No because you can't use IAM to control access to CloudWatch data for specific resources.
- B. Yes
- C. You can use IAM to control access to CloudWatch data for specific resources.
- D. No because you need to be Sysadmin to access CloudWatch data.
- E. Yes
- F. Any user can see all CloudWatch data and needs no access right

**Answer: A**

**Explanation:**

Amazon CloudWatch integrates with AWS Identity and Access Management (IAM) so that you can

specify which CloudWatch actions a user in your AWS Account can perform. For example, you could create an IAM policy that gives only certain users in your organization permission to use GetMetricStatistics. They could then use the action to retrieve data about your cloud resources.

You can't use IAM to control access to CloudWatch data for specific resources. For example, you can't give a user access to CloudWatch data for only a specific set of instances or a specific LoadBalancer. Permissions granted using IAM cover all the cloud resources you use with CloudWatch. In addition, you can't use IAM roles with the Amazon CloudWatch command line tools.

Using Amazon CloudWatch with IAM doesn't change how you use CloudWatch. There are no changes to CloudWatch actions, and no new CloudWatch actions related to users and access control.

Reference: <http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/UsingIAM.html>

**NEW QUESTION 152**

You have multiple VPN connections and want to provide secure communication between sites using the AWS VPN CloudHub. Which statement is the most accurate in describing what you must do to set this up correctly?

- A. Create a virtual private gateway with multiple customer gateways, each with unique Border Gateway Protocol (BGP) Autonomous System Numbers (ASNs)
- B. Create a virtual private gateway with multiple customer gateways, each with a unique set of keys
- C. Create a virtual public gateway with multiple customer gateways, each with a unique Private subnet
- D. Create a virtual private gateway with multiple customer gateways, each with unique subnet id

**Answer: A**

**Explanation:**

If you have multiple VPN connections, you can provide secure communication between sites using the AWS VPN CloudHub. The VPN CloudHub operates on a simple hub-and-spoke model that you can use with or without a VPC. This design is suitable for customers with multiple branch offices and existing Internet connections who'd like to implement a convenient, potentially low-cost hub-and-spoke model for primary or backup connectivity between these remote offices.

To use the AWS VPN CloudHub, you must create a virtual private gateway with multiple customer

gateways, each with unique Border Gateway Protocol (BGP) Autonomous System Numbers (ASNs). Customer gateways advertise the appropriate routes (BGP prefixes) over their VPN connections. These routing advertisements are received and re-advertised to each BGP peer, enabling each site to send data to and receive data from the other sites. The routes for each spoke must have unique ASNs and the sites must not have overlapping IP ranges. Each site can also send and receive data from the VPC as if they were using a standard VPN connection.

Reference: [http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN\\_CloudHub.html](http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN_CloudHub.html)

**NEW QUESTION 155**

Which one of the below is not an AWS Storage Service?

- A. Amazon S3
- B. Amazon Glacier
- C. Amazon CloudFront
- D. Amazon EBS

**Answer: C**

**Explanation:**

AWS Storage Services are: Amazon S3

Amazon Glacier Amazon EBS

AWS Storage Gateway

Reference: <https://console.aws.amazon.com/console>

**NEW QUESTION 158**

After setting up an EC2 security group with a cluster of 20 EC2 instances, you find an error in the security group settings. You quickly make changes to the security group settings. When will the changes to the settings be effective?

- A. The settings will be effective immediately for all the instances in the security group.
- B. The settings will be effective only when all the instances are restarted.
- C. The settings will be effective for all the instances only after 30 minutes.
- D. The settings will be effective only for the new instances added to the security group

**Answer: A**

**Explanation:**

Amazon Redshift applies changes to a cluster security group immediately. So if you have associated the cluster security group with a cluster, inbound cluster access rules in the updated cluster security group apply immediately.

Reference: <http://docs.aws.amazon.com/redshift/latest/mgmt/working-with-security-groups.html>

**NEW QUESTION 163**

You have a lot of data stored in the AWS Storage Gateway and your manager has come to you asking about how the billing is calculated, specifically the Virtual Tape Shelf usage. What would be a correct response to this?

- A. You are billed for the virtual tape data you store in Amazon Glacier and are billed for the size of the virtual tape.
- B. You are billed for the virtual tape data you store in Amazon Glacier and billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.
- C. You are billed for the virtual tape data you store in Amazon S3 and billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.
- D. You are billed for the virtual tape data you store in Amazon S3 and are billed for the size of the virtual tape.

**Answer: B**

**Explanation:**

The AWS Storage Gateway is a service connecting an on-premises software appliance with cloud-based storage to provide seamless and secure integration between an organization's on-premises IT environment and AWS's storage infrastructure.

AWS Storage Gateway billing is as follows. Volume storage usage (per GB per month):

You are billed for the Cached volume data you store in Amazon S3. You are only billed for volume capacity you use, not for the size of the volume you create.

Snapshot Storage usage (per GB per month): You are billed for the snapshots your gateway stores in Amazon S3. These snapshots are stored and billed as Amazon EBS snapshots. Snapshots are incremental backups, reducing your storage charges. When taking a new snapshot, only the data that has changed since your last snapshot is stored.

Virtual Tape Library usage (per GB per month):

You are billed for the virtual tape data you store in Amazon S3. You are only billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.

Virtual Tape Shelf usage (per GB per month):

You are billed for the virtual tape data you store in Amazon Glacier. You are only billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.

Reference: <https://aws.amazon.com/storagegateway/faqs/>

**NEW QUESTION 164**

You are configuring a new VPC for one of your clients for a cloud migration project, and only a public VPN will be in place. After you created your VPC, you created a new subnet, a new internet gateway, and attached your internet gateway to your VPC. When you launched your first instance into your VPC, you realized that you aren't able to connect to the instance, even if it is configured with an elastic IP. What should be done to access the instance?

- A. A route should be created as 0.0.0.0/0 and your internet gateway as target.
- B. Attach another ENI to the instance and connect via new ENI.
- C. A NAT instance should be created and all traffic should be forwarded to NAT instance.
- D. A NACL should be created that allows all outbound traffic

**Answer: A**

**Explanation:**

All traffic should be routed via Internet Gateway. So, a route should be created with 0.0.0.0/0 as a source, and your Internet Gateway as your target.

Reference: [http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC\\_Scenario1.html](http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Scenario1.html)

**NEW QUESTION 169**

A user is currently building a website which will require a large number of instances in six months, when a demonstration of the new site will be given upon launch. Which of the below mentioned options allows the user to procure the resources beforehand so that they need not worry about infrastructure availability during the demonstration?

- A. Procure all the instances as reserved instances beforehand.
- B. Launch all the instances as part of the cluster group to ensure resource availability.
- C. Pre-warm all the instances one month prior to ensure resource availability.
- D. Ask AWS now to procure the dedicated instances in 6 month

**Answer:** A

**Explanation:**

Amazon Web Services has massive hardware resources at its data centers, but they are finite. The best way for users to maximize their access to these resources is by reserving a portion of the computing capacity that they require. This can be done through reserved instances. With reserved instances, the user literally reserves the computing capacity in the Amazon Web Services cloud.

Reference: [http://media.amazonwebservices.com/AWS\\_Building\\_Fault\\_Tolerant\\_Applications.pdf](http://media.amazonwebservices.com/AWS_Building_Fault_Tolerant_Applications.pdf)

**NEW QUESTION 170**

You receive the following request from a client to quickly deploy a static website for them, specifically on AWS. The requirements are low-cost, reliable, online storage, and a reliable and cost-effective way to route customers to the website, as well as a way to deliver content with low latency and high data transfer speeds so that visitors to his website don't experience unnecessary delays. What do you think would be the minimum AWS services that could fulfill the client's request?

- A. Amazon Route 53, Amazon CloudFront and Amazon VPC.
- B. Amazon S3, Amazon Route 53 and Amazon RDS
- C. Amazon S3, Amazon Route 53 and Amazon CloudFront
- D. Amazon S3 and Amazon Route 53.

**Answer:** C

**Explanation:**

You can easily and inexpensively use AWS to host a website that uses client-side technologies (such as HTML, CSS, and JavaScript) and does not require server-side technologies (such as PHP and ASP.NET). This type of site is called a static website, and is used to display content that does not change frequently. Before you create and deploy a static website, you must plan your architecture to ensure that it meets your requirements. Amazon S3, Amazon Route 53, and Amazon CloudFront would be required in this instance.

Reference: <http://docs.aws.amazon.com/gettingstarted/latest/swl/website-hosting-intro.html>

**NEW QUESTION 174**

What is the default maximum number of Access Keys per user?

- A. 10
- B. 15
- C. 2
- D. 20

**Answer:** C

**Explanation:**

The default maximum number of Access Keys per user is 2.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/LimitationsOnEntities.html>

**NEW QUESTION 178**

What is the network performance offered by the c4.8xlarge instance in Amazon EC2?

- A. 20 Gigabit
- B. 10 Gigabit
- C. Very High but variable
- D. 5 Gigabit

**Answer:** B

**Explanation:**

Networking performance offered by the c4.8xlarge instance is 10 Gigabit. Reference: <http://aws.amazon.com/ec2/instance-types/>

**NEW QUESTION 182**

You are planning and configuring some EBS volumes for an application. In order to get the most performance out of your EBS volumes, you should attach them to an instance with enough to support your volumes.

- A. Redundancy
- B. Storage
- C. Bandwidth
- D. Memory

**Answer:** C

**Explanation:**

When you plan and configure EBS volumes for your application, it is important to consider the configuration of the instances that you will attach the volumes to. In order to get the most performance out of your EBS volumes, you should attach them to an instance with enough bandwidth to support your volumes, such as an



EBS-optimized instance or an instance with 10 Gigabit network connectMty. This is especially important when you use General Purpose (SSD) or Provisioned IOPS (SSD) volumes, or when you stripe multiple volumes together in a RAID configuration.  
Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-ec2-config.html>

**NEW QUESTION 184**

A user is hosting a website in the US West-1 region. The website has the highest client base from the Asia-Pacific (Singapore / Japan) region. The application is accessing data from S3 before serving it to client. Which of the below mentioned regions gives a better performance for S3 objects?

- A. Japan
- B. Singapore
- C. US East
- D. US West-1

**Answer:** D

**Explanation:**

Access to Amazon S3 from within Amazon EC2 in the same region is fast. In this aspect, though the client base is Singapore, the application is being hosted in the US West-1 region. Thus, it is recommended that S3 objects be stored in the US-West-1 region.  
Reference: [http://media.amazonwebservices.com/AWS\\_Storage\\_Options.pdf](http://media.amazonwebservices.com/AWS_Storage_Options.pdf)

**NEW QUESTION 189**

Which of the following statements is true of tagging an Amazon EC2 resource?

- A. You don't need to specify the resource identifier while terminating a resource.
- B. You can terminate, stop, or delete a resource based solely on its tags.
- C. You can't terminate, stop, or delete a resource based solely on its tags.
- D. You don't need to specify the resource identifier while stopping a resourc

**Answer:** C

**Explanation:**

You can assign tags only to resources that already exist. You can't terminate, stop, or delete a resource based solely on its tags; you must specify the resource identifier.  
Reference: [http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Using\\_Tags.html](http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Using_Tags.html)

**NEW QUESTION 192**

Your organization is in the business of architecting complex transactional databases. For a variety of reasons, this has been done on EBS. What is AWS's recommendation for customers who have architected databases using EBS for backups?

- A. Backups to Amazon S3 be performed through the database management system.
- B. Backups to AWS Storage Gateway be performed through the database management system.
- C. If you take regular snapshots no further backups are required.
- D. Backups to Amazon Glacier be performed through the database management syste

**Answer:** A

**Explanation:**

Data stored in Amazon EBS volumes is redundantly stored in multiple physical locations as part of normal operation of those services and at no additional charge. However, Amazon EBS replication is stored within the same availability zone, not across multiple zones; therefore, it is highly recommended that you conduct regular snapshots to Amazon S3 for long-term data durability.  
For customers who have architected complex transactional databases using EBS, it is recommended that backups to Amazon S3 be performed through the database management system so that distributed transactions and logs can be checkpointed.  
AWS does not perform backups of data that are maintained on virtual disks attached to running instances on Amazon EC2.  
Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

**NEW QUESTION 194**

You have three Amazon EC2 instances with Elastic IP addresses in the US East (Virginia) region, and you want to distribute requests across all three IPs evenly for users for whom US East (Virginia) is the appropriate region.  
How many EC2 instances would be sufficient to distribute requests in other regions?

- A. 3
- B. 9
- C. 2
- D. 1

**Answer:** D

**Explanation:**

If your application is running on Amazon EC2 instances in two or more Amazon EC2 regions, and if you have more than one Amazon EC2 instance in one or more regions, you can use latency-based routing to route traffic to the correct region and then use weighted resource record sets to route traffic to instances within the region based on weights that you specify.  
For example, suppose you have three Amazon EC2 instances with Elastic IP addresses in the US East (Virginia) region and you want to distribute requests across all three IPs evenly for users for whom US East (Virginia) is the appropriate region. Just one Amazon EC2 instance is sufficient in the other regions, although you can apply the same technique to many regions at once.  
Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/Tutorials.html>

**NEW QUESTION 195**

A major client who has been spending a lot of money on his internet service provider asks you to set up an AWS Direct Connection to try and save him some

money. You know he needs high-speed connectMty. Which connection port speeds are available on AWS Direct Connect?

- A. 500Mbps and 1Gbps
- B. 1Gbps and 10Gbps
- C. 100Mbps and 1Gbps
- D. 1Gbps

**Answer:** B

**Explanation:**

AWS Direct Connect is a network service that provides an alternative to using the internet to utilize AWS cloud services.

Using AWS Direct Connect, data that would have previously been transported over the Internet can now be delivered through a private network connection between AWS and your datacenter or corporate network.

1Gbps and 10Gbps ports are available. Speeds of 50Mbps, 100Mbps, 200Mbps, 300Mbps, 400Mbps, and 500Mbps can be ordered from any APN partners supporting AWS Direct Connect.

Reference: <https://aws.amazon.com/directconnect/faqs/>

**NEW QUESTION 199**

Is it possible to get a history of all EC2 API calls made on your account for security analysis and operational troubleshooting purposes?

- A. Yes, by default, the history of your API calls is logged.
- B. Yes, you should turn on the CloudTrail in the AWS console.
- C. No, you can only get a history of VPC API calls.
- D. No, you cannot store history of EC2 API calls on Amazon.

**Answer:** B

**Explanation:**

To get a history of all EC2 API calls (including VPC and EBS) made on your account, you simply turn on C|oudTrail| in the AWS Management Console.

Reference: <https://aws.amazon.com/ec2/faqs/>

**NEW QUESTION 204**

After setting up some EC2 instances you now need to set up a monitoring solution to keep track of these instances and to send you an email when the CPU hits a certain threshold. Which statement below best describes what thresholds you can set to trigger a CloudWatch Alarm?

- A. Set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.
- B. Thresholds need to be set in IAM not CloudWatch
- C. Only default thresholds can be set you can't choose your own thresholds.
- D. Set a target value and choose whether the alarm will trigger when the value hits this threshold

**Answer:** A

**Explanation:**

Amazon CloudWatch is a monitoring service for AWS cloud resources and the applications you run on AWS. You can use Amazon CloudWatch to collect and track metrics, collect and monitor log files, and set alarms.

When you create an alarm, you first choose the Amazon CloudWatch metric you want it to monitor. Next, you choose the evaluation period (e.g., five minutes or one hour) and a statistical value to measure (e.g., Average or Maximum).

To set a threshold, set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.

Reference: <http://aws.amazon.com/cloudwatch/faqs/>

**NEW QUESTION 205**

When does the billing of an Amazon EC2 system begin?

- A. It starts when the Status column for your distribution changes from Creating to Deployed.
- B. It starts as soon as you click the create instance option on the main EC2 console.
- C. It starts when your instance reaches 720 instance hours.
- D. It starts when Amazon EC2 initiates the boot sequence of an AM instanc

**Answer:** D

**Explanation:**

Billing commences when Amazon EC2 initiates the boot sequence of an AM instance. Billing ends when the instance terminates, which could occur through a web services command, by running "shutdown -h", or through instance failure. When you stop an instance, Amazon shuts it down but doesn't charge hourly usage for a stopped instance, or data transfer fees, but charges for the storage for any Amazon EBS volumes.

Reference: <http://aws.amazon.com/ec2/faqs/>

**NEW QUESTION 210**

You have just discovered that you can upload your objects to Amazon S3 using Multipart Upload API. You start to test it out but are unsure of the benefits that it would provide. Which of the following is not a benefit of using multipart uploads?

- A. You can begin an upload before you know the final object size.
- B. Quick recovery from any network issues.
- C. Pause and resume object uploads.
- D. It's more secure than normal uploa

**Answer:** D

**Explanation:**

Multipart upload in Amazon S3 allows you to upload a single object as a set of parts. Each part is a contiguous portion of the object's data. You can upload these object parts independently and in any order.

If transmission of any part fails, you can re-transmit that part without affecting other parts. After all parts of your object are uploaded, Amazon S3 assembles these parts and creates the object. In general, when your object size reaches 100 MB, you should consider using multipart uploads instead of uploading the object in a single operation.

Using multipart upload provides the following advantages:

- Improved throughput—You can upload parts in parallel to improve throughput.
- Quick recovery from any network issues—Smaller part size minimizes the impact of restarting a failed upload due to a network error.
- Pause and resume object uploads—You can upload object parts over time. Once you initiate a multipart upload there is no expiry; you must explicitly complete or abort the multipart upload.
- Begin an upload before you know the final object size—You can upload an object as you are creating it. Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/uploadobjusingmpu.html>

**NEW QUESTION 214**

What is the data model of DynamoDB?

- A. Since DynamoDB is schema-less, there is no data model.
- B. "Items", with Keys and one or more Attribute; and "Attribute", with Name and Value.
- C. "Table", a collection of Items; "Items", with Keys and one or more Attribute; and "Attribute", with Name and Value.
- D. "Database", which is a set of "Tables", which is a set of "Items", which is a set of "Attributes".

**Answer:** C

**Explanation:**

The data model of DynamoDB is: "Table", a collection of Items; "Items", with Keys and one or more Attribute; "Attribute", with Name and Value.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/DataModel.html>

**NEW QUESTION 216**

A gaming company comes to you and asks you to build them infrastructure for their site. They are not sure how big they will be as with all start ups they have limited money and big ideas. What they do tell you is that if the game becomes successful, like one of their previous games, it may rapidly grow to millions of users and generate tens (or even hundreds) of thousands of writes and reads per second. After considering all of this, you decide that they need a fully managed NoSQL database service that provides fast and predictable performance with seamless scalability. Which of the following databases do you think would best fit their needs?

- A. Amazon DynamoDB
- B. Amazon Redshift
- C. Any non-relational database.
- D. Amazon SimpleDB

**Answer:** A

**Explanation:**

Amazon DynamoDB is a fully managed NoSQL database service that provides fast and predictable performance with seamless scalability. Amazon DynamoDB enables customers to offload the administrative burdens of operating and scaling distributed databases to AWS, so they don't have to worry about hardware provisioning, setup and configuration, replication, software patching, or cluster scaling.

Today's web-based applications generate and consume massive amounts of data. For example, an online game might start out with only a few thousand users and a light database workload consisting of 10 writes per second and 50 reads per second. However, if the game becomes successful, it may rapidly grow to millions of users and generate tens (or even hundreds) of thousands of writes and reads per second. It may also create terabytes or more of data per day. Developing your applications against Amazon DynamoDB enables you to start small and simply dial-up your request capacity for a table as your requirements scale, without incurring downtime. You pay highly cost-efficient rates for the request capacity you provision, and let Amazon DynamoDB do the work over partitioning your data and traffic over sufficient server capacity to meet your needs. Amazon DynamoDB does the database management and administration, and you simply store and request your data. Automatic replication and failover provides built-in fault tolerance, high availability, and data durability. Amazon DynamoDB gives you the peace of mind that your database is fully managed and can grow with your application requirements.

Reference: <http://aws.amazon.com/dynamodb/faqs/>

**NEW QUESTION 221**

Mike is appointed as Cloud Consultant in Netcrak Inc. Netcrak has the following VPCs set-up in the US East Region:

A VPC with CIDR block 10.10.0.0/16, a subnet in that VPC with CIDR block 10.10.1.0/24

A VPC with CIDR block 10.40.0.0/16, a subnet in that VPC with CIDR block 10.40.1.0/24

Netcrak Inc is trying to establish network connection between two subnets, a subnet with CIDR block 10.10.1.0/24 and another subnet with CIDR block 10.40.1.0/24. Which one of the following solutions should Mike recommend to Netcrak Inc?

- A. Create 2 Virtual Private Gateways and configure one with each VPC.
- B. Create one EC2 instance in each subnet, assign Elastic IPs to both instances, and configure a set up Site-to-Site VPN connection between both EC2 instances.
- C. Create a VPC Peering connection between both VPCs.
- D. Create 2 Internet Gateways, and attach one to each VPC

**Answer:** C

**Explanation:**

A VPC peering connection is a networking connection between two VPCs that enables you to route traffic between them using private IP addresses. EC2 instances in either VPC can communicate with each other as if they are within the same network. You can create a VPC peering connection between your own VPCs, or with a VPC in another AWS account within a single region.

AWS uses the existing infrastructure of a VPC to create a VPC peering connection; it is neither a gateway nor a VPN connection, and does not rely on a separate piece of physical hardware.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/vpc-peering.html>

**NEW QUESTION 225**

How many types of block devices does Amazon EC2 support?

- A. 4
- B. 5
- C. 2
- D. 1

**Answer:** C

**Explanation:**

Amazon EC2 supports 2 types of block devices. Reference:

<http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/block-device-mapping-concepts.html>

**NEW QUESTION 226**

You need to set up security for your VPC and you know that Amazon VPC provides two features that you can use to increase security for your VPC: Security groups and network access control lists (ACLs). You start to look into security groups first. Which statement below is incorrect in relation to security groups?

- A. Are stateful: Return traffic is automatically allowed, regardless of any rules.
- B. Evaluate all rules before deciding whether to allow traffic.
- C. Support allow rules and deny rules.
- D. Operate at the instance level (first layer of defense).

**Answer:** C

**Explanation:**

Amazon VPC provides two features that you can use to increase security for your VPC:

Security groups—Act as a firewall for associated Amazon EC2 instances, controlling both inbound and outbound traffic at the instance level and supports allow rules only.

Network access control lists (ACLs)—Act as a firewall for associated subnets, controlling both inbound and outbound traffic at the subnet level and supports allow rules and deny rules.

Reference: [http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC\\_Security.html](http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Security.html)

**NEW QUESTION 228**

A user wants to increase the durability and availability of the EBS volume. Which of the below mentioned actions should he perform?

- A. Take regular snapshots.
- B. Create an AML.
- C. Create EBS with higher capacity.
- D. Access EBS regularl

**Answer:** A

**Explanation:**

In Amazon Web Services, Amazon EBS volumes that operate with 20 GB or less of modified data since their most recent snapshot can expect an annual failure rate (AFR) between 0.1% and 0.5%. For this reason, to maximize both durability and availability of their Amazon EBS data, the user should frequently create snapshots of the Amazon EBS volumes.

Reference: [http://media.amazonwebservices.com/AWS\\_Storage\\_Options.pdf](http://media.amazonwebservices.com/AWS_Storage_Options.pdf)

**NEW QUESTION 231**

You are using Amazon SES as an email solution but are unsure of what its limitations are. Which statement below is correct in regards to that?

- A. New Amazon SES users who have received production access can send up to 1,000 emails per 24-hour period, at a maximum rate of 10 emails per second.
- B. Every Amazon SES sender has a the same set of sending limits
- C. Sending limits are based on messages rather than on recipients
- D. Every Amazon SES sender has a unique set of sending limits

**Answer:** D

**Explanation:**

Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. Amazon SES eliminates the complexity and expense of building an in-house email solution or licensing, installing, and operating a third-party email service for this type of email communication.

Every Amazon SES sender has a unique set of sending limits, which are calculated by Amazon SES on an ongoing basis:

Sending quota — the maximum number of emails you can send in a 24-hour period. Maximum send rate — the maximum number of emails you can send per second.

New Amazon SES users who have received production access can send up to 10,000 emails per 24-hour period, at a maximum rate of 5 emails per second.

Amazon SES automatically adjusts these limits upward, as long as you send high-quality email. If your existing quota is not adequate for your needs and the system has not automatically increased your quota, you can submit an SES Sending Quota Increase case at any time.

Sending limits are based on recipients ratherthan on messages. You can check your sending limits at any time by using the Amazon SES console.

Note that if your email is detected to be of poor or QUESTION able quality (e.g., high complaint rates, high bounce rates, spam, or abusive content), Amazon SES might temporarily or permanently reduce your permitted send volume, or take other action as AWS deems appropriate.

Reference: <https://aws.amazon.com/ses/faqs/>

**NEW QUESTION 236**

Having just set up your first Amazon Virtual Private Cloud (Amazon VPC) network, which defined a default network interface, you decide that you need to create and attach an additional network interface, known as an elastic network interface (ENI) to one of your instances. Which of the following statements is true regarding attaching network interfaces to your instances in your VPC?



- A. You can attach 5 ENIs per instance type.
- B. You can attach as many ENIs as you want.
- C. The number of ENIs you can attach varies by instance type.
- D. You can attach 100 ENIs total regardless of instance type.

**Answer: C**

**Explanation:**

Each instance in your VPC has a default network interface that is assigned a private IP address from the IP address range of your VPC. You can create and attach an additional network interface, known as an elastic network interface (ENI), to any instance in your VPC. The number of ENIs you can attach varies by instance type.

**NEW QUESTION 239**

A for a VPC is a collection of subnets (typically private) that you may want to designate for your backend RDS DB Instances.

- A. DB Subnet Set
- B. RDS Subnet Group
- C. DB Subnet Group
- D. DB Subnet Collection

**Answer: C**

**Explanation:**

DB Subnet Groups are a set of subnets (one per Availability Zone of a particular region) designed for your DB instances that reside in a VPC. They make easy to manage Multi-AZ deployments as well as the conversion from a Single-AZ to a Multi-AZ one.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Overview.RDSVPC.html>

**NEW QUESTION 240**

Amazon Elastic Load Balancing is used to manage traffic on a fleet of Amazon EC2 instances, distributing traffic to instances across all availability zones within a region. Elastic Load Balancing has all the advantages of an on-premises load balancer, plus several security benefits.

Which of the following is not an advantage of ELB over an on-premise load balancer?

- A. ELB uses a four-tier, key-based architecture for encryption.
- B. ELB offers clients a single point of contact, and can also serve as the first line of defense against attacks on your network.
- C. ELB takes over the encryption and decryption work from the Amazon EC2 instances and manages it centrally on the load balancer.
- D. ELB supports end-to-end traffic encryption using TLS (previously SSL) on those networks that use secure HTTP (HTTPS) connections.

**Answer: A**

**Explanation:**

Amazon Elastic Load Balancing is used to manage traffic on a fleet of Amazon EC2 instances, distributing traffic to instances across all availability zones within a region. Elastic Load Balancing has all the advantages of an on-premises load balancer, plus several security benefits:

Takes over the encryption and decryption work from the Amazon EC2 instances and manages it centrally on the load balancer

Offers clients a single point of contact, and can also serve as the first line of defense against attacks on your network

When used in an Amazon VPC, supports creation and management of security groups associated with your Elastic Load Balancing to provide additional networking and security options

Supports end-to-end traffic encryption using TLS (previously SSL) on those networks that use secure HTTP (HTTPS) connections. When TLS is used, the TLS server certificate used to terminate client connections can be managed centrally on the load balancer, rather than on every individual instance. Reference:

<http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

**NEW QUESTION 244**

You have set up an S3 bucket with a number of images in it and you have decided that you want anybody to be able to access these images, even anonymous users. To accomplish this you create a bucket policy. You will need to use an Amazon S3 bucket policy that specifies a in the principal element, which means anyone can access the bucket.

- A. hash tag (#)
- B. anonymous user
- C. wildcard (\*)
- D. S3 user

**Answer: C**

**Explanation:**

You can use the AWS Policy Generator to create a bucket policy for your Amazon S3 bucket. You can then use the generated document to set your bucket policy by using the Amazon S3 console, by a number of third-party tools, or via your application.

You use an Amazon S3 bucket policy that specifies a wildcard (\*) in the principal element, which means anyone can access the bucket. With anonymous access, anyone (including users without an AWS account) will be able to access the bucket.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#d0e20565>

**NEW QUESTION 246**

You have been asked to build AWS infrastructure for disaster recovery for your local applications and within that you should use an AWS Storage Gateway as part of the solution. Which of the following best describes the function of an AWS Storage Gateway?

- A. Accelerates transferring large amounts of data between the AWS cloud and portable storage devices.
- B. A web service that speeds up distribution of your static and dynamic web content.
- C. Connects an on-premises software appliance with cloud-based storage to provide seamless and secure integration between your on-premises IT environment and AWS's storage infrastructure.
- D. Is a storage service optimized for infrequently used data, or "cold data."

**Answer:** C

**Explanation:**

AWS Storage Gateway connects an on-premises software appliance with cloud-based storage to provide seamless integration with data security features between your on-premises IT environment and the Amazon Web Services (AWS) storage infrastructure. You can use the service to store data in the AWS cloud for scalable and cost-effective storage that helps maintain data security. AWS Storage Gateway offers both volume-based and tape-based storage solutions:

Volume gateways Gateway-cached volumes Gateway-stored volumes

Gateway-virtual tape library (VTL)

Reference:

[http://media.amazonwebservices.com/architecturecenter/AWS\\_ac\\_ra\\_disasterrecovery\\_07.pdf](http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_disasterrecovery_07.pdf)

**NEW QUESTION 249**

In Amazon CloudFront, if you use Amazon EC2 instances and other custom origins with CloudFront, it is recommended to .

- A. not use Elastic Load Balancing
- B. restrict Internet communication to private instances while allowing outgoing traffic
- C. enable access key rotation for CloudWatch metrics
- D. specify the URL of the load balancer for the domain name of your origin server

**Answer:** D

**Explanation:**

In Amazon CloudFront, you should use an Elastic Load Balancing load balancer to handle traffic across multiple Amazon EC2 instances and to isolate your application from changes to Amazon EC2 instances. When you create your CloudFront distribution, specify the URL of the load balancer for the domain name of your origin server.

Reference: <http://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/CustomOriginBestPractices.html>

**NEW QUESTION 251**

What is the time period with which metric data is sent to CloudWatch when detailed monitoring is enabled on an Amazon EC2 instance?

- A. 15 minutes
- B. 5 minutes
- C. 1 minute
- D. 45 seconds

**Answer:** C

**Explanation:**

By default, Amazon EC2 metric data is automatically sent to CloudWatch in 5-minute periods. However, you can, enable detailed monitoring on an Amazon EC2 instance, which sends data to CloudWatch in

1-minute periods

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-cloudwatch.html>

**NEW QUESTION 256**

A user has created an ELB with the availability zone US-East-1A. The user wants to add more zones to ELB to achieve High Availability. How can the user add more zones to the existing ELB?

- A. The user should stop the ELB and add zones and instances as required
- B. The only option is to launch instances in different zones and add to ELB
- C. It is not possible to add more zones to the existing ELB
- D. The user can add zones on the fly from the AWS console

**Answer:** D

**Explanation:**

The user has created an Elastic Load Balancer with the availability zone and wants to add more zones to the existing ELB. The user can do so in two ways:

From the console or CLI, add new zones to ELB;

Launch instances in a separate AZ and add instances to the existing ELB. Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/enable-disable-az.html>

**NEW QUESTION 257**

What happens to data on an ephemeral volume of an EBS-backed EC2 instance if it is terminated or if it fails?

- A. Data is automatically copied to another volume.
- B. The volume snapshot is saved in S3.
- C. Data persists.
- D. Data is delete

**Answer:** D

**Explanation:**

Any data on the instance store volumes persists as long as the instance is running, but this data is deleted when the instance is terminated or if it fails (such as if an underlying drive has issues). After an instance store-backed instance fails or terminates, it cannot be restored.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/RootDeviceStorage.html>

**NEW QUESTION 260**

AWS Identity and Access Management is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS. In

addition to supporting IAM user policies, some services support resource-based permissions. Which of the following services are supported by resource-based permissions?

- A. Amazon SNS, and Amazon SQS and AWS Direct Connect.
- B. Amazon S3 and Amazon SQS and Amazon ElastiCache.
- C. Amazon S3, Amazon SNS, Amazon SQS, Amazon Glacier and Amazon EBS.
- D. Amazon Glacier, Amazon SNS, and Amazon CloudWatch

**Answer: C**

**Explanation:**

In addition to supporting IAM user policies, some services support resource-based permissions, which let you attach policies to the service's resources instead of to IAM users or groups. Resource-based permissions are supported by Amazon S3, Amazon SNS, Amazon SQS, Amazon Glacier and Amazon EBS.

Reference: [http://docs.aws.amazon.com/IAM/latest/UserGuide/Using\\_SpecificProducts.html](http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_SpecificProducts.html)

**NEW QUESTION 262**

A user is trying to launch a similar EC2 instance from an existing instance with the option "Launch More like this". The AMI of the selected instance is deleted. What will happen in this case?

- A. AWS does not need an AMI for the "Launch more like this" option
- B. AWS will launch the instance but will not create a new AMI
- C. AWS will create a new AMI and launch the instance
- D. AWS will throw an error saying that the AMI is deregistered

**Answer: D**

**Explanation:**

If the user has deregistered the AMI of an EC2 instance and is trying to launch a similar instance with the option "Launch more like this", AWS will throw an error saying that the AMI is deregistered or not available.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/launching-instance.html>

**NEW QUESTION 265**

Your company has multiple IT departments, each with their own VPC. Some VPCs are located within the same AWS account, and others in a different AWS account. You want to peer together all VPCs to enable the IT departments to have full access to each others' resources. There are certain limitations placed on VPC peering. Which of the following statements is incorrect in relation to VPC peering?

- A. Private DNS values cannot be resolved between instances in peered VPCs.
- B. You can have up to 3 VPC peering connections between the same two VPCs at the same time.
- C. You cannot create a VPC peering connection between VPCs in different regions.
- D. You have a limit on the number active and pending VPC peering connections that you can have per VPC.

**Answer: B**

**Explanation:**

To create a VPC peering connection with another VPC, you need to be aware of the following limitations and rules:

You cannot create a VPC peering connection between VPCs that have matching or overlapping CIDR blocks.

You cannot create a VPC peering connection between VPCs in different regions.

You have a limit on the number active and pending VPC peering connections that you can have per VPC. VPC peering does not support transitive peering relationships; in a VPC peering connection, your VPC will not have access to any other VPCs that the peer VPC may be peered with. This includes VPC peering connections that are established entirely within your own AWS account.

You cannot have more than one VPC peering connection between the same two VPCs at the same time. The Maximum Transmission Unit (MTU) across a VPC peering connection is 1500 bytes.

A placement group can span peered VPCs; however, you will not get full-bisection bandwidth between instances in peered VPCs.

Unicast reverse path forwarding in VPC peering connections is not supported.

You cannot reference a security group from the peer VPC as a source or destination for ingress or egress rules in your security group. Instead, reference CIDR blocks of the peer VPC as the source or destination of your security group's ingress or egress rules.

Private DNS values cannot be resolved between instances in peered VPCs. Reference:

<http://docs.aws.amazon.com/AmazonVPC/latest/PeeringGuide/vpc-peering-overview.html#vpc-peering-limitations>

**NEW QUESTION 269**

You are architecting a highly-scalable and reliable web application which will have a huge amount of content. You have decided to use CloudFront as you know it will speed up distribution of your static and dynamic web content and know that Amazon CloudFront integrates with Amazon CloudWatch metrics so that you can monitor your web application. Because you live in Sydney you have chosen the the Asia Pacific (Sydney) region in the AWS console. However you have set up this up but no CloudFront metrics seem to be appearing in the CloudWatch console. What is the most likely reason from the possible choices below for this?

- A. Metrics for CloudWatch are available only when you choose the same region as the application you are monitoring.
- B. You need to pay for CloudWatch for it to become active.
- C. Metrics for CloudWatch are available only when you choose the US East (Virginia)
- D. Metrics for CloudWatch are not available for the Asia Pacific region as yet

**Answer: C**

**Explanation:**

CloudFront is a global service, and metrics are available only when you choose the US East (N. Virginia) region in the AWS console. If you choose another region, no CloudFront metrics will appear in the CloudWatch console.

Reference:

<http://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/monitoring-using-cloudwatch.html>

**NEW QUESTION 270**

A friend wants you to set up a small BitTorrent storage area for him on Amazon S3. You tell him it is highly unlikely that AWS would allow such a thing in their infrastructure. However you decide to investigate. Which of the following statements best describes using BitTorrent with Amazon S3?

- A. Amazon S3 does not support the BitTorrent protocol because it is used for pirated software.
- B. You can use the BitTorrent protocol but only for objects that are less than 100 GB in size.
- C. You can use the BitTorrent protocol but you need to ask AWS for specific permissions first.
- D. You can use the BitTorrent protocol but only for objects that are less than 5 GB in size.

**Answer:** D

**Explanation:**

BitTorrent is an open, peer-to-peer protocol for distributing files. You can use the BitTorrent protocol to retrieve any publicly-accessible object in Amazon S3. Amazon S3 supports the BitTorrent protocol so that developers can save costs when distributing content at high scale. Amazon S3 is useful for simple, reliable storage of any data. The default distribution mechanism for Amazon S3 data is via client/server download. In client/server distribution, the entire object is transferred point-to-point from Amazon S3 to every authorized user who requests that object. While client/server delivery is appropriate for a wide variety of use cases, it is not optimal for everybody. Specifically, the costs of client/server distribution increase linearly as the number of users downloading objects increases. This can make it expensive to distribute popular objects.

BitTorrent addresses this problem by recruiting the very clients that are downloading the object as distributors themselves: Each client downloads some pieces of the object from Amazon S3 and some from other clients, while simultaneously uploading pieces of the same object to other interested "peers." The benefit for publishers is that for large, popular files the amount of data actually supplied by Amazon S3 can be substantially lower than what it would have been serving the same clients via client/server download. Less data transferred means lower costs for the publisher of the object.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/S3Torrent.html>

**NEW QUESTION 272**

After a major security breach your manager has requested a report of all users and their credentials in AWS. You discover that in IAM you can generate and download a credential report that lists all users in your account and the status of their various credentials, including passwords, access keys, MFA devices, and signing certificates. Which following statement is incorrect in regards to the use of credential reports?

- A. Credential reports are downloaded XML files.
- B. You can get a credential report using the AWS Management Console, the AWS CLI, or the IAM API.
- C. You can use the report to audit the effects of credential lifecycle requirements, such as password rotation.
- D. You can generate a credential report as often as once every four hours

**Answer:** A

**Explanation:**

To access your AWS account resources, users must have credentials.

You can generate and download a credential report that lists all users in your account and the status of their various credentials, including passwords, access keys, MFA devices, and signing certificates. You can get a credential report using the AWS Management Console, the AWS CLI, or the IAM API.

You can use credential reports to assist in your auditing and compliance efforts. You can use the report to audit the effects of credential lifecycle requirements, such as password rotation. You can provide the report to an external auditor, or grant permissions to an auditor so that he or she can download the report directly. You can generate a credential report as often as once every four hours. When you request a report, IAM first checks whether a report for the account has been generated within the past four hours. If so, the most recent report is downloaded. If the most recent report for the account is more than four hours old, or if there are no previous reports for the account, IAM generates and downloads a new report.

Credential reports are downloaded as comma-separated values (CSV) files.

You can open CSV files with common spreadsheet software to perform analysis, or you can build an application that consumes the CSV files programmatically and performs custom analysis. Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/credential-reports.html>

**NEW QUESTION 275**

A user has defined an AutoScaling termination policy to first delete the instance with the nearest billing hour. AutoScaling has launched 3 instances in the US-East-1A region and 2 instances in the US-East-1 B region. One of the instances in the US-East-1B region is running nearest to the billing hour. Which instance will AutoScaling terminate first while executing the termination action?

- A. Random Instance from US-East-1A
- B. Instance with the nearest billing hour in US-East-1 B
- C. Instance with the nearest billing hour in US-East-1A
- D. Random instance from US-East-1B

**Answer:** C

**Explanation:**

Even though the user has configured the termination policy, before AutoScaling selects an instance to terminate, it first identifies the Availability Zone that has more instances than the other Availability Zones used by the group. Within the selected Availability Zone, it identifies the instance that matches the specified termination policy.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/us-termination-policy.html>

**NEW QUESTION 280**

A user has configured a website and launched it using the Apache web server on port 80. The user is using ELB with the EC2 instances for Load Balancing. What should the user do to ensure that the EC2 instances accept requests only from ELB?

- A. Configure the security group of EC2, which allows access to the ELB source security group
- B. Configure the EC2 instance so that it only listens on the ELB port
- C. Open the port for an ELB static IP in the EC2 security group
- D. Configure the security group of EC2, which allows access only to the ELB listener

**Answer:** A

**Explanation:**

When a user is configuring ELB and registering the EC2 instances with it, ELB will create a source security group. If the user wants to allow traffic only from ELB,



he should remove all the rules set for the other requests and open the port only for the ELB source security group.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/using-elb-security-groups.html>

#### NEW QUESTION 281

You are playing around with setting up stacks using JSON templates in CloudFormation to try and understand them a little better. You have set up about 5 or 6 but now start to wonder if you are being charged for these stacks. What is AWS's billing policy regarding stack resources?

- A. You are not charged for the stack resources if they are not taking any traffic.
- B. You are charged for the stack resources for the time they were operating (even if you deleted the stack right away)
- C. You are charged for the stack resources for the time they were operating (but not if you deleted the stack within 60 minutes)
- D. You are charged for the stack resources for the time they were operating (but not if you deleted the stack within 30 minutes)

**Answer: B**

#### Explanation:

A stack is a collection of AWS resources that you can manage as a single unit. In other words, you can create, update, or delete a collection of resources by creating, updating, or deleting stacks. All the resources in a stack are defined by the stack's AWS CloudFormation template. A stack, for instance, can include all the resources required to run a web application, such as a web server, a database, and networking rules. If you no longer require that web application, you can simply delete the stack, and all of its related resources are deleted.

You are charged for the stack resources for the time they were operating (even if you deleted the stack right away).

Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/stacks.html>

#### NEW QUESTION 282

You have been given a scope to set up an AWS Media Sharing Framework for a new start up photo sharing company similar to flickr. The first thing that comes to mind about this is that it will obviously need a huge amount of persistent data storage for this framework. Which of the following storage options would be appropriate for persistent storage?

- A. Amazon Glacier or Amazon S3
- B. Amazon Glacier or AWS Import/Export
- C. AWS Import/Export or Amazon CloudFront
- D. Amazon EBS volumes or Amazon S3

**Answer: D**

#### Explanation:

Persistent storage-If you need persistent virtual disk storage similar to a physical disk drive for files or other data that must persist longer than the lifetime of a single Amazon EC2 instance, Amazon EBS volumes or Amazon S3 are more appropriate.

Reference: [http://media.amazonwebservices.com/AWS\\_Storage\\_Options.pdf](http://media.amazonwebservices.com/AWS_Storage_Options.pdf)

#### NEW QUESTION 285

In Route 53, what does a Hosted Zone refer to?

- A. A hosted zone is a collection of geographical load balancing rules for Route 53.
- B. A hosted zone is a collection of resource record sets hosted by Route 53.
- C. A hosted zone is a selection of specific resource record sets hosted by CloudFront for distribution to Route 53.
- D. A hosted zone is the Edge Location that hosts the Route 53 records for a use

**Answer: B**

#### Explanation:

A Hosted Zone refers to a selection of resource record sets hosted by Route 53.

Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/AboutHostedZones.html>

#### NEW QUESTION 290

While creating a network in the VPC, which of the following is true of a NAT device?

- A. You have to administer the NAT Gateway Service provided by AWS.
- B. You can choose to use any of the three kinds of NAT devices offered by AWS for special purposes.
- C. You can use a NAT device to enable instances in a private subnet to connect to the Internet.
- D. You are recommended to use AWS NAT instances over NAT gateways, as the instances provide better availability and bandwidth.

**Answer: C**

#### Explanation:

You can use a NAT device to enable instances in a private subnet to connect to the Internet (for example, for software updates) or other AWS services, but prevent the Internet from initiating connections with the instances. AWS offers two kinds of NAT devices: a NAT gateway or a NAT instance. We recommend NAT gateways, as they provide better availability and bandwidth over NAT instances. The NAT Gateway service is also a managed service that does not require your administration efforts. A NAT instance is launched from a NAT AM. You can choose to use a NAT instance for special purposes.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/vpc-nat.html>

#### NEW QUESTION 295

All Amazon EC2 instances are assigned two IP addresses at launch. Which are those?

- A. 2 Elastic IP addresses
- B. A private IP address and an Elastic IP address
- C. A public IP address and an Elastic IP address
- D. A private IP address and a public IP address

**Answer:** D

**Explanation:**

In Amazon EC2-Classic every instance is given two IP Addresses: a private IP address and a public IP address

Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-instance-addressing.html#differences>

**NEW QUESTION 296**

Can I change the EC2 security groups after an instance is launched in EC2-Classic?

- A. Yes, you can change security groups after you launch an instance in EC2-Classic.
- B. No, you cannot change security groups after you launch an instance in EC2-Classic.
- C. Yes, you can only when you remove rules from a security group.
- D. Yes, you can only when you add rules to a security group

**Answer:** B

**Explanation:**

After you launch an instance in EC2-Classic, you can't change its security groups. However, you can add rules to or remove rules from a security group, and those changes are automatically applied to all instances that are associated with the security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

**NEW QUESTION 298**

You can seamlessly join an EC2 instance to your directory domain. What connectMty do you need to be able to connect remotely to this instance?

- A. You must have IP connectMty to the instance from the network you are connecting from.
- B. You must have the correct encryption keys to connect to the instance remotely.
- C. You must have enough bandwidth to connect to the instance.
- D. You must use MFA authentication to be able to connect to the instance remotel

**Answer:** A

**Explanation:**

You can seamlessly join an EC2 instance to your directory domain when the instance is launched using the Amazon EC2 Simple Systems Manager. If you need to manually join an EC2 instance to your domain, you must launch the instance in the proper region and security group or subnet, then join the instance to the domain. To be able to connect remotely to these instances, you must have IP connectMty to the instances from the network you are connecting from. In most cases, this requires that an Internet gateway be attached to your VPC and that the instance has a public IP address.

Reference: [http://docs.aws.amazon.com/directoryservice/latest/admin-guide/join\\_a\\_directory.html](http://docs.aws.amazon.com/directoryservice/latest/admin-guide/join_a_directory.html)

**NEW QUESTION 302**

George has launched three EC2 instances inside the US-East-1a zone with his AWS account. Ray has launched two EC2 instances in the US-East-1a zone with his AWS account. Which of the below mentioned statements will help George and Ray understand the availability zone (AZ) concept better?

- A. All the instances of George and Ray can communicate over a private IP with a minimal cost
- B. The US-East-1a region of George and Ray can be different availability zones
- C. All the instances of George and Ray can communicate over a private IP without any cost
- D. The instances of George and Ray will be running in the same data centre

**Answer:** B

**Explanation:**

Each AWS region has multiple, isolated locations known as Availability Zones. To ensure that the AWS resources are distributed across the Availability Zones for a region, AWS independently maps the Availability Zones to identifiers for each account. In this case the Availability Zone US-East-1a where George's EC2 instances are running might not be the same location as the US-East-1a zone of Ray's EC2 instances. There is no way for the user to coordinate the Availability Zones between accounts.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-regions-availability-zones.html>

**NEW QUESTION 304**

Can you encrypt EBS volumes?

- A. Yes, you can enable encryption when you create a new EBS volume using the AWS Management Console, API, or CLI.
- B. No, you should use a third-party software to perform raw block-level encryption of an EBS volume.
- C. Yes, but you must use a third-party API for encrypting data before it's loaded on EBS.
- D. Yes, you can encrypt with the special "ebs\_encrypt" command through Amazon API

**Answer:** A

**Explanation:**

With Amazon EBS encryption, you can now create an encrypted EBS volume and attach it to a supported instance type. Data on the volume, disk I/O, and snapshots created from the volume are then all encrypted. The encryption occurs on the servers that host the EC2 instances, providing encryption of data as it moves between EC2 instances and EBS storage. EBS encryption is based on the industry standard AES-256 cryptographic algorithm.

To get started, simply enable encryption when you create a new EBS volume using the AWS Management Console, API, or CLI. Amazon EBS encryption is available for all the latest EC2 instances in all commercially available AWS regions.

Reference:

<https://aws.amazon.com/about-aws/whats-new/2014/05/21/Amazon-EBS-encryption-now-available/>

**NEW QUESTION 305**

A user has created an ELB with Auto Scaling. Which of the below mentioned offerings from ELB helps the user to stop sending new requests traffic from the load balancer to the EC2 instance when the instance is being deregistered while continuing in-flight requests?

- A. ELB sticky session
- B. ELB deregistration check
- C. ELB auto registration Off
- D. ELB connection draining

**Answer:** D

**Explanation:**

The Elastic Load Balancer connection draining feature causes the load balancer to stop sending new requests to the back-end instances when the instances are deregistering or become unhealthy, while ensuring that in-flight requests continue to be served.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/config-conn-drain.html>

**NEW QUESTION 310**

While controlling access to Amazon EC2 resources, which of the following acts as a firewall that controls the traffic allowed to reach one or more instances?

- A. A security group
- B. An instance type
- C. A storage cluster
- D. An object

**Answer:** A

**Explanation:**

A security group acts as a firewall that controls the traffic allowed to reach one or more instances. When you launch an instance, you assign it one or more security groups.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

**NEW QUESTION 313**

You have some very sensitive data stored on AWS S3 and want to try every possible alternative to keeping it secure in regards to access control. What are the mechanisms available for access control on AWS S3?

- A. (IAM) policies, Access Control Lists (ACLs), bucket policies, and query string authentication.
- B. (IAM) policies, Access Control Lists (ACLs) and bucket policies.
- C. Access Control Lists (ACLs), bucket policies, and query string authentication
- D. (IAM) policies, Access Control Lists (ACLs), bucket policies, query string authentication and encryption.

**Answer:** A

**Explanation:**

Amazon S3 supports several mechanisms that give you flexibility to control who can access your data as well as how, when, and where they can access it.

Amazon S3 provides four different access control mechanisms:

AWS Identity and Access Management (IAM) policies, Access Control Lists (ACLs), bucket policies, and query string authentication.

IAM enables organizations to create and manage multiple users under a single AWS account. With IAM policies, you can grant IAM users fine-grained control to your Amazon S3 bucket or objects. You can use ACLs to selectively add (grant) certain permissions on individual objects.

Amazon S3 bucket policies can be used to add or deny permissions across some or all of the objects within a single bucket.

With Query string authentication, you have the ability to share Amazon S3 objects through URLs that are valid for a specified period of time.

**NEW QUESTION 318**

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your AWS-Solution-Architect-Associate Exam with Our Prep Materials Via below:**

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>