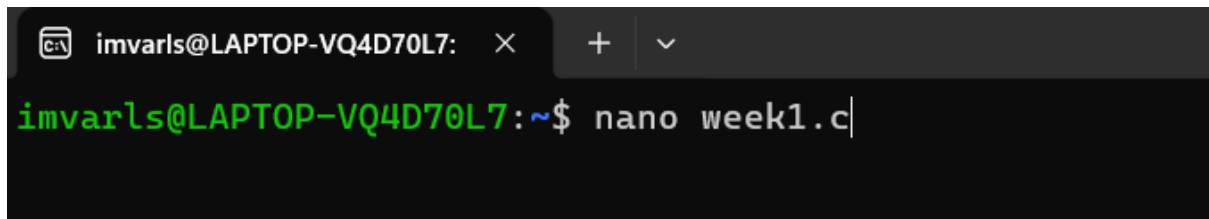
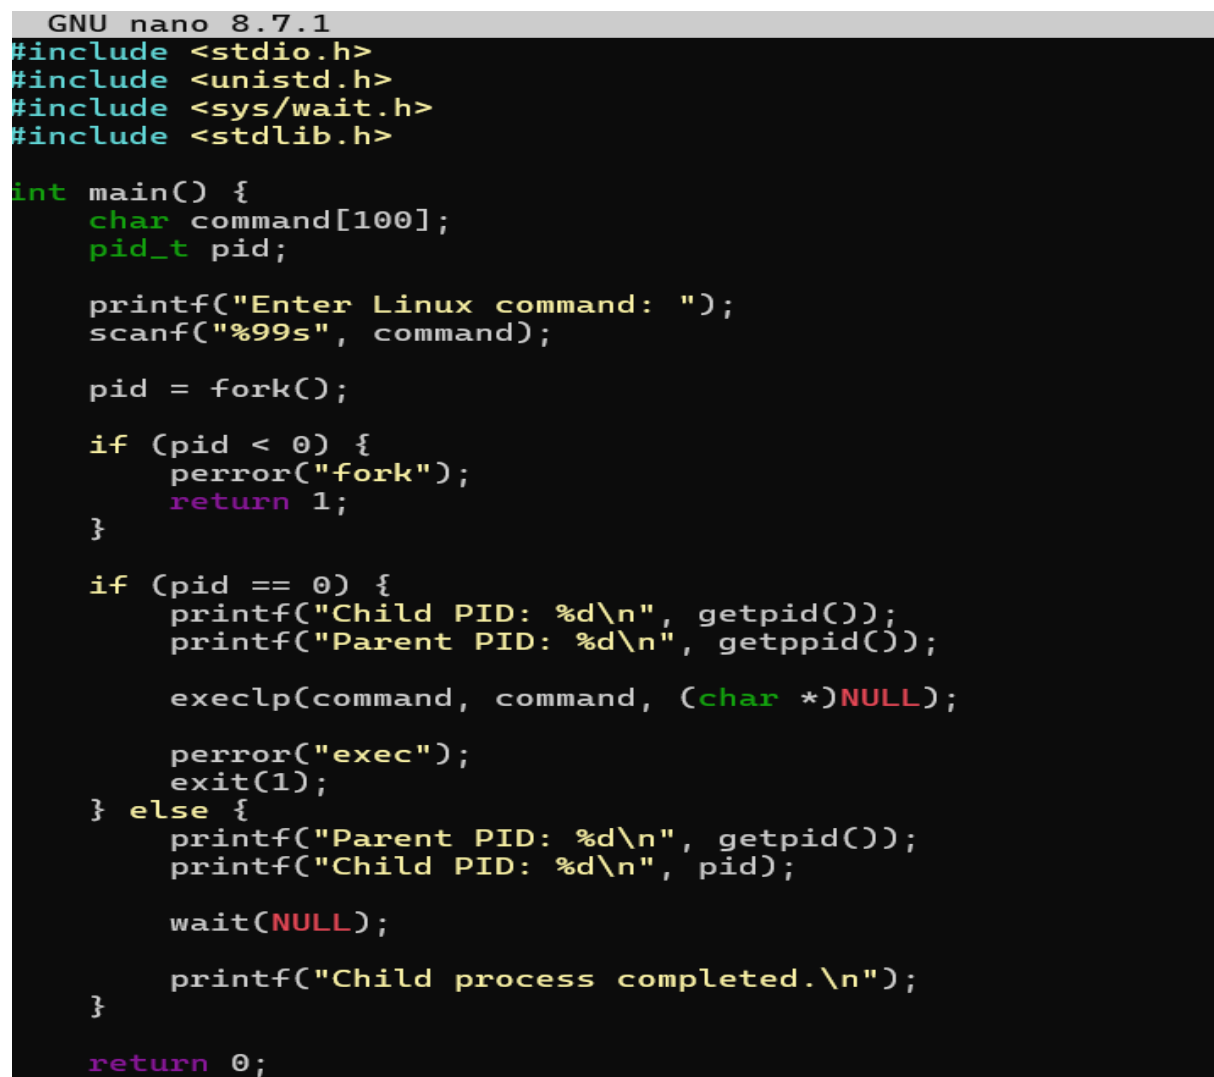


WEEK 1

Create file

A terminal window with a dark background. The title bar shows 'imvarls@LAPTOP-VQ4D70L7:'. The command prompt shows 'imvarls@LAPTOP-VQ4D70L7:~\$ nano week1.c|'.

CODE

A code editor window titled 'GNU nano 8.7.1'. It contains the following C code:

```
#include <stdio.h>
#include <unistd.h>
#include <sys/wait.h>
#include <stdlib.h>

int main() {
    char command[100];
    pid_t pid;

    printf("Enter Linux command: ");
    scanf("%99s", command);

    pid = fork();

    if (pid < 0) {
        perror("fork");
        return 1;
    }

    if (pid == 0) {
        printf("Child PID: %d\n", getpid());
        printf("Parent PID: %d\n", getppid());

        execlp(command, command, (char *)NULL);

        perror("exec");
        exit(1);
    } else {
        printf("Parent PID: %d\n", getpid());
        printf("Child PID: %d\n", pid);

        wait(NULL);

        printf("Child process completed.\n");
    }

    return 0;
}
```

```
imvarls@LAPTOP-VQ4D70L7: ~$ nano week1.c
imvarls@LAPTOP-VQ4D70L7: ~$ gcc week1.c -o week1
imvarls@LAPTOP-VQ4D70L7: ~$ |
```

```
imvarls@LAPTOP-VQ4D70L7: ~$ nano week1.c
imvarls@LAPTOP-VQ4D70L7: ~$ gcc week1.c -o week1
imvarls@LAPTOP-VQ4D70L7: ~$ ./week1
Enter Linux command: |
```

OUTPUT

```
imvarls@LAPTOP-VQ4D70L7: ~$ nano week1.c
imvarls@LAPTOP-VQ4D70L7: ~$ gcc week1.c -o week1
imvarls@LAPTOP-VQ4D70L7: ~$ ./week1
Enter Linux command: pwd
Parent PID: 634
Child PID: 637
Child PID: 637
Parent PID: 634
/home/imvarls
Child process completed.
imvarls@LAPTOP-VQ4D70L7: ~$ |
```