

Tables and figures

Tables

Tinytable emits raw Typst content directly. Keep results: "asis" to pass it through into the document:

```
#calepin.chunk(results: "asis")[
  ``r
library(tinytable)
dat <- head(iris)
tt(dat, caption = "Hello world!") |>
  style_tt(i = 1:2, j = 2:3, background = "teal", color = "white") |>
  print('typst')
  ``
]
```

Sepal.Length	Sepal.Width	Petal.Length	Petal.Width	Species
5.1	3.5	1.4	0.2	setosa
4.9	3.0	1.4	0.2	setosa
4.7	3.2	1.3	0.2	setosa
4.6	3.1	1.5	0.2	setosa
5.0	3.6	1.4	0.2	setosa
5.4	3.9	1.7	0.4	setosa

Table 1: Hello world!

Multi-plot figures

Chunks that produce multiple plots can be displayed as one figure. Use `fig-layout-columns` and `fig-layout-rows` to control the grid, and `fig-subcaptions` to add per-panel captions.

```
#calepin.chunk(
  fig-caption: [Regression diagnostics],
  fig-subcaptions: (
    [Residuals vs fitted],
    [Normal Q-Q],
    [Scale-location],
    [Cook's distance],
  ),
  fig-layout-columns: (1fr, 1fr),
  fig-layout-rows: (auto, auto),
  fig-display-width: 90%,
)[``r
model <- lm(mpg ~ wt + hp, data = mtcars)

plot(model, which = 1)
plot(model, which = 2)
plot(model, which = 3)
plot(model, which = 4)
``]
```

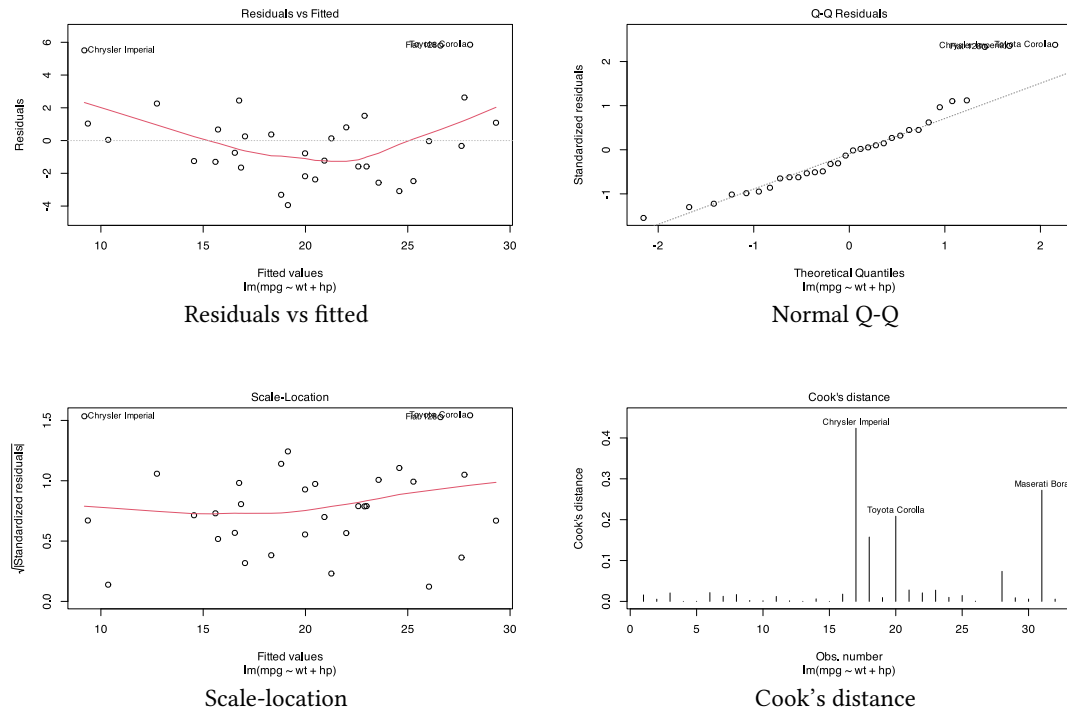


Figure 1: Regression diagnostics

With `fig-layout-columns: (1fr, 1fr)`, Kalepin displays the four plots in a two-column grid. The first plot is saved with the chunk label, and later plots use numbered artifact names such as `fig-diagnostics-2.svg`.