

Beginning Android 3



Mark Murphy



Apress®

Beginning Android 3

Copyright © 2011 by Mark Murphy

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without the prior written permission of the copyright owner and the publisher.

ISBN-13 (pbk): 978-1-4302-3297-1

ISBN-13 (electronic): 978-1-4302-3298-8

Trademarked names, logos, and images may appear in this book. Rather than use a trademark symbol with every occurrence of a trademarked name, logo, or image we use the names, logos, and images only in an editorial fashion and to the benefit of the trademark owner, with no intention of infringement of the trademark.

The use in this publication of trade names, trademarks, service marks, and similar terms, even if they are not identified as such, is not to be taken as an expression of opinion as to whether or not they are subject to proprietary rights.

President and Publisher: Paul Manning

Lead Editor: Steve Anglin

Development Editor: Tom Welsh

Technical Reviewer: Dylan Philips

Editorial Board: Steve Anglin, Mark Beckner, Ewan Buckingham, Gary Cornell, Jonathan Gennick, Jonathan Hassell, Michelle Lowman, Matthew Moodie, James Markham, Jeff Olson, Jeffrey Pepper, Frank Pohlmann, Douglas Pundick, Ben Renow-Clarke, Dominic Shakeshaft, Matt Wade, Tom Welsh

Coordinating Editor: Jessica Belanger

Copy Editor: William McManus

Compositor: MacPS, LLC

Indexer: John Collin

Artist: April Milne

Cover Designer: Anna Ishchenko

Distributed to the book trade worldwide by Springer Science+Business Media, LLC., 233 Spring Street, 6th Floor, New York, NY 10013. Phone 1-800-SPRINGER, fax 201-348-4505, e-mail orders-ny@springer-sbm.com, or visit www.springeronline.com.

For information on translations, please e-mail rights@apress.com, or visit www.apress.com.

Apress and friends of ED books may be purchased in bulk for academic, corporate, or promotional use. eBook versions and licenses are also available for most titles. For more information, reference our Special Bulk Sales—eBook Licensing web page at www.apress.com/bulk-sales.

The information in this book is distributed on an “as is” basis, without warranty. Although every precaution has been taken in the preparation of this work, neither the author(s) nor Apress shall have any liability to any person or entity with respect to any loss or damage caused or alleged to be caused directly or indirectly by the information contained in this work.

The source code for this book is available to readers at www.apress.com.

Contents

Part I: Core Concept.....	1
■ Chapter 1: The Big Picture.....	3
Benefits and Drawbacks of Smartphone Programming.....	3
What Androids Are Made Of.....	4
Stuff at Your Disposal	5
The Big Picture...of This Book.....	6
■ Chapter 2: How to Get Started	7
Step 1: Set Up Java.....	7
Install the JDK.....	7
Learn Java	8
Step 2: Install the Android SDK.....	8
Install the Base Tools.....	8
Install the SDKs and Add-ons	9
Step 3: Install the ADT for Eclipse.....	12
Step 4: Install Apache Ant.....	14
Step 5: Set Up the Emulator.....	15
Step 6: Set Up the Device	21
Windows	21
Mac OS X and Linux.....	22
■ Chapter 3: Your First Android Project	23
Step 1: Create the New Project.....	23
Eclipse	23
Command Line	26
Step 2: Build, Install, and Run the Application in Your Emulator or Device	27
Eclipse	27
Command Line	28

Chapter 4: Examining Your First Project	31
Project Structure.....	31
Root Contents	31
The Sweat Off Your Brow	32
And Now, the Rest of the Story.....	32
What You Get Out of It.....	33
Inside Your Manifest	33
In the Beginning, There Was the Root, and It Was Good.....	34
An Application for Your Application	35
Chapter 5: A Bit About Eclipse.....	37
What the ADT Gives You.....	37
Coping with Eclipse	38
How to Import a Non-Eclipse Project.....	38
How to Get to DDMS	42
How to Create an Emulator	43
How to Run a Project	44
How Not to Run Your Project	45
Alternative IDEs.....	45
IDEs and This Book	46
Chapter 6: Enhancing Your First Project	47
Supporting Multiple Screen Sizes.....	47
Specifying Versions	48
Part II: Activities	49
Chapter 7: Rewriting Your First Project	51
The Activity	51
Dissecting the Activity	52
Building and Running the Activity.....	53
Chapter 8: Using XML-Based Layouts	55
What Is an XML-Based Layout?	55
Why Use XML-Based Layouts?	55
OK, So What Does It Look Like?.....	56
What's with the @ Signs?.....	57
And How Do We Attach These to the Java?	57
The Rest of the Story	58
Chapter 9: Employing Basic Widgets.....	61
Assigning Labels	61
Button, Button, Who's Got the Button?	62
Fleeting Images	63
Fields of Green...or Other Colors.....	64
Just Another Box to Check.....	66
Turn the Radio Up	68
It's Quite a View	70
Padding.....	70
Other Useful Properties.....	71
Useful Methods	71
Colors.....	71

■ Chapter 10: Working with Containers	73
Thinking Linearly	73
LinearLayout Concepts and Properties	74
LinearLayout Example.....	76
The Box Model	80
All Things Are Relative	81
RelativeLayout Concepts and Properties	82
RelativeLayout Example.....	84
Overlap.....	86
Tabula Rasa	87
TableLayout Concepts and Properties	87
TableLayout Example.....	89
Scrollwork.....	90
■ Chapter 11: The Input Method Framework.....	93
Keyboards, Hard and Soft	93
Tailored to Your Needs.....	94
Tell Android Where It Can Go	98
Fitting In.....	100
Jane, Stop This Crazy Thing!	101
■ Chapter 12: Using Selection Widgets	103
Adapting to the Circumstances.....	103
Using ArrayAdapter.....	104
Lists of Naughty and Nice	104
Selection Modes	106
Spin Control	108
Grid Your Lions (or Something Like That...)	111
Fields: Now with 35% Less Typing!	115
Galleries, Give or Take the Art	118
■ Chapter 13: Getting Fancy with Lists	119
Getting to First Base	119
A Dynamic Presentation.....	121
Inflating Rows Ourselves	123
A Sidebar About Inflation	123
And Now, Back to Our Story	125
Better. Stronger. Faster.	125
Using convertView	125
Using the Holder Pattern.....	127
Interactive Rows	129
■ Chapter 14: Still More Widgets and Containers.....	135
Pick and Choose	135
Time Keeps Flowing Like a River.....	140
Seeking Resolution	141
Putting It on My Tab	142
The Pieces	143
Wiring It Together	144
Adding Them Up.....	146

Flipping Them Off.....	149
Getting in Somebody's Drawer	154
Other Good Stuff	156
Chapter 15: Embedding the WebKit Browser	159
A Browser, Writ Small	159
Loading It Up.....	161
Navigating the Waters.....	162
Entertaining the Client	163
Settings, Preferences, and Options (Oh, My!)	165
Chapter 16: Applying Menus	167
Flavors of Menu	167
Menus of Options	168
Menus in Context.....	169
Taking a Peek	170
Yet More Inflation.....	175
Menu XML Structure	175
Menu Options and XML.....	176
Inflating the Menu.....	177
In the Land of Menus and Honey	178
Chapter 17: Showing Pop-Up Messages.....	179
Raising Toasts.....	179
Alert! Alert!.....	180
Checking Them Out.....	181
Chapter 18: Handling Activity Lifecycle Events	183
Schroedinger's Activity	183
Life, Death, and Your Activity.....	184
onCreate() and onDestroy()	184
onStart(), onRestart(), and onStop()	185
onPause() and onResume()	185
The Grace of State	185
Chapter 19: Handling Rotation	187
A Philosophy of Destruction	187
It's All the Same, Just Different	188
Picking and Viewing a Contact	189
Saving Your State	190
Now with More Savings!.....	193
DIY Rotation	195
...But Google Does Not Recommend This	198
Forcing the Issue	198
Making Sense of It All	200
Chapter 20: Dealing with Threads	203
The Main Application Thread	203
Making Progress with ProgressBars.....	204
Getting Through the Handlers	204
Messages.....	205
Runnables	208

Where Oh Where Has My UI Thread Gone?	208
Asynching Feeling.....	208
The Theory	208
AsyncTask, Generics, and Varargs.....	209
The Stages of AsyncTask.....	209
A Sample Task.....	210
Threads and Rotation.....	214
Manual Activity Association.....	215
Flow of Events	217
Why This Works	218
And Now, the Caveats.....	218
Chapter 21: Creating Intent Filters	221
What's Your Intent?.....	221
Pieces of Intents	222
Intent Routing	222
Stating Your Intent(ions)	223
Narrow Receivers	224
The Pause Caveat	225
Chapter 22: Launching Activities and Subactivities	227
Peers and Subs	227
Start 'Em Up.....	228
Make an Intent.....	228
Make the Call	228
Tabbed Browsing, Sort Of.....	232
Chapter 23: Working with Resources	235
The Resource Lineup	235
String Theory	235
Plain Strings.....	236
String Formats	236
Styled Text	237
Styled Text and Formats	237
Got the Picture?	240
XML: The Resource Way	241
Miscellaneous Values	243
Dimensions	244
Colors.....	244
Arrays.....	245
Different Strokes for Different Folks	246
RTL Languages: Going Both Ways	250
Chapter 24: Defining and Using Styles	251
Styles: DIY DRY	251
Elements of Style	253
Where to Apply a Style.....	253
The Available Attributes.....	254
Inheriting a Style.....	254
The Possible Values	255
Themes: A Style by Any Other Name.....	256

Chapter 25: Handling Multiple Screen Sizes	257
Taking the Default.....	257
Whole in One.....	258
Think About Rules, Not Positions	259
Consider Physical Dimensions	260
Avoid "Real" Pixels	260
Choose Scalable Drawables	260
Tailor-Made, Just for You (and You, and You, and...).....	261
Adding the <supports-screens> Element.....	261
Resources and Resource Sets	262
Finding Your Size	263
Ain't Nothing Like the Real Thing.....	263
Density Differs	264
Adjusting the Density	264
Ruthlessly Exploiting the Situation	265
Replace Menus with Buttons	265
Replace Tabs with a Simple Activity	266
Consolidate Multiple Activities	266
Example: EU4You	266
The First Cut.....	267
Fixing the Fonts	272
Fixing the Icons.....	274
Using the Space	274
What If It Is Not a Browser?	276
Part III: Honeycomb and Tablets	279
Chapter 26: Introducing the Honeycomb UI	281
Why Honeycomb?	281
What the User Sees.....	282
The Holographic Theme	285
Dealing with the Rest of the Devices	286
Chapter 27: Using the Action Bar	289
Enabling the Action Bar	289
Promoting Menu Items to the Action Bar	290
Responding to the Logo	291
Adding Custom Views to the Action Bar	291
Defining the Layout	292
Putting the Layout in the Menu	293
Getting Control of User Input	294
Don't Forget the Phones!	295
Chapter 28: Fragments	297
Introducing Fragments	297
The Problem Addressed by Fragments	297
The Fragments Solution	298
The Android Compatibility Library	299
Creating Fragment Classes	300
General Fragments	300
ListFragment.....	301

Other Fragment Base Classes.....	306
Fragments, Layouts, Activities, and Multiple Screen Sizes	306
EU4You.....	307
DetailsActivity	311
Fragments and Configuration Changes.....	312
Designing for Fragments	312
Chapter 29: Handling Platform Changes	313
Things That Make You Go Boom	313
View Hierarchy	313
Changing Resources	314
Handling API Changes	314
Minimum, Maximum, Target, and Build Versions	315
Detecting the Version.....	316
Wrapping the API	317
Patterns for Honeycomb	318
The Action Bar	319
Writing Tablet-Only Apps	321
Chapter 30: Accessing Files	323
You and the Horse You Rode in On	323
Readin' 'n Writin'	326
External Storage: Giant Economy-Size Space	330
Where to Write	330
When to Write	331
StrictMode: Avoiding Janky Code	331
Setting Up StrictMode.....	332
Seeing StrictMode in Action	332
Development Only, Please!	333
Conditionally Being Strict.....	333
Linux File Systems: You Sync, You Win	335
Part IV: Data Stores, Network Services, and APIs	337
Chapter 31: Using Preferences	339
Getting What You Want	339
Stating Your Preference.....	340
Introducing PreferenceActivity.....	340
Letting Users Have Their Say	341
Adding a Wee Bit o' Structure	345
The Kind of Pop-Ups You Like.....	347
Preferences via Fragments.....	350
The Honeycomb Way	351
Adding Backward Compatibility.....	354
Chapter 32: Managing and Accessing Local Databases	357
A Quick SQLite Primer	359
Start at the Beginning	359
Setting the Table.....	362
Makin' Data.....	362
What Goes Around, Comes Around	364

Raw Queries.....	364
Regular Queries	364
Using Cursors.....	365
Custom CursorAdapters	366
Making Your Own Cursors	366
Flash: Sounds Faster Than It Is.....	367
Data, Data, Everywhere	367
Chapter 33: Leveraging Java Libraries	369
Ants and JARs.....	369
The Outer Limits.....	370
Following the Script.....	371
Reviewing the Script.....	374
Chapter 34: Communicating via the Internet	377
REST and Relaxation.....	377
HTTP Operations via Apache HttpClient.....	378
Parsing Responses	379
Stuff to Consider	381
AndroidHttpClient.....	382
Leveraging Internet-Aware Android Components.....	382
Downloading Files.....	383
Continuing Our Escape from Janky Code.....	391
Part V: Services	393
Chapter 35: Services: The Theory.....	395
Why Services?	395
Setting Up a Service	396
Service Class	396
Lifecycle Methods.....	396
Manifest Entry.....	397
Communicating to Services	397
Sending Commands with startService().....	397
Binding with bindService().....	398
Communicating from Services.....	399
Callback/Listener Objects	400
Broadcast Intents.....	400
Pending Results	400
Messenger	401
Notifications.....	401
Chapter 36: Basic Service Patterns.....	403
The Downloader.....	403
The Design	403
The Service Implementation	404
Using the Service	406
The Music Player	407
The Design	407
The Service Implementation	408
Using the Service	409
The Web Service Interface.....	410

The Design	411
The Rotation Challenge	411
The Service Implementation	411
Using the Service	416
Chapter 37: Alerting Users via Notifications	423
Notification Configuration	423
Hardware Notifications	424
Icons	424
Notifications in Action	425
Staying in the Foreground	429
FakePlayer, Redux	430
Notifications and Honeycomb	431
Part VI: Other Android Capabilities	435
Chapter 38: Requesting and Requiring Permissions	437
Mother, May I?	437
Halt! Who Goes There?	438
Enforcing Permissions via the Manifest	439
Enforcing Permissions Elsewhere	440
May I See Your Documents?	440
New Permissions in Old Applications	440
Permissions: Up Front or Not at All	441
Chapter 39: Accessing Location-Based Services	443
Location Providers: They Know Where You're Hiding	443
Finding Yourself	444
On the Move	445
Are We There Yet? Are We There Yet?	446
Testing...Testing...	447
Chapter 40: Mapping with MapView and MapActivity	449
Terms, Not of Endearment	449
Piling On	450
The Key to It All	450
The Bare Bones	451
Optional Maps	452
Exercising Your Control	453
Zoom	453
Center	454
Layers Upon Layers	454
Overlay Classes	454
Drawing the ItemizedOverlay	454
Handling Screen Taps	456
My, Myself, and MyLocationOverlay	456
Rugged Terrain	458
Maps and Fragments	459
Limit Yourself to Android 3.0	459
Use onCreateView() and onActivityCreated()	460
Host the Fragment in a MapActivity	461

■ Chapter 41: Handling Telephone Calls	463
Report to the Manager	463
You Make the Call!	464
No, Really, You Make the Call!	466
■ Chapter 42: Fonts	467
Love the One You're With	467
Additional Fonts	469
Here a Glyph, There a Glyph	470
■ Chapter 43: More Development Tools	473
Hierarchy Viewer: How Deep Is Your Code?	473
DDMS: Under Android's Hood	477
Logging	479
File Push and Pull	480
Screenshots	481
Location Updates	481
Placing Calls and Messages	482
Memory Management	485
adb: Like DDMS, with More Typing	487
Part VII: Alternative Application Environments	489
■ Chapter 44: The Role of Alternative Environments	491
In the Beginning, There Was Java...	491
...And It Was OK	492
Bucking the Trend	492
Support, Structure	493
Caveat Developer	493
■ Chapter 45: HTML5	495
Offline Applications	495
What Does It Mean?	495
How Do You Use It?	496
Web Storage	500
What Does It Mean?	500
How Do You Use It?	501
Web SQL Database	502
Going to Production	502
Testing	503
Signing and Distribution	503
Updates	503
Issues You May Encounter	503
Android Device Versions	503
Screen Sizes and Densities	504
Limited Platform Integration	504
Performance and Battery	505
Look and Feel	505
Distribution	505
HTML5 and Alternative Android Browsers	506
HTML5: The Baseline	506

Chapter 46: PhoneGap	507
What Is PhoneGap?	507
What Do You Write In?	507
What Features Do You Get?	508
What Do Apps Look Like?	508
How Does Distribution Work?	509
What About Other Platforms?	509
Using PhoneGap.....	510
Installation	510
Creating and Installing Your Project	510
PhoneGap Build.....	511
PhoneGap and the Checklist Sample	514
Sticking to the Standards	515
Adding PhoneGap APIs.....	517
Issues You May Encounter.....	519
Security.....	519
Screen Sizes and Densities	521
Look and Feel.....	521
For More Information	522
Chapter 47: Other Alternative Environments.....	523
Rhodes	523
Flash, Flex, and AIR	524
JRuby and Ruboto.....	524
Mono for Android	524
App Inventor.....	525
Titanium Mobile	526
Other JVM Compiled Languages.....	527
Part VIII: The Ever-Evolving Android	529
Chapter 48: Dealing with Devices.....	531
This App Contains Explicit Instructions.....	531
Explicit Feature Requests	531
Implied Feature Requests	532
A Guaranteed Market.....	533
Other Stuff That Varies.....	534
Bugs, Bugs, Bugs.....	534
Device Testing	535
Chapter 49: Where Do We Go from Here?	537
Questions, Sometimes with Answers	537
Heading to the Source	538
Getting Your News Fix.....	539
Index	541

Part

Core Concept

The Big Picture

Android is everywhere. Phones. Tablets. TVs and set-top boxes powered by Google TV. Soon, Android will be in cars and all sort of other places as well.

However, the general theme of Android devices will be smaller screens and/or no hardware keyboard. And, by the numbers, Android will probably be associated mostly with smartphones for the foreseeable future. For developers, this has both benefits and drawbacks, as described next. This chapter also describes the main components in an Android application and the Android features that you can exploit when developing your applications.

Benefits and Drawbacks of Smartphone Programming

On the plus side, Android-style smartphones are sexy. Offering Internet services over mobile devices dates back to the mid-1990s and the Handheld Device Markup Language (HDML). However, only in recent years have phones capable of Internet access taken off. Now, thanks to trends like text messaging and products like Apple's iPhone, phones that can serve as Internet-access devices are rapidly gaining popularity. So, working on Android applications gives you experience with an interesting technology (Android) in a fast-moving market segment (Internet-enabled phones), which is always a good thing.

The problem comes when you actually have to program the darn things.

Anyone with experience in programming for PDAs or phones has felt the pain of phones simply being *small* in all sorts of dimensions:

- Screens are small (you will not get comments like, “Is that a 24-inch LCD in your pocket, or...?”).
- Keyboards, if they exist, are small.

- Pointing devices, if they exist, are annoying (as anyone who has lost their stylus will tell you) or inexact (large fingers and “multitouch” LCDs can sometimes be...problematic).
- CPU speed and memory are limited compared to what’s available on desktops and servers.

Moreover, applications running on a phone have to deal with the fact that they’re *on a phone*.

People with mobile phones tend to get very irritated when those phones do not work. Similarly, those same people will get irritated if your program “breaks” their phones by

- Tying up the CPU such that calls can’t be received.
- Not quietly fading into the background when a call comes in or needs to be placed, because the program doesn’t work properly with the rest of the phone’s operating system.
- Crashing the phone’s operating system, such as by leaking memory like a sieve.

Hence, developing programs for a phone is a different experience than developing desktop applications, web sites, or back-end server processes. The tools look different, the frameworks behave differently, and you have more limitations on what you can do with your programs.

What Android tries to do is meet you halfway:

- You get a commonly used programming language (Java) with some commonly used libraries (e.g., some Apache Commons APIs), with support for tools you may be used to using (Eclipse).
- You get a fairly rigid and uncommon framework in which your programs need to run so they can be “good citizens” on the phone and not interfere with other programs or the operation of the phone itself.

As you might expect, much of this book deals with that framework and how you write programs that work within its confines and take advantage of its capabilities.

What Androids Are Made Of

When you write a desktop application, you are “master of your own domain.” You launch your main window and any child windows—like dialog boxes—that are needed. From your standpoint, you are your own world, leveraging features supported by the operating system, but largely ignorant of any other program that may be running on the computer at the same time. If you do interact with other programs, it is typically through an application programming interface (API), such as Java Database Connectivity (JDBC), or frameworks atop it, to communicate with MySQL or another database.

Android has similar concepts, but they are packaged differently and structured to make phones more crash-resistant:

- *Activities*: The building block of the user interface is the activity. You can think of an activity as being the Android analogue for the window or dialog box in a desktop application or the page in a classic web application. Android is designed to support lots of cheap activities, so you can allow users to keep tapping to open new activities and tapping the Back button to back up, just like they do in a web browser.
- *Services*: Activities are short-lived and can be shut down at any time. Services, on the other hand, are designed to keep running, if needed, independent of any activity. You might use a service to check for updates to an RSS feed or to play back music even if the controlling activity is no longer operating. You will also use services for scheduled tasks (“cron jobs”) and for exposing custom APIs to other applications on the device, though those are relatively advanced capabilities.
- *Content providers*: Content providers provide a level of abstraction for any data stored on the device that is accessible by multiple applications. The Android development model encourages you to make your own data available to other applications, as well as your own applications. Building a content provider lets you do that, while maintaining complete control over how your data gets accessed.
- *Intents*: Intents are system messages that run around the inside of the device and notify applications of various events, from hardware state changes (e.g., an SD card was inserted), to incoming data (e.g., a Short Message Service [SMS] message arrived), to application events (e.g., your activity was launched from the device’s main menu). Not only can you respond to an Intent, but you can create your own to launch other activities or to let you know when specific situations arise (e.g., raise such-and-so Intent when the user gets within 100 meters of this-and-such location).

Stuff at Your Disposal

- *Storage*: You can package data files with your application for things that do not change, such as icons or help files. You also can carve out a small bit of space on the device itself, for databases or files containing user-entered or retrieved data needed by your application. And, if the user supplies bulk storage, like an SD card, you can read and write files on there as needed.

- *Network*: Android devices generally are Internet-ready, through one communications medium or another. You can take advantage of the Internet access at any level you wish, from raw Java sockets all the way up to a built-in WebKit-based web browser widget you can embed in your application.
- *Multimedia*: Android devices have the ability to play back and record audio and video. While the specifics may vary from device to device, you can query the device to learn its capabilities and then take advantage of the multimedia capabilities as you see fit, whether that is to play back music, take pictures with the camera, or use the microphone for audio note-taking.
- *Global Positioning System (GPS)*: Android devices frequently have access to location providers, such as GPS, that can tell your applications where the device is on the face of the Earth. In turn, you can display maps or otherwise take advantage of the location data, such as to track a device's movements if the device has been stolen.
- *Phone services*: Because Android devices are typically phones, your software can initiate calls, send and receive SMS messages, and do everything else you expect from a modern bit of telephony technology.

The Big Picture...of This Book

Now that you have the Android big picture, here is what's coming in the rest of this book:

- The next two chapters are designed to get you going quickly with the Android environment, through a series of step-by-step, tutorial-style instructions for setting up the tools you need, creating your first project, and getting that first project running on the Android emulator.
- The three chapters that follow explain a bit more about what just happened in Chapters 2 and 3. We examine the Android project that we created, talk a bit more about Eclipse, and discuss some things we could add to the project to help it run on more devices and enhance its capabilities.
- The bulk of the book explores the various capabilities of the Android APIs—how to create components like activities, how to access the Internet and local databases, how to get your location and show it on a map, and so forth.

Chapter 2

How to Get Started

Without further ado, let's get you set up with the pieces and parts necessary to build an Android app.

NOTE: The instructions presented here are accurate as of the time of this writing. However, the tools change rapidly, so these instructions may be out of date by the time you read this. Please refer to the Android Developers web site for current instructions, using this as a base guideline of what to expect.

Step 1: Set Up Java

When you write Android applications, you typically write them in Java source code. That Java source code is then turned into the stuff that Android actually runs (Dalvik bytecode in an Android package [APK] file).

Hence, the first thing you need to do is get set up with a Java development environment so that you are prepared to start writing Java classes.

Install the JDK

You need to obtain and install the official Sun/Oracle Java SE SDK (JDK). You can obtain this from the Oracle Java web site for Windows and Linux, and presumably from Apple for Mac OS X. The plain JDK (sans any “bundles”) should suffice. Follow the instructions supplied by Oracle or Apple for installing it on your machine. At the time of this writing, Android supports Java 5 and Java 6, the latter being the now-current edition.

Alternative Java Compilers

In principle, you are supposed to use the official Sun/Oracle Java SE Development Kit (JDK) In practice, it appears that OpenJDK also works, at least on Ubuntu. However, the

further removed you get from the official Sun/Oracle implementation, the less likely it is that it will work. For example, the GNU Compiler for Java (GCJ) may not work with Android.

Learn Java

This book, like most books and documentation on Android, assumes that you have basic Java programming experience. If you lack this, you really should consider spending a bit of time on Java fundamentals, before you dive into Android. Otherwise, you may find the experience to be frustrating.

If you are in need of a crash course in Java to get involved in Android development, here are the concepts you need to learn, presented in no particular order:

- Language fundamentals (flow control, etc.)
- Classes and objects
- Methods and data members
- Public, private, and protected
- Static and instance scope
- Exceptions
- Threads and concurrency control
- Collections
- Generics
- File I/O
- Reflection
- Interfaces

One of the easiest ways of acquiring this knowledge is to read *Learn Java for Android Development* by Jeff Friesen (Apress, 2010).

Step 2: Install the Android SDK

The Android SDK gives you all the tools you need to create and test Android applications. It comes in two parts: the base tools, and version-specific SDKs and related add-ons.

Install the Base Tools

You can find the Android developer tools on the Android Developers web site. Download the ZIP file that is appropriate for your platform and unzip it in a logical location on your

machine—no specific path is required. Windows users also have the option of running a self-installing EXE file.

Install the SDKs and Add-ons

Inside the tools/ directory of your Android SDK installation from the previous step, you will see an android batch file or shell script. If you run that, you will be presented with the Android SDK and AVD Manager, shown in Figure 2–1.



Figure 2–1. *Android SDK and AVD Manager*

At this point, you have some of the build tools, but you lack the Java files necessary to compile an Android application. You also lack a few additional build tools, and the files necessary to run an Android emulator. To address this, click the Available packages option on the left to open the screen shown in Figure 2–2.

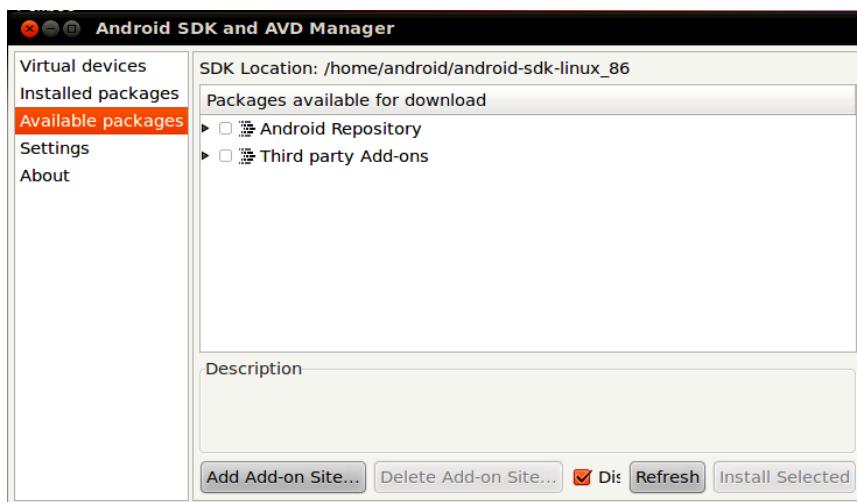


Figure 2–2. *Android SDK and AVD Manager available packages*

Open the Android Repository branch of the tree. After a short pause, you will see a screen similar to Figure 2–3.

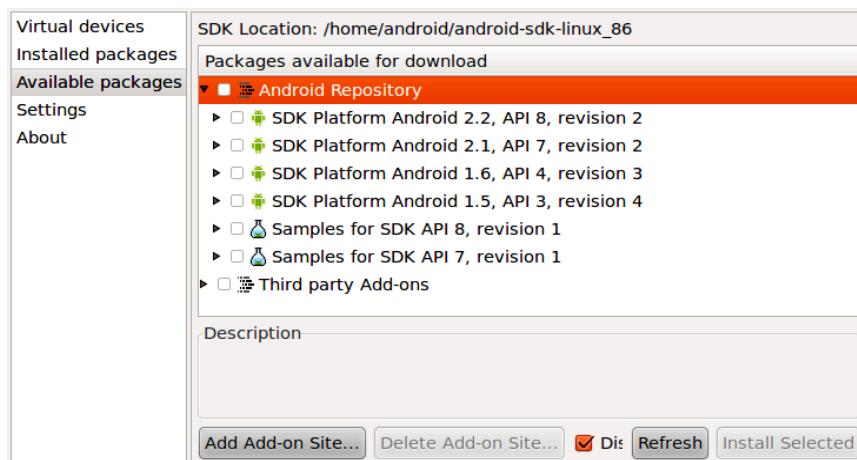


Figure 2–3. *Android SDK and AVD Manager available Android packages*

Check the boxes for the following items:

- “SDK Platform” for all Android SDK releases you want to test against
- “Documentation for Android SDK” for the latest Android SDK release
- “Samples for SDK” for the latest Android SDK release, and perhaps for older releases if you wish

Then, open the Third party Add-ons branch of the tree. After a short pause, you will see a screen similar to Figure 2–4.

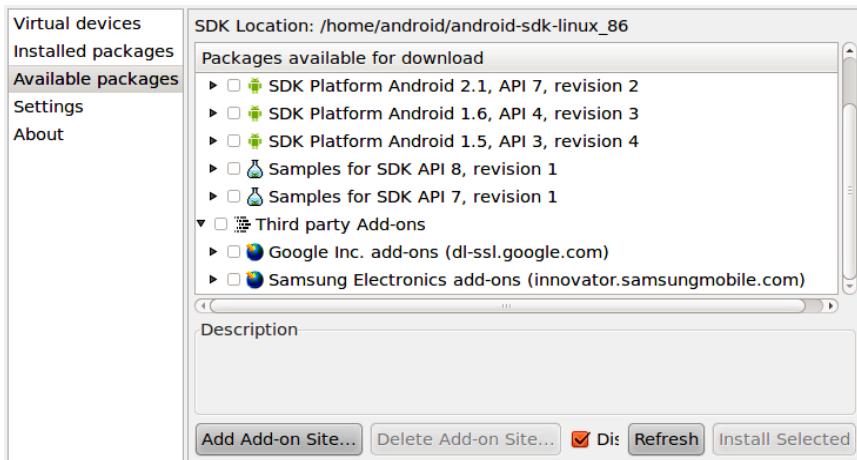


Figure 2–4. *Android SDK and AVD Manager available third-party add-ons*

Click the “Google Inc. add-ons” branch to open it, as shown in Figure 2–5.

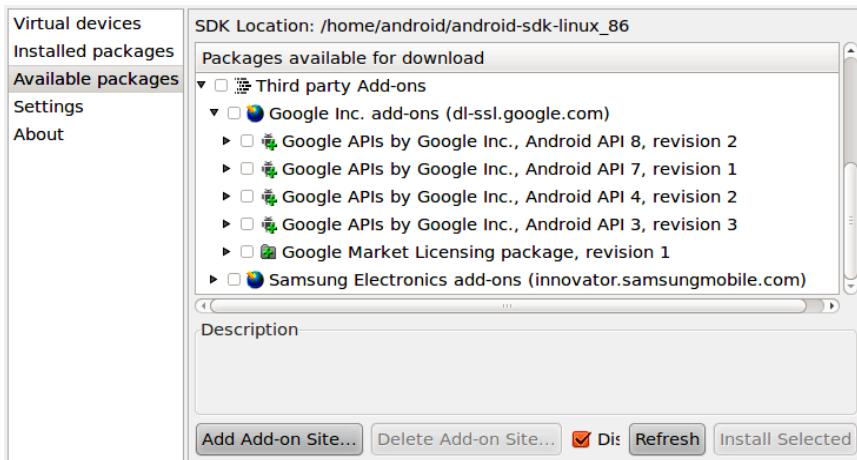


Figure 2–5. *Android SDK and AVD Manager available Google add-ons*

Most likely, you will want to check the boxes for the “Google APIs by Google Inc.” items that match up with the SDK versions you selected in the Android Repository branch. The Google APIs include support for Google Maps, both from your code and in the Android emulator.

After you have checked all the items you want to download, click the Install Selected button, which brings up a license confirmation dialog box, shown in Figure 2–6.

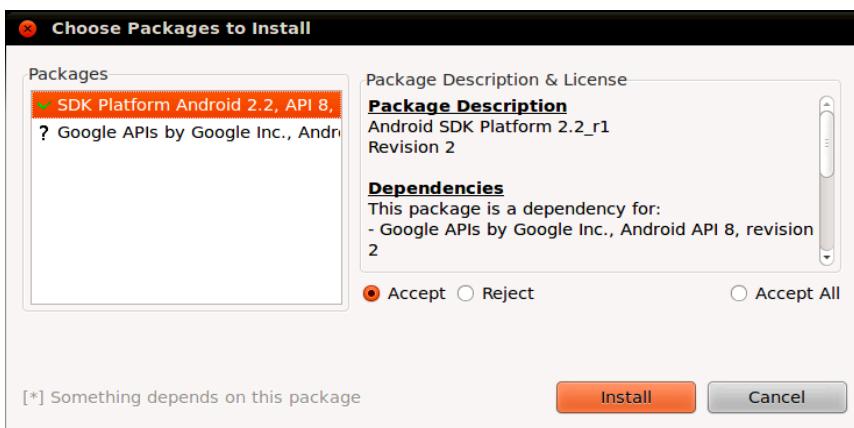


Figure 2–6. *Android SDK and AVD Manager license agreement screen*

Review and accept the licenses if you agree with the terms, and then click the Install button. At this point, this is a fine time to go get lunch or dinner. Unless you have a substantial Internet connection, downloading all of this data and unpacking it will take a fair bit of time.

When the download is complete, you can close the SDK and AVD Manager if you wish, though you will use it to set up the emulator in Step 5 of this chapter.

Step 3: Install the ADT for Eclipse

If you will not be using Eclipse for your Android development, you can skip to the next section. If you will be using Eclipse but have not yet installed it, you will need to do that first. Eclipse can be downloaded from the Eclipse web site, www.eclipse.org/. The Eclipse IDE for Java Developers package will work fine.

Next, you need to install the Android Developer Tools (ADT) plug-in. To do this, open Eclipse and choose Help > Install New Software. Then, in the Install dialog box, click the Add button to add a new source of plug-ins. Give it a name (e.g., Android) and supply the following URL: <https://dl-ssl.google.com/android/eclipse/>. That should trigger Eclipse to download the roster of plug-ins available from that site (see Figure 2–7).

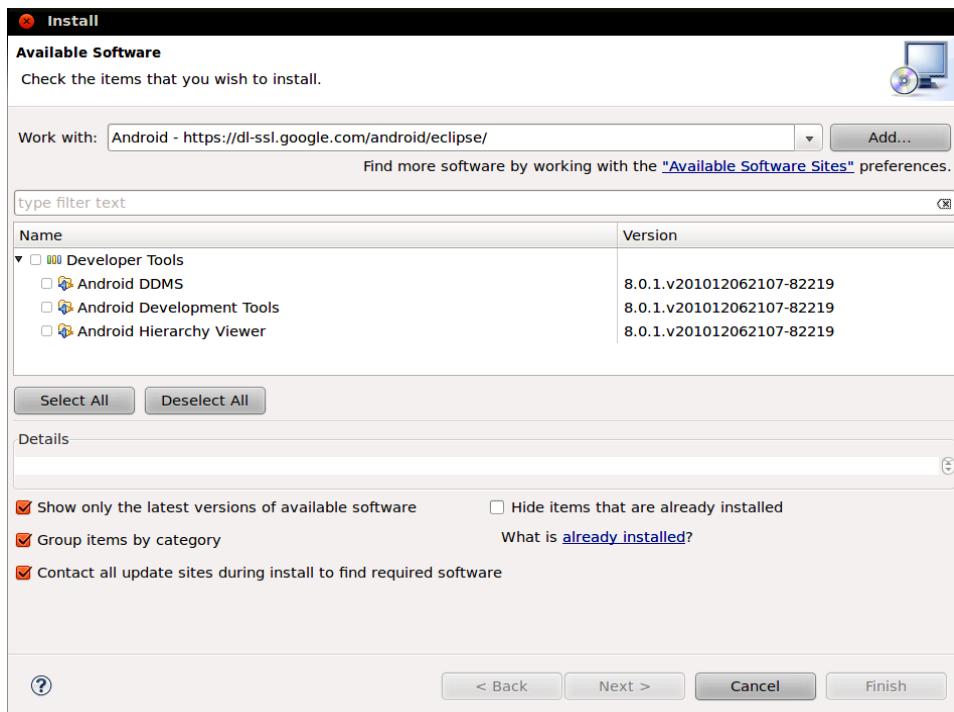


Figure 2–7. Eclipse ADT plug-in installation

Check the Developer Tools check box and click the Next button. Follow the rest of the wizard steps to review the tools to be downloaded and review and accept their respective license agreements. When the Finish button is enabled, click it, and Eclipse will download and install the plug-ins. When it's done, Eclipse will ask to restart; let it do so.

Then, you need to show ADT where to locate your Android SDK installation from the preceding section. To do this, choose Window ▶ Preferences from the Eclipse main menu (or the equivalent Preferences option for Mac OS X). Click the Android entry in the list pane of the Preferences dialog box, as shown in Figure 2–8.

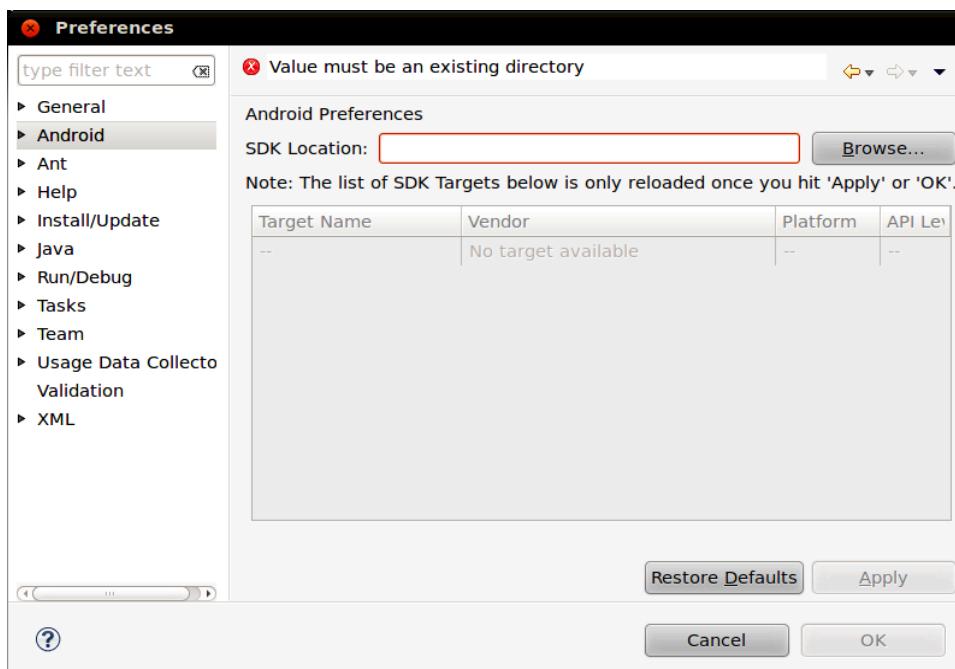


Figure 2–8. Eclipse ADT configuration

Then, click the Browse button to find the directory where you installed the SDK. After choosing it, click Apply in the Preferences dialog box, and you should see the Android SDK versions you installed previously. Then, click OK, and the ADT will be ready for use.

Step 4: Install Apache Ant

If you will be doing all of your development from Eclipse, you can skip to the next section. If you wish to develop using command-line build tools, you need to install Apache Ant. You may have this installed already from previous Java development work, as it is fairly common in Java projects. However, you need Ant version 1.8.1 or later, so check your current copy (e.g., `ant -version`).

If you do not have Ant or do not have the correct version, you can obtain it from the Apache Ant web site, at <http://ant.apache.org/>. Full installation instructions are available in the Ant manual, but the basic steps are as follows:

1. Unpack the ZIP archive in a logical place on your machine.
2. Add a `JAVA_HOME` environment variable, pointing to where your JDK is installed, if you do not have one already.
3. Add an `ANT_HOME` environment variable, pointing to the directory where you unpacked Ant in step 1.

4. Add \$JAVA_HOME/bin and \$ANT_HOME/bin to your PATH.
5. Run ant -version to confirm that Ant is installed properly.

Step 5: Set Up the Emulator

The Android tools include an *emulator*, a piece of software that pretends to be an Android device. This is very useful for development—it not only enables you to get started on your Android development without a device, but also enables you to test device configurations for devices that you do not own.

The Android emulator can emulate one or several Android devices. Each configuration you want is stored in an Android Virtual Device (AVD). The Android SDK and AVD Manager, which you used to download the SDK components earlier in this chapter, is where you create these AVDs.

If you do not have the SDK and AVD Manager running, you can run it via the android command from your SDK's tools/ directory, or via Window ▶ SDK and AVD Manager from Eclipse. It opens with a screen listing the AVDs you have available; initially, the list will be empty, as shown in Figure 2–9.



Figure 2–9. *Android SDK and AVD Manager* *Android Virtual Devices* list

Click the New button to create a new AVD file. This opens the dialog box shown in Figure 2–10, where you can configure how this AVD should look work.

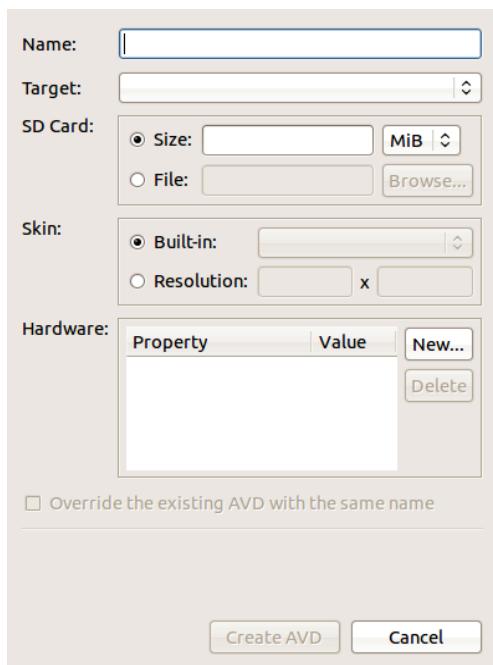


Figure 2–10. Adding a new AVD

You need to provide the following:

- *A name for the AVD:* Since the name goes into files on your development machine, you are limited by the file name conventions for your operating system (e.g., no backslashes on Windows).
- *The Android version (target) you want the emulator to run:* Choose one of the SDKs you installed via the Target drop-down list. Note that in addition to “pure” Android environments, you will have options based on the third-party add-ons you selected. For example, you probably have some options for setting up AVDs containing the Google APIs, and you will need such an AVD for testing an application that uses Google Maps.
- *Details about the SD card the emulator should emulate:* Since Android devices invariably have some form of external storage, you probably want to set up an SD card, by supplying a size in the associated field. However, since a file will be created on your development machine of whatever size you specify for the card, you probably do not want to create a 2GB emulated SD card. 32MB is a nice starting point, though you can go larger if needed.

- The “skin” or resolution the emulator should run in: The skin options you have available depend upon what target you chose. The skins let you choose a typical Android screen resolution (e.g., WVGA800 for 800×480). You can also manually specify a resolution when you want to test a nonstandard configuration.

You can skip the Hardware section of the dialog box for now, as changing those settings is usually only required for advanced configurations.

The resulting dialog box might look something like Figure 2–11.

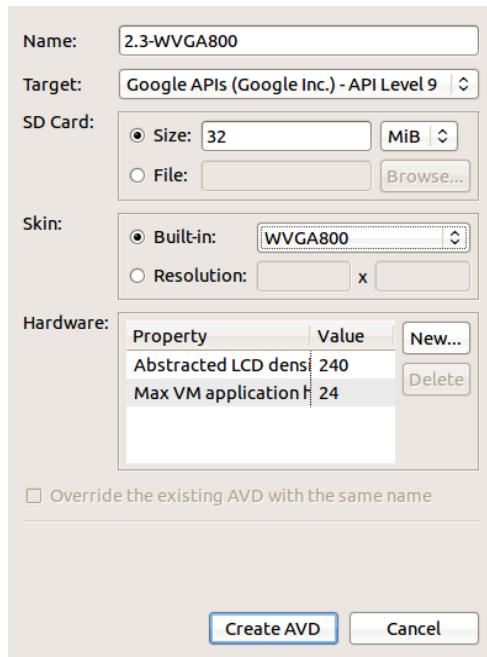


Figure 2–11. Adding a new AVD (continued)

Click the Create AVD button, and your AVD stub will be created.

To start the emulator, select it in the Android Virtual Devices list and click Start. You can skip the launch options for now and just click Launch. The first time you launch a new AVD, it will take a long time to start up. The second and subsequent times you start the AVD, it will come up a bit faster, and usually you need to start it only once per day (e.g., when you start development). You do not need to stop and restart the emulator every time you want to test your application, in most cases.

The emulator will go through a few startup phases, the first of which displays a plain-text ANDROID label, as shown in Figure 2–12.

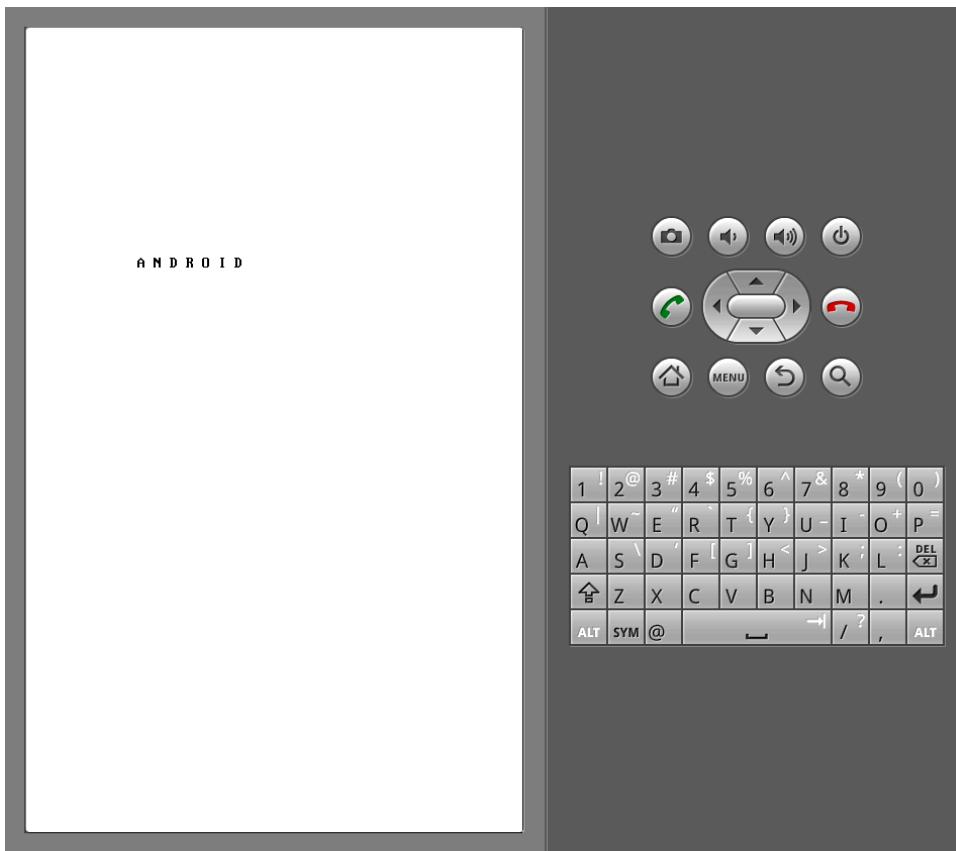


Figure 2–12. *Android emulator, initial startup segment*

The second phase displays a graphical Android logo, as shown in Figure 2–13.

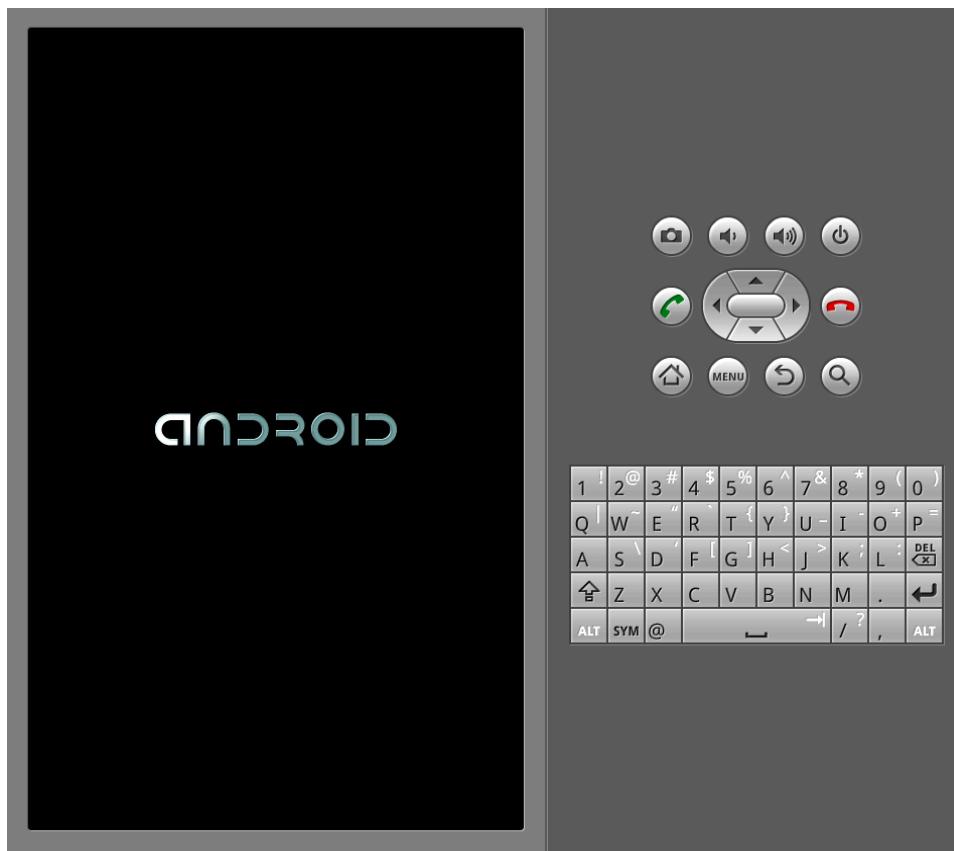


Figure 2–13. *Android emulator, secondary startup segment*

Finally, the emulator reaches the home screen (the first time you run the AVD; see Figure 2–14) or the keyguard (see Figure 2–15).

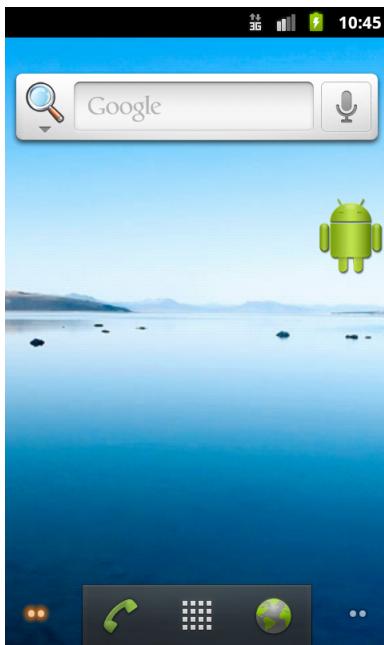


Figure 2–14. *Android home screen*

If you get the keyguard, press the Menu button or slide the green lock on the screen to the right, to get to the emulator’s home screen.



Figure 2–15. *Android keyguard*

Step 6: Set Up the Device

With an emulator set up, you do not need an Android device to get started in Android application development. Having one is a good idea before you try to ship an application (e.g., upload it to the Android Market). But perhaps you already have a device—maybe that is what is spurring your interest in developing for Android.

The first step to make your device ready for use with development is to go into the Settings application on the device. From there, choose Applications, then Development. That should give you a set of check boxes for choosing development-related options, similar to what's shown in Figure 2–16.

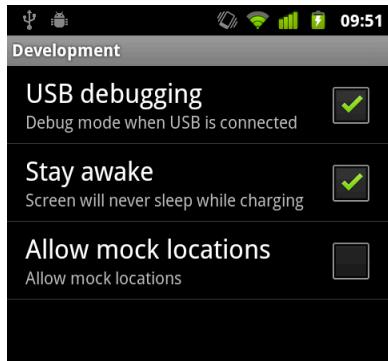


Figure 2–16. *Android device development settings*

Generally, you will want to enable USB debugging so that you can use your device with the Android build tools. You can leave the other settings alone for now if you wish, though you may find the Stay awake option to be handy, as it saves you from having to unlock your phone repeatedly while it is plugged into USB.

Next, you need to set up your development machine to talk to your device. That process varies by the operating system of your development machine, as covered in the following sections.

Windows

When you first plug in your Android device, Windows attempts to find a driver for it. It is possible that, by virtue of other software you have installed, the driver is ready for use. If Windows finds a driver, you are probably ready to go.

If Windows doesn't find the driver, here are some options for getting one:

- *Windows Update:* Some versions of Windows (e.g., Vista) prompt you to search Windows Update for drivers. This is certainly worth a shot, though not every device will have supplied its driver to Microsoft.

- *Standard Android driver:* In your Android SDK installation, you will find a google-usb_driver directory, containing a generic Windows driver for Android devices. You can try pointing the driver wizard at this directory to see if it thinks this driver is suitable for your device.
- *Manufacturer-supplied driver:* If you still do not have a driver, search the CD that came with the device (if any) or search the web site of the device manufacturer. Motorola, for example, has drivers available for all of its devices in one spot for download.

Mac OS X and Linux

Odds are decent that simply plugging in your device will “just work.” You can see if Android recognizes your device by running adb devices in a shell (e.g., OS X Terminal), where adb is in your platform-tools/ directory of your SDK. If you get output similar to the following, Android detected your device:

```
List of devices attached  
HT9CPP809576 device
```

If you are running Ubuntu (or perhaps another Linux variant) and this command did not work, you may need to add some udev rules. For example, here is a 51-android.rules file that will handle the devices from a handful of manufacturers:

```
SUBSYSTEM=="usb", SYSFS{idVendor}=="0bb4", MODE="0666"  
SUBSYSTEM=="usb", SYSFS{idVendor}=="22b8", MODE="0666"  
SUBSYSTEM=="usb", SYSFS{idVendor}=="18d1", MODE="0666"  
SUBSYSTEMS=="usb", ATTRS{idVendor}=="18d1", ATTRS{idProduct}=="0c01", MODE="0666",  
    OWNER="[me]"  
SUBSYSTEM=="usb", SYSFS{idVendor}=="19d2", SYSFS{idProduct}=="1354", MODE="0666"  
SUBSYSTEM=="usb", SYSFS{idVendor}=="04e8", SYSFS{idProduct}=="681c", MODE="0666"
```

Drop that in your /etc/udev/rules.d directory on Ubuntu, and then either reboot the computer or otherwise reload the udev rules (e.g., sudo service udev reload). Then, unplug the device, plug it in again, and see if it is detected.

Chapter 3

Your First Android Project

Now that you have the Android SDK, it is time to make your first Android project. The good news is that this requires zero lines of code—Android’s tools create a “Hello, world!” application for you as part of creating a new project. All you need to do is build it, install it, and watch it open on your emulator or device.

Step 1: Create the New Project

Android’s tools can create a complete skeleton project for you, with everything you need for a complete (albeit very trivial) Android application. The process differs depending on whether you are using Eclipse or the command line.

Eclipse

From the Eclipse main menu, choose File ▶ New ▶ Project to open the New Project dialog box, which gives you a list of project type wizards to choose from. Expand the Android option and click Android Project, as shown in Figure 3–1.

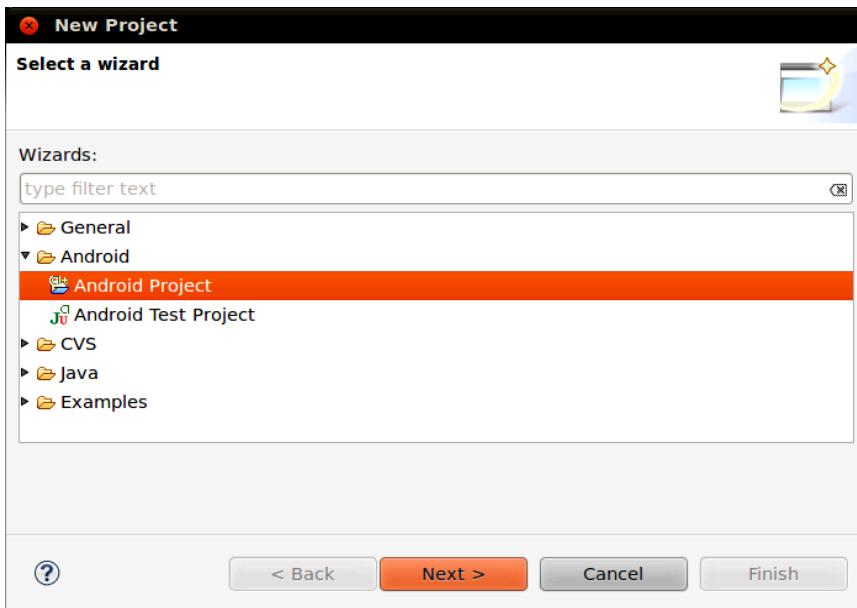


Figure 3–1. Selecting a wizard in the Eclipse New Project dialog box

Click Next to advance to the first page of the New Android Project wizard, shown in Figure 3–2.

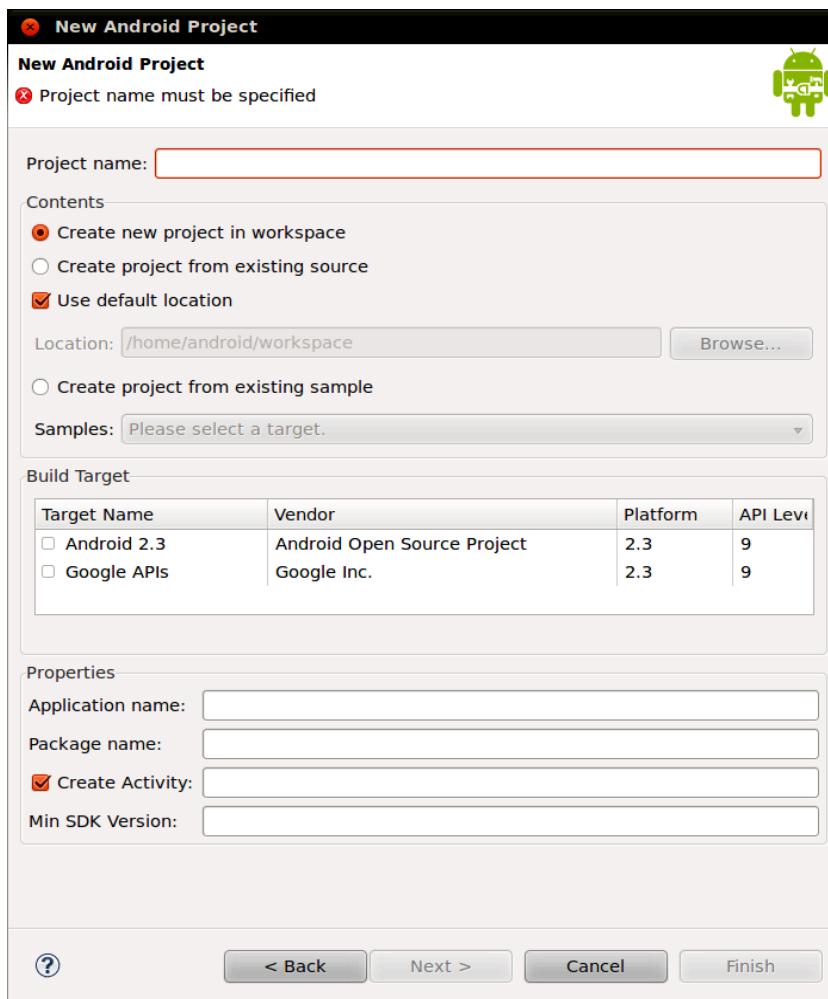


Figure 3–2. Eclipse New Android Project wizard, ready to fill in

Fill in the following and leave the default settings otherwise (the completed example for this project is shown in Figure 3–3):

- *Project name:* The name of the project (e.g., Now)
- *Build Target:* The Android SDK you wish to compile against (e.g., Google APIs for Android 2.3.3)
- *Application name:* The display name of your application, which will be used for the caption under your icon in the launcher (e.g., Now)
- *Package name:* The name of the Java package in which this project belongs (e.g., com.commonsware.android.skeleton)
- *Create Activity:* The name of the initial activity to create (e.g., Now)

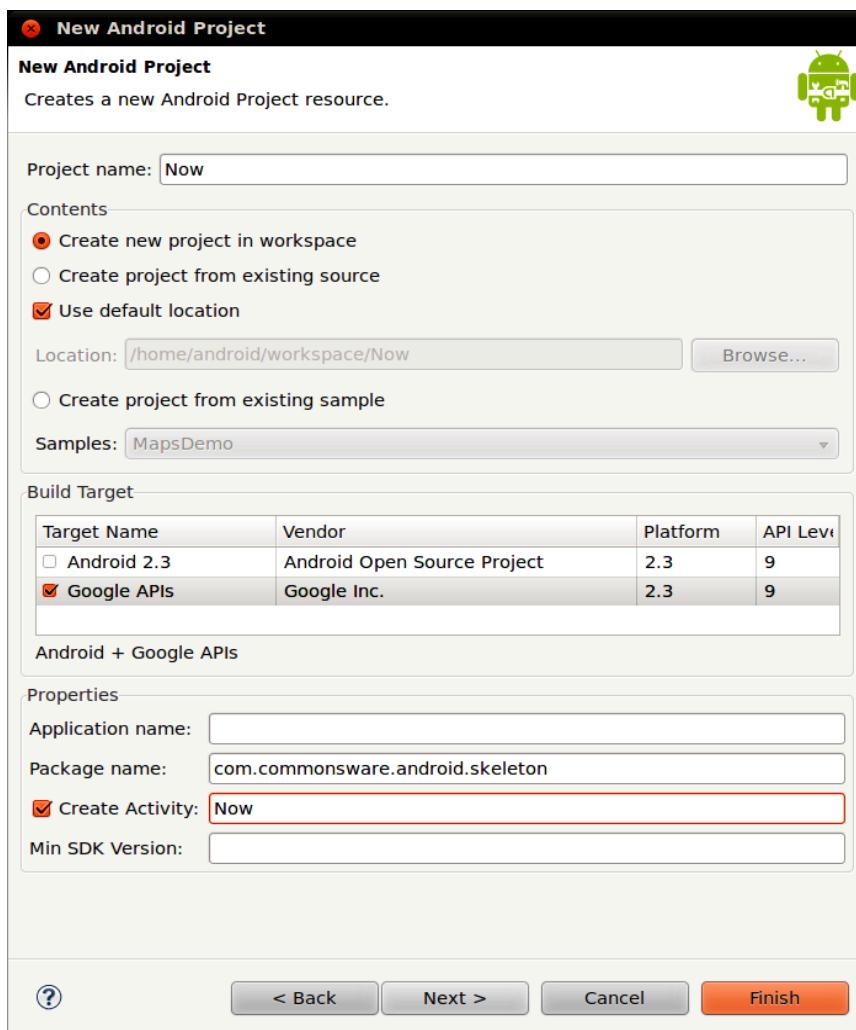


Figure 3–3. Eclipse New Android Project wizard, completed

At this point, click Finish to create your Eclipse project.

Command Line

Here is a sample command that creates an Android project from the command line:

```
android create project --target "Google Inc.:Google APIs:7" --path Skeleton/Now
--activity Now --package com.commonware.android.skeleton
```

This creates an application skeleton for you, complete with everything you need to build your first Android application: Java source code, build instructions, and so forth.

However, you'll probably need to customize this somewhat. Here are what those command-line switches mean:

- `--target`: Indicates which version of Android you are targeting in terms of your build process. You need to supply the ID of a target that is installed on your development machine, one you downloaded via the Android SDK and AVD Manager. You can find out which targets are available via the `android list targets` command. Typically, your build process will target the newest version of Android that you have available.
- `--path`: Indicates where you want the project files to be generated. Android will create a directory if the one you name does not exist. For example, in the preceding command, a `Skeleton/Now/` directory will be created (or used if it exists) under the current working directory, and the project files will be stored there.
- `--activity`: Indicates the Java class name of your first activity for this project. Do not include a package name, and make sure the name meets Java class-naming conventions.
- `--package`: Indicates the Java package in which your first activity will be located. This package name also uniquely identifies your project on any device on which you install it, and it must be unique on the Android Market if you plan on distributing your application there. Hence, typically, you should construct your package based on a domain name you own (e.g., `com.commonsware.android.skeleton`), to reduce the odds of an accidental package name collision with somebody else.

For your development machine, you need to pick a suitable target, and you may wish to change the path. You can ignore the activity and package for now.

Step 2: Build, Install, and Run the Application in Your Emulator or Device

Having a project is nice and all, but it would be even better if you could build and run it, whether on the Android emulator or on your Android device. Once again, the process differs somewhat depending on whether you are using Eclipse or the command line.

Eclipse

With your project selected on the Package Explorer panel of Eclipse, click the green play button in the Eclipse toolbar to run your project. The first time you do this, you have to go through a few steps to set up a run configuration, so Eclipse knows what you want to do.

First, in the Run As dialog box, choose Android Application, as shown in Figure 3–4.

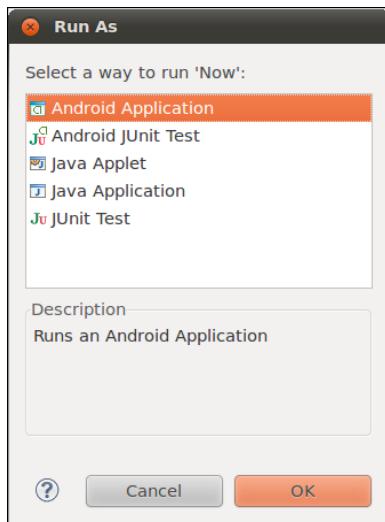


Figure 3–4. Choosing to run as an Android application in the Eclipse Run As dialog box

Click OK. If you have more than one emulator AVD or device available, you will then get an option to choose which you wish to run the application on. Otherwise, if you do not have a device plugged in, the emulator will start up with the AVD you created earlier. Then, Eclipse will install the application on your device or emulator and start it.

Command Line

For developers who are not using Eclipse, in your terminal, change into the Skeleton/Now directory, then run the following command:

```
ant clean install
```

The Ant-based build should emit a list of steps involved in the installation process, which looks like this:

```
Buildfile: /home/some-balding-guy/projects/Skeleton/Now/build.xml
[setup] Android SDK Tools Revision 10
[setup] Project Target: Android 1.6
[setup] API level: 4
[setup]
[setup]
[setup] -----
[setup] Resolving library dependencies:
[setup] No library dependencies.
[setup]
[setup] -----
[setup]
[setup] -----
[setup] WARNING: No minSdkVersion value set. Application will install on all Android
versions.
[setup]
[setup] Importing rules file: tools/ant/main_rules.xml
```

```
clean:
```

```
[delete] Deleting directory /home/some-balding-guy/projects/Skeleton/Now/bin
[delete] Deleting directory /home/some-balding-guy/projects/Skeleton/Now/gen

-debug-obfuscation-check:

-set-debug-mode:

-compile-tested-if-test:

-pre-build:

-dirs:
    [echo] Creating output directories if needed...
    [mkdir] Created dir: /home/some-balding-guy/projects/Skeleton/Now/bin
    [mkdir] Created dir: /home/some-balding-guy/projects/Skeleton/Now/gen
    [mkdir] Created dir: /home/some-balding-guy/projects/Skeleton/Now/bin/classes

-aidl:
    [echo] Compiling aidl files into Java classes...

-renderscript:
    [echo] Compiling RenderScript files into Java classes and RenderScript bytecode...

-resource-src:
    [echo] Generating R.java / Manifest.java from the resources...

-pre-compile:

compile:
    [javac] /opt/android-sdk-linux/tools/ant/main_rules.xml:384: warning:
        'includeantruntime' was not set, defaulting to build.sysclasspath=last; set to false for
        repeatable builds
    [javac] Compiling 2 source files to /home/some-balding-
guy/projects/Skeleton/Now/bin/classes

-post-compile:

-obfuscate:

-dex:
    [echo] Converting compiled files and external libraries into /home/some-balding-
guy/projects/Skeleton/Now/bin/classes.dex...

-package-resources:
    [echo] Packaging resources
    [aapt] Creating full resource package...

-package-debug-sign:
[apkbuilder] Creating Now-debug-unaligned.apk and signing it with a debug key...

debug:
    [echo] Running zip align on final apk...
    [echo] Debug Package: /home/some-balding-guy/projects/Skeleton/Now/bin/Now-
debug.apk

install:
```

```
[echo] Installing /home/some-balding-guy/projects/Skeleton/Now/bin/Now-debug.apk  
onto default emulator or device...  
[exec] 98 KB/s (4626 bytes in 0.045s)  
[exec] pkg: /data/local/tmp/Now-debug.apk  
[exec] Success
```

BUILD SUCCESSFUL

Total time: 10 seconds

Note the BUILD SUCCESSFUL at the bottom—that is how you know the application compiled successfully.

When you have a clean build, in your emulator or device, open the application launcher, shown in Figure 3–5, which typically is found at the bottom of the home screen.

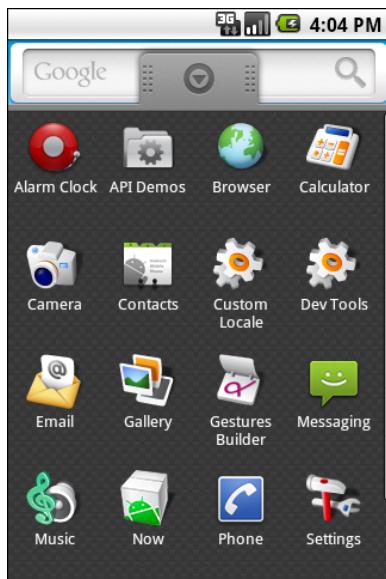


Figure 3–5. *Android emulator application launcher*

Notice there is an icon for your Now application. Click it to open it and see your first activity in action. To leave the application and return to the launcher, press the Back button, which is located to the right of the Menu button and looks like an arrow pointing to the left.

Chapter 4

Examining Your First Project

The previous chapter stepped you through creating a stub project. This chapter describes what is inside of this project, so you understand what Android gives you at the outset and what the roles are for the various directories and files.

Project Structure

The Android build system is organized around a specific directory tree structure for your Android project, much like any other Java project. The specifics, though, are fairly unique to Android—the Android build tools do a few extra things to prepare the actual application that will run on the device or emulator. Here’s a quick primer on the project structure, to help you make sense of it all, particularly for the sample code referenced in this book.

Root Contents

When you create a new Android project (e.g., via `android create project`), you get several items in the project’s root directory, including the following:

- `AndroidManifest.xml`: An XML file that describes the application being built and what components (activities, services, etc.) are being supplied by that application
- `bin/`: The directory that holds the application once it is compiled
- `libs/`: The directory that holds any third-party JARs your application requires
- `res/`: The directory that holds resources, such as icons, GUI layouts, and the like, that are packaged with the compiled Java in the application
- `src/`: The directory that holds the Java source code for the application

In addition to the preceding file and directories, you may find any of the following in Android projects:

- assets/: The directory that holds other static files that you want packaged with the application for deployment onto the device
- gen/: The directory in which Android's build tools place source code that they generate
- build.xml and *.properties: Files that are used as part of the Ant-based command-line build process, if you are not using Eclipse
- proguard.cfg: A file that is used for integration with ProGuard to obfuscate your Android code

The Sweat Off Your Brow

When you create an Android project (e.g., via `android create project`), you supply the fully qualified class name of the main activity for the application (e.g., `com.commonsware.android.SomeDemo`). You will then find that your project's `src/` tree already has the namespace directory tree in place, plus a stub Activity subclass representing your main activity (e.g., `src/com/commonsware/android/SomeDemo.java`). You are welcome to modify this file and add others to the `src/` tree as needed to implement your application.

The first time you compile the project (e.g., via `ant`), out in the main activity's namespace directory, the Android build chain will create `R.java`. This contains a number of constants tied to the various resources you placed in the `res/` directory tree. You should not modify `R.java` yourself, but instead let the Android tools handle it for you. You will see throughout this book that many of the examples reference things in `R.java` (e.g., referring to a layout's identifier via `R.layout.main`).

And Now, the Rest of the Story

The `res/` directory tree in your project holds *resources*—static files that are packaged along with your application, either in their original form or, occasionally, in a preprocessed form. Following are some of the subdirectories you will find or create under `res/`:

- `res/drawable/`: For images (PNG, JPEG, etc.)
- `res/layout/`: For XML-based UI layout specifications
- `res/menu/`: For XML-based menu specifications
- `res/raw/`: For general-purpose files (e.g., an audio clip or a CSV file of account information)
- `res/values/`: For strings, dimensions, and the like
- `res/xml/`: For other general-purpose XML files you wish to ship

Some of the directory names may have suffixes, like `res/drawable-hdpi/`. This indicates that the directory of resources should be used only in certain circumstances—in this case, the drawable resources should be used only on devices with high-density screens.

We will cover all of these resources, and more, in later chapters of this book.

In your initial project, you will find the following:

- `res/drawable-hdpi/icon.png`, `res/drawable-ldpi/icon.png`, and `res/drawable-mdpi/icon.png`: Three renditions of a placeholder icon for your application for high-, low-, and medium-density screens, respectively
- `res/layout/main.xml`: An XML file that describes the very simple layout of your user interface
- `res/values/strings.xml`: An XML file that contains externalized strings, notably the placeholder name of your application

What You Get Out of It

When you compile your project (via ant or the IDE), the results go into the `bin/` directory under your project root, as follows:

- `bin/classes/`: Holds the compiled Java classes
- `bin/classes.dex`: Holds the executable created from those compiled Java classes
- `bin/yourapp.ap_`: Holds your application's resources, packaged as a ZIP file (where `yourapp` is the name of your application)
- `bin/yourapp-*.apk`: The actual Android application (where * varies)

The `.apk` file is a ZIP archive containing the `.dex` file, the compiled edition of your resources (`resources.arsc`), any uncompiled resources (such as what you put in `res/raw/`), and the `AndroidManifest.xml` file. If you build a debug version of the application (which is the default), you will have `yourapp-debug.apk` and `yourapp-debug-aligned.apk` as two versions of your APK. The latter has been optimized with the `zipalign` utility to make it run faster.

Inside Your Manifest

The foundation for any Android application is the manifest file, `AndroidManifest.xml`, in the root of your project. This is where you declare what is inside your application—the activities, the services, and so on. You also indicate how these pieces attach themselves to the overall Android system; for example, you indicate which activity (or activities) should appear on the device's main menu (a.k.a., the launcher).

When you create your application, a starter manifest is generated for you automatically. For a simple application, offering a single activity and nothing else, the autogenerated manifest will probably work out fine, or perhaps require a few minor modifications. On the other end of the spectrum, the manifest file for the Android API demo suite is over 1,000 lines long. Your production Android applications will probably fall somewhere in the middle.

In the Beginning, There Was the Root, and It Was Good

The root of all manifest files is, not surprisingly, a `manifest` element:

```
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.search">
...
</manifest>
```

Note the namespace declaration. Curiously, the generated manifests apply it only on the attributes, not the elements (e.g., `manifest`, not `android:manifest`). This pattern works, so, unless Android changes, you should stick with it.

The biggest piece of information you need to supply on the `manifest` element is the `package` attribute (also curiously not namespaced). Here, you can provide the name of the Java package that will be considered the “base” of your application. Then, everywhere else in the manifest file that needs a class name, you can just substitute a leading dot as shorthand for the package. For example, if you needed to refer to `com.commonsware.android.search.Snicklefritz` in the preceding manifest, you could just use `.Snicklefritz`, since `com.commonsware.android.search` is defined as the application’s package.

As noted in the previous chapter, your package also is a unique identifier for your application. A device can have only one application installed with a given package, and the Android Market will list only one project with a given package.

Your manifest also specifies `android:versionName` and `android:versionCode` attributes. These represent the versions of your application. The `android:versionName` value is what the user will see in the Applications list in their Settings application. Also, the version name is used by the Android Market listing, if you are distributing your application that way. The version name can be any string value you want. The `android:versionCode`, on the other hand, must be an integer, and newer versions must have higher version codes than do older versions. Android and the Android Market will compare the version code of a new APK to the version code of an installed application to determine if the new APK is indeed an update. The typical approach is to start the version code at 1 and increment it with each production release of your application, though you can choose another convention if you wish.

An Application for Your Application

In your initial project's manifest, the only child of the `<manifest>` element is an `<application>` element. The children of the `<application>` element represent the core of the manifest file.

One attribute of the `<application>` element that you may need in select circumstances is the `android:debuggable` attribute. This needs to be set to true if you are installing the application on an actual device, you are using Eclipse (or another debugger), and your device precludes debugging without this flag. For example, the Google/HTC Nexus One requires `android:debuggable = "true"`, according to some reports.

By default, when you create a new Android project, you get a single `<activity>` element inside the `<application>` element:

```
<?xml version="1.0"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.skeleton">
    <application>
        <activity android:name=".Now" android:label="Now">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
    </application>
</manifest>
```

This element supplies `android:name` for the class implementing the activity, `android:label` for the display name of the activity, and (frequently) an `<intent-filter>` child element describing under what conditions this activity will be displayed. The stock `<activity>` element sets up your activity to appear in the launcher, so users can choose to run it. As you'll see later in this book, you can have several activities in one project, if you so choose.

A Bit About Eclipse

Eclipse is an extremely popular integrated development environment (IDE), particularly for Java development. It is also designed to be extensible via an add-in system. To top it off, Eclipse is open source. That combination made it an ideal choice of IDE for the core Android developer team.

Specifically, to go alongside the Android SDK, Google has published some add-ins for the Eclipse environment. Primary among these is the Android Developer Tools (ADT) add-in, which gives the core of Eclipse awareness of Android.

What the ADT Gives You

The ADT add-in, in essence, takes regular Eclipse operations and extends them to work with Android projects. For example, with Eclipse, you get the following features (among others):

- New project wizards to create regular Android projects, Android test projects, and so forth
- The ability to run an Android project just like you might run a regular Java application—via the green Run button in the toolbar—despite the fact that this really involves pushing the Android application over to an emulator or device, possibly even starting up the emulator if it is not running
- Tooltip support for Android classes and methods

In addition, the latest version of the ADT provides you with preliminary support for drag-and-drop GUI editing. While this book will focus on the XML files that Eclipse generates, Eclipse now lets you assemble those XML files by dragging GUI components around on the screen, adjusting properties as you go. Drag-and-drop GUI editing is fairly new, so there may be a few rough edges for a while as the community and Google identify the problems and limitations with the current implementation.

Coping with Eclipse

Eclipse is a powerful tool. Like many powerful tools, Eclipse is sometimes confounding. Determining how to solve some specific development problem can be a challenge, exacerbated by the newness of Android itself.

This section offers some tips for handling some common issues in using Eclipse with Android.

How to Import a Non-Eclipse Project

Not all Android projects ship with Eclipse project files, such as the sample projects associated with this book. However, you can easily add them to your Eclipse workspace, if you wish. Here's how to do it!

First, choose File > New > Project from the Eclipse main menu, as shown in Figure 5–1.

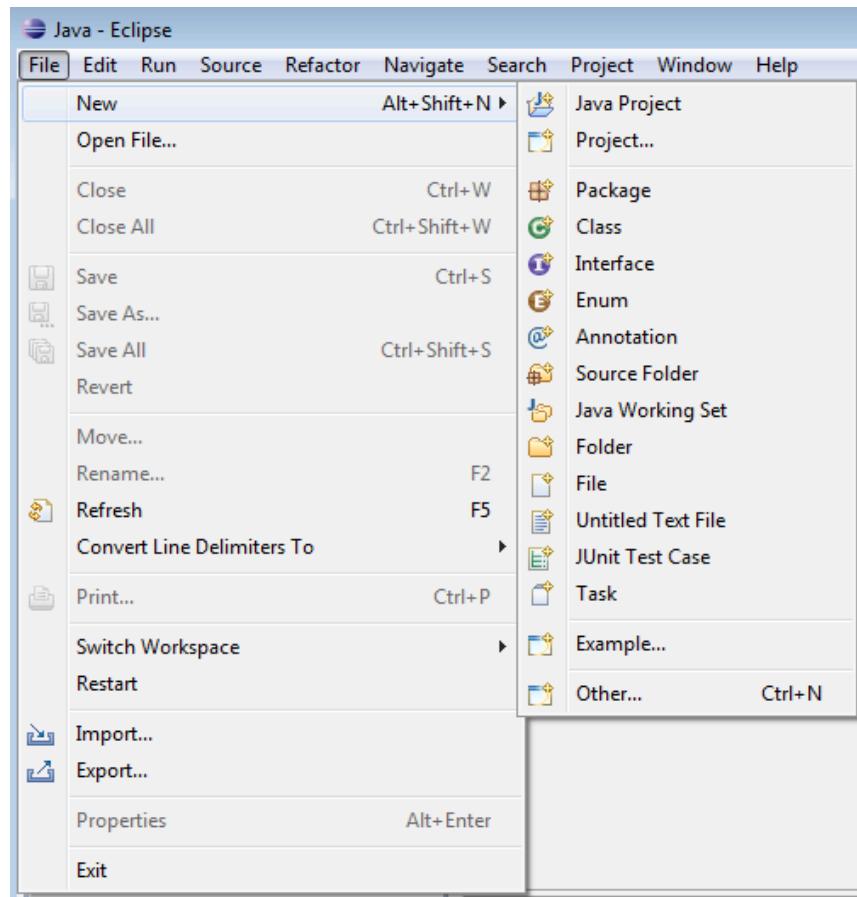


Figure 5–1. File menu in Eclipse

Then, choose Android > Android Project from the tree of available project types, as shown in Figure 5–2, and click Next.

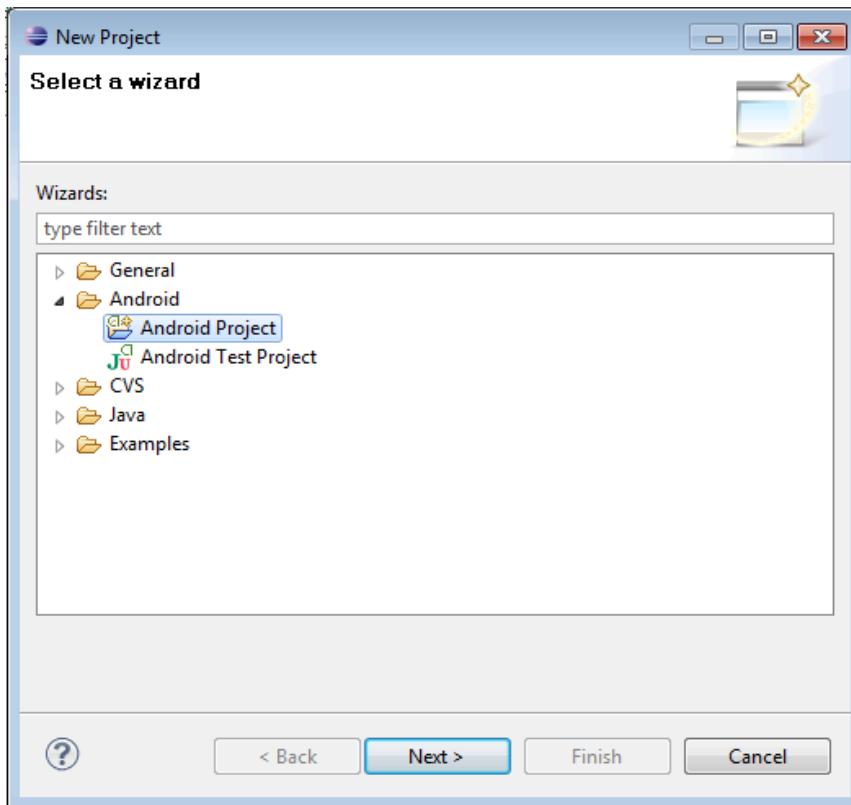


Figure 5–2. New Project wizard in Eclipse

NOTE: If you do not see this option, you have not installed Android Developer Tools.

Then, on the first page of the New Android Project wizard, choose the “Create project from existing source” radio button, click the Browse button, and open the directory containing your project’s `AndroidManifest.xml` file. This will populate most of the rest of the wizard page, though you may need to also specify a build target from the table, as shown in Figure 5–3.

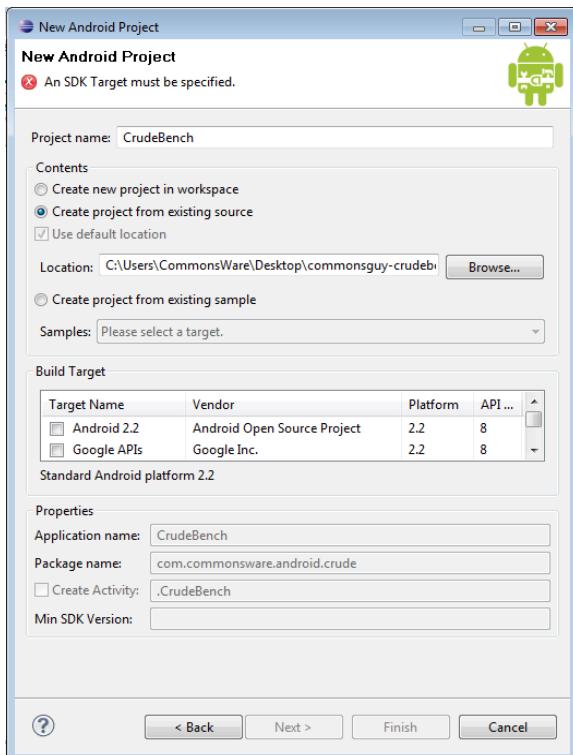


Figure 5–3. New Android Project wizard in Eclipse

Then, click Finish. This will return you to Eclipse, with the imported project in your workspace, as shown in Figure 5–4.

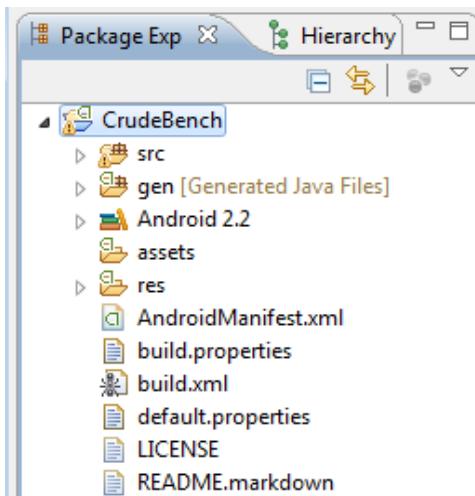


Figure 5–4. Android project tree in Eclipse

Next, right-click the project name and choose Build Path > Configure Build Path from the context menu, as shown in Figure 5–5.

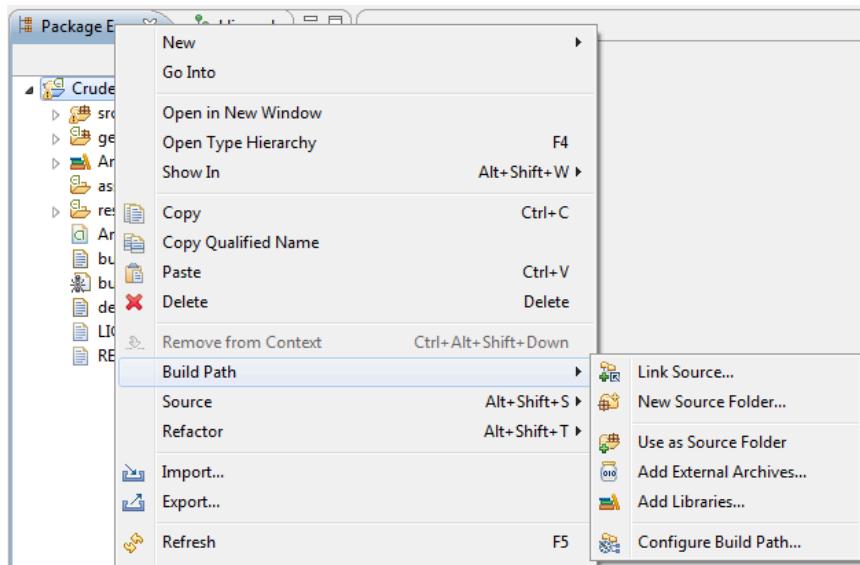


Figure 5–5. Project context menu in Eclipse

This brings up the Java Build Path portion of the project Properties window, as shown in Figure 5–6.

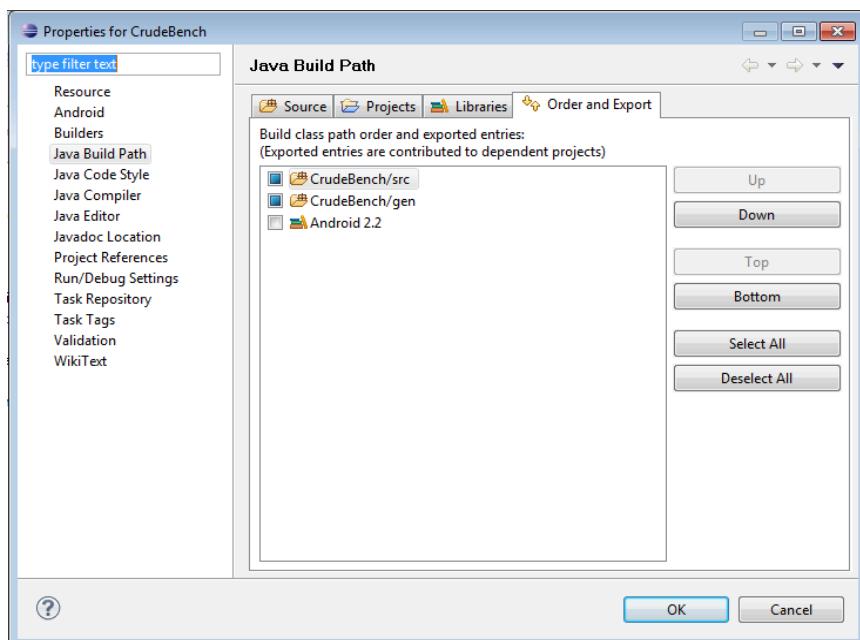


Figure 5–6. Project Properties window in Eclipse

If the Android JAR is not checked (the Android 2.2 entry in Figure 5–6), check it, and then click OK to close the Properties window. At this point, your project should be ready for use.

How to Get to DDMS

Many times, you will be told to take a look at something in DDMS, such as the LogCat tab to examine Java stack traces. In Eclipse, DDMS is a perspective. To open this perspective in your workspace, choose Window > Open Perspective > Other from the main menu, as shown in Figure 5–7.

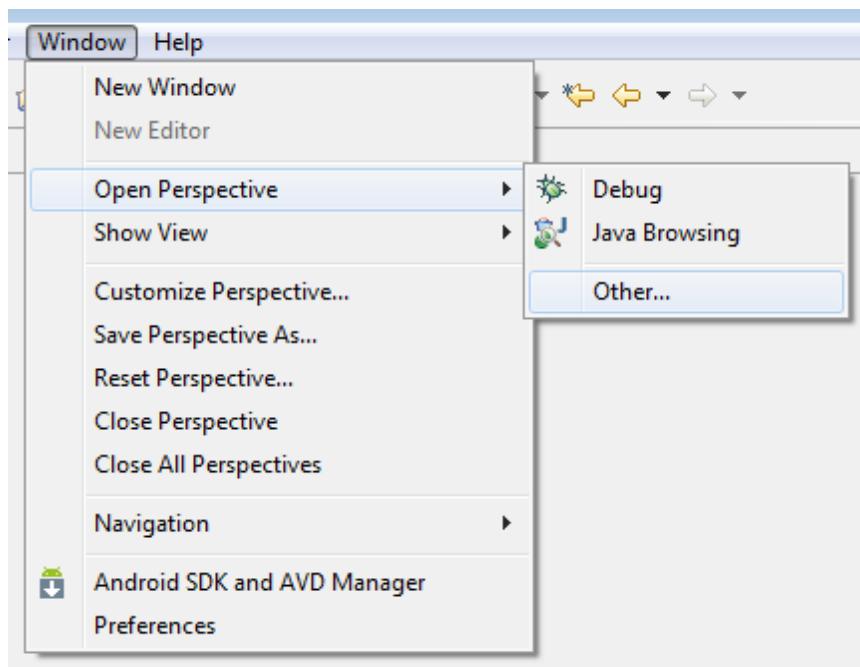


Figure 5–7. Perspective menu in Eclipse

Then, in the list of perspectives, shown in Figure 5–8, choose DDMS.

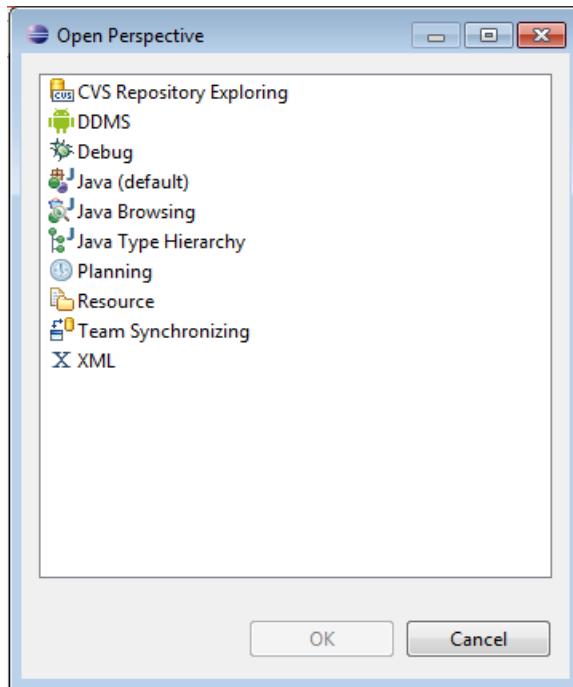


Figure 5–8. Perspective roster in Eclipse

This will add the DDMS perspective to your workspace and open it in your Eclipse IDE. DDMS is covered in greater detail in a later chapter of this book.

How to Create an Emulator

By default, your Eclipse environment has no Android emulators set up. You will need one before you can run your project successfully.

To do this, first choose **Window > Android SDK and AVD Manager** from the main menu, as shown in Figure 5–9.

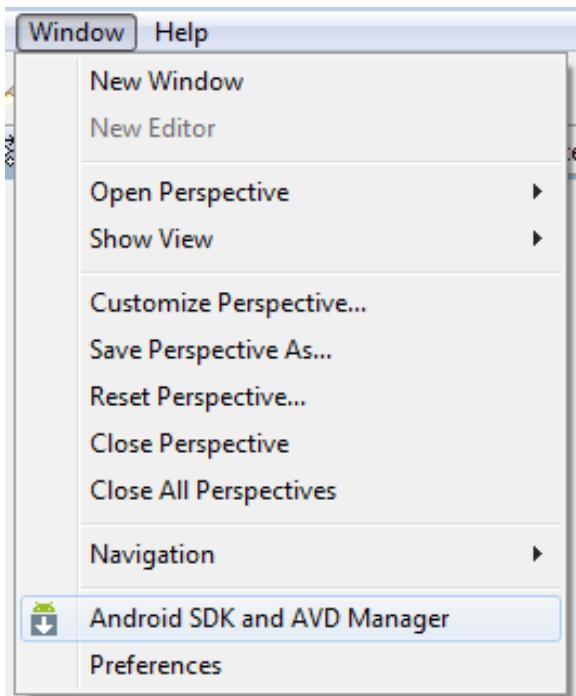


Figure 5–9. *Android SDK and AVD Manager menu option in Eclipse*

That brings up the same window as you get by running `android` from the command line.

You can now define an Android Virtual Device (AVD) by following the instructions given in Chapter 2, in the section “Step 5: Set Up the Emulator.”

How to Run a Project

Given that you have an AVD defined, or that you have a device set up for debugging and connected to your development machine, you can run your project in the emulator.

First, click the Run toolbar button, or choose Project > Run from the main menu. This brings up the Run As dialog box the first time you run the project, as shown in Figure 5–10.

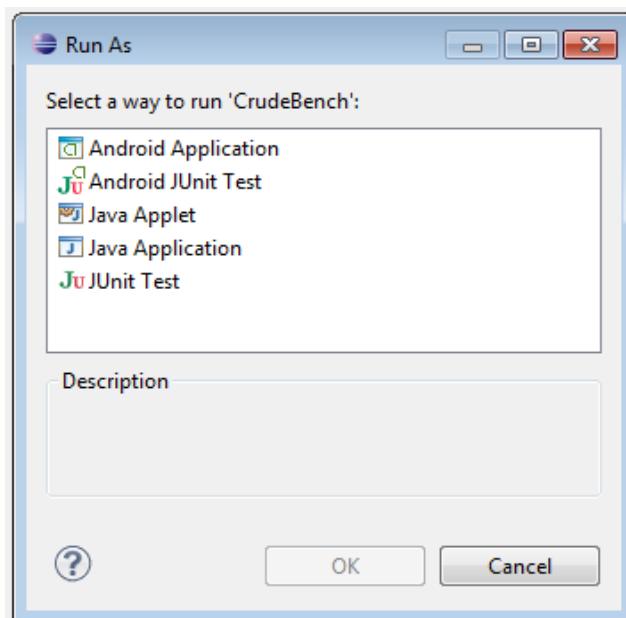


Figure 5–10. The *Run As* dialog box in Eclipse

Choose Android Application and click OK. If you have more than one AVD or device available, you will be presented with a window in which you choose the desired target environment. Then, the emulator will start up to run your application. Note that you will need to unlock the lock screen on the emulator (or device) if it is locked.

How Not to Run Your Project

When you go to run your project, be sure that an XML file is not the active tab in the editor. Attempting to “run” this will result in a .out file being created in whatever directory the XML file lives in (e.g., res/layout/main.xml.out). To recover, simply delete the offending .out file and try running again, this time with a Java file as the active tab.

Alternative IDEs

If you really like Eclipse and the ADT, you may want to consider MOTODEV Studio for Android. This is another set of add-ins for Eclipse, augmenting the ADT and offering a number of other Android-related development features, including the following (among many others):

- More wizards for helping you create Android classes
- Integrated SQLite browsing, so you can manipulate a SQLite database in your emulator right from your IDE

- More validators to check for common bugs, and a library of code snippets to have fewer bugs at the outset
- Assistance with translating your application to multiple languages

While MOTODEV Studio for Android is published by Motorola, you can use it to build applications for all Android devices, not only those manufactured by Motorola themselves.

Other IDEs are slowly getting their equivalents of the ADT, albeit with minimal assistance from Google. For example, IntelliJ's IDEA has a module for Android. It was originally commercial, but now it is part of the open source community edition of IDEA as of version 10.

And, of course, you do not need to use an IDE at all. While this may sound sacrilegious to some, IDEs are not the only way to build applications. Much of what is accomplished via the ADT can be accomplished through command-line equivalents, meaning a shell and an editor is all you truly need. For example, the author of this book does not presently use an IDE and has no intention of adopting Eclipse any time soon.

IDEs and This Book

You are welcome to use Eclipse as you work through this book. You are welcome to use another IDE if you wish. You are even welcome to skip the IDE outright and just use an editor.

This book is focused on demonstrating Android capabilities and the APIs for exploiting those capabilities. It is not aimed at teaching the use of any one IDE. As such, the sample code shown should work in any IDE, particularly if you follow the instructions in this chapter for importing non-Eclipse projects into Eclipse.

Enhancing Your First Project

The `AndroidManifest.xml` file that Android generated for your first project gets the job done. However, for a production application, you may wish to consider adding a few attributes and elements, such as those described in this chapter.

Supporting Multiple Screen Sizes

Android devices come with a wide range of screen sizes, from 2.8-inch tiny smartphones to 46-inch Google TVs. Android divides these into four categories, based on physical screen size and the distance at which they are usually viewed:

- Small (under 3 inches)
- Normal (3 inches to around 4.5 inches)
- Large (4.5 inches to around 10 inches)
- Extra-large (over 10 inches)

By default, your application will not support small screens, will support normal screens, and may support large and extra-large screens via some automated conversion code built into Android.

To truly support all the screen sizes you want to target, you should consider adding a `<supports-screens>` element. This enumerates the screen sizes you have explicit support for. For example, if you want to support small screens, you need to include the `<supports-screens>` element. Similarly, if you are providing custom UI support for large or extra-large screens, you will want to have the `<supports-screens>` element. So, while the default settings in the starting manifest file work, you should consider adding support for handling multiple screen sizes.

Much more information about providing solid support for all screen sizes can be found in Chapter 25.

Specifying Versions

As noted in the previous chapter, your manifest already contains some version information about your application's version. However, you probably want to add to your `AndroidManifest.xml` file a `<uses-sdk>` element as a child of the `<manifest>` element, to specify what versions of Android your application supports. By default, your application is assumed to support every Android version from 1.0 to the current 3.0 and onward to any version in the future. Most likely, that is not what you want.


The most important attribute for your `<uses-sdk>` element is `android:minSdkVersion`. This indicates what is the oldest version of Android you are testing with your application. The value of the attribute is an integer representing the Android SDK version:

- 1: Android 1.0
- 2: Android 1.1
- 3: Android 1.5
- 4: Android 1.6
- 5: Android 2.0
- 6: Android 2.0.1
- 7: Android 2.1
- 8: Android 2.2
- 9: Android 2.3
- 10: Android 2.3.3
- 11: Android 3.0

So, if you are testing your application only on Android 2.1 and newer versions of Android, you would set the `android:minSdkVersion` attribute to 7.

You may also wish to specify an `android:targetSdkVersion` attribute. This indicates what version of Android you are targeting as you are writing your code. If your application is run on a newer version of Android, Android may do some things to try to improve compatibility of your code with respect to changes made in the newer Android. So, for example, you might specify `android:targetSdkVersion="10"`, indicating you are writing your application with Android 2.3.3 in mind; if your app someday is run on an Android 3.0 device, Android may take some extra steps to make sure your 2.3.3-centric code runs correctly on the 3.0 device. In particular, to get the new Honeycomb look and feel when running on an Android 3.0 (or higher) tablet, you need to specify a target SDK version of 11. This topic will be covered in more detail in Chapters 26 and 27.

Part



Activities

Rewriting Your First Project

The project you created in Chapter 3 is composed of just the default files generated by the Android build tools—you did not write any Java code yourself. In this chapter, you will modify that project to make it somewhat more interactive. Along the way, you will examine the basic Java code that comprises an Android activity.

NOTE: The instructions in this chapter assume you followed the original instructions in Chapter 3 in terms of the names of packages and files. If you used different names, you will need to adjust the names in the following steps to match yours.

The Activity

Your project's `src/` directory contains the standard Java-style tree of directories based on the Java package you used when you created the project (e.g., `com.commonware.android` results in `src/com/commonware/android/`). Inside the innermost directory you should find a pregenerated source file named `Now.java`, which is where your first activity will go.

Open `Now.java` in your editor and paste in the following code (or, if you downloaded the source files from the Apress web site, you can just use the `Skeleton/Now` project directly):

```
package com.commonware.android.skeleton;

import android.app.Activity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import java.util.Date;

public class Now extends Activity implements View.OnClickListener {
```

```
Button btn;

@Override
public void onCreate(Bundle icicle) {
    super.onCreate(icicle);

    btn=new Button(this);
    btn.setOnClickListener(this);
    updateTime();
    setContentView(btn);
}

public void onClick(View view) {
    updateTime();
}

private void updateTime() {
    btn.setText(new Date().toString());
}
}
```

Dissecting the Activity

Let's examine this Java code piece by piece, starting with the package declaration and imported classes:

```
package com.commonsware.android.skeleton;

import android.app.Activity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import java.util.Date;
```

The package declaration needs to be the same as the one you used when creating the project. And, as with any other Java project, you need to import any classes you reference. Most of the Android-specific classes are in the android package.

NOTE: Not every Java SE class is available to Android programs. Visit the [Android class reference](#) to see what is and is not available.

Activities are public classes, inheriting from the android.app.Activity base class. In this case, the activity holds a button (btn):

```
public class Now extends Activity implements View.OnClickListener {
    Button btn;
```

Since, for simplicity, we want to trap all button clicks just within the activity itself, we also have the activity class implement OnClickListener.

The `onCreate()` method is invoked when the activity is started. The first thing you should do is chain upward to the superclass, so the stock Android activity initialization can be done:

```
@Override  
public void onCreate(Bundle icicle) {  
    super.onCreate(icicle);  
  
    btn=new Button(this);  
    btn.setOnClickListener(this);  
    updateTime();  
    setContentView(btn);  
}
```

In our implementation, we then create the button instance (`new Button(this)`), tell it to send all button clicks to the activity instance itself (via `setOnClickListener()`), call a private `updateTime()` method, and then set the activity's content view to be the button itself (via `setContentView()`). We will take a look at that magical `Bundle icicle` in a later chapter. For the moment, consider it an opaque handle that all activities receive upon creation.

```
public void onClick(View view) {  
    updateTime();  
}
```

In Swing, a JButton click raises an ActionEvent, which is passed to the ActionListener configured for the button. In Android, a button click causes `onClick()` to be invoked in the OnClickListener instance configured for the button. The listener is provided the view that triggered the click (in this case, the button). All we do here is call that private `updateTime()` method:

```
private void updateTime() {  
    btn.setText(new Date().toString());  
}
```

When we open the activity (`onCreate()`) or when the button is clicked (`onClick()`), we update the button's label to be the current time via `setText()`, which functions much the same as the JButton equivalent.

Building and Running the Activity

To build the activity, use your IDE's built-in Android packaging tool, or run `ant clean install` in the base directory of your project (as described in Chapter 3). Then, run the activity. It should be launched for you automatically if you are using Eclipse; otherwise, find the activity in the home screen launcher. You should see an activity akin to what's shown in Figure 7–1.



Figure 7–1. The *Now* demonstration activity

Clicking the button—in other words, clicking pretty much anywhere on the device’s screen—will update the time shown in the button’s label.

Note that the label is centered horizontally and vertically, as those are the default styles applied to button captions. We can control that formatting, which will be covered in a later chapter.

After you are finished gazing at the awesomeness of Advanced Push-Button Technology, you can click the Back button on the emulator to return to the launcher.

Chapter 8

Using XML-Based Layouts

While it is technically possible to create and attach widgets to your activity purely through Java code, as we did in the preceding chapter, the more common approach is to use an XML-based layout file. Dynamic instantiation of widgets is reserved for more complicated scenarios, where the widgets are not known at compile time (e.g., populating a column of radio buttons based on data retrieved from the Internet).

With that in mind, it's time to break out the XML and learn how to lay out Android activity views that way.

What Is an XML-Based Layout?

As the name suggests, an XML-based layout is a specification of widgets' relationships to each other—and to containers—encoded in XML format. Specifically, Android considers XML-based layouts to be resources, and as such, layout files are stored in the `res/layout` directory inside your Android project.

Each XML file contains a tree of elements specifying a layout of widgets and containers that make up one View. The attributes of the XML elements are properties, describing how a widget should look or how a container should behave. For example, if a `Button` element has an attribute value of `android:textStyle = "bold"`, that means that the text appearing on the face of the button should be rendered in a boldface font style.

Android's SDK ships with a tool (`aapt`) that uses the layouts. This tool should be automatically invoked by your Android tool chain (e.g., Eclipse or Ant's `build.xml`). Of particular importance to you as a developer is that `aapt` generates the `R.java` source file within your project's `gen/` directory, allowing you to access layouts and widgets within those layouts directly from your Java code, as will be demonstrated later in this chapter.

Why Use XML-Based Layouts?

Most everything you do using XML layout files can be achieved through Java code. For example, you could use `setTypeface()` to have a button render its text in bold, instead

of using a property in an XML layout. Since XML layouts are yet another file for you to keep track of, we need good reasons for using such files.

Perhaps the biggest reason is to assist in the creation of tools for view definition, such as a GUI builder in an IDE like Eclipse or a dedicated Android GUI designer like DroidDraw. Such GUI builders could, in principle, generate Java code instead of XML. The challenge is rereading the definition in to support edits, which is far simpler when the data is in a structured format like XML rather than in a programming language. Moreover, keeping the generated bits separated from handwritten code makes it less likely that somebody's custom-crafted source will get clobbered by accident when the generated bits get regenerated. XML forms a nice middle ground between something that is easy for tool writers to use and something that is easy for programmers to work with by hand as needed.

Also, XML as a GUI definition format is becoming more commonplace. Microsoft's Extensible Application Markup Language (XAML), Adobe's Flex, Google's Google Web Toolkit (GWT), and Mozilla's XML User Interface Language (XUL) all take a similar approach to that of Android: put layout details in an XML file and put programming smarts in source files (e.g., JavaScript for XUL). Many less-well-known GUI frameworks, such as ZK, also use XML for view definition. While "following the herd" is not necessarily the best policy, it does have the advantage of helping to ease the transition to Android from any other XML-centered view description language.

OK, So What Does It Look Like?

Here is the Button from the previous chapter's sample application, converted into an XML layout file, found in the Layouts/NowRedux sample project:

```
<?xml version="1.0" encoding="utf-8"?>
<Button xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/button"
    android:text=""
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"/>
```

The class name of the widget, Button, forms the name of the XML element. Since Button is an Android-supplied widget, we can just use the bare class name. If you create your own widgets as subclasses of android.view.View, you will need to provide a full package declaration as well (e.g., com.commonsware.android.MyWidget).

The root element needs to declare the Android XML namespace:

```
xmlns:android="http://schemas.android.com/apk/res/android"
```

All other elements will be children of the root and will inherit that namespace declaration.

Because we want to reference this button from our Java code, we need to give it an identifier via the android:id attribute. We will cover this concept in greater detail in the next section.

The remaining attributes are properties of this Button instance:

- `android:text`: Indicates the initial text to be displayed on the button face (in this case, an empty string)
- `android:layout_width` and `android:layout_height`: Tell Android to have the button's width and height fill the parent, which in this case is the entire screen

These attributes will be covered in greater detail in Chapter 10.

Since this single widget is the only content in our activity's view, we need only this single element. Complex views will require a whole tree of elements, representing the widgets and containers that control their positioning. All the remaining chapters of this book will use the XML layout form whenever practical, so there are dozens of other examples of more complex layouts for you to peruse.

What's with the @ Signs?

Many widgets and containers need to appear only in the XML layout file and do not need to be referenced in your Java code. For example, a static label (`TextView`) frequently needs to be in the layout file only to indicate where it should appear. These sorts of elements in the XML file do not need to have the `android:id` attribute to give them a name.

Anything you *do* want to use in your Java source, though, needs an `android:id`.

The convention is to use `@+id/...` as the `id` value, where the `...` represents your locally unique name for the widget in question, for the first occurrence of a given `id` value in your layout file. In the XML layout example in the preceding section, `@+id/button` is the identifier for the `Button` widget. The second and subsequent occurrences in the same layout file should drop the `+` sign—a feature we will use in Chapter 10.

Android provides a few special `android:id` values, of the form `@android:id/....`. You will see some of these values in various examples throughout this book.

And How Do We Attach These to the Java?

Given that you have painstakingly set up the widgets and containers for your view in an XML layout file named `main.xml` stored in `res/layout`, all you need is one statement in your activity's `onCreate()` callback to use that layout:

```
setContentView(R.layout.main);
```

This is the same `setContentView()` we used earlier, passing it an instance of a `View` subclass (in that case, a `Button`). The Android-built `View`, constructed from our layout, is accessed from that code-generated `R` class. All of the layouts are accessible under `R.layout`, keyed by the base name of the layout file; for example, `res/layout/main.xml` results in `R.layout.main`.

To access your identified widgets, use `findViewById()`, passing it the numeric identifier of the widget in question. That numeric identifier was generated by Android in the `R`

class as R.id.something (where something is the specific widget you are seeking). Those widgets are simply subclasses of View, just like the Button instance we created in the previous chapter.

The Rest of the Story

In the original Now demo, the button's face would show the current time, which would reflect when the button was last pushed (or when the activity was first shown, if the button had not yet been pushed). Most of that logic still works, even in this revised demo (NowRedux). However, rather than instantiating the Button in our activity's onCreate() callback, we can reference the one from the XML layout:

```
package com.commonsware.android.layouts;

import android.app.Activity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import java.util.Date;

public class NowRedux extends Activity
    implements View.OnClickListener {
    Button btn;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);

        setContentView(R.layout.main);

        btn=(Button)findViewById(R.id.button);
        btn.setOnClickListener(this);
        updateTime();
    }

    public void onClick(View view) {
        updateTime();
    }

    private void updateTime() {
        btn.setText(new Date().toString());
    }
}
```

The first difference is that, rather than setting the content view to be a view we created in Java code, we set it to reference the XML layout (setContentView(R.layout.main)). The R.java source file will be updated when we rebuild this project to include a reference to our layout file (stored as main.xml in our project's res/layout directory).

The other difference is that we need to get our hands on our Button instance, for which we use the findViewById() call. Since we identified our button as @+id/button, we can reference the button's identifier as R.id.button. Now, with the Button instance in hand, we can set the callback and set the label as needed.

The results look the same as with the original Now demo, as shown in Figure 8–1.

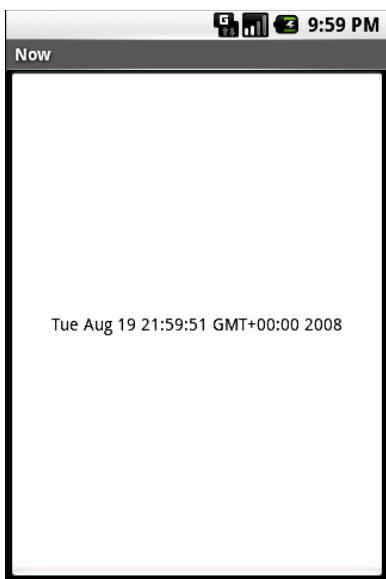


Figure 8–1. The *NowRedux* sample activity

Employing Basic Widgets

Every GUI toolkit has some basic widgets: fields, labels, buttons, and so forth. Android's toolkit is no different in scope, and the basic widgets provide a good introduction to how widgets work in Android activities.

Assigning Labels

The simplest widget is the label, referred to in Android as a `TextView`. As in most GUI toolkits, labels are bits of text that can't be edited directly by users. Typically, labels are used to identify adjacent widgets (e.g., a "Name:" label next to a field where the user fills in a name).

In Java, you can create a label by creating a `TextView` instance. More commonly, though, you will create labels in XML layout files by adding a `TextView` element to the layout, with an `android:text` property to set the value of the label itself. If you need to swap labels based on certain criteria, such as internationalization, you may wish to use a string resource reference in the XML instead, as will be described later in this book.

`TextView` has numerous other properties of relevance for labels, such as the following:

- `android:typeface`: Sets the typeface to use for the label (e.g., `monospace`)
- `android:textStyle`: Indicates that the typeface should be made bold (`bold`), italic (`italic`), or bold and italic (`bold_italic`)
- `android:textColor`: Sets the color of the label's text, in RGB hex format (e.g., `#FF0000` for red)

For example, in the `Basic/Label` project, you will find the following layout file:

```
<?xml version="1.0" encoding="utf-8"?>
<TextView xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:text="You were expecting something profound?">
</>
```

Just that layout alone, with the stub Java source provided by Android's project builder (e.g., android create project), gives you the result shown in Figure 9–1.

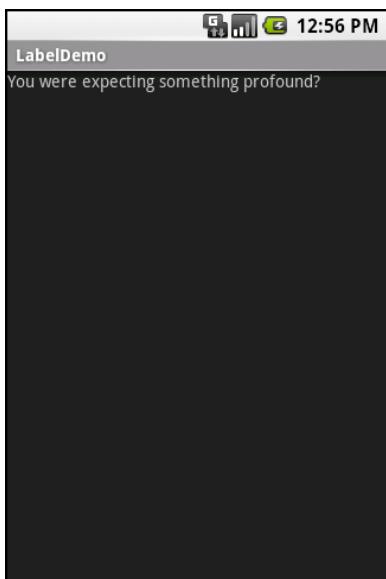


Figure 9–1. The *LabelDemo* sample application

Button, Button, Who's Got the Button?

You've already seen the use of the `Button` widget in the previous two chapters. As it turns out, `Button` is a subclass of `TextView`, so everything discussed in the preceding section also applies to formatting the face of the button.

However, Android 1.6 added a new feature for the declaration of the “on-click” listener for a `Button`. In addition to the classic approach of defining some object (such as the activity) as implementing the `View.OnClickListener` interface, you can now take a somewhat simpler approach:

- Define some method on your Activity that holds the button that takes a single `View` parameter, has a `void` return value, and is `public`.
- In your layout XML, on the `Button` element, include the `android:onClick` attribute with the name of the method you defined in the previous step.

For example, we might have a method on our Activity that looks like this:

```
public void someMethod(View theButton) {  
    // do something useful here  
}
```

Then, we could use this XML declaration for the Button itself, including android:onClick:

```
<Button  
    android:onClick="someMethod"  
    ...  
/>
```

This is enough for Android to wire together the Button with the click handler.

Fleeting Images

Android has two widgets to help you embed images in your activities: ImageView and ImageButton. As the names suggest, they are image-based analogues to TextView and Button, respectively.

Each widget takes an android:src attribute (in an XML layout) to specify which picture to use. These attributes usually reference a drawable resource, described in greater detail in the chapter on resources.

ImageButton, a subclass of ImageView, mixes in the standard Button behaviors, for responding to clicks and whatnot. For example, take a peek at the main.xml layout from the Basic/ImageView sample project:

```
<?xml version="1.0" encoding="utf-8"?>  
<ImageView xmlns:android="http://schemas.android.com/apk/res/android"  
    android:id="@+id/icon"  
    android:layout_width="fill_parent"  
    android:layout_height="fill_parent"  
    android:adjustViewBounds="true"  
    android:src="@drawable/molecule"  
/>
```

The result, just using the code-generated activity, is simply the image, as shown in Figure 9–2.

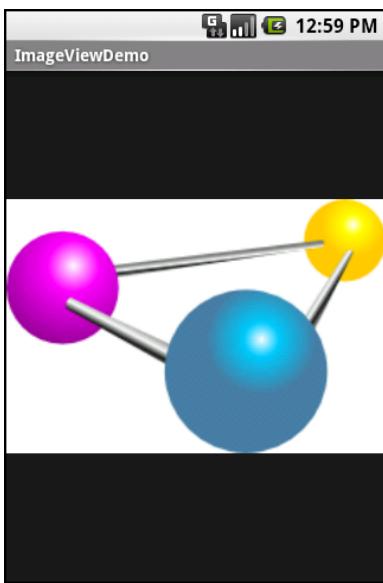


Figure 9–2. The *ImageViewDemo* sample application

Fields of Green...or Other Colors

Along with buttons and labels, fields are the third anchor of most GUI toolkits. In Android, they are implemented via the `EditText` widget, which is a subclass of the `TextView` used for labels.

Along with the standard `TextView` properties (e.g., `android:textStyle`), `EditText` has many other properties that will be useful to you in constructing fields, including the following:

- `android:autoText`: Controls if the field should provide automatic spelling assistance
- `android:capitalize`: Controls if the field should automatically capitalize the first letter of entered text (e.g., in name and city fields)
- `android:digits`: Configures the field to accept only certain digits
- `android:singleLine`: Controls if the field is for single-line input or multiple-line input (e.g., does pressing Enter move you to the next widget or add a newline?)

Most of the preceding properties are also available from the new `android:inputType` attribute, added in Android 1.5 as part of adding “soft keyboards” to Android (discussed in Chapter 11).

For example, from the `Basic/Field` project, here is an XML layout file showing an `EditText` widget:

```
<?xml version="1.0" encoding="utf-8"?>
<EditText xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/field"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:singleLine="false"
    />
```

Note that `android:singleLine` is set to "false", so users will be able to enter several lines of text.

For this project, the `FieldDemo.java` file populates the input field with some prose:

```
package com.commonsware.android.field;

import android.app.Activity;
import android.os.Bundle;
import android.widget.EditText;

public class FieldDemo extends Activity {
    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        EditText fld=(EditText)findViewById(R.id.field);
        fld.setText("Licensed under the Apache License, Version 2.0 " +
            "(the \"License\"); you may not use this file " +
            "except in compliance with the License. You may " +
            "obtain a copy of the License at " +
            "http://www.apache.org/licenses/LICENSE-2.0");
    }
}
```

The result, once built and installed into the emulator, is shown in Figure 9–3.

Another flavor of field is one that offers autocompletion, to help users supply a value without typing in the whole text. That is provided in Android as the `AutoCompleteTextView` widget, discussed in greater detail later in this book.

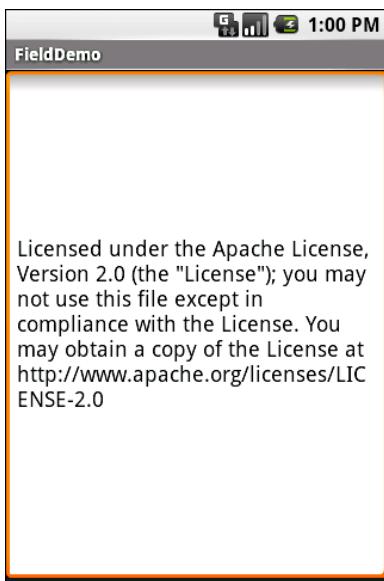


Figure 9–3. The *FieldDemo* sample application

Just Another Box to Check

The classic check box has two states: checked and unchecked. Clicking the check box toggles between those states to indicate a choice (e.g., “Add rush delivery to my order”).

In Android, there is a `CheckBox` widget to meet this need. It has `TextView` as an ancestor, so you can use `TextView` properties like `android:textColor` to format the widget.

Within Java, you can invoke the following:

- `isChecked()`: Determines if the check box has been checked
- `setChecked()`: Forces the check box into a checked or unchecked state
- `toggle()`: Toggles the check box as if the user checked it

Also, you can register a listener object (in this case, an instance of `OnCheckedChangeListener`) to be notified when the state of the check box changes.

For example, from the `Basic/CheckBox` project, here is a simple check box layout:

```
<?xml version="1.0" encoding="utf-8"?>
<CheckBox xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/check"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="This checkbox is: unchecked" />
```

The corresponding `CheckBoxDemo.java` retrieves and configures the behavior of the check box:

```
public class CheckBoxDemo extends Activity
    implements CompoundButton.OnCheckedChangeListener {
    CheckBox cb;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        cb=(CheckBox)findViewById(R.id.check);
        cb.setOnCheckedChangeListener(this);
    }

    public void onCheckedChanged(CompoundButton buttonView,
                                boolean isChecked) {
        if (isChecked) {
            cb.setText("This checkbox is: checked");
        }
        else {
            cb.setText("This checkbox is: unchecked");
        }
    }
}
```

Note that the activity serves as its own listener for check box state changes, since it implements the `OnCheckedChangeListener` interface (via `cb.setOnCheckedChangeListener(this)`). The callback for the listener is `onCheckedChanged()`, which receives the check box whose state has changed and the new state. In this case, we update the text of the check box to reflect what the actual box contains.

The result? Clicking the check box immediately updates its text, as shown in Figures 9–4 and 9–5.

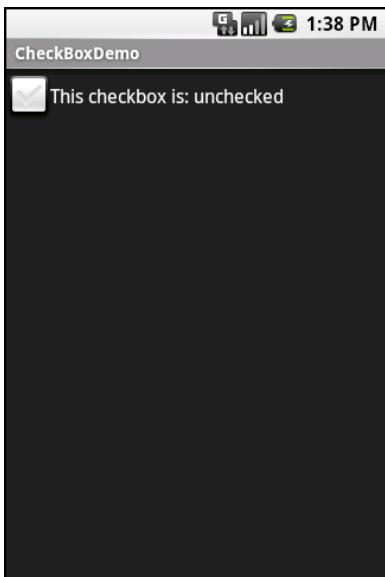


Figure 9–4. The *CheckBoxDemo* sample application, with the check box unchecked

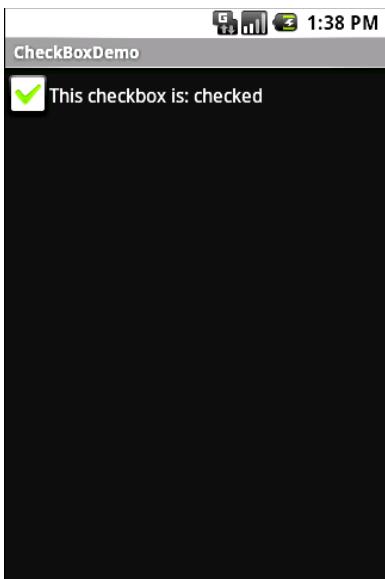


Figure 9–5. The same application, now with the check box checked

Turn the Radio Up

As with other implementations of radio buttons in other toolkits, Android's radio buttons are two-state, like check boxes, but can be grouped such that only one radio button in the group can be checked at any time.

Like CheckBox, RadioButton inherits from CompoundButton, which in turn inherits from TextView. Hence, all the standard TextView properties for font face, style, color, and so forth are available for controlling the look of radio buttons. Similarly, you can call isChecked() on a RadioButton to see if it is selected, toggle() to select it, and so on, as you can with a CheckBox.

Most times, you will want to put your RadioButton widgets inside a RadioGroup. The RadioGroup indicates a set of radio buttons whose state is tied, meaning only one button in the group can be selected at any time. If you assign an android:id to your RadioGroup in your XML layout, you can access the group from your Java code and invoke the following:

- check(): Checks a specific radio button via its ID (e.g.,
group.check(R.id.radio1))
- clearCheck(): Clears all radio buttons, so none in the group are checked
- getCheckedRadioButtonId(): Gets the ID of the currently checked radio button (or -1 if none are checked)

Note that the mutual-exclusion feature of RadioGroup applies only to RadioButton widgets that are immediate children of the RadioGroup. You cannot have other containers—discussed in the next chapter—between the RadioGroup and its RadioButton widgets.

For example, from the Basic/RadioButton sample application, here is an XML layout showing a RadioGroup wrapping a set of RadioButton widgets:

```
<?xml version="1.0" encoding="utf-8"?>
<RadioGroup
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <RadioButton android:id="@+id/radio1"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Rock" />

    <RadioButton android:id="@+id/radio2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Scissors" />

    <RadioButton android:id="@+id/radio3"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Paper" />
</RadioGroup>
```

Using the stock Android-generated Java for the project and this layout, you get the result shown in Figure 9–6.

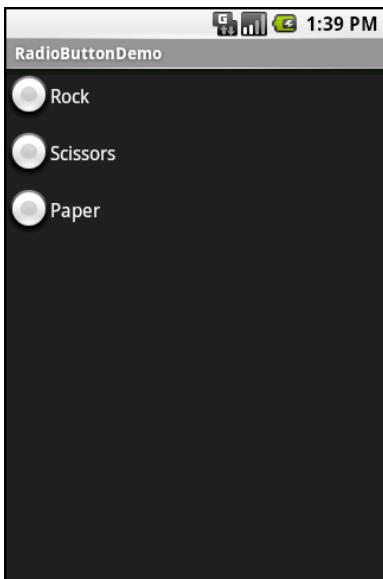


Figure 9–6. The RadioButtonDemo sample application

Note that the radio button group is initially set to be completely unchecked at the outset. To preset one of the radio buttons to be checked, use either `setChecked()` on the `RadioButton` or `check()` on the `RadioGroup` from within your `onCreate()` callback in your activity.

It's Quite a View

All widgets, including the ones shown in the previous sections, extend `View`, which gives all widgets an array of useful properties and methods beyond those already described.

Padding

Widgets have a minimum size, which may be influenced by what is inside of them. So, for example, a `Button` will expand to accommodate the size of its caption. You can control this size by using padding. Adding padding will increase the space between the contents (e.g., the caption of a `Button`) and the edges of the widget.

Padding can be set once in XML for all four sides (`android:padding`) or on a per-side basis (`android:paddingLeft`, etc.). Padding can also be set in Java via the `setPadding()` method.

The value of any of these is a dimension, a combination of a unit of measure and a count. So, `5px` is 5 pixels, `10dp` is 10 density-independent pixels, and `2mm` is 2 millimeters. We will examine dimension in greater detail in an upcoming chapter.

Other Useful Properties

In addition to the properties presented in this chapter and in the next chapter, some of the other properties on View that are most likely to be used include the following:

- `android: visibility`: Controls whether the widget is initially visible
- `android:nextFocusDown`, `android:nextFocusLeft`,
`android:nextFocusRight`, and `android:nextFocusUp`: Control the focus order if the user uses the D-pad, trackball, or similar pointing device
- `android:contentDescription`: Roughly equivalent to the `alt` attribute on an HTML `` tag, used by accessibility tools to help people who cannot see the screen navigate the application

Useful Methods

You can toggle whether or not a widget is enabled via `setEnabled()` and see if it is enabled via `isEnabled()`. One common use pattern for this is to disable some widgets based on a CheckBox or RadioButton selection.

You can give a widget focus via `requestFocus()` and see if it is focused via `isFocused()`. You might use this in concert with disabling widgets to ensure the proper widget has the focus once your disabling operation is complete.

To help navigate the tree of widgets and containers that make up an activity's overall view, you can use:

- `getParent()`: Finds the parent widget or container
- `findViewById()`: Finds a child widget with a certain ID
- `getRootView()`: Gets the root of the tree (e.g., what you provided to the activity via `setContentView()`)

Colors

There are two types of color attributes in Android widgets. Some, like `android:background`, take a single color (or a graphic image to serve as the background). Others, like `android:textColor` on `TextView` (and subclasses), can take a `ColorStateList`, including via the Java setter (in this case, `setTextColor()`).

A `ColorStateList` allows you to specify different colors for different conditions. For example, a `TextView` can have one text color when it is the selected item in a list and another color when it is not selected (Chapter 12 covers selection widgets). This is handled via the default `ColorStateList` associated with `TextView`.

If you wish to change the color of a `TextView` widget in Java code, you have two main choices:

- Use `ColorStateList.valueOf()`, which returns a `ColorStateList` in which all states are considered to have the same color, which you supply as the parameter to the `valueOf()` method. This is the Java equivalent of the `android:textColor` approach, to make the `TextView` always a specific color regardless of circumstances.
- Create a `ColorStateList` with different values for different states, either via the constructor or via an XML drawable resource, a concept discussed in a later chapter.

Working with Containers

Containers pour a collection of widgets (and possibly child containers) into specific structures you like. If you want a form with labels on the left and fields on the right, you need a container. If you want OK and Cancel buttons to be beneath the rest of the form, next to one another, and flush to right side of the screen, you need a container. Just from a pure XML perspective, if you have multiple widgets (beyond RadioButton widgets in a RadioGroup), you need a container just to have a root element in which to place the widgets.

Most GUI toolkits have some notion of layout management, frequently organized into containers. In Java/Swing, for example, you have layout managers like BoxLayout and containers that use them (e.g., Box). Some toolkits, such as XUL and Flex, stick strictly to the box model, figuring that any desired layout can be achieved through the right combination of nested boxes. Android, through LinearLayout, also offers a box model, but in addition supports a range of containers that provide different layout rules.

In this chapter, we will look at three commonly used containers, LinearLayout (the box model), RelativeLayout (a rule-based model), and TableLayout (the grid model), along with ScrollView, a container designed to assist with implementing scrolling containers.

Thinking Linearly

As just noted, LinearLayout is a box model—widgets or child containers are lined up in a column or row, one after the next. This works similarly to FlowLayout in Java/Swing, vbox and hbox in Flex and XUL, and so forth.

Flex and XUL use the box as their primary unit of layout. If you want, you can use LinearLayout in much the same way, eschewing some of the other containers. Getting the visual representation you want is mostly a matter of identifying where boxes should nest and which properties those boxes should have, such as their alignment relative to other boxes.

LinearLayout Concepts and Properties

To configure a `LinearLayout`, you have five main areas of control besides the container's contents: the orientation, the fill model, the weight, the gravity, and the padding.

Orientation

Orientation indicates whether the `LinearLayout` represents a row or a column. Just add the `android:orientation` property to your `LinearLayout` element in your XML layout, and set the value to be `horizontal` for a row or `vertical` for a column.

The orientation can be modified at runtime by invoking `setOrientation()` on the `LinearLayout`, supplying it either `HORIZONTAL` or `VERTICAL`.

Fill Model

Let's imagine a row of widgets, such as a pair of radio buttons. These widgets have a "natural" size based on their text. Their combined size probably does not exactly match the width of the Android device's screen—particularly since screens come in various sizes. We then have the issue of what to do with the remaining space.

All widgets inside a `LinearLayout` must supply `android:layout_width` and `android:layout_height` properties to help address this issue. These properties' values have three flavors:

- You can provide a specific dimension, such as `125dp` to indicate the widget should take up exactly a certain size.
- You can provide `wrap_content`, which means the widget should fill up its natural space, unless that is too big, in which case Android can use `word-wrap` as needed to make it fit.
- You can provide `fill_parent`, which means the widget should fill up all available space in its enclosing container, after all other widgets are taken care of.

The latter two flavors are the most common, as they are independent of screen size, allowing Android to adjust your view to fit the available space.

NOTE: In API level 8 (Android 2.2), `fill_parent` was renamed to `match_parent`, for unknown reasons. You can still use `fill_parent`, as it will be supported for the foreseeable future. However, at such point in time as you are supporting only API level 8 or higher (e.g., `android:minSdkVersion="8"` in your manifest), you should probably switch over to `match_parent`.

Weight

But what happens if we have two widgets that should split the available free space? For example, suppose we have two multiline fields in a column, and we want them to take up the remaining space in the column after all other widgets have been allocated their space.

To make this work, in addition to setting `android:layout_width` (for rows) or `android:layout_height` (for columns) to `fill_parent`, you must also set `android:layout_weight`. This property indicates the proportion of the free space that should go to that widget. For example, if you set `android:layout_weight` to be the same nonzero value for a pair of widgets (e.g., 1), the free space will be split evenly between them. If you set it to be 1 for one widget and 2 for the other widget, the second widget will use up twice the free space that the first widget does. And so on. The weight for a widget is 0 by default.

Another pattern for using weights is if you want to allocate sizes on a percentage basis. To use this technique for, say, a horizontal layout, do the following:

- Set all the `android:layout_width` values to be 0 for the widgets in the layout.
- Set the `android:layout_weight` values to be the desired percentage size for each widget in the layout.
- Make sure all those weights add up to 100.

Gravity

By default, everything in a `LinearLayout` is left- and top-aligned. So, if you create a row of widgets via a horizontal `LinearLayout`, the row will start flush on the left side of the screen. If that is not what you want, you need to specify a gravity value. Using `android:layout_gravity` on a widget (or calling `setGravity()` at runtime on the widget's Java object), you can tell the widget and its container how to align it *vis-à-vis* the screen.

For a column of widgets, common gravity values are `left`, `center_horizontal`, and `right` for left-aligned, centered, and right-aligned widgets, respectively.

For a row of widgets, the default is for them to be aligned so their text is aligned on the baseline (the invisible line that letters seem to “sit on”). You can specify a gravity of `center_vertical` to center the widgets along the row’s vertical midpoint.

Margins

By default, widgets are tightly packed next to each other. You can change this via the use of margins, a concept that is similar to that of padding, described in Chapter 9.

The difference between padding and margins is apparent only for widgets with a nontransparent background. For widgets with a transparent background—like the

default look of a `TextView`—padding and margins have similar visual effect, increasing the space between the widget and adjacent widgets. For widgets with a nontransparent background—like a `Button`—padding is considered to be inside the background, while margins are considered to be outside the background. In other words, adding padding will increase the space between the contents (e.g., the caption of a `Button`) and the edges, while adding margins increases the empty space between the edges and adjacent widgets.

Margins can be set in XML, either on a per-side basis (e.g., `android:layout_marginTop`) or on all sides via `android:layout_margin`. As with padding, the value of any of these is a dimension—a combination of a unit of measure and a count, such as `5px` for 5 pixels.

LinearLayout Example

Let's look at an example (`Containers/Linear`) that shows `LinearLayout` properties set both in the XML layout file and at runtime. Here is the layout:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <RadioGroup android:id="@+id/orientation"
        android:orientation="horizontal"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:padding="5dip">
        <RadioButton
            android:id="@+id/horizontal"
            android:text="horizontal" />
        <RadioButton
            android:id="@+id/vertical"
            android:text="vertical" />
    </RadioGroup>
    <RadioGroup android:id="@+id/gravity"
        android:orientation="vertical"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:padding="5dip">
        <RadioButton
            android:id="@+id/left"
            android:text="left" />
        <RadioButton
            android:id="@+id/center"
            android:text="center" />
        <RadioButton
            android:id="@+id/right"
            android:text="right" />
    </RadioGroup>
</LinearLayout>
```

Note that we have a `LinearLayout` wrapping two `RadioGroup` sets. `RadioGroup` is a subclass of `LinearLayout`, so our example demonstrates nested boxes as if they were all `LinearLayout` containers.

The top `RadioGroup` sets up a row (`android:orientation = "horizontal"`) of `RadioButton` widgets. The `RadioGroup` has 5dip of padding on all sides, separating it from the other `RadioGroup`, where dip stands for density-independent pixels (think of them as ordinary pixels for now—we will get into the distinction later in the book). The width and height are both set to `wrap_content`, so the radio buttons will take up only the space that they need.

The bottom `RadioGroup` is a column (`android:orientation = "vertical"`) of three `RadioButton` widgets. Again, we have 5dip of padding on all sides and a natural height (`android:layout_height = "wrap_content"`). However, we have set `android:layout_width` to be `fill_parent`, meaning the column of radio buttons claims the entire width of the screen.

To adjust these settings at runtime based on user input, we need some Java code:

```
package com.commonsware.android.linear;

import android.app.Activity;
import android.os.Bundle;
import android.view.Gravity;
import android.text.TextWatcher;
import android.widget.LinearLayout;
import android.widget.RadioGroup;
import android.widget.EditText;

public class LinearLayoutDemo extends Activity
    implements RadioGroup.OnCheckedChangeListener {
    RadioGroup orientation;
    RadioGroup gravity;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        orientation=(RadioGroup)findViewById(R.id.orientation);
        orientation.setOnCheckedChangeListener(this);
        gravity=(RadioGroup)findViewById(R.id.gravity);
        gravity.setOnCheckedChangeListener(this);
    }

    public void onCheckedChanged(RadioGroup group, int checkedId) {
        switch (checkedId) {
            case R.id.horizontal:
                orientation.setOrientation(LinearLayout.HORIZONTAL);
                break;

            case R.id.vertical:
                orientation.setOrientation(LinearLayout.VERTICAL);
                break;
        }
    }
}
```

```
        case R.id.left:  
            gravity.setGravity(Gravity.LEFT);  
            break;  
  
        case R.id.center:  
            gravity.setGravity(Gravity.CENTER_HORIZONTAL);  
            break;  
  
        case R.id.right:  
            gravity.setGravity(Gravity.RIGHT);  
            break;  
    }  
}  
}
```

In `onCreate()`, we look up our two `RadioGroup` containers and register a listener on each, so we are notified when the radio buttons change state (`setOnCheckedChangeListener(this)`). Since the activity implements `OnCheckedChangeListener`, the activity itself is the listener.

In `onCheckedChanged()` (the callback for the listener), we see which `RadioButton` had a state change. Based on the clicked-upon item, we adjust either the orientation of the first `LinearLayout` or the gravity of the second `LinearLayout`.

Figure 10–1 shows the result when the demo is first launched inside the emulator.

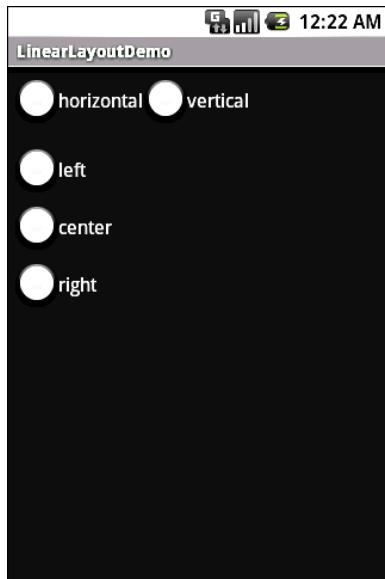


Figure 10–1. The `LinearLayoutDemo` sample application, as initially launched

If we toggle on the “vertical” radio button, the top `RadioGroup` adjusts to match, as shown in Figure 10–2.

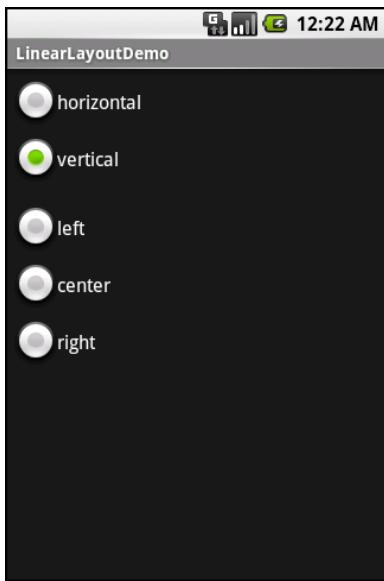


Figure 10–2. The same application, with the vertical radio button selected

If we toggle the “center” or “right” radio button, the bottom RadioGroup adjusts to match, as shown in Figures 10–3 and 10–4.

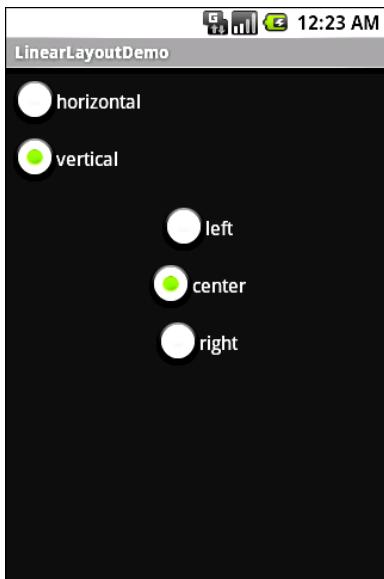


Figure 10–3. The same application, with the vertical and center radio buttons selected

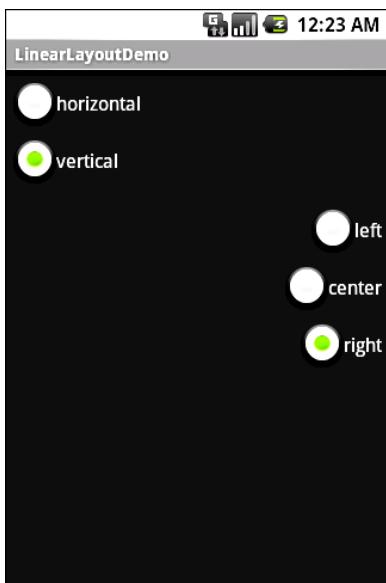


Figure 10–4. The same application, with the vertical and right radio buttons selected

The Box Model

As noted earlier in this chapter, some GUI frameworks treat everything as boxes—what Android calls `LinearLayout` containers. In Flex and XUL, for example, you create boxes and indicate how big they should be, as a percentage of the available space, and then you put widgets in the boxes. A similar pattern exists in Android for `LinearLayout`, as is demonstrated in the `Containers\LinearPercent` project.

Here we have a layout XML file that contains a vertical `LinearLayout` wrapping three `Button` widgets:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button
        android:text="Fifty Percent"
        android:layout_width="fill_parent"
        android:layout_height="0dip"
        android:layout_weight="50"
    />
    <Button
        android:text="Thirty Percent"
        android:layout_width="fill_parent"
        android:layout_height="0dip"
        android:layout_weight="30"
    />
```

```
<Button  
    android:text="Twenty Percent"  
    android:layout_width="fill_parent"  
    android:layout_height="0dip"  
    android:layout_weight="20"  
/>  
</LinearLayout>
```

Each of the three widgets will take up a certain percentage of the vertical space for the LinearLayout. Since the LinearLayout is set to fill the screen, this means that the three widgets will divide up the screen based on their requested percentages.

To request a percentage, each Button does the following:

- Sets its android:layout_height to be 0dip (note that we use height here because it is a vertical LinearLayout we are subdividing)
- Sets its android:layout_weight to be the desired percentage (e.g., android:layout_weight="50")

So long as the weights sum to 100, as they do in this case, you will get your desired breakdown by percentage, as shown in Figure 10–5.

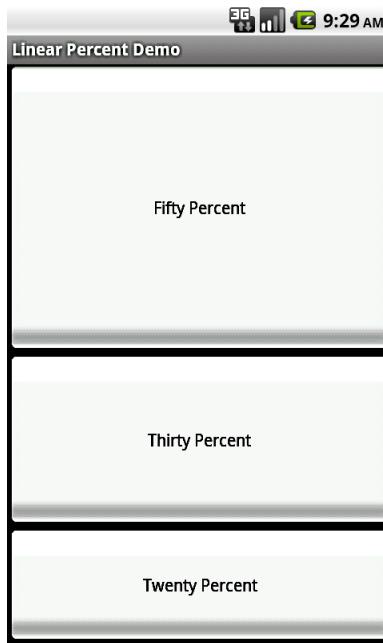


Figure 10–5. A LinearLayout split among three Buttons by percentage

All Things Are Relative

RelativeLayout, as the name suggests, lays out widgets based on their relationship to other widgets in the container and the parent container. You can place widget X below and to the left of widget Y, have widget Z's bottom edge align with the bottom of the

container, and so on. This is reminiscent of James Elliot's RelativeLayout for use with Java/Swing.

RelativeLayout Concepts and Properties

To make all this work, we need ways to reference other widgets within an XML layout file, plus ways to indicate the relative positions of those widgets.

Positions Relative to Container

The easiest relationships to set up are those that tie a widget's position to that of its container, using the following properties:

- `android:layout_alignParentTop`: Aligns the widget's top with the top of the container
- `android:layout_alignParentBottom`: Aligns the widget's bottom with the bottom of the container
- `android:layout_alignParentLeft`: Aligns the widget's left side with the left side of the container
- `android:layout_alignParentRight`: Aligns the widget's right side with the right side of the container
- `android:layout_centerHorizontal`: Positions the widget horizontally at the center of the container
- `android:layout_centerVertical`: Positions the widget vertically at the center of the container
- `android:layout_centerInParent`: Positions the widget both horizontally and vertically at the center of the container

All of these properties take a simple Boolean value (true or false).

Note that the padding of the widget is taken into account when performing these various alignments. The alignments are based on the widget's overall cell (combination of its natural space plus the padding).

Relative Notation in Properties

The remaining properties of relevance to RelativeLayout take as a value the identity of a widget in the container. To do this:

1. Put identifiers (`android:id` attributes) on all elements that you will need to address.
2. Reference other widgets using the same identifier value.

The first occurrence of an `id` value should include the plus sign (`@+id/widget_a`); the second and subsequent times that `id` value is used in the layout file, the plus sign should be omitted (`@id/widget_a`). This allows the build tools to better help you catch typos in your widget `id` values—if you do not have a plus sign for a widget `id` value that has not been seen before, that will be caught at compile time.

For example, if widget A is identified as `@+id/widget_a`, widget B can refer to widget A in one of its own properties via the identifier `@id/widget_a`.

Positions Relative to Other Widgets

The following four properties control the position of a widget relative to other widgets:

- `android:layout_above`: Indicates that the widget should be placed above the widget referenced in the property
- `android:layout_below`: Indicates that the widget should be placed below the widget referenced in the property
- `android:layout_toLeftOf`: Indicates that the widget should be placed to the left of the widget referenced in the property
- `android:layout_toRightOf`: Indicates that the widget should be placed to the right of the widget referenced in the property

Beyond those four properties, five additional properties can be used to control one widget's alignment relative to another:

- `android:layout_alignTop`: Indicates that the widget's top should be aligned with the top of the widget referenced in the property
- `android:layout_alignBottom`: Indicates that the widget's bottom should be aligned with the bottom of the widget referenced in the property
- `android:layout_alignLeft`: Indicates that the widget's left should be aligned with the left of the widget referenced in the property
- `android:layout_alignRight`: Indicates that the widget's right should be aligned with the right of the widget referenced in the property
- `android:layout_alignBaseline`: Indicates that the baseline of the two widgets should be aligned (where the baseline is the invisible line that text appears to sit on)

The `android:layout_alignBaseline` property is useful for aligning labels and fields so that the text appears natural. Since fields have a box around them and labels do not, `android:layout_alignTop` would align the top of the field's box with the top of the label, causing the text of the label to be higher on the screen than the text entered into the field.

So, if we want widget B to be positioned to the right of widget A, in the XML element for widget B, we need to include `android:layout_toRightOf = "@+id/widget_a"` (assuming `@+id/widget_a` is the identity of widget A).

Order of Evaluation

Android formerly used a single pass to process `RelativeLayout`-defined rules. That meant you could not reference a widget (e.g., via `android:layout_above`) until it had been declared in the XML. This made defining some layouts a bit complicated. Starting in Android 1.6, Android uses two passes to process the rules, so you can now safely have forward references to as-yet-undefined widgets.

RelativeLayout Example

With all that in mind, let's examine a typical form with a field, a label, and a pair of buttons labeled OK and Cancel. Here is the XML layout, pulled from the `Containers/RelativeLayout` sample project:

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content">
    <TextView android:id="@+id/label"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="URL:"
        android:layout_alignBaseline="@+id/entry"
        android:layout_alignParentLeft="true"/>
    <EditText
        android:id="@+id/entry"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:layout_toRightOf="@+id/label"
        android:layout_alignParentTop="true"/>
    <Button
        android:id="@+id/ok"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_below="@+id/entry"
        android:layout_alignRight="@+id/entry"
        android:text="OK" />
    <Button
        android:id="@+id/cancel"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_toLeftOf="@+id/ok"
        android:layout_alignTop="@+id/ok"
        android:text="Cancel" />
</RelativeLayout>
```

First, we open the `RelativeLayout`. In this case, we want to use the full width of the screen (`android:layout_width = "fill_parent"`) and only as much height as we need (`android:layout_height = "wrap_content"`).

Next, we define the label as a `TextView`. We indicate that we want its left edge aligned with the left edge of the `RelativeLayout` (`android:layout_alignParentLeft="true"`) and its baseline aligned with the baseline of the yet-to-be-defined `EditText`. Since the `EditText` has not been declared yet, we use the + sign in the ID (`android:layout_alignBaseline="@+id/entry"`).

After that, we add in the field as an `EditText`. We want the field to be to the right of the label, have the field be aligned with the top of the `RelativeLayout`, and have the field take up the rest of this “row” in the layout. These requirements are handled by the following three properties, respectively:

- `android:layout_toRightOf = "@+id/label"`
- `android:layout_alignParentTop = "true"`
- `android:layout_width = "fill_parent"`

Then, the OK button is set to be below the field (`android:layout_below = "@+id/entry"`) and have its right side align with the right side of the field (`android:layout_alignRight = "@+id/entry"`). The Cancel button is set to be to the left of the OK button (`android:layout_toLeft = "@+id/ok"`) and have its top aligned with the OK button (`android:layout_alignTop = "@+id/ok"`).

With no changes to the autogenerated Java code, the emulator gives us the result shown in Figure 10–6.

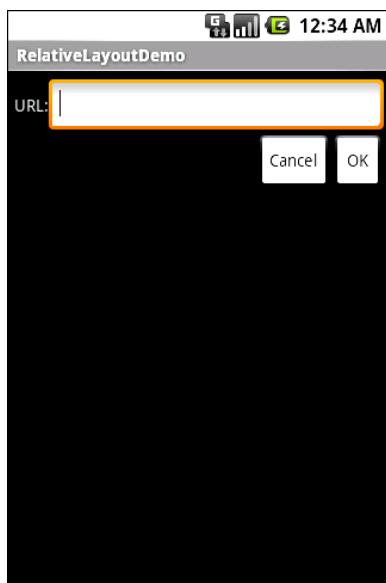


Figure 10–6. The `RelativeLayoutDemo` sample application

Overlap

RelativeLayout also has a feature that LinearLayout lacks—the ability to have widgets overlap one another. Later children of a RelativeLayout are “higher in the Z axis” than are earlier children, meaning that later children will overlap earlier children if they are set up to occupy the same space in the layout.

This will be clearer with an example. Here is a layout, from `Containers/RelativeOverlap`, with a RelativeLayout holding two Button widgets:

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button
        android:text="I AM BIG"
        android:textSize="120dip"
        android:textStyle="bold"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
    />
    <Button
        android:text="I am small"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_centerInParent="true"
    />
</RelativeLayout>
```

The first Button is set to fill the screen. The second Button is set to be centered inside the parent and to take up only as much space as is needed for its caption. Hence, the second Button will appear to float over the first Button, as shown in Figure 10–7.

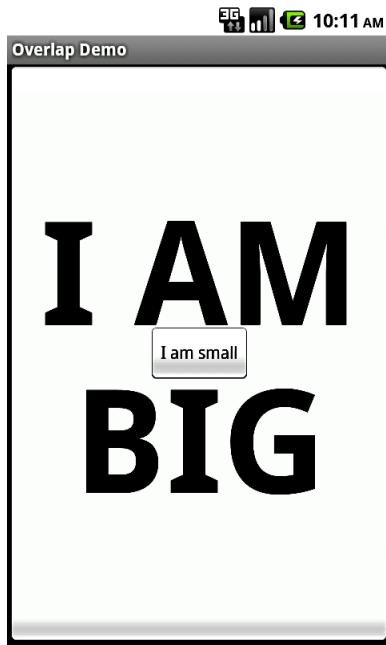


Figure 10–7. The *RelativeOverlap* sample application

Both Button widgets can still be clicked, though clicking the smaller Button does not also click the bigger Button. Your clicks will be handled by the widget on top in the case of an overlap like this.

Tabula Rasa

If you like HTML tables, spreadsheet grids, and similar layout options, you will like Android's TableLayout, which allows you to position your widgets in a grid to your specifications. You control the number of rows and columns, which columns might shrink or stretch to accommodate their contents, and so on.

TableLayout works in conjunction with TableRow. TableLayout controls the overall behavior of the container, with the widgets themselves poured into one or more TableRow containers, one per row in the grid.

TableLayout Concepts and Properties

For your table layout to work as you intend, you need to understand how widgets work with rows and columns, and how to handle widgets that live outside of rows.

Putting Cells in Rows

Rows are declared by you, the developer, by putting widgets as children of a `TableRow` inside the overall `TableLayout`. You, therefore, control directly how many rows appear in the table.

The number of columns is determined by Android; you control the number of columns in an indirect fashion. First, there will be at least one column per widget in your longest row. So if you have three rows—one with two widgets, one with three widgets, and one with four widgets—there will be at least four columns. However, you can have a widget take up more than one column by including the `android:layout_span` property, indicating the number of columns the widget spans. This is akin to the `colspan` attribute one finds in table cells in HTML. In this XML layout fragment, the field spans three columns:

```
<TableRow>
    <TextView android:text="URL:" />
    <EditText
        android:id="@+id/entry"
        android:layout_span="3"/>
</TableRow>
```

Ordinarily, widgets are put into the first available column. In the preceding fragment, the label would go in the first column (column 0, as columns are counted starting from 0), and the field would go into a spanned set of three columns (columns 1 through 3). However, you can put a widget into a different column via the `android:layout_column` property, specifying the 0-based column the widget belongs to:

```
<TableRow>
    <Button
        android:id="@+id/cancel"
        android:layout_column="2"
        android:text="Cancel" />
    <Button android:id="@+id/ok" android:text="OK" />
</TableRow>
```

In the preceding XML layout fragment, the Cancel button goes in the third column (column 2). The OK button then goes into the next available column, which is the fourth column.

Non-Row Children of TableLayout

Normally, `TableLayout` contains only `TableRow` elements as immediate children. However, it is possible to put other widgets in between rows. For those widgets, `TableLayout` behaves a bit like `LinearLayout` with vertical orientation. The widgets automatically have their width set to `fill_parent`, so they will fill the same space that the longest row does.

One pattern for this is to use a plain `View` as a divider. For example, you could use `<View android:layout_height = "2dip" android:background = "#0000FF" />` as a two-pixel-high blue bar across the width of the table.

Stretch, Shrink, and Collapse

By default, each column will be sized according to the natural size of the widest widget in that column (taking spanned columns into account). Sometimes, though, that does not work out very well, and you need more control over column behavior.

You can place an `android:stretchColumns` property on the `TableLayout`. The value should be a single column number (again, 0-based) or a comma-delimited list of column numbers. Those columns will be stretched to take up any available space on the row. This helps if your content is narrower than the available space.

Conversely, you can place an `android:shrinkColumns` property on the `TableLayout`. Again, this should be a single column number or a comma-delimited list of column numbers. The columns listed in this property will try to word-wrap their contents to reduce the effective width of the column—by default, widgets are not word-wrapped. This helps if you have columns with potentially wordy content that might cause some columns to be pushed off the right side of the screen.

You can also leverage an `android:collapseColumns` property on the `TableLayout`, again with a column number or comma-delimited list of column numbers. These columns will start out collapsed, meaning they will be part of the table information but will be invisible. Programmatically, you can collapse and uncollapse columns by calling `setColumnCollapsed()` on the `TableLayout`. You might use this to allow users to control which columns are of importance to them and should be shown versus which ones are less important and can be hidden.

You can also control stretching and shrinking at runtime via `setColumnStretchable()` and `setColumnShrinkable()`.

TableLayout Example

The XML layout fragments previously shown, when combined, give us a `TableLayout` rendition of the form we created for `RelativeLayout`, with the addition of a divider line between the label/field and the two buttons (found in the `Containers/Table` demo):

```
<?xml version="1.0" encoding="utf-8"?>
<TableLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:stretchColumns="1">
    <TableRow>
        <TextView
            android:text="URL:" />
        <EditText android:id="@+id/entry"
            android:layout_span="3"/>
    </TableRow>
    <View
        android:layout_height="2dip"
        android:background="#0000FF" />
<TableRow>
```

```
<Button android:id="@+id/cancel"
    android:layout_column="2"
    android:text="Cancel" />
<Button android:id="@+id/ok"
    android:text="OK" />
</TableRow>
</TableLayout>
```

When compiled against the generated Java code and run on the emulator, we get the result shown in Figure 10–8.

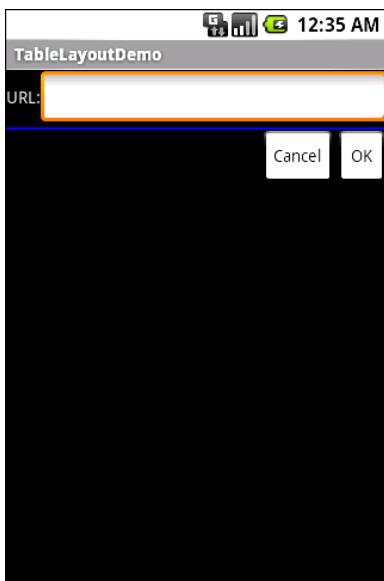


Figure 10–8. The TableLayoutDemo sample application

Scrollwork

Phone screens tend to be small, which requires developers to use some tricks to present a lot of information in the limited available space. One trick for doing this is to use scrolling, so that only part of the information is visible at one time, and the rest is available via scrolling up or down.

ScrollView is a container that provides scrolling for its contents. You can take a layout that might be too big for some screens, wrap it in a ScrollView, and still use your existing layout logic. The user can see only part of your layout at one time, and see the rest via scrolling.

For example, here is a ScrollView used in an XML layout file (from the Containers/Scroll demo):

```
<?xml version="1.0" encoding="utf-8"?>
<ScrollView
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
```

```
    android:layout_height="wrap_content">
<TableLayout
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:stretchColumns="0">
    <TableRow>
        <View
            android:layout_height="80dip"
            android:background="#000000"/>
        <TextView android:text="#000000"
            android:paddingLeft="4dip"
            android:layout_gravity="center_vertical" />
    </TableRow>
    <TableRow>
        <View
            android:layout_height="80dip"
            android:background="#440000" />
        <TextView android:text="#440000"
            android:paddingLeft="4dip"
            android:layout_gravity="center_vertical" />
    </TableRow>
    <TableRow>
        <View
            android:layout_height="80dip"
            android:background="#884400" />
        <TextView android:text="#884400"
            android:paddingLeft="4dip"
            android:layout_gravity="center_vertical" />
    </TableRow>
    <TableRow>
        <View
            android:layout_height="80dip"
            android:background="#aa8844" />
        <TextView android:text="#aa8844"
            android:paddingLeft="4dip"
            android:layout_gravity="center_vertical" />
    </TableRow>
    <TableRow>
        <View
            android:layout_height="80dip"
            android:background="#ffaa88" />
        <TextView android:text="#ffaa88"
            android:paddingLeft="4dip"
            android:layout_gravity="center_vertical" />
    </TableRow>
    <TableRow>
        <View
            android:layout_height="80dip"
            android:background="#ffffaa" />
        <TextView android:text="#ffffaa"
            android:paddingLeft="4dip"
            android:layout_gravity="center_vertical" />
    </TableRow>
    <TableRow>
        <View
            android:layout_height="80dip"
            android:background="#ffffff" />
```

```
<TextView android:text="#ffffff"
    android:paddingLeft="4dip"
    android:layout_gravity="center_vertical" />
</TableRow>
</TableLayout>
</ScrollView>
```

Without the ScrollView, the table would take up at least 560 pixels (seven rows at 80 pixels each, based on the View declarations). There may be some devices with screens capable of showing that much information, but many will be smaller. The ScrollView lets us keep the table as is, but present only part of it at a time.

On the stock Android emulator, when the activity is first viewed, it appears as shown in Figure 10–9.

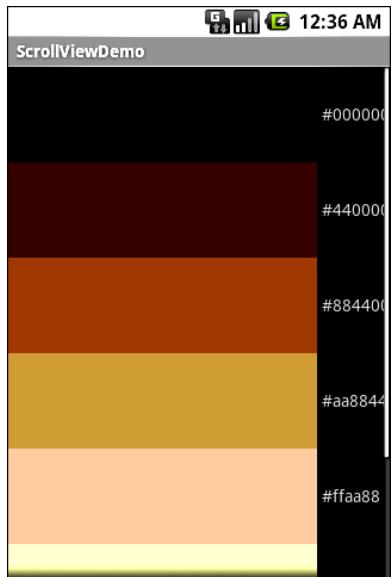


Figure 10–9. The ScrollViewDemo sample application

Notice how only five rows and part of the sixth are visible. By pressing the up/down buttons on the D-pad, you can scroll up and down to see the remaining rows. Also note how the right side of the content is clipped by the scrollbar—be sure to put some padding on that side or otherwise ensure your own content does not get clipped in that fashion.

Android 1.5 introduced HorizontalScrollView, which works like ScrollView, but horizontally. This is useful for forms that might be too wide rather than too tall. Note that neither ScrollView nor HorizontalScrollView will give you bidirectional scrolling, so you have to choose vertical or horizontal.

Also, note that you cannot put scrollable items into a ScrollView. For example, a ListView widget—which we will see in an upcoming chapter—already knows how to scroll. If you put a ListView in a ScrollView, it will not work very well.

The Input Method Framework

Android 1.5 introduced the input method framework (IMF), which is commonly referred to as *soft keyboards*. However, this term is not necessarily accurate, as IMF could be used for handwriting recognition or other means of accepting text input via the screen.

Keyboards, Hard and Soft

Some Android devices have a hardware keyboard that is visible some of the time (when it is slid out). A few Android devices have a hardware keyboard that is always visible (so-called “bar” or “slab” phones). Most Android devices, though, have no hardware keyboard at all. The IMF handles all of these scenarios.

In short, if there is no hardware keyboard, an input method editor (IME) will be available to the user when they tap an enabled `EditText`. If the default functionality of the IME is what you want to offer, you don’t need to make any code changes to your application. Fortunately, Android is fairly smart about guessing what you want, so you may simply need to test with the IME and make no specific code changes.

But the IME may not quite behave how you would like it to for your application. For example, in the Basic/Field sample project, the `FieldDemo` activity has the IME overlaying the multiple-line `EditText`, as shown in Figure 11–1. It would be nice to have more control over how this appears, and to be able to control other behavior of the IME. Fortunately, the IMF as a whole gives you many options for this, as described in this chapter.

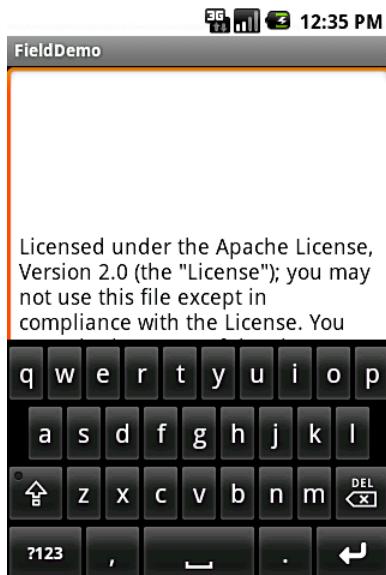


Figure 11–1. The input method editor, as seen in the FieldDemo sample application

Tailored to Your Needs

Android 1.1 and earlier offered many attributes on `EditText` widgets to control their style of input, such as `android:password` to indicate a field should be for password entry (shrouding the password keystrokes from prying eyes). Starting in Android 1.5, with the IMF, many of these attributes have been combined into a single `android:inputType` attribute.

The `android:inputType` attribute takes a class plus modifiers, in a pipe-delimited list (where `|` is the pipe character). The class generally describes what the user is allowed to input, and this determines the basic set of keys available on the soft keyboard. The available classes are as follows:

- `text` (the default)
- `number`
- `phone`
- `datetime`
- `date`
- `time`

Many of these classes offer one or more modifiers to further refine what the user will be allowed to enter. To get a better understanding of how these modifiers work, take a look at the `res/layout/main.xml` file from the `InputMethod/IMEDemo1` project:

```
<?xml version="1.0" encoding="utf-8"?>
<TableLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:stretchColumns="1"
    >
    <TableRow>
        <TextView
            android:text="No special rules:"/>
        <EditText/>
    </TableRow>
    <TableRow>
        <TextView
            android:text="Email address:"/>
        <EditText
            android:inputType="text|textEmailAddress"/>
    </TableRow>
    <TableRow>
        <TextView
            android:text="Signed decimal number:"/>
        <EditText
            android:inputType="number|numberSigned|numberDecimal"/>
    </TableRow>
    <TableRow>
        <TextView
            android:text="Date:"/>
        <EditText
            android:inputType="date"/>
    </TableRow>
    <TableRow>
        <TextView
            android:text="Multi-line text:"/>
        <EditText
            android:inputType="text|textMultiLine|textAutoCorrect"
            android:minLines="3"
            android:gravity="top"/>
    </TableRow>
</TableLayout>
```

This shows a TableLayout containing five rows, each demonstrating a slightly different flavor of EditText:

- The first row has no attributes at all on the `EditText`, meaning you get a plain text-entry field.
- The second row has `android:inputType = "text|textEmailAddress"`, meaning it is a text-entry field that specifically seeks an e-mail address.
- The third row allows for signed decimal numeric input, via `android:inputType = "number|numberSigned|numberDecimal"`.
- The fourth row is set up to allow for data entry of a date (`android:inputType = "date"`).
- The last allows for multiline input with autocorrection of probable spelling errors (`android:inputType = "text|textMultiLine|textAutoCorrect"`).

The class and modifiers tailor the keyboard. So, a plain text-entry field results in a plain soft keyboard, as shown in Figure 11–2.

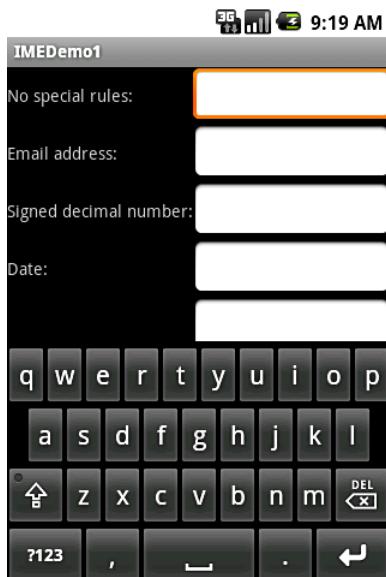


Figure 11–2. A standard input method editor (a.k.a., soft keyboard)

An e-mail address field might put the @ symbol on the soft keyboard, at the cost of a smaller spacebar, as shown in Figure 11–3.

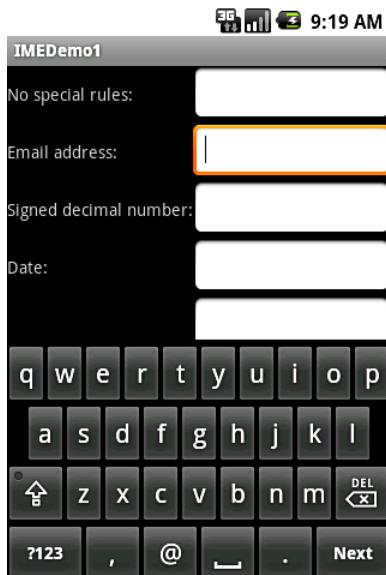


Figure 11–3. The input method editor for e-mail addresses

Note, though, that this behavior is specific to the IME. Some editors might put the @ symbol on the primary keyboard for an e-mail field. Some might put a .com button on the primary keyboard. Some might not react at all. It is up to the implementation of the IME—all you can do is supply the hint.

Number and date fields restrict the keys to numeric keys, plus a set of symbols that may or may not be valid on a given field, as shown in Figure 11–4.

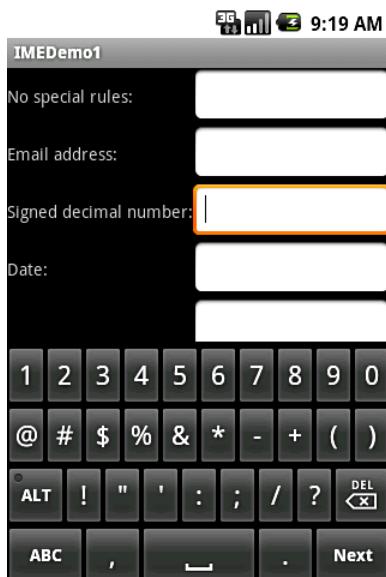


Figure 11–4. The input method editor for signed decimal numbers

These are just a few examples of the possible IMEs. By choosing the appropriate `android:inputType`, you can give users a soft keyboard that best suits the type of data they should be entering.

Tell Android Where It Can Go

You may have noticed a subtle difference between the IME shown in Figure 11–2 and the IME shown in Figure 11–3, beyond the addition of the @ key. The lower-right corner of the soft keyboard in Figure 11–3 has a Next button, whereas the one in Figure 11–2 has a newline button. This points out two things:

- EditText widgets are multiline by default if you do not specify `android:inputType`.
- You can control what goes on with that lower-right button, called the accessory button.

By default, on an EditText where you have specified `android:inputType`, the accessory button will be Next, moving you to the next EditText in sequence, or Done, if you are on the last EditText on the screen. You can manually stipulate what the accessory button will be labeled via the `android:imeOptions` attribute. For example, in the `res/layout/main.xml` file from `InputMethod/IMEDemo2`, you will see an augmented version of the previous example, where two input fields specify what their accessory button should look like:

```
<?xml version="1.0" encoding="utf-8"?>
<ScrollView xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
```

```
    android:layout_height="fill_parent"
  >
  <TableLayout
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:stretchColumns="1"
  >
  <TableRow>
    <TextView
      android:text="No special rules:"
    />
    <EditText
    />
  </TableRow>
  <TableRow>
    <TextView
      android:text="Email address:"
    />
    <EditText
      android:inputType="text|textEmailAddress"
      android:imeOptions="actionSend"
    />
  </TableRow>
  <TableRow>
    <TextView
      android:text="Signed decimal number:"
    />
    <EditText
      android:inputType="number|numberSigned|numberDecimal"
      android:imeOptions="actionDone"
    />
  </TableRow>
  <TableRow>
    <TextView
      android:text="Date:"
    />
    <EditText
      android:inputType="date"
    />
  </TableRow>
  <TableRow>
    <TextView
      android:text="Multi-line text:"
    />
    <EditText
      android:inputType="text|textMultiLine|textAutoCorrect"
      android:minLines="3"
      android:gravity="top"
    />
  </TableRow>
</TableLayout>
</ScrollView>
```

Here, we attach a Send action to the accessory button for the e-mail address (android:imeOptions = "actionSend"), and the Done action on the middle field (android:imeOptions = "actionDone").

By default, Next moves the focus to the next EditText and Done closes the IME. However, for those actions, or for any others like Send, you can use `setOnEditorActionListener()` on EditText (technically, on the TextView superclass) to get control when the accessory button is clicked or the user presses the Enter key. You are provided with a flag indicating the desired action (e.g., `IME_ACTION_SEND`), and you can then do something to handle that request (e.g., send an e-mail to the supplied e-mail address).

Fitting In

Notice that the IMEDemo2 layout shown in the preceding section has another difference from its IMEDemo1 predecessor: the use of a `ScrollView` container wrapping the `TableLayout`. This ties into another level of control you have over the IMEs: what happens to your activity's own layout when the IME appears. There are three possibilities, depending on circumstances:

- Android can “pan” your activity, effectively sliding the whole layout up to accommodate the IME, or overlaying your layout, depending on whether the EditText being edited is at the top or bottom. This has the effect of hiding some portion of your UI.
- Android can resize your activity, effectively causing it to shrink to a smaller screen dimension, allowing the IME to sit below the activity itself. This is great when the layout can readily be shrunk (e.g., it is dominated by a list or multiline input field that does not need the whole screen to be functional).
- In landscape mode, Android may display the IME full-screen, obscuring your entire activity. This allows for a bigger keyboard and generally easier data entry.

Android controls the full-screen option purely on its own. And, by default, Android will choose between pan and resize modes depending on what your layout looks like. If you want to specifically choose between pan and resize, you can do so via an `android:windowSoftInputMode` attribute on the `<activity>` element in your `AndroidManifest.xml` file. For example, here is the manifest from IMEDemo2:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.imf.two" android:versionCode="1"
    android:versionName="1.0">
    <application android:label="@string/app_name" android:icon="@drawable/cw">
        <activity android:name=".IMEDemo2" android:label="@string/app_name"
            android:windowSoftInputMode="adjustResize">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
    </application>
```

```
<supports-screens android:largeScreens="true" android:normalScreens="true"  
    android:smallScreens="true" android:anyDensity="true"/>  
</manifest>
```

Because we specified `resize`, Android will shrink our layout to accommodate the IME. With the `ScrollView` in place, this means the scroll bar will appear as needed, as shown in Figure 11–5.



Figure 11–5. The shrunken, scrollable layout

Jane, Stop This Crazy Thing!

Sometimes, you need the IME to just go away. For example, if you make the accessory button a Search button, the IME won't be hidden automatically when the user taps that button, whereas you may want it to be hidden. To hide the IME, you need to make a call to the `InputMethodManager`, a system service that controls these IMEs:

```
InputMethodManager mgr=(InputMethodManager) getSystemService(INPUT_METHOD_SERVICE);  
mgr.hideSoftInputFromWindow(fld.getWindowToken(), 0);
```

(In the preceding line, `fld` is the `EditText` whose IME you want to hide.)

This will always close the designated IME. However, bear in mind that there are two ways a user can open the IME in the first place:

- If the user's device does not have a hardware keyboard exposed, and the user taps the `EditText`, the IME should appear.
- If the user previously dismissed the IME or is using the IME for a widget that does not normally pop one up (e.g., `ListView`), and the user presses the Menu button, the IME should appear.

If you want to close the IME only for the first scenario, but not the second, use `InputMethodManager.HIDE_IMPLICIT_ONLY` as a flag for the second parameter to your call to `hideSoftInputFromWindow()`, instead of the 0 shown in the previous example.

Using Selection Widgets

In Chapter 11, you saw how fields could have constraints placed on them to limit possible input, such as numeric-only or phone-number-only. These sorts of constraints help users “get it right” when entering information, particularly on mobile devices with cramped keyboards.

Of course, the ultimate in constrained input is to allow selection only from a set of items, such as a group of radio buttons. Classic UI toolkits have list boxes, combo boxes, drop-down lists, and the like for that very purpose. Android provides many of the same sorts of widgets, plus others of particular interest for mobile devices (e.g., the Gallery for examining saved photos).

Moreover, Android offers a flexible framework for determining which choices are available in these widgets. Specifically, Android offers a framework of data adapters that provides a common interface for selection lists, ranging from static arrays to database contents. Selection views—widgets for presenting lists of choices—are handed an adapter to supply the actual choices.

Adapting to the Circumstances

In the abstract, adapters provide a common interface to multiple disparate APIs. More specifically, in Android’s case, adapters provide a common interface to the data model behind a selection-style widget, such as a list box. This use of Java interfaces is fairly common (e.g., Java/Swing’s model adapters for JTable), and Java is far from the only environment offering this sort of abstraction (e.g., Flex’s XML data-binding framework accepts XML inlined as static data or retrieved from the Internet).

Android’s adapters are responsible not only for providing the roster of data for a selection widget, but also for converting individual elements of data into specific views to be displayed inside the selection widget. The latter facet of the adapter system may sound a little odd, but in reality, it is not that different from other GUI toolkits’ ways of overriding default display behavior. For example, in Java/Swing, if you want a JList-backed list box to actually be a checklist (where individual rows are a check box plus label, and clicks adjust the state of the check box), you inevitably wind up calling

`setCellRenderer()` to supply your own `ListCellRenderer`, which in turn converts strings for the list into `JCheckBox`-plus-`JLabel` composite widgets.

Using ArrayAdapter

The easiest adapter to use is `ArrayAdapter`. You simply wrap one of these around a Java array or `java.util.List` instance, and you have a fully functioning adapter:

```
String[] items={"this", "is", "a",
                "really", "silly", "list"};
new ArrayAdapter<String>(this,
    android.R.layout.simple_list_item_1, items);
```

One flavor of the `ArrayAdapter` constructor takes three parameters:

- The Context to use (typically this will be your activity instance)
- The resource ID of a view to use (such as a built-in system resource ID, as shown in the preceding example)
- The actual array or list of items to show

By default, the `ArrayAdapter` will invoke `toString()` on the objects in the list and wrap each of those strings in the view designated by the supplied resource.

`android.R.layout.simple_list_item_1` simply turns those strings into `TextView` objects. Those `TextView` widgets, in turn, will be shown in the list, spinner, or whatever widget uses this `ArrayAdapter`. If you want to see what `android.R.layout.simple_list_item_1` looks like, you can find a copy of it in your SDK installation—just search for `simple_list_item_1.xml`.

In Chapter 13, you'll see how to subclass an adapter and override row creation, to give you greater control over how rows appear.

Lists of Naughty and Nice

The classic list box widget in Android is known as `ListView`. Include one of these in your layout, invoke `setAdapter()` to supply your data and child views, and attach a listener via `setOnItemSelectedListener()` to find out when the selection has changed. With that, you have a fully functioning list box.

However, if your activity is dominated by a single list, you might consider creating your activity as a subclass of `ListActivity`, rather than the regular `Activity` base class. If your main view is just the list, you do not even need to supply a layout—`ListActivity` will construct a full-screen list for you. If you do want to customize the layout, you can, as long as you identify your `ListView` as `@android:id/list`, so `ListActivity` knows which widget is the main list for the activity.

For example, here is a layout pulled from the `Selection/List` sample project, a simple list with a label on top to show the current selection:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent" >
    <TextView
        android:id="@+id/selection"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"/>
    <ListView
        android:id="@+id/list"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:drawSelectorOnTop="false"
        />
</LinearLayout>
```

The Java code to configure the list and connect the list with the label is as follows:

```
public class ListViewDemo extends ListActivity {
    private TextView selection;
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        setListAdapter(new ArrayAdapter<String>(this,
            android.R.layout.simple_list_item_1,
            items));
        selection=(TextView)findViewById(R.id.selection);
    }

    public void onListItemClick(ListView parent, View v, int position,
        long id) {
        selection.setText(items[position]);
    }
}
```

With `ListActivity`, you can set the list adapter via `setListAdapter()`—in this case, providing an `ArrayAdapter` wrapping an array of nonsense strings. To find out when the list selection changes, override `onListItemClick()` and take appropriate steps based on the supplied child view and position—in this case, updating the label with the text for that position. The results are shown in Figure 12–1.

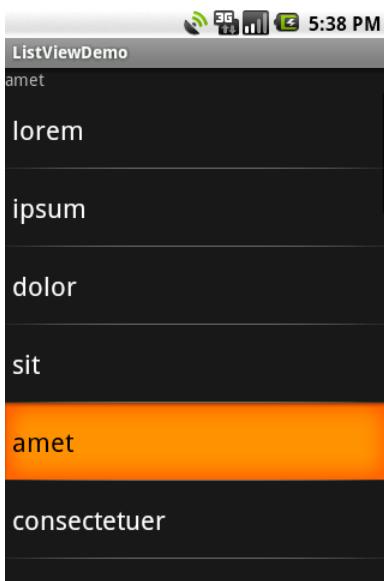


Figure 12–1. The *ListViewDemo* sample application

The second parameter to our `ArrayAdapter`, `android.R.layout.simple_list_item_1`, controls the appearance of the rows. The value used in the preceding example provides the standard Android list row: big font, a lot of padding, and white text.

Selection Modes

By default, `ListView` is set up to simply collect clicks on list entries. If you want a list that tracks a user's selection, or possibly multiple selections, `ListView` can handle that as well, but it requires a few changes.

First, you need to call `setSelectionMode()` on the `ListView` in Java code to set the choice mode, supplying either `CHOICE_MODE_SINGLE` or `CHOICE_MODE_MULTIPLE` as the value. You can get your `ListView` from a `ListActivity` via `getListView()`. You can also declare this via the `android:choiceMode` attribute in your layout XML.

Then, instead of using `android.R.layout.simple_list_item_1` as the layout for the list rows in your `ArrayAdapter` constructor, you need to use either
 `android.R.layout.simple_list_item_single_choice` or
 `android.R.layout.simple_list_item_multiple_choice` for single-choice or multiple-choice lists, respectively.

For example, here is an activity layout from the `Selection/Checklist` sample project:

```
<?xml version="1.0" encoding="utf-8"?>
<ListView
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/list"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
```

```
    android:drawSelectorOnTop="false"
    android:choiceMode="multipleChoice"
/>>
```

It is a full-screen ListView, with the android:choiceMode="multipleChoice" attribute to indicate that we want multiple-choice support.

Our activity simply uses a standard ArrayAdapter on our list of nonsense words, but uses android.R.layout.simple_list_item_multiple_choice as the row layout:

```
package com.commonsware.android.checklist;

import android.os.Bundle;
import android.app.ListActivity;
import android.widget.ArrayAdapter;
import android.widget.ListView;

public class ChecklistDemo extends ListActivity {
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        setListAdapter(new ArrayAdapter<String>(this,
            android.R.layout.simple_list_item_multiple_choice,
            items));
    }
}
```

The user sees the list of words on the left with check boxes down the right edge, as shown in Figure 12-2.



Figure 12–2. Multiple-select mode

If we wanted to, we could call `getCheckedItemPositions()` on our `ListView` to find out which items the user checked, or `setItemChecked()` to check (or uncheck) a specific entry ourselves.

Spin Control

In Android, the `Spinner` is the equivalent of the drop-down selector you might find in other toolkits (e.g., `JComboBox` in Java/Swing). Pressing the center button on the D-pad pops up a selection dialog box from which the user can choose an item. The `Spinner` basically provides list selection capabilities without taking up all the screen space of a `ListView`, at the cost of an extra click or screen tap to make a change.

As with `ListView`, you provide the adapter for data and child views via `setAdapter()`, and hook in a listener object for selections via `setOnItemSelectedListener()`.

If you want to tailor the view used when displaying the drop-down perspective, you need to configure the adapter, not the `Spinner` widget. Use the `setDropDownViewResource()` method to supply the resource ID of the view to use.

For example, culled from the `Selection/Spinner` sample project, here is an XML layout for a simple view with a `Spinner`:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
```

```
    android:layout_height="fill_parent"
  >
<TextView
    android:id="@+id/selection"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
  />
<Spinner android:id="@+id/spinner"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:drawSelectorOnTop="true"
  />
</LinearLayout>
```

This is the same view as shown in the previous section, but with a Spinner instead of a ListView. The Spinner property android:drawSelectorOnTop controls whether the arrow is drawn on the selector button on the right side of the Spinner UI.

To populate and use the Spinner, we need some Java code:

```
public class SpinnerDemo extends Activity
    implements AdapterView.OnItemSelectedListener {
    private TextView selection;
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        selection=(TextView)findViewById(R.id.selection);

        Spinner spin=(Spinner)findViewById(R.id.spinner);
        spin.setOnItemSelectedListener(this);

        ArrayAdapter<String> aa=new ArrayAdapter<String>(this,
            android.R.layout.simple_spinner_item,
            items);

        aa.setDropDownViewResource(
            android.R.layout.simple_spinner_dropdown_item);
        spin.setAdapter(aa);
    }

    public void onItemSelected(AdapterView<?> parent,
        View v, int position, long id) {
        selection.setText(items[position]);
    }

    public void onNothingSelected(AdapterView<?> parent) {
        selection.setText("");
    }
}
```

Here, we attach the activity itself as the selection listener (`spin.setOnItemSelectedListener(this)`). This works because the activity implements the `OnItemSelectedListener` interface. We configure the adapter not only with the list of fake words, but also with a specific resource to use for the drop-down view (via `aa.setDropDownViewResource()`). Also note the use of `android.R.layout.simple_spinner_item` as the built-in View for showing items in the spinner itself.

Finally, we implement the callbacks required by `OnItemSelectedListener` to adjust the selection label based on user input. Figures 12–3 and 12–4 show the results.

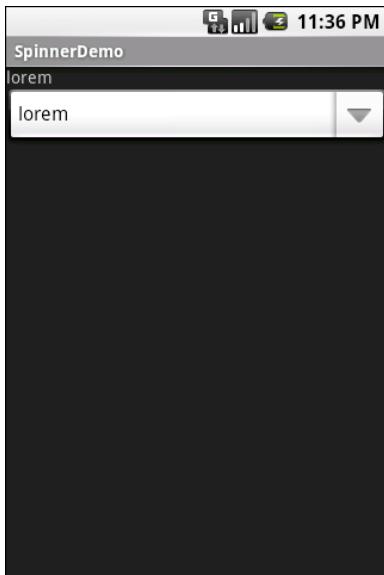


Figure 12–3. The *SpinnerDemo* sample application, as initially launched



Figure 12–4. The same application, with the spinner drop-down list displayed

Grid Your Lions (or Something Like That...)

As the name suggests, `GridView` gives you a two-dimensional grid of items to choose from. You have moderate control over the number and size of the columns; the number of rows is dynamically determined based on the number of items the supplied adapter says are available for viewing.

There are a few properties that, when combined, determine the number of columns and their sizes:

- `android:numColumns`: Indicates how many columns there are, or, if you supply a value of `auto_fit`, Android will compute the number of columns based on the available space and the following properties in this list.
- `android:verticalSpacing` and `android:horizontalSpacing`: Indicate how much whitespace should exist between items in the grid.
- `android:columnWidth`: Indicates how many pixels wide each column should be.
- `android:stretchMode`: Indicates, for grids with `auto_fit` for `android:numColumns`, what should happen for any available space not taken up by columns or spacing. This can be `columnWidth`, to have the columns take up available space, or `spacingWidth`, to have the whitespace between columns absorb extra space.

Otherwise, the `GridView` works much like any other selection widget—use `setAdapter()` to provide the data and child views, invoke `setOnItemSelectedListener()` to register a selection listener, and so on.

For example, here is an XML layout from the `Selection/Grid` sample project, showing a `GridView` configuration:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <TextView
        android:id="@+id/selection"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        />
    <GridView
        android:id="@+id/grid"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:verticalSpacing="40dip"
        android:horizontalSpacing="5dip"
        android:numColumns="auto_fit"
        android:columnWidth="100dip"
        android:stretchMode="columnWidth"
        android:gravity="center"
        />
</LinearLayout>
```

For this grid, we take up the entire screen except for what our selection label requires. The number of columns is computed by Android (`android:numColumns = "auto_fit"`) based on our horizontal spacing (`android:horizontalSpacing = "5dip"`) and column width (`android:columnWidth = "100dip"`), with the columns absorbing any “slop” width left over (`android:stretchMode = "columnWidth"`).

The Java code to configure the `GridView` is as follows:

```
package com.commonsware.android.grid;

import android.app.Activity;
import android.content.Context;
import android.os.Bundle;
import android.view.View;
import android.widget.AdapterView;
import android.widget.ArrayAdapter;
import android.widget.GridView;
import android.widget.TextView;

public class GridDemo extends Activity
    implements AdapterView.OnItemSelectedListener {
    private TextView selection;
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
```

```
"consectetuer", "adipiscing", "elit", "morbi", "vel",
"ligula", "vitae", "arcu", "aliquet", "mollis",
"etiam", "vel", "erat", "placerat", "ante",
"porttitor", "sodales", "pellentesque", "augue", "purus"};
```

```
@Override
public void onCreate(Bundle icicle) {
    super.onCreate(icicle);
    setContentView(R.layout.main);
    selection=(TextView)findViewById(R.id.selection);

    GridView g=(GridView) findViewById(R.id.grid);
    g.setAdapter(new ArrayAdapter<String>(this,
        R.layout.cell,
        items));
    g.setOnItemClickListener(this);
}

public void onItemClick(AdapterView<?> parent, View v,
    int position, long id) {
    selection.setText(items[position]);
}

public void onNothingSelected(AdapterView<?> parent) {
    selection.setText("");
}
```

The grid cells are defined by a separate `res/layout/cell.xml` file, referenced in our `ArrayAdapter` as `R.layout.cell`:

```
<?xml version="1.0" encoding="utf-8"?>
<TextView
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:textSize="14dip"
/>
```

With the vertical spacing from the XML layout (`android:verticalSpacing = "40dip"`), the grid overflows the boundaries of the emulator's screen, as shown in Figures 12–5 and 12–6.



Figure 12–5. The GridDemo sample application, as initially launched



Figure 12–6. The same application, scrolled to the bottom of the grid

Fields: Now with 35% Less Typing!

The AutoCompleteTextView is sort of a hybrid between the EditText (field) and the Spinner. With autocompletion, as the user types, the text is treated as a prefix filter, comparing the entered text as a prefix against a list of candidates. Matches are shown in a selection list that drops down from the field (as with Spinner). The user can either type the full entry (e.g., something not in the list) or choose an item from the list to be the value of the field.

AutoCompleteTextView subclasses EditText, so you can configure all the standard look-and-feel aspects, such as font face and color. In addition, AutoCompleteTextView has a android:completionThreshold property, to indicate the minimum number of characters a user must enter before the list filtering begins.

You can give AutoCompleteTextView an adapter containing the list of candidate values via setAdapter(). However, since the user could type something that is not in the list, AutoCompleteTextView does not support selection listeners. Instead, you can register a TextWatcher, as you can with any EditText widget, to be notified when the text changes. These events will occur either because of manual typing or from a selection from the drop-down list.

The following is a familiar XML layout, this time containing an AutoCompleteTextView (pulled from the Selection/AutoComplete sample application):

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <TextView
        android:id="@+id/selection"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        />
    <AutoCompleteTextView android:id="@+id/edit"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:completionThreshold="3"/>
</LinearLayout>
```

The corresponding Java code is as follows:

```
package com.commonsware.android.auto;

import android.app.Activity;
import android.os.Bundle;
import android.text.Editable;
import android.text.TextWatcher;
import android.view.View;
import android.widget.AdapterView;
import android.widget.ArrayAdapter;
import android.widget.AutoCompleteTextView;
```

```
import android.widget.TextView;

public class AutoCompleteDemo extends Activity
    implements TextWatcher {
    private TextView selection;
    private AutoCompleteTextView edit;
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        selection=(TextView)findViewById(R.id.selection);
        edit=(AutoCompleteTextView)findViewById(R.id.edit);
        edit.addTextChangedListener(this);

        edit.setAdapter(new ArrayAdapter<String>(this,
            android.R.layout.simple_dropdown_item_1line,
            items));
    }

    public void onTextChanged(CharSequence s, int start, int before,
        int count) {
        selection.setText(edit.getText());
    }

    public void beforeTextChanged(CharSequence s, int start,
        int count, int after) {
        // needed for interface, but not used
    }

    public void afterTextChanged(Editable s) {
        // needed for interface, but not used
    }
}
```

This time, our activity implements `TextWatcher`, which means our callbacks are `onTextChanged()`, `beforeTextChanged()`, and `afterTextChanged()`. In this case, we are interested only in `onTextChanged()`, and we update the selection label to match the `AutoCompleteTextView`'s current contents. Figures 12–7, 12–8, and 12–9 show the results.

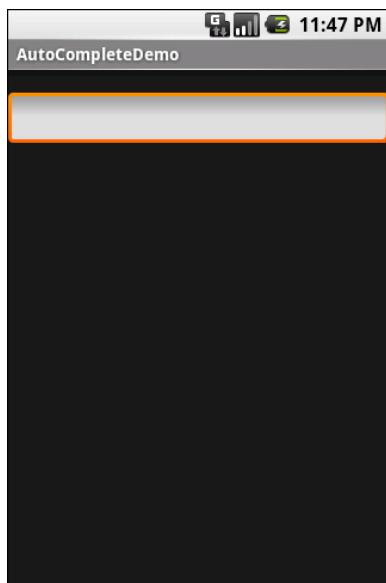


Figure 12–7. The AutoCompleteDemo sample application, as initially launched

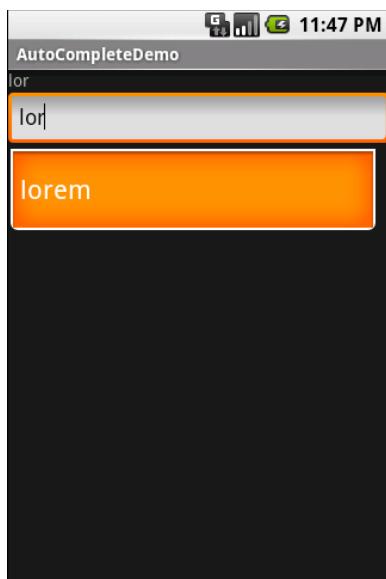


Figure 12–8. The same application, after a few matching letters were entered, showing the autocomplete dropdown

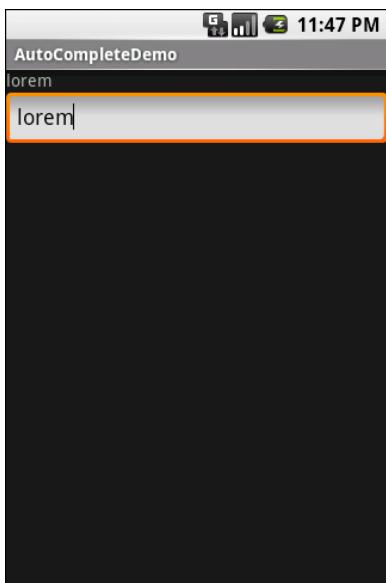


Figure 12–9. The same application, after the autocomplete value was selected

Galleries, Give or Take the Art

The `Gallery` widget is not one ordinarily found in GUI toolkits. It is, in effect, a list box that is laid out horizontally. One choice follows the next across the horizontal plane, with the currently selected item highlighted. On an Android device, one rotates through the options via the left and right D-pad buttons.

Compared to the `ListView`, the `Gallery` takes up less screen space, while still showing multiple choices at one time (assuming they are short enough). Compared to the `Spinner`, the `Gallery` always shows more than one choice at a time.

The quintessential example use for the `Gallery` is image preview. Given a collection of photos or icons, the `Gallery` lets people preview the pictures in the process of choosing one.

Code-wise, the `Gallery` works much like a `Spinner` or `GridView`. In your XML layout, you have a few properties at your disposal:

- `android:spacing`: Controls the number of pixels between entries in the list.
- `android:spinnerSelector`: Controls what is used to indicate a selection. This can either be a reference to a `Drawable` (see the resources chapter) or an RGB value in `#AARRGGBB` or similar notation.

`android:drawSelectorOnTop`: Indicates if the selection bar (or `Drawable`) should be drawn before (`false`) or after (`true`) drawing the selected child. If you choose `true`, be sure that your selector has sufficient transparency to show the child through the selector; otherwise, users will not be able to read the selection.

Getting Fancy with Lists

The humble `ListView` is one of the most important widgets in all of Android, simply because it is used so frequently. Whether choosing a contact to call, an e-mail message to forward, or an e-book to read, `ListView` widgets are employed in a wide range of activities. Of course, it would be nice if they were more than just plain text.

The good news is that Android lists can be as fancy as you want, within the limitations of a mobile device's screen, of course. However, making them fancy takes some work, requiring the features of Android that are covered in this chapter.

Getting to First Base

The classic Android `ListView` is a plain list of text—solid but uninspiring. Basically, we hand the `ListView` a bunch of words in an array and tell Android to use a simple built-in layout for pouring those words into a list.

However, we can have a list whose rows are made up of icons, icons and text, check boxes and text, or whatever we want. It is merely a matter of supplying enough data to the adapter and helping the adapter to create a richer set of `View` objects for each row.

For example, suppose we want a `ListView` whose entries are made up of an icon, followed by some text. We could construct a layout for the row that looks like this, found in `res/layout/row.xml` in the `FancyLists/Static` sample project:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent" >
    <TextView
        android:id="@+id/selection"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"/>
    <ListView
        android:id="@+id/list"
        android:layout_width="fill_parent"
```

```
        android:layout_height="fill_parent"
        android:drawSelectorOnTop="false"
    />
</LinearLayout>
```

This layout uses a `LinearLayout` to set up a row, with the icon on the left and the text (in a nice big font) on the right.

However, by default, Android has no idea that we want to use this layout with our `ListView`. To make the connection, we need to supply our `Adapter` with the resource ID of the custom layout shown previously:

```
public class StaticDemo extends ListActivity {
    private TextView selection;
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        setListAdapter(new ArrayAdapter<String>(this,
            R.layout.row, R.id.label,
            items));
        selection=(TextView)findViewById(R.id.selection);
    }

    public void onListItemClick(ListView parent, View v,
                               int position, long id) {
        selection.setText(items[position]);
    }
}
```

This follows the general structure for the previous `ListView` sample. The key difference here is that we have told `ArrayAdapter` that we want to use our custom layout (`R.layout.row`) and that the `TextView` where the word should go is known as `R.id.label` within that custom layout.

NOTE: Remember that to reference a layout (`row.xml`), use `R.layout` as a prefix on the base name of the layout XML file (`R.layout.row`).

The result is a `ListView` with icons down the left side; in this example, all the icons are the same, as shown in Figure 13-1.



Figure 13-1. The StaticDemo application

A Dynamic Presentation

As shown in the previous section, the technique of supplying an alternate layout to use for rows handles simple cases very nicely. However, what if we want the icon to change based on the row data? For example, suppose we want to use one icon for small words and a different icon for large words. In the case of ArrayAdapter, we will need to extend it, creating our own custom subclass (e.g., IconicAdapter) that incorporates our business logic. In particular, it will need to override `getView()`.

The `getView()` method of an Adapter is what an AdapterView (like ListView or Spinner) calls when it needs the View associated with a given piece of data the Adapter is managing. In the case of an ArrayAdapter, `getView()` is called as needed for each position in the array—“get me the View for the first row,” “get me the View for the second row,” and so forth.

As an example, let’s rework the code in the preceding section to use `getView()`, so we can show different icons for different rows—in this case, one icon for short words and one for long words (from the FancyLists/Dynamic sample project):

```
public class DynamicDemo extends ListActivity {  
    TextView selection;  
    private static final String[] items={"lorem", "ipsum", "dolor",  
        "sit", "amet",  
        "consectetuer", "adipiscing", "elit", "morbi", "vel",  
        "ligula", "vitae", "arcu", "aliquet", "mollis",  
        "etiam", "vel", "erat", "placerat", "ante",
```

```
"porttitor", "sodales", "pellentesque", "augue", "purus");

@Override
public void onCreate(Bundle icicle) {
    super.onCreate(icicle);
    setContentView(R.layout.main);
    setListAdapter(new IconicAdapter());
    selection=(TextView)findViewById(R.id.selection);
}

public void onListItemClick(ListView parent, View v,
                           int position, long id) {
    selection.setText(items[position]);
}

class IconicAdapter extends ArrayAdapter<String> {
    IconicAdapter() {
        super(DynamicDemo.this, R.layout.row, R.id.label, items);
    }

    public View getView(int position, View convertView,
                       ViewGroup parent) {
        View row=super.getView(position, convertView, parent);
        ImageView icon=(ImageView)row.findViewById(R.id.icon);

        if (items[position].length()>4) {
            icon.setImageResource(R.drawable.delete);
        }
        else {
            icon.setImageResource(R.drawable.ok);
        }

        return(row);
    }
}
}
```

Our IconicAdapter—an inner class of the activity—has two methods. First, it has the constructor, which simply passes to ArrayAdapter the same data we used in the ArrayAdapter constructor in StaticDemo. Second, it has our getView() implementation, which does two things:

- It chains to the superclass's implementation of getView(), which returns to us an instance of our row View, as prepared by ArrayAdapter. In particular, our word has already been put into the TextView, since ArrayAdapter does that normally.
- It finds our ImageView and applies a business rule to set which icon should be used, referencing one of two drawable resources (R.drawable.ok and R.drawable.delete).

The result of our revised example is shown in Figure 13-2.



Figure 13-2. The *DynamicDemo* application

Inflating Rows Ourselves

The preceding version of the *DynamicDemo* application works fine. However, sometimes `ArrayAdapter` cannot be used even to set up the basics of our row. For example, it is possible to have a `ListView` where the rows are materially different, such as category headers interspersed among regular rows. In that case, we may need to do all the work ourselves, starting with inflating our rows. We will do that after a brief introduction to inflation.

A Sidebar About Inflation

“Inflation” means the act of converting an XML layout specification into the actual tree of `View` objects the XML represents. This is undoubtedly a tedious bit of code: take an element, create an instance of the specified View class, walk the attributes, convert those into property setter calls, iterate over all child elements, lather, rinse, and repeat.

The good news is that the fine folks on the Android team wrapped up all that into a class called `LayoutInflater`, which we can use ourselves. When it comes to fancy lists, for example, we want to inflate a `View` for each row shown in the list, so we can use the convenient shorthand of the XML layout to describe what the rows are supposed to look like.

For example, let’s look at a slightly different implementation of the `DynamicDemo` class, from the `FancyLists/DynamicEx` project:

```
public class DynamicDemo extends ListActivity {
    TextView selection;
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        setListAdapter(new IconicAdapter());
        selection=(TextView)findViewById(R.id.selection);
    }

    public void onListItemClick(ListView parent, View v,
                               int position, long id) {
        selection.setText(items[position]);
    }

    class IconicAdapter extends ArrayAdapter<String> {
        IconicAdapter() {
            super(DynamicDemo.this, R.layout.row, items);
        }

        public View getView(int position, View convertView,
                           ViewGroup parent) {
            LayoutInflater inflater=getLayoutInflater();
            View row=inflater.inflate(R.layout.row, parent, false);
            TextView label=(TextView)row.findViewById(R.id.label);

            label.setText(items[position]);

            ImageView icon=(ImageView)row.findViewById(R.id.icon);

            if (items[position].length()>4) {
                icon.setImageResource(R.drawable.delete);
            }
            else {
                icon.setImageResource(R.drawable.ok);
            }

            return(row);
        }
    }
}
```

Here we inflate our `R.layout.row` layout by use of a `LayoutInflater` object, obtained from our `Activity` via `getLayoutInflater()`. This gives us a `View` object back, which, in reality, is our `LinearLayout` with an `ImageView` and a `TextView`, just as `R.layout.row` specifies. However, rather than having to create all those objects ourselves and wire them together, the XML and `LayoutInflater` handle the “heavy lifting” for us.

And Now, Back to Our Story

So we have used `LayoutInflater` to give us a `View` representing the row. This row is “empty,” since the static layout file has no idea what actual data goes into the row. It is our job to customize and populate the row as we see fit before returning it, as follows:

- Fill in the text label for our label widget, using the word at the supplied position
- See if the word is longer than four characters and, if so, find our `ImageView` icon widget and replace the stock resource with a different one

The user sees nothing different—we have simply changed how those rows are being created. Obviously, this was a fairly contrived example, but you can see that this technique could be used to customize rows based on any sort of criteria.

Better. Stronger. Faster.

The `getView()` implementation shown in the `FancyLists/DynamicEx` project works, but it’s inefficient. Every time the user scrolls, we have to create a bunch of new `View` objects to accommodate the newly shown rows. This is bad.

It might be bad for the immediate user experience, if the list appears to be sluggish. More likely, though, it will be bad due to battery usage—every bit of CPU that is used eats up the battery. This is compounded by the extra work the garbage collector needs to do to get rid of all those extra objects we create. So the less efficient our code, the more quickly the phone’s battery will be drained, and the less happy the user will be. And we want happy users, right?

So, let’s take a look at a few tricks to make our fancy `ListView` widgets more efficient.

Using `convertView`

The `getView()` method receives, as one of its parameters, a `View` named, by convention, `convertView`. Sometimes, `convertView` will be `null`. In those cases, we need to create a new row `View` from scratch (e.g., via inflation), just as we did in the previous example. However, if `convertView` is not `null`, then it is actually one of our previously created `View` objects! This will happen primarily when the user scrolls the `ListView`. As new rows appear, Android will attempt to recycle the views of the rows that scrolled off the other end of the list, to save us from having to rebuild them from scratch.

Assuming that each of our rows has the same basic structure, we can use `findViewById()` to get at the individual widgets that make up our row and change their contents, and then return `convertView` from `getView()`, rather than create a whole new row. For example, here is the `getView()` implementation from the earlier example, now optimized via `convertView` (from the `FancyLists/Recycling` project):

```
public class RecyclingDemo extends ListActivity {
    private TextView selection;
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        setListAdapter(new IconicAdapter());
        selection=(TextView)findViewById(R.id.selection);
    }

    public void onListItemClick(ListView parent, View v,
                               int position, long id) {
        selection.setText(items[position]);
    }

    class IconicAdapter extends ArrayAdapter<String> {
        IconicAdapter() {
            super(RecyclingDemo.this, R.layout.row, items);
        }

        public View getView(int position, View convertView,
                           ViewGroup parent) {
            View row=convertView;

            if (row==null) {
                LayoutInflater inflater=getLayoutInflater();
                row=inflater.inflate(R.layout.row, parent, false);
            }

            TextView label=(TextView)row.findViewById(R.id.label);
            label.setText(items[position]);

            ImageView icon=(ImageView)row.findViewById(R.id.icon);

            if (items[position].length()>4) {
                icon.setImageResource(R.drawable.delete);
            }
            else {
                icon.setImageResource(R.drawable.ok);
            }

            return(row);
        }
    }
}
```

Here, we check to see if the convertView is null. If so, we inflate our row; otherwise, we just reuse it. The work to fill in the contents (icon image and text) is the same in either case. The advantage is that we avoid the potentially expensive inflation step. In fact, according to statistics cited by Google at the 2010 Google I/O conference, a ListView that uses a recycling ListAdapter will perform 150 percent faster than one that does not. For complex rows, that might even underestimate the benefit.

Not only is this faster, but it uses much less memory. Each widget or container—in other words, each subclass of View—holds onto up to 2KB of data, not counting things like images in ImageView widgets. Each of our rows, therefore, might be as big as 6KB. For our list of 25 nonsense words, consuming as much as 150KB for a nonrecycling list (25 rows at 6KB each) would be inefficient but not a huge problem. A list of 1000 nonsense words, though, consuming as much as 6MB of RAM, would be a much bigger issue. Bear in mind that your application may have only 16MB of Java heap memory to work with. Recycling allows us to handle arbitrary list lengths with only as much View memory consumed as is needed for the rows visible onscreen.

Note that row recycling is an issue only if we are creating the rows ourselves. If we let ArrayAdapter create the rows, by leveraging its implementation of getView(), as shown in the FancyLists/Dynamic project, then it deals with the recycling.

Using the Holder Pattern

Another somewhat expensive operation commonly done with fancy views is calling findViewById(). This dives into our inflated row and pulls out widgets by their assigned identifiers, so we can customize the widget contents (e.g., to change the text of a TextView or change the icon in an ImageView). Since findViewById() can find widgets anywhere in the tree of children of the row's root View, this could take a fair number of instructions to execute, particularly if we need to find the same widgets repeatedly.

In some GUI toolkits, this problem is avoided by having the composite View objects, like rows, be declared totally in program code (in this case, Java). Then, accessing individual widgets is merely a matter of calling a getter or accessing a field. And we can certainly do that with Android, but the code gets rather verbose. What would be nice is a way that enables us still to use the layout XML, yet cache our row's key child widgets so that we need to find them only once. That's where the holder pattern comes into play, in a class we'll call ViewHolder.

All View objects have getTag() and setTag() methods. These allow us to associate an arbitrary object with the widget. The holder pattern uses that “tag” to hold an object that, in turn, holds each of the child widgets of interest. By attaching that holder to the row View, every time we use the row, we already have access to the child widgets we care about, without having to call findViewById() again.

So, let's take a look at one of these holder classes (taken from the FancyLists/ViewHolder sample project):

```
package com.commonsware.android.fancylists.five;

import android.view.View;
import android.widget.ImageView;

class ViewHolder {
    ImageView icon=null;

    ViewHolder(View base) {
        this.icon=(ImageView)base.findViewById(R.id.icon);
    }
}
```

`ViewHolder` holds onto the child widgets, initialized via `findViewById()` in its constructor. The widgets are simply package-protected data members, accessible from other classes in this project, such as a `ViewHolderDemo` activity. In this case, we are holding onto only one widget—the icon—since we will let `ArrayAdapter` handle our label for us.

Using `ViewHolder` is a matter of creating an instance whenever we inflate a row and attaching said instance to the row `View` via `setTag()`, as shown in this rewrite of `getView()`, found in `ViewHolderDemo`:

```
public View getView(int position, View convertView,
                    ViewGroup parent) {
    View row=super.getView(position, convertView, parent);
    ViewHolder holder=(ViewHolder)row.getTag();

    if (holder==null) {
        holder=new ViewHolder(row);
        row.setTag(holder);
    }

    if (getModel(position).length()>4) {
        holder.icon.setImageResource(R.drawable.delete);
    }
    else {
        holder.icon.setImageResource(R.drawable.ok);
    }

    return(row);
}
```

Here, we go back to allowing `ArrayAdapter` to handle our row inflation and recycling for us. If the call to `getTag()` on the row returns null, we know we need to create a new `ViewHolder`, which we then attach to the row via `setTag()` for later reuse. Then, accessing the child widgets is merely a matter of accessing the data members on the holder. The first time the `ListView` is displayed, all new rows need to be inflated, and we wind up creating a `ViewHolder` for each. As the user scrolls, rows get recycled, and we can reuse their corresponding `ViewHolder` widget caches.

Using a holder helps performance, but the effect is not as dramatic. Whereas recycling can give you a 150 percent performance improvement, adding in a holder increases the improvement to 175 percent. Hence, while you may wish to implement recycling up front

when you create your adapter, adding in a holder might be something you deal with later, when you are working specifically on performance tuning.

In this particular case, we certainly could simplify all of this by skipping ViewHolder and using `getTag()` and `setTag()` with the `ImageView` directly. This example is written as it is to demonstrate how to handle a more complex scenario, where you might have several widgets that would need to be cached via the holder pattern.

Interactive Rows

Lists with pretty icons next to them are all fine and well. But, can we create `ListView` widgets whose rows contain interactive child widgets instead of just passive widgets like `TextView` and `ImageView`? For example, there is a `RatingBar` widget that allows users to assign a rating by clicking on a set of star icons. Could we combine the `RatingBar` with text to allow people to scroll a list of, say, songs and rate them right inside the list? There is good news and bad news.

The good news is that interactive widgets in rows work just fine. The bad news is that it is a little tricky, specifically when it comes to taking action when the interactive widget's state changes (e.g., a value is typed into a field). We need to store that state somewhere, since our `RatingBar` widget will be recycled when the `ListView` is scrolled. We need to be able to set the `RatingBar` state based on the actual word being viewed as the `RatingBar` is recycled, and we need to save the state when it changes so it can be restored when this particular row is scrolled back into view.

What makes this interesting is that, by default, the `RatingBar` has absolutely no idea which item in the `ArrayAdapter` it represents. After all, the `RatingBar` is just a widget, used in a row of a `ListView`. We need to teach the rows which item in the `ArrayAdapter` they are currently displaying, so when their `RatingBar` is checked, they know which item's state to modify.

So, let's see how this is done, using the activity in the `FancyLists/RateList` sample project. We will use the same basic classes that we used in our previous example. We are displaying a list of nonsense words, which can then be rated. In addition, words given a top rating are put in all caps.

```
package com.commonsware.android.fancylists.six;

import android.app.Activity;
import android.os.Bundle;
import android.app.ListActivity;
import android.view.View;
import android.view.ViewGroup;
import android.view.LayoutInflater;
import android.widget.AdapterView;
import android.widget.ArrayAdapter;
import android.widget.RatingBar;
import android.widget.LinearLayout;
import android.widget.ListView;
import android.widget.TextView;
import java.util.ArrayList;
```

```
public class RateListDemo extends ListActivity {
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet",
        "consectetuer", "adipiscing", "elit", "morbi", "vel",
        "ligula", "vitae", "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};
    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        ArrayList<RowModel> list=new ArrayList<RowModel>();
        for (String s : items) {
            list.add(new RowModel(s));
        }
        setListAdapter(new RatingAdapter(list));
    }
    private RowModel getModel(int position) {
        return((RatingAdapter)getListAdapter()).getItem(position);
    }
    class RatingAdapter extends ArrayAdapter<RowModel> {
        RatingAdapter(ArrayList<RowModel> list) {
            super(RateListDemo.this, R.layout.row, R.id.label, list);
        }
        public View getView(int position, View convertView,
                           ViewGroup parent) {
            View row=super.getView(position, convertView, parent);
            ViewHolder holder=(ViewHolder)row.getTag();
            if (holder==null) {
                holder=new ViewHolder(row);
                row.setTag(holder);
            }
            RatingBar.OnRatingBarChangeListener l=
                new RatingBar.OnRatingBarChangeListener() {
                    public void onRatingChanged(RatingBar ratingBar,
                                                float rating,
                                                boolean fromTouch) {
                        Integer myPosition=(Integer)ratingBar.getTag();
                        RowModel model=getModel(myPosition);
                        model.rating=rating;
                        LinearLayout parent=(LinearLayout)ratingBar.getParent();
                        TextView label=(TextView)parent.findViewById(R.id.label);
                        label.setText(model.toString());
                    }
                };
            holder.ratingBar.setOnRatingBarChangeListener(l);
        }
    }
}
```

```
        holder.rate.setOnRatingBarChangeListener(l);
    }

    RowModel model=getModel(position);

    holder.rate.setTag(new Integer(position));
    holder.rate.setRating(model.rating);

    return(row);
}
}

class RowModel {
    String label;
    float rating=2.0f;

    RowModel(String label) {
        this.label=label;
    }

    public String toString() {
        if (rating>=3.0) {
            return(label.toUpperCase());
        }

        return(label);
    }
}
```

The following explains what is different in this activity and `getView()` implementation from before:

- We are still using `String[]` items as the list of nonsense words, but instead of pouring that `String` array straight into an `ArrayAdapter`, we turn it into a list of `RowModel` objects. `RowModel` is the mutable model: it holds the nonsense word plus the current checked state. In a real system, these might be objects populated from a database, and the properties would have more business meaning.
- We updated utility methods such as `onListItemClick()` to reflect the change from a pure-`String` model to use a `RowModel`.
- The `ArrayAdapter` subclass (`RatingAdapter`), in `getView()`, lets `ArrayAdapter` inflate and recycle the row, and then checks to see if we have a `ViewHolder` in the row's tag. If not, we create a new `ViewHolder` and associate it with the row. For the row's `RatingBar`, we add an anonymous `onRatingChanged()` listener that looks at the row's tag (`getTag()`) and converts that into an `Integer`, representing the position within the `ArrayAdapter` that this row is displaying. Using that, the rating bar can get the actual `RowModel` for the row and update the model based on the new state of the rating bar. It also updates the text adjacent to the `RatingBar` when checked, to match the rating bar state.

- We always make sure that the RatingBar has the proper contents and has a tag (via `setTag()`) pointing to the position in the adapter the row is displaying.

The row layout is very simple, just a RatingBar and a TextView inside a LinearLayout:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:orientation="horizontal"
>
    <RatingBar
        android:id="@+id/rate"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:numStars="3"
        android:stepSize="1"
        android:rating="2" />
    <TextView
        android:id="@+id/label"
        android:padding="2dip"
        android:textSize="18sp"
        android:layout_gravity="left|center_vertical"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"/>
</LinearLayout>
```

The ViewHolder is similarly simple, just extracting the RatingBar out of the row View for caching purposes:

```
package com.commonsware.android.fancylists.six;

import android.view.View;
import android.widget.RatingBar;

class ViewHolder {
    RatingBar rate=null;

    ViewHolder(View base) {
        this.rate=(RatingBar)base.findViewById(R.id.rate);
    }
}
```

And the result is what you would expect, visually, as shown in Figure 13-3.



Figure 13-3. The RateListDemo application, as initially launched

Figure 13-4 shows a toggled rating bar turning its word into all caps.



Figure 13-4. The same application, showing a top-rated word

Still More Widgets and Containers

This book has covered a number of widgets and containers so far. This chapter is the last that focuses exclusively on widgets and containers, covering a number of popular options, from date and time widgets to tabs. After this chapter, we introduce new widgets occasionally, but in the context of some other topic, such as introducing the `ProgressBar` in Chapter 20 (covering threads).

Pick and Choose

With limited-input devices like phones, having widgets and dialogs that are aware of the type of stuff a user is supposed to be entering is very helpful. They minimize keystrokes and screen taps and reduce the chance that a user will make some sort of error (e.g., entering a letter somewhere only numbers are expected).

As shown in Chapter 9, `EditText` has content-aware flavors for entering numbers and text. Android also supports widgets (`DatePicker` and `TimePicker`) and dialogs (`DatePickerDialog` and `TimePickerDialog`) for helping users enter dates and times.

`DatePicker` and `DatePickerDialog` allow you to set the starting date for the selection, in the form of a year, month, and day of month value. Note that the month runs from 0 for January through 11 for December. Most importantly, both let you provide a callback object (`OnDateChangedListener` or `OnDateSetListener`) where you are informed of a new date selected by the user. It is up to you to store that date someplace, particularly if you are using the dialog, since there is no other way for you to access the chosen date later.

Similarly, `TimePicker` and `TimePickerDialog` let you do the following:

- Set the initial time the user can adjust, in the form of an hour (0 through 23) and a minute (0 through 59)

- Indicate if the selection should be in 12-hour mode with an AM/PM toggle or in 24-hour mode (what is thought of in the United States as “military time” and in much of the rest of the world as “the way times are supposed to be”)
- Provide a callback object (`OnTimeChangedListener` or `OnTimeSetListener`) to be notified of when the user has chosen a new time, which is supplied to you in the form of an hour and minute

As an example of using date and time pickers, from the Fancy/Chrono sample project, here’s a trivial layout containing a label and two buttons, which will pop up the dialog flavors of the date and time pickers:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <TextView android:id="@+id/dateAndTime"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        />
    <Button android:id="@+id/dateBtn"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:text="Set the Date"
        android:onClick="chooseDate"
        />
    <Button android:id="@+id/timeBtn"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:text="Set the Time"
        android:onClick="chooseTime"
        />
</LinearLayout>
```

The more interesting stuff comes in the Java source:

```
package com.commonsware.android.chrono;

import android.app.Activity;
import android.os.Bundle;
import android.app.DatePickerDialog;
import android.app.TimePickerDialog;
import android.view.View;
import android.widget.DatePicker;
import android.widget.TimePicker;
import android.widget.TextView;
import java.text.DateFormat;
import java.util.Calendar;

public class ChronoDemo extends Activity {
    DateFormat fmtDateAndTime=DateFormat.getDateInstance();
    TextView dateAndTimeLabel;
```

```
Calendar dateAndTime=Calendar.getInstance();

@Override
public void onCreate(Bundle icicle) {
    super.onCreate(icicle);
    setContentView(R.layout.main);

    dateAndTimeLabel=(TextView)findViewById(R.id.dateAndTime);

    updateLabel();
}

public void chooseDate(View v) {
    new DatePickerDialog(ChronoDemo.this, d,
        dateAndTime.get(Calendar.YEAR),
        dateAndTime.get(Calendar.MONTH),
        dateAndTime.get(Calendar.DAY_OF_MONTH))
        .show();
}

public void chooseTime(View v) {
    new TimePickerDialog(ChronoDemo.this, t,
        dateAndTime.get(Calendar.HOUR_OF_DAY),
        dateAndTime.get(Calendar.MINUTE),
        true)
        .show();
}

private void updateLabel() {
    dateAndTimeLabel.setText(fmtDateAndTime
        .format(dateAndTime.getTime()));
}

DatePickerDialog.OnDateSetListener d=new DatePickerDialog.OnDateSetListener() {
    public void onDateSet(DatePicker view, int year, int monthOfYear,
        int dayOfMonth) {
        dateAndTime.set(Calendar.YEAR, year);
        dateAndTime.set(Calendar.MONTH, monthOfYear);
        dateAndTime.set(Calendar.DAY_OF_MONTH, dayOfMonth);
        updateLabel();
    }
};

TimePickerDialog.OnTimeSetListener t=new TimePickerDialog.OnTimeSetListener() {
    public void onTimeSet(TimePicker view, int hourOfDay,
        int minute) {
        dateAndTime.set(Calendar.HOUR_OF_DAY, hourOfDay);
        dateAndTime.set(Calendar.MINUTE, minute);
        updateLabel();
    }
};
```

The model for this activity is just a `Calendar` instance, initially set to be the current date and time. We pour it into the view via a `DateFormat` formatter. In the `updateLabel()` method, we take the current `Calendar`, format it, and put it in the `TextView`.

Each button has a corresponding method that will get control when the user clicks it (`chooseDate()` and `chooseTime()`). When the button is clicked, either a `DatePickerDialog` or a `TimePickerDialog` is shown. In the case of the `DatePickerDialog`, we give it an `OnDateSetListener` callback that updates the `Calendar` with the new date (year, month, and day of month). We also give the dialog the last-selected date, getting the values from the `Calendar`. In the case of the `TimePickerDialog`, it gets an `OnTimeSetListener` callback to update the time portion of the `Calendar`, the last-selected time, and a true indicating we want 24-hour mode on the time selector.

With all this wired together, the resulting activity looks like Figures 14–1, 14–2, and 14–3.

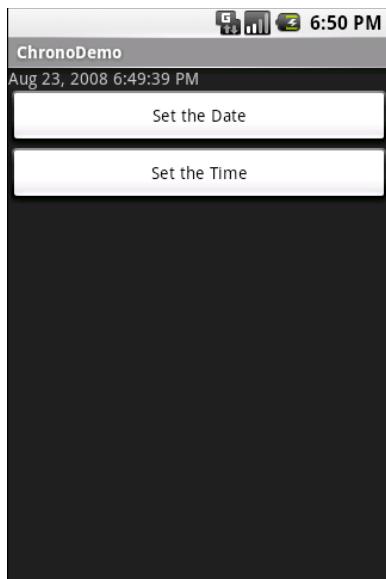


Figure 14–1. The *ChronoDemo* sample application, as initially launched



Figure 14–2. The same application, showing the date picker dialog

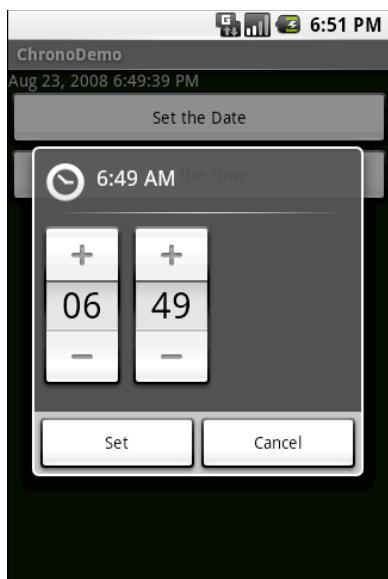


Figure 14–3. The same application, showing the time picker dialog

Time Keeps Flowing Like a River

If you want to display the time, rather than have users enter the time, you may wish to use the `DigitalClock` widget or `AnalogClock` widget. These widgets are extremely easy to use, as they automatically update with the passage of time. All you need to do is put them in your layout and let them do their thing.

For example, from the `Fancy/Clocks` sample application, here is an XML layout containing both `DigitalClock` and `AnalogClock`:

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <AnalogClock android:id="@+id/analog"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:layout_centerHorizontal="true"
        android:layout_alignParentTop="true"
        />
    <DigitalClock android:id="@+id/digital"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_centerHorizontal="true"
        android:layout_below="@+id/analog"
        />
</RelativeLayout>
```

Without any Java code other than the generated stub, we can build this project and get the activity shown in Figure 14–4.

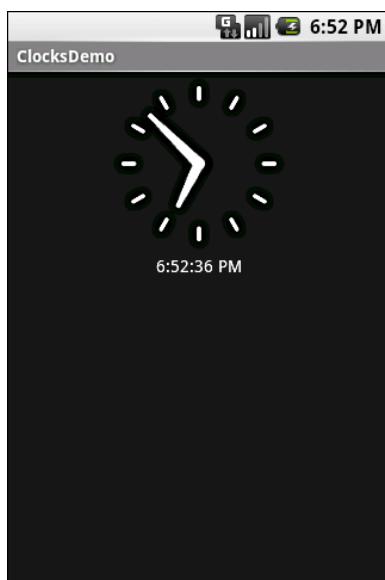


Figure 14–4. The `ClocksDemo` sample application

If you are looking for more of a timer, Chronometer may be of interest. With a Chronometer, you can track elapsed time from a starting point, as shown in the example in Figure 14–5. You simply tell it when to start() and stop(), and possibly override the format string that displays the text.

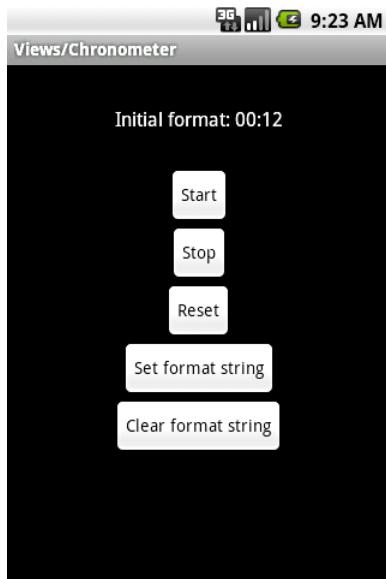


Figure 14–5. The Views/Chronometer API Demo from the Android 2.0 SDK

Seeking Resolution

The SeekBar is an input widget that allows the user to select a value along a range of possible values. Figure 14–6 shows an example.

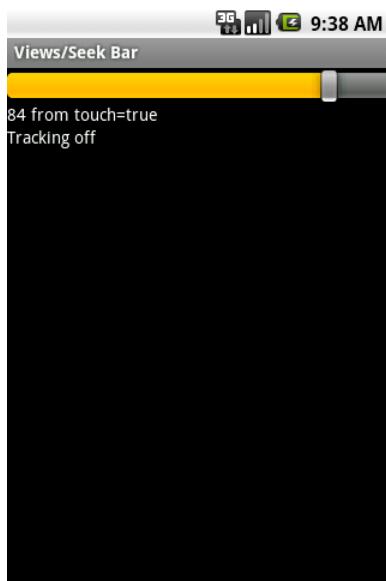


Figure 14–6. The Views/SeekBar API Demo from the Android 2.0 SDK

The user can either drag the thumb or click on either side of the thumb to reposition it. The thumb then points to a particular value along a range. That range will be 0 to some maximum value, 100 by default, which you control via a call to `setMax()`. You can find out what the current position is via `getProgress()`, or find out when the user makes a change to the thumb's position by registering a listener via `setOnSeekBarChangeListener()`.

We saw a variation on this theme with the `RatingBar` example in Chapter 13.

Putting It on My Tab

The general Android philosophy is to keep activities short and sweet. If there is more information than can reasonably fit on one screen, albeit perhaps with scrolling, then it perhaps belongs in another activity kicked off via an Intent, as will be described in Chapter 22. However, that can be complicated to set up. Moreover, sometimes there legitimately is a lot of information that needs to be collected to be processed as an atomic operation.

In a traditional UI, you might use tabs to collect and display information, such as a `JTabbedPane` in Java/Swing. In Android, you now have the option of using a `TabHost` container in much the same way. A portion of your activity's screen is taken up with tabs, which, when clicked, swap out part of the view and replace it with something else. For example, you might have an activity with a tab for entering a location and a second tab for showing a map of that location.

Some GUI toolkits refer to “tabs” as only the things that a user clicks to toggle from one view to another. Other GUI toolkits refer to “tabs” as the combination of the clickable

button-like element and the content that appears when that element is chosen. Android treats the tab buttons and contents as discrete entities, so they are referred to as “tab buttons” and “tab contents” in this section.

The Pieces

You use the following widgets and containers to set up a tabbed portion of a view:

- TabHost: The overarching container for the tab buttons and tab contents.
- TabWidget: Implements the row of tab buttons, which contain text labels and, optionally, icons.
- FrameLayout: The container for the tab contents. Each tab content is a child of the FrameLayout.

This is similar to the approach that Mozilla’s XUL takes. In XUL’s case, the `tabbox` element corresponds to Android’s `TabHost`, the `tabs` element corresponds to `TabWidget`, and `tabpanel`s corresponds to `FrameLayout`.

For example, here is a layout definition for a tabbed activity, from `Fancy/Tab`:

```
<?xml version="1.0" encoding="utf-8"?>
<TabHost xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/tabhost"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent">
    <LinearLayout
        android:orientation="vertical"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent">
        <TabWidget android:id="@+id/tabs"
            android:layout_width="fill_parent"
            android:layout_height="wrap_content"
        />
        <FrameLayout android:id="@+id/tabcontent"
            android:layout_width="fill_parent"
            android:layout_height="fill_parent">
            <AnalogClock android:id="@+id/tab1"
                android:layout_width="fill_parent"
                android:layout_height="fill_parent"
            />
            <Button android:id="@+id/tab2"
                android:layout_width="fill_parent"
                android:layout_height="fill_parent"
                android:text="A semi-random button"
            />
        </FrameLayout>
    </LinearLayout>
</TabHost>
```

Note that the `TabWidget` and `FrameLayout` are indirect children of the `TabHost`, and the `FrameLayout` itself has children representing the various tabs. In this case, there are two

tabs: a clock and a button. In a more complicated scenario, the tabs could be some form of container (e.g., `LinearLayout`) with their own contents.

Wiring It Together

You can put these widgets in a regular Activity or a TabActivity. `TabActivity`, like `ListActivity`, wraps a common UI pattern (an activity made up entirely of tabs) into a pattern-aware activity subclass. If you wish to use the `TabActivity`, you must give the `TabHost` an `android:id` of `@+id/tabhost`. Conversely, if you do not wish to use `TabActivity`, you need to get your `TabHost` via `findViewById()`, and then call `setup()` on the `TabHost`, before you do anything else.

The rest of the Java code needs to tell the `TabHost` which views represent the tab contents and what the tab buttons should look like. This is all wrapped up in `TabSpec` objects. You get a `TabSpec` instance from the host via `newTabSpec()`, fill it out, and then add it to the host in the proper sequence.

`TabSpec` has two key methods:

- `setContent()`: Indicates what goes in the tab content for this tab, typically the `android:id` of the view you want shown when this tab is selected
- `setIndicator()`: Sets the caption for the tab button and, in some flavors of this method, supplies a `Drawable` to represent the icon for the tab

Note that tab “indicators” can actually be views in their own right, if you need more control than a simple label and optional icon.

Also note that you must call `setup()` on the `TabHost` before configuring any of these `TabSpec` objects. The call to `setup()` is not needed if you are using the `TabActivity` base class for your activity.

For example, here is the Java code to wire together the tabs from the preceding layout example:

```
package com.commonsware.android.fancy;

import android.app.Activity;
import android.os.Bundle;
import android.widget.TabHost;

public class TabDemo extends Activity {
    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        TabHost tabs=(TabHost)findViewById(R.id.tabhost);

        tabs.setup();
```

```
TabHost.TabSpec spec=tabs.newTabSpec("tag1");
spec.setContent(R.id.tab1);
spec.setIndicator("Clock");
tabs.addTab(spec);

spec=tabs.newTabSpec("tag2");
spec.setContent(R.id.tab2);
spec.setIndicator("Button");
tabs.addTab(spec);
}
}
```

We find our TabHost via the familiar `findViewById()` method, and then have it `setup()`. After that, we get a TabSpec via `newTabSpec()`, supplying a tag whose purpose is unknown at this time. Given the spec, we call `setContent()` and `setIndicator()`, and then call `addTab()` back on the TabHost to register the tab as available for use. Finally, we can choose which tab is the one to show via `setCurrentTab()`, providing the 0-based index of the tab.

The results are shown in Figures 14–7 and 14–8.

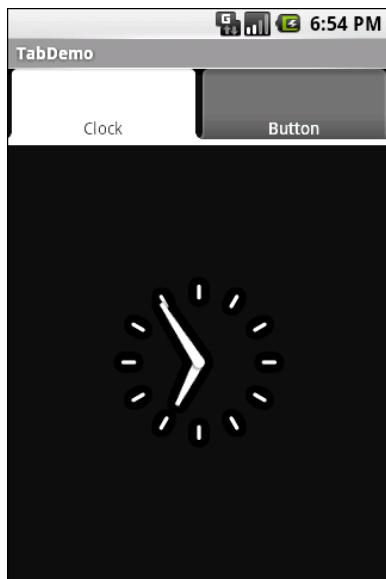


Figure 14–7. The *TabDemo* sample application, showing the first tab

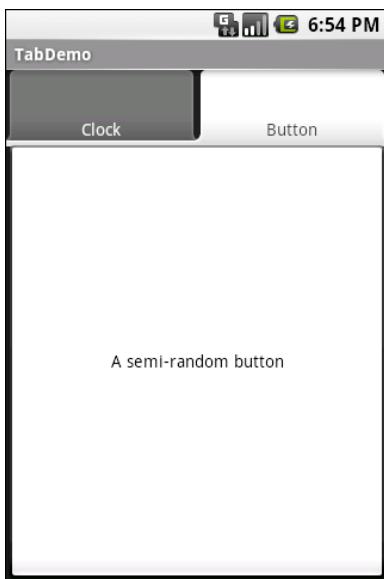


Figure 14–8. The same application, showing the second tab

Adding Them Up

TabWidget is set up to allow you to easily define tabs at compile time. However, sometimes you may want to add tabs to your activity during runtime. For example, imagine an e-mail client where individual e-mail messages are opened in their own tab, for easy toggling between messages. In this case, you do not know how many tabs you will need or what their contents will be until runtime, when the user chooses to open a message. Fortunately, Android also supports adding tabs dynamically at runtime.

Adding tabs dynamically at runtime works much like the compile-time tabs previous described, except you use a different flavor of setContent(), one that takes a TabHost.TabContentFactory instance. This is just a callback that will be invoked. You provide an implementation of createTabContent() and use it to build and return the View that becomes the content of the tab.

Let's take a look at an example (Fancy/DynamicTab). First, here is some layout XML for an activity that sets up the tabs and defines one tab, containing one button:

```
<?xml version="1.0" encoding="utf-8"?>
<TabHost xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/tabhost"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent">
    <LinearLayout
        android:orientation="vertical"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent">
        <TabWidget android:id="@android:id/tabs"
            android:layout_width="fill_parent"
```

```
        android:layout_height="wrap_content"
    />
<FrameLayout android:id="@+id/tabcontent"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent">
    <Button android:id="@+id/button1"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:text="A semi-random button"
        android:onClick="addTab"
    />
</FrameLayout>
</LinearLayout>
</TabHost>
```

We want to add new tabs whenever the button is clicked, which we can accomplish with the following code:

```
package com.commonsware.android.dynamictab;

import android.app.Activity;
import android.os.Bundle;
import android.view.View;
import android.widget.AnalogClock;
import android.widget.TabHost;

public class DynamicTabDemo extends Activity {
    private TabHost tabs=null;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        tabs=(TabHost)findViewById(R.id.tabhost);
        tabs.setup();

        TabHost.TabSpec spec=tabs.newTabSpec("button1");
        spec.setContent(R.id.button1);
        spec.setIndicator("Button");
        tabs.addTab(spec);
    }

    public void addTab(View v) {
        TabHost.TabSpec spec=tabs.newTabSpec("tag1");

        spec.setContent(new TabHost.TabContentFactory() {
            public View createTabContent(String tag) {
                return(new AnalogClock(DynamicTabDemo.this));
            }
        });

        spec.setIndicator("Clock");
        tabs.addTab(spec);
    }
}
```

In our button's `addTab()` callback, we create a `TabHost.TabSpec` object and give it an anonymous `TabHost.TabContentFactory`. The factory, in turn, returns the View to be used for the tab—in this case, just an `AnalogClock`. The logic for constructing the tab's View could be much more elaborate, such as using `LayoutInflater` to construct a view from layout XML.

Initially, when the activity is launched, we just have the one tab, as shown in Figure 14–9. Figure 14–10 shows the three dynamically created tabs.

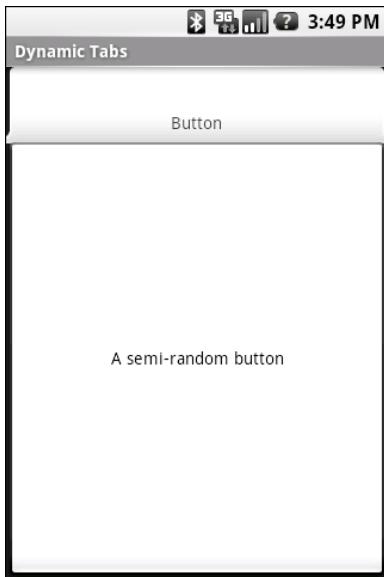


Figure 14–9. The *DynamicTab* application, with the single initial tab



Figure 14–10. The *DynamicTab* application, with three dynamically created tabs

Flipping Them Off

Sometimes, you want the overall effect of tabs (only some Views visible at a time) but not the actual UI implementation of tabs. Maybe the tabs take up too much screen space. Maybe you want to switch between perspectives based on a gesture or a device shake. Or maybe you just like being different.

The good news is that the guts of the view-flipping logic from tabs can be found in the `ViewFlipper` container, which can be used in other ways than the traditional tab.

`ViewFlipper` inherits from `FrameLayout`, in the same way we use it to describe the innards of a `TabWidget`. However, initially, `ViewFlipper` just shows the first child view. It is up to you to arrange for the views to flip, either manually by user interaction or automatically via a timer.

For example, here is a layout for a simple activity (`Fancy/Flipper1`) using a `Button` and a `ViewFlipper`:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button android:id="@+id/flip_me"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:text="Flip Me!"
        android:onClick="flip"
        />
```

```
<ViewFlipper android:id="@+id/details"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <TextView
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:textStyle="bold"
        android:textColor="#FF00FF00"
        android:text="This is the first panel"
    />
    <TextView
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:textStyle="bold"
        android:textColor="#FFFF0000"
        android:text="This is the second panel"
    />
    <TextView
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:textStyle="bold"
        android:textColor="#FFFFFF00"
        android:text="This is the third panel"
    />
</ViewFlipper>
</LinearLayout>
```

Notice that the layout defines three child views for the ViewFlipper, each a TextView with a simple message. Of course, you could have very complicated child views, if you so chose.

To manually flip the views, we need to hook into the Button and flip them ourselves when the button is clicked:

```
package com.commonsware.android.flipper1;

import android.app.Activity;
import android.os.Bundle;
import android.view.View;
import android.widget.ViewFlipper;

public class FlipperDemo extends Activity {
    ViewFlipper flipper;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        flipper=(ViewFlipper)findViewById(R.id.details);
    }

    public void flip(View v) {
        flipper.showNext();
    }
}
```

This is just a matter of calling `showNext()` on the `ViewFlipper`, as you can on any `ViewAnimator` class. The result is a trivial activity: click the button, and the next `TextView` in sequence is displayed, wrapping around to the first after viewing the last, as shown in Figures 14–11 and 14–12.

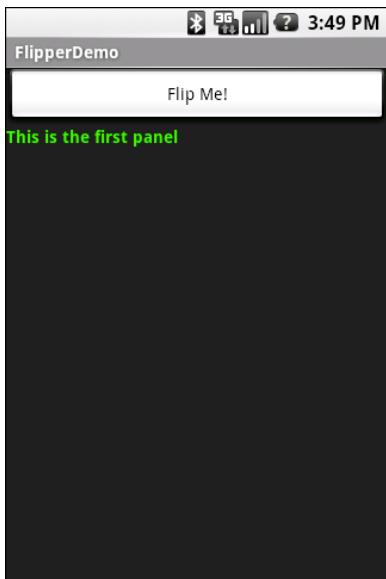


Figure 14–11. The *Flipper1* application, showing the first panel

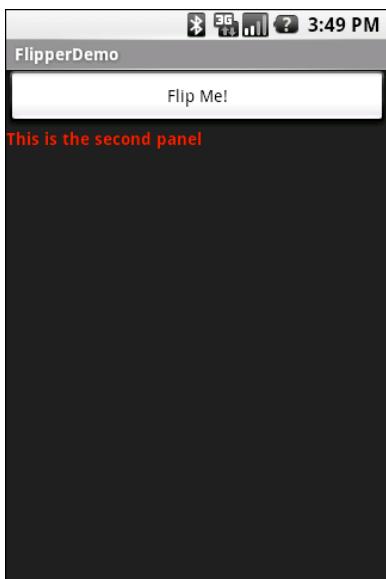


Figure 14–12. The same application, after switching to the second panel

Of course, this could be handled more simply by having a single `TextView` and changing the text and color on each click. However, you can imagine that the `ViewFlipper` contents could be much more complicated, like the contents you might put into a `TabView`.

As with the `TabWidget`, sometimes your `ViewFlipper` contents may not be known at compile time. And as with `TabWidget`, you can add new contents on-the-fly with ease.

For example, let's look at another sample activity (`Fancy/Flipper2`), using this layout:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <ViewFlipper android:id="@+id/details"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        >
    </ViewFlipper>
</LinearLayout>
```

Notice that the `ViewFlipper` has no contents at compile time. Also notice that there is no `Button` for flipping between the contents—more on this in a moment.

For the `ViewFlipper` contents, we will create large `Button` widgets, each containing one of the random words used in many chapters in this book. And, we will set up the `ViewFlipper` to automatically rotate between the `Button` widgets.

```
package com.commonsware.android.flipper2;

import android.app.Activity;
import android.os.Bundle;
import android.view.View;
import android.view.ViewGroup;
import android.widget.Button;
import android.widget.ViewFlipper;

public class FlipperDemo2 extends Activity {
    static String[] items={"lorem", "ipsum", "dolor", "sit", "amet",
        "consectetuer", "adipiscing", "elit",
        "morbi", "vel", "ligula", "vitae",
        "arcu", "aliquet", "mollis", "etiam",
        "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque",
        "augue", "purus"};
    ViewFlipper flipper;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        flipper=(ViewFlipper)findViewById(R.id.details);
        for (String item : items) {
```

```
Button btn=new Button(this);
btn.setText(item);
flipper.addView(btn,
    new ViewGroup.LayoutParams(
        ViewGroup.LayoutParams.FILL_PARENT,
        ViewGroup.LayoutParams.FILL_PARENT));
}
flipper.setFlipInterval(2000);
flipper.startFlipping();
}
}
```

After iterating over the funky words, turning each into a Button, and adding the Button as a child of the ViewFlipper, we set up the flipper to automatically flip between children (`flipper.setFlipInterval(2000);`) and to start flipping (`flipper.startFlipping();`).

The result is an endless series of buttons, each of which appears, as shown in Figure 14–13, and then is replaced by the next button in sequence after 2 seconds, wrapping around to the first after the last has been shown.

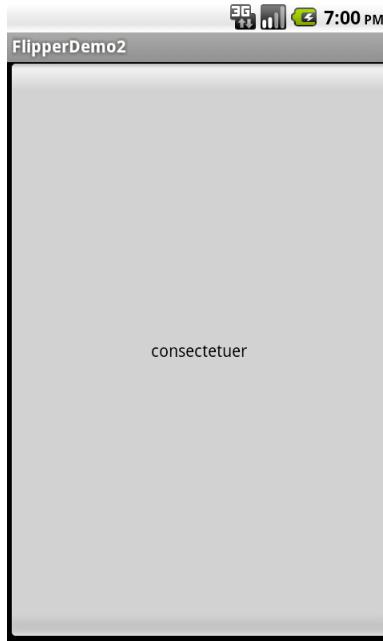


Figure 14–13. The *Flipper2* application

The autoflipping ViewFlipper is useful for status panels or other situations where you have a lot of information to display, but not much room. However, since it automatically flips between views, expecting users to interact with individual views is dicey, because the view might switch away partway through their interaction.

Getting in Somebody's Drawer

For a long time, Android developers yearned for a sliding-drawer container that worked like the one on the home screen, containing the icons for launching applications. The official implementation was in the open source code but was not part of the SDK, until Android 1.5, when the developers released `SlidingDrawer` for others to use.

Unlike most other Android containers, `SlidingDrawer` moves, switching from a closed to an open position. This puts some restrictions on which container can hold the `SlidingDrawer`. It needs to be in a container that allows multiple widgets to sit atop each other. `RelativeLayout` and `FrameLayout` satisfy this requirement. `FrameLayout` is a container purely for stacking widgets atop one another. On the flip side, `LinearLayout` does not allow widgets to stack (they fall one after another in a row or column), and so you should not have a `SlidingDrawer` as an immediate child of a `LinearLayout`.

Here is a layout showing a `SlidingDrawer` in a `FrameLayout`, from the Fancy/DrawerDemo project:

```
<?xml version="1.0" encoding="utf-8"?>
<FrameLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:background="#FF4444CC"
    >
    <SlidingDrawer
        android:id="@+id/drawer"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:handle="@+id/handle"
        android:content="@+id/content">
        <ImageView
            android:id="@+id/handle"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:src="@drawable/tray_handle_normal"
        />
        <Button
            android:id="@+id/content"
            android:layout_width="fill_parent"
            android:layout_height="fill_parent"
            android:text="I'm in here!">
        />
    </SlidingDrawer>
</FrameLayout>
```

The `SlidingDrawer` should contain two things:

- A handle, frequently an `ImageView` or something along those lines, such as the one used here, pulled from the Android open source project
- The contents of the drawer itself, usually some sort of container, but a `Button` in this example

Moreover, `SlidingDrawer` needs to know the `android:id` values of the handle and contents, via the `android:handle` and `android:content` attributes, respectively. These tell the drawer how to animate itself as it slides open and closed.

Figure 14–14 shows what the `SlidingDrawer` looks like closed, using the supplied handle, and Figure 14–15 shows what it looks like open.

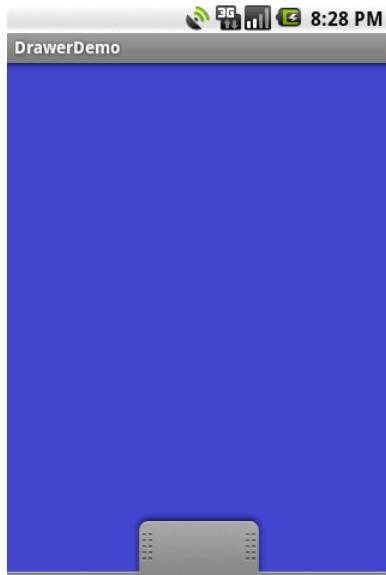


Figure 14–14. A `SlidingDrawer`, closed



Figure 14–15. A `SlidingDrawer`, open

As you might expect, you can open and close the drawer from Java code, as well as via user touch events. However, you have two sets of these methods: ones that take place instantaneously (`open()`, `close()`, and `toggle()`) and ones that use the animation (`animateOpen()`, `animateClose()`, and `animateToggle()`). You can also `lock()` and `unlock()` the drawer; while locked, the drawer will not respond to touch events.

You can also register three types of callbacks if you wish:

- A listener to be invoked when the drawer is opened
- A listener to be invoked when the drawer is closed
- A listener to be invoked when the drawer is “scrolled” (i.e., the user drags or flings the handle)

For example, the Android launcher’s `SlidingDrawer` toggles the icon on the handle from open to closed to “delete” (if you long-tap something on the desktop). It accomplishes this, in part, through callbacks like these.

`SlidingDrawer` can be vertical or horizontal. Note, though, that it keeps its orientation despite the screen orientation. In other words, if you rotate the Android device or emulator running `DrawerDemo`, the drawer always opens from the bottom—it does not always “stick” to the original side it opened from. This means that if you want the drawer to always open from the same side, like the launcher does, you will need separate layouts for portrait versus landscape, a topic discussed in Chapter 23.

Other Good Stuff

Android offers `AbsoluteLayout`, where the contents are laid out based on specific coordinate positions. You tell `AbsoluteLayout` where to place a child in precise x and y coordinates, and Android puts it there, no questions asked. On the plus side, this gives you precise positioning. On the minus side, it means your views will look right only on screens of a certain dimension, or you will need to write a bunch of code to adjust the coordinates based on screen size. Since Android screens might run the gamut of sizes, with new sizes cropping up periodically, using `AbsoluteLayout` could get quite annoying. Also, note that `AbsoluteLayout` is officially deprecated, meaning that although it is available to you, its use is discouraged.

Android also has the `ExpandableListView`. This provides a simplified tree representation, supporting two levels of depth: groups and children. Groups contain children; children are “leaves” of the tree. This requires a new set of adapters, since the `ListAdapter` family does not provide any sort of group information for the items in the list.

Here are some other widgets available in Android beyond those covered so far in this book:

- `CheckedTextView`: A `TextView` that can have either a check box or a radio button next to it, used with single- and multiple-choice lists
- `Chronometer`: A stopwatch-style countdown timer

- **Gallery:** A horizontal scrolling selection widget, designed for thumbnail previews of images (e.g., camera photos and album covers)
- **MultiAutoCompleteTextView:** Like an AutoCompleteTextView, except that the user can make multiple choices from the drop-down list, rather than just one
- **QuickContactBadge:** Given the identity of a contact from the user's contacts database, displays a roster of icons representing actions to be performed on that contact (place a call, send a text message, send an e-mail, etc.)
- **ToggleButton:** A two-state button where the states are indicated by a "light" and prose ("ON", "OFF") instead of a check mark
- **ViewSwitcher** (and the `ImageSwitcher` and `TextSwitcher` subclasses): Like a simplified `ViewFlipper` for toggling between two views

Embedding the WebKit Browser

Other GUI toolkits let you use HTML for presenting information, from limited HTML renderers (e.g., Java/Swing and wxWidgets) to embedding Internet Explorer into .NET applications. Android is much the same, in that you can embed the built-in web browser as a widget in your own activities, for displaying HTML or full-fledged browsing. The Android browser is based on WebKit, the same engine that powers Apple's Safari web browser.

The Android browser is sufficiently complex that it gets its own Java package (`android.webkit`). Using the `WebView` widget itself can be simple or powerful, based on your requirements.

A Browser, Writ Small

For simple stuff, `WebView` is not significantly different from any other widget in Android—pop it into a layout, tell it which URL to navigate to via Java code, and you are finished.

For example, here is a simple layout with a `WebView` (from `WebKit/Browser1`):

```
<?xml version="1.0" encoding="utf-8"?>
<WebView xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/webkit"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
/>
```

As with any other widget, you need to tell it how it should fill up the space in the layout (in this case, it fills all remaining space).

The Java code is equally simple:

```
package com.commonsware.android.browser1;

import android.app.Activity;
```

```
import android.os.Bundle;
import android.webkit.WebView;

public class BrowserDemo1 extends Activity {
    WebView browser;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        browser=(WebView)findViewById(R.id.webkit);

        browser.loadUrl("http://commonsware.com");
    }
}
```

The only thing unusual with this edition of `onCreate()` is that we invoke `loadUrl()` on the `WebView` widget, to tell it to load a web page (in this case, the home page of some random firm).

However, we also need to make one change to `AndroidManifest.xml`, requesting permission to access the Internet:

```
<?xml version="1.0"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
package="com.commonsware.android.browser1">
    <uses-permission android:name="android.permission.INTERNET"/>
    <application android:icon="@drawable/cw">
        <activity android:name=".BrowserDemo1" android:label="BrowserDemo1">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
    </application>
    <supports-screens android:largeScreens="true" android:normalScreens="true"
        android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

If we fail to add this permission, the browser will refuse to load pages. Permissions will be covered in greater detail in Chapter 38.

The resulting activity looks like a web browser, but with hidden scrollbars, as shown in Figure 15–1.



Figure 15–1. The *BrowserDemo1* sample application

As with the regular Android browser, you can pan around the page by dragging it, while the D-pad moves you around all the focusable elements on the page. What is missing is all the extra stuff that make up a web browser, such as a navigational toolbar.

Now, you may be tempted to replace the URL in that source code with something that relies on JavaScript, such as Google’s home page. By default, JavaScript is turned off in `WebView` widgets. If you want to enable JavaScript, call `getSettings().setJavaScriptEnabled(true);` on the `WebView` instance. This option is covered in a bit more detail later in this chapter.

Loading It Up

There are two main ways to get content into the `WebView`. One, described in the previous section, is to provide the browser with a URL and have the browser display that page via `loadUrl()`. The browser will access the Internet through whatever means are available to that specific device at the present time (Wi-Fi, 2G, 3G, WiMAX, well-trained tiny carrier pigeons, etc.).

The alternative is to use `loadData()`. Here, you supply the HTML for the browser to view. You might use this to do the following:

- Display a manual that was installed as a file with your application package
- Display snippets of HTML you retrieved as part of other processing, such as the description of an entry in an Atom feed

- Generate a whole user interface using HTML, instead of using the Android widget set

There are two flavors of `loadData()`. The simpler one allows you to provide the content, the MIME type, and the encoding, all as strings. Typically, your MIME type will be `text/html` and your encoding will be UTF-8 for ordinary HTML.

For example, you could replace the `loadUrl()` invocation in the previous example with the following:

```
browser.loadData("<html><body>Hello, world!</body></html>",
    "text/html", "UTF-8");
```

You would get the result shown in Figure 15–2.

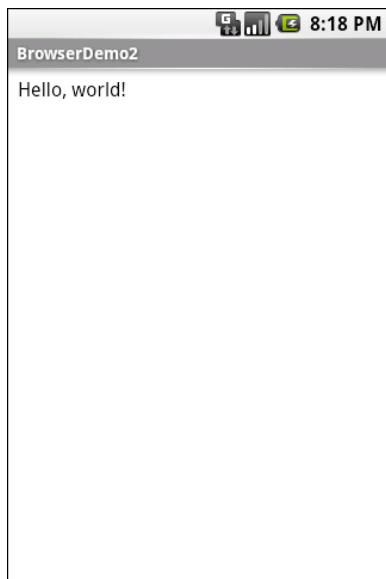


Figure 15–2. The *BrowserDemo2* sample application

This is also available as a fully buildable sample, as `WebKit/Browser2`.

Navigating the Waters

As previously mentioned, the `WebView` widget doesn't have a navigation toolbar. This allows you to use it in places where such a toolbar would be pointless and a waste of screen real estate. That being said, if you want to offer navigational capabilities, you can, but you have to supply the UI.

`WebView` offers ways to perform garden-variety browser navigation, including the following methods:

- `reload()`: Refreshes the currently viewed web page

- `goBack()`: Goes back one step in the browser history
- `canGoBack()`: Determines if there is any history to go back to
- `goForward()`: Goes forward one step in the browser history
- `canGoForward()`: Determines if there is any history to go forward to
- `goBackOrForward()`: Goes backward or forward in the browser history, where a negative number as an argument represents how many steps to go backward, and a positive number represents how many steps to go forward
- `canGoBackOrForward()`: Determines if the browser can go backward or forward the stated number of steps (following the same positive/negative convention as `goBackOrForward()`)
- `clearCache()`: Clears the browser resource cache
- `clearHistory()`: Clears the browsing history

Entertaining the Client

If you are going to use the `WebView` as a local UI (versus browsing the Web), you will want to be able to get control at key times, particularly when users click links. You will want to make sure those links are handled properly, either by loading your own content back into the `WebView`, by submitting an Intent to Android to open the URL in a full browser, or by some other means (see Chapter 22).

Your hook into the `WebView` activity is via `setWebViewClient()`, which takes an instance of a `WebViewClient` implementation as a parameter. The supplied callback object will be notified of a wide range of events, from when parts of a page have been retrieved (`onPageStarted()`, etc.) to when you, as the host application, need to handle certain user- or circumstance-initiated events, such as `onTooManyRedirects()` or `onReceivedHttpAuthRequest()`.

A common hook will be `shouldOverrideUrlLoading()`, where your callback is passed a URL (plus the `WebView` itself), and you return true if you will handle the request or false if you want default handling (e.g., actually fetch the web page referenced by the URL). In the case of a feed reader application, for example, you will probably not have a full browser with navigation built into your reader. In this case, if the user clicks a URL, you probably want to use an Intent to ask Android to load that page in a full browser. But if you have inserted a “fake” URL into the HTML, representing a link to some activity-provided content, you can update the `WebView` yourself.

As an example, let's amend the first browser demo to make it an application that, upon a click, shows the current time. From WebKit/WebKit3, here is the revised Java:

```
public class BrowserDemo3 extends Activity {  
    WebView browser;  
  
    @Override  
    public void onCreate(Bundle icicle) {  
        super.onCreate(icicle);  
        setContentView(R.layout.main);  
        browser=(WebView)findViewById(R.id.webkit);  
        browser.setWebViewClient(new Callback());  
  
        loadTime();  
    }  
  
    void loadTime() {  
        String page="<html><body><a href=\"clock\">"  
            +new Date().toString()  
            +"</a></body></html>";  
  
        browser.loadData(page, "text/html", "UTF-8");  
    }  
  
    private class Callback extends WebViewClient {  
        public boolean shouldOverrideUrlLoading(WebView view, String url) {  
            loadTime();  
  
            return(true);  
        }  
    }  
}
```

Here, we load into the browser (`loadTime()`) a simple web page that consists of the current time, made into a hyperlink to the /clock URL. We also attach an instance of a `WebViewClient` subclass, providing our implementation of `shouldOverrideUrlLoading()`. In this case, no matter what the URL, we want to just reload the `WebView` via `loadTime()`.

Running this activity gives the result shown in Figure 15–3.

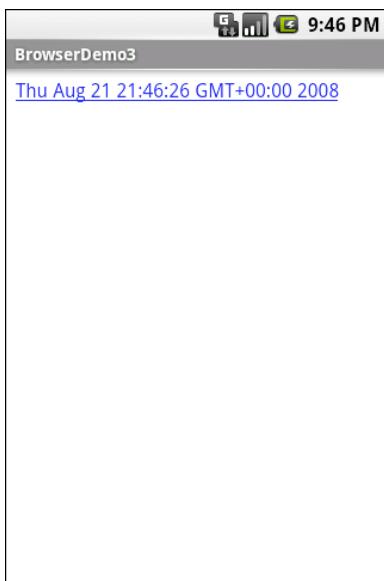


Figure 15–3. The *BrowserDemo3* sample application

Selecting the link and clicking the D-pad center button will “click” the link, causing the page to be rebuilt with the new time.

Settings, Preferences, and Options (Oh, My!)

With your favorite desktop web browser, you have some sort of settings, preferences, or options window. Between that and the toolbar controls, you can tweak and twiddle the behavior of your browser, from preferred fonts to the behavior of JavaScript. Similarly, you can adjust the settings of your `WebView` widget as you see fit, via the `WebSettings` instance returned from calling the widget’s `getSettings()` method.

There are lots of options on `WebSettings` to play with. Most appear fairly esoteric (e.g., `setFantasyFontFamily()`). However, here are some that you may find more useful:

- Control the font sizing via `setDefaultFontSize()` (to use a point size) or `setTextSize()` (to use constants indicating relative sizes like `LARGER` and `SMALLEST`)
- Control JavaScript via `setJavaScriptEnabled()` (to disable it outright) and `setJavaScriptCanOpenWindowsAutomatically()` (to merely stop it from opening pop-up windows)
- Control web site rendering via `setUserAgent()`, so you can supply your own user agent string to make the web server think you are a desktop browser, another mobile device (e.g., an iPhone), or whatever

The settings you change are not persistent, so you should store them somewhere (such as via the Android preferences engine) if you are allowing your users to determine the settings, versus hard-wiring the settings in your application.

Applying Menus

Like applications for the desktop and some mobile operating systems, Android supports activities with application menus. Most Android phones have a dedicated menu key for popping up the menu; other devices offer alternate means for triggering the menu to appear, such as the onscreen button used by the Archos 5 Android tablet.

Also, as with many GUI toolkits, you can create context menus for your Android applications. On a traditional GUI, a context menu might be triggered by the user clicking with the right-mouse button. On mobile devices, context menus typically appear when the user taps and holds over a particular widget. For example, if a `TextView` had a context menu, and the device was designed for finger-based touch input, you could push the `TextView` with your finger, hold it for a second or two, and a pop-up menu would appear.

Flavors of Menu

Android refers to the two types of menu described in the preceding section as options menus and context menus. The options menu is triggered by pressing the hardware Menu button on the device, while the context menu is raised by a tap-and-hold on the widget sporting the menu.

In addition, the options menu operates in one of two modes: icon and expanded. When the user first presses the Menu button, the icon mode will appear, showing up to the first six menu choices as large, finger-friendly buttons in a grid at the bottom of the screen. If the menu has more than six choices, the sixth button will be labeled More. Tapping the More option will bring up the expanded mode, showing the remaining choices not visible in the regular menu. The menu is scrollable, so the user can get to any of the menu choices.

Menus of Options

Instead of building your activity's options menu during `onCreate()`, the way you wire up the rest of your UI, you need to implement `onCreateOptionsMenu()`. This callback receives an instance of `Menu`.

The first thing you should do is chain upward to the superclass (`super.onCreateOptionsMenu(menu)`), so the Android framework can add in any menu choices it feels are necessary. Then you can go about adding your own options, as described in this section.

If you will need to adjust the menu during your activity's use (e.g., disable a now-invalid menu choice), just hold onto the `Menu` instance you receive in `onCreateOptionsMenu()`. Alternatively, you can implement `onPrepareOptionsMenu()`, which is called just before displaying the menu each time it is requested.

Given that you have received a `Menu` object via `onCreateOptionsMenu()`, you add menu choices by calling `add()`. There are many flavors of this method, which require some combination of the following parameters:

- A group identifier (int), which should be `NONE` unless you are creating a specific grouped set of menu choices for use with `setGroupCheckable()` (described shortly)
- A choice identifier (also an int), for use in identifying this choice in the `onOptionsItemSelected()` callback when a menu choice is chosen
- An order identifier (yet another int), for indicating where this menu choice should be slotted if the menu has Android-supplied choices alongside your own; for now, just use `NONE`
- The text of the menu choice, as a `String` or a resource ID

The `add()` family of methods all return an instance of `MenuItem`, where you can adjust any of the menu item settings you have already set (e.g., the text of the menu choice).

You can also set the shortcuts for the menu choice, which are single-character mnemonics that choose that menu item when the menu is visible. Android supports both an alphabetic (or QWERTY) set of shortcuts and a numeric set of shortcuts. These are set individually by calling `setAlphabeticShortcut()` and `setNumericShortcut()`, respectively. The menu is placed into alphabetic shortcut mode by calling `setQwertyMode()` on the menu with a `true` parameter.

The choice and group identifiers are keys used to unlock additional menu features, such as the following:

- Calling `MenuItem#setCheckable()` with a choice identifier, to control if the menu choice has a two-state check box alongside the title, where the check box value is toggled when the user chooses that menu item

- Calling `Menu#setGroupCheckable()` with a group identifier, to turn a set of menu choices into ones with a mutual-exclusion radio button between them, so that only one item in the group can be in the checked state at any time

Finally, you can create fly-out submenus by calling `addSubMenu()`, supplying the same parameters as `addMenu()`. Android will eventually call `onCreatePanelMenu()`, passing it the choice identifier of your submenu, along with another `Menu` instance representing the submenu itself. As with `onCreateOptionsMenu()`, you should chain upward to the superclass, and then add menu choices to the submenu. One limitation is that you cannot indefinitely nest submenus—a menu can have a submenu, but a submenu cannot have a sub-submenu.

If the user makes a menu choice, your activity will be notified via the `onOptionsItemSelected()` callback that a menu choice was selected. You are given the `MenuItem` object corresponding to the selected menu choice. A typical pattern is to `switch()` on the menu ID (`item.getItemId()`) and take appropriate behavior. Note that `onOptionsItemSelected()` is used regardless of whether the chosen menu item was in the base menu or a submenu.

Menus in Context

By and large, context menus use the same guts as options menus. The two main differences are how you populate the menu and how you are informed of menu choices.

First, you need to indicate which widget(s) on your activity have context menus. To do this, call `registerForContextMenu()` from your activity, supplying the `View` that is the widget needing a context menu.

Next, you need to implement `onCreateContextMenu()`, which, among other things, is passed the `View` you supplied in `registerForContextMenu()`. You can use that to determine which menu to build, assuming your activity has more than one.

The `onCreateContextMenu()` method gets the `ContextMenu` itself, the `View` the context menu is associated with, and a `ContextMenu.ContextMenuInfo`, which tells you which item in the list the user did the tap-and-hold over, in case you want to customize the context menu based on that information. For example, you could toggle a checkable menu choice based on the current state of the item.

It is also important to note that `onCreateContextMenu()` gets called each time the context menu is requested. Unlike the options menu (which is built only once per activity), context menus are discarded after they are used or dismissed. Hence, you do not want to hold onto the supplied `ContextMenu` object; just rely on getting the chance to rebuild the menu to suit your activity's needs on an on-demand basis based on user actions.

To find out when a context menu choice was chosen, implement `onContextItemSelected()` on the activity. Note that you get only the `MenuItem` instance that was chosen in this callback. As a result, if your activity has two or more context menus, you may want to ensure they have unique menu item identifiers for all their

choices, so you can distinguish between them apart in this callback. Also, you can call `getMenuInfo()` on the `MenuItem` to get the `ContextMenu.ContextMenuInfo` you received in `onCreateContextMenu()`. Otherwise, this callback behaves the same as `onOptionsItemSelected()` as described in the previous section.

Taking a Peek

In the sample project `Menus/Menus`, you will find an amended version of the `ListView` sample (`List`) with associated menus. Since the menus do not affect the layout, the XML layout file does not need to be changed and thus is not reprinted here. However, the Java code has a few new behaviors:

```
package com.commonsware.android_menus;

import android.app.AlertDialog;
import android.app.ListActivity;
import android.content.DialogInterface;
import android.os.Bundle;
import android.view.ContextMenu;
import android.view.Menu;
import android.view.MenuItem;
import android.view.View;
import android.widget.AdapterView;
import android.widget.ArrayAdapter;
import android.widget.EditText;
import android.widget.ListView;
import android.widget.TextView;
import java.util.ArrayList;

public class MenuDemo extends ListActivity {
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet", "consectetuer", "adipiscing", "elit",
        "morbi", "vel", "ligula", "vitae", "arcu", "aliquet",
        "mollis", "etiam", "vel", "erat", "placerat", "ante",
        "porttitor", "sodales", "pellentesque", "augue", "purus"};
    public static final int MENU_ADD = Menu.FIRST+1;
    public static final int MENU_RESET = Menu.FIRST+2;
    public static final int MENU_CAP = Menu.FIRST+3;
    public static final int MENU_REMOVE = Menu.FIRST+4 ;
    private ArrayList<String> words=null;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);

        initAdapter();
        registerForContextMenu(getListView());
    }

    @Override
    public boolean onCreateOptionsMenu(Menu menu) {
        menu
            .add(Menu.NONE, MENU_ADD, Menu.NONE, "Add")
            .setIcon(R.drawable.ic_menu_add);
```

```
menu
    .add(Menu.NONE, MENU_RESET, Menu.NONE, "Reset")
    .setIcon(R.drawable.ic_menu_refresh);

    return(super.onCreateOptionsMenu(menu));
}

@Override
public void onCreateContextMenu(ContextMenu menu, View v,
                               ContextMenu.ContextMenuItemInfo menuInfo) {
    menu.add(Menu.NONE, MENU_CAP, Menu.NONE, "Capitalize");
    menu.add(Menu.NONE, MENU_REMOVE, Menu.NONE, "Remove");
}

@Override
public boolean onOptionsItemSelected(MenuItem item) {
    switch (item.getItemId()) {
        case MENU_ADD:
            add();
            return(true);

        case MENU_RESET:
            initAdapter();
            return(true);
    }

    return(super.onOptionsItemSelected(item));
}

@Override
public boolean onContextItemSelected(MenuItem item) {
    AdapterView.AdapterContextMenuInfo info=
        (AdapterView.AdapterContextMenuInfo)item.getMenuInfo();
    ArrayAdapter<String> adapter=(ArrayAdapter<String>)getListAdapter();

    switch (item.getItemId()) {
        case MENU_CAP:
            String word=words.get(info.position);
            word=word.toUpperCase();
            adapter.remove(words.get(info.position));
            adapter.insert(word, info.position);

            return(true);

        case MENU_REMOVE:
            adapter.remove(words.get(info.position));

            return(true);
    }

    return(super.onContextItemSelected(item));
}

private void initAdapter() {
```

```
words=new ArrayList<String>();

for (String s : items) {
    words.add(s);
}

setListAdapter(new ArrayAdapter<String>(this,
        android.R.layout.simple_list_item_1, words));
}

private void add() {
    final View addView=getLayoutInflater().inflate(R.layout.add, null);

    new AlertDialog.Builder(this)
        .setTitle("Add a Word")
        .setView(addView)
        .setPositiveButton("OK",
            new DialogInterface.OnClickListener() {
                public void onClick(DialogInterface dialog,
                        int whichButton) {
                    ArrayAdapter<String> adapter=(ArrayAdapter<String>)getListAdapter();
                    EditText title=(EditText)addView.findViewById(R.id.title);

                    adapter.add(title.getText().toString());
                }
            })
        .setNegativeButton("Cancel", null)
        .show();
}
```

In `onCreate()`, we register our `ListView` widget as having a context menu. We also delegate loading the adapter to an `initAdapter()` private method, one that copies the data out of our static `String` array and pours it into an `ArrayList`, using the `ArrayList` for the `ArrayAdapter`. The reason we do this is that we want to be able to change the contents of the list on-the-fly, and that is much easier if we use an `ArrayList` rather than an ordinary `String` array.

For the options menu, we override `onCreateOptionsMenu()` and add two menu items, one to add a new word to the list and one to reset the words to their initial state. These menu items have IDs defined locally as static data members (`MENU_ADD` and `MENU_RESET`), and they also sport icons copied from the Android open source project. If the user displays the menu, it looks as shown in Figure 16–1.



Figure 16–1. The *MenuDemo* sample application and its options menu

We also override `onOptionsItemSelected()`, which will be called if the user makes a choice from the menu. The supplied `MenuItem` has a `getMenuItemId()` method that should map to either `MENU_ADD` or `MENU_RESET`. In the case of `MENU_ADD`, we call a private `add()` method that displays an `AlertDialog` with a custom View as its contents, inflated from `res/layout/add.xml`:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="horizontal"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    >
    <TextView
        android:text="Word:"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        />
    <EditText
        android:id="@+id/title"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:layout_marginLeft="4dp"
        />
</LinearLayout>
```

That produces a dialog like the one shown in Figure 16–2.

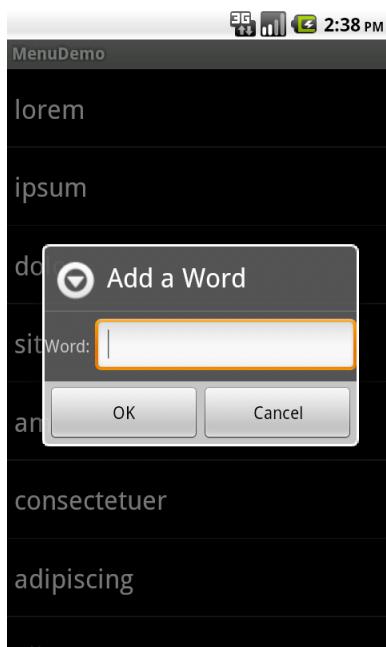


Figure 16–2. The same application, showing the Add a Word dialog

If the user taps the OK button, we get our ArrayAdapter and call add() on it, adding the entered word to the end of the list.

If the user chooses MENU_RESET, we call initAdapter() again, setting up a new ArrayAdapter and attaching it to our ListActivity.

For the context menu, we override onCreateContextMenu(). Once again, we define a pair of menu items with local IDs, MENU_CAP (to capitalize the long-tapped-upon word) and MENU_REMOVE (to remove the word). Since context menus have no icons, we can skip that part. That gives the user the context menu shown in Figure 16–3 if they long-tap on a word.

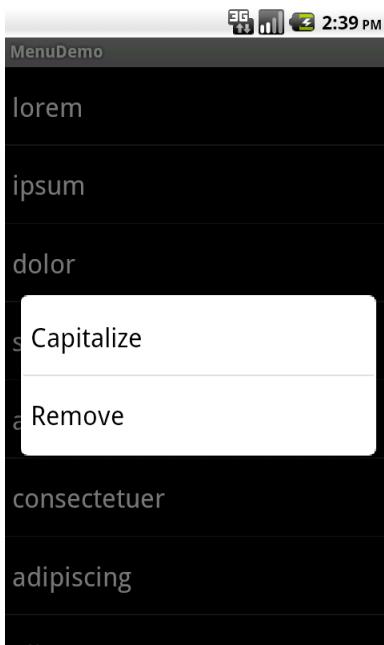


Figure 16–3. The same application, showing the context menu

We also override `onContextItemSelected()`. Since this is a context menu for a `ListView`, our `MenuItem` has some extra information for us—specifically, which item was long-tapped upon in the list. To do that, we call `getMenuInfo()` on the `MenuItem` and cast the result to be an `AdapterView.AdapterContextMenuInfo`. That object, in turn, has a `position` data member, which is the index into our array of the word the user chose. From there, we work with our `ArrayAdapter` to capitalize or remove the word, as requested.

Yet More Inflation

Chapter 13 explained how you can describe Views via XML files and “inflate” them into actual View objects at runtime. Android also allows you to describe menus via XML files and inflate them when a menu is needed. This helps you keep your menu structure separate from the implementation of menu-handling logic, and it provides easier ways to develop menu-authoring tools.

Menu XML Structure

Menu XML goes in `res/menu/` in your project tree, alongside the other types of resources that your project might employ. As with layouts, you can have several menu XML files in your project, each with its own filename and the `.xml` extension.

For example, from the `Menus/Inflation` sample project, here is a menu called `option.xml`:

```
<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android">
    <item android:id="@+id/add"
        android:title="Add"
        android:icon="@drawable/ic_menu_add" />
    <item android:id="@+id/reset"
        android:title="Reset"
        android:icon="@drawable/ic_menu_refresh" />
</menu>
```

- You must start with a menu root element.
- Inside a menu element are item elements and group elements, the latter representing a collection of menu items that can be operated upon as a group.
- Submenus are specified by adding a menu element as a child of an item element, using this new menu element to describe the contents of the submenu.
- If you want to detect when an item is chosen, or to reference an item or group from your Java code, be sure to apply an android:id, just as you do with View layout XML.

Menu Options and XML

Inside the item and group elements, you can specify various options, matching up with corresponding methods on Menu or MenuItem, as follows:

- *Title*: The title of a menu item is provided via the android:title attribute on an item element. This can be either a literal string or a reference to a string resource (e.g., @string/foo).
- *Icon*: Menu items optionally have icons. To provide an icon, in the form of a reference to a drawable resource (e.g., @drawable/eject), use the android:icon attribute on the item element.
- *Order*: By default, the order of the items in the menu is determined by the order in which they appear in the menu XML. You can change that order by specifying the android:orderInCategory attribute on the item element. This is a 0-based index of the order for the items associated with the current category. There is an implicit default category; groups can provide an android:menuCategory attribute to specify a different category to use for items in that group. Generally, though, it is simplest just to put the items in the XML in the order you want them to appear.
- *Enabled*: Items and groups can be enabled or disabled, controlled in the XML via the android:enabled attribute on the item or group element. By default, items and groups are enabled. Disabled items and groups appear in the menu but cannot be selected. You can change

an item's status at runtime via the `setEnabled()` method on `MenuItem`, or change a group's status via `setGroupEnabled()` on `Menu`.

- **Visible:** Items and groups can be visible or invisible, controlled in the XML via the `android:visible` attribute on the `item` or `group` element. By default, items and groups are visible. Invisible items and groups do not appear in the menu. You can change an item's status at runtime via the `setVisible()` method on `MenuItem`, or change a group's status via `setGroupVisible()` on `Menu`.
- **Shortcut:** Items can have shortcuts—single letters (`android:alphabeticShortcut`) or numbers (`android:numericShortcut`) that can be pressed to choose the item without having to use the touchscreen, D-pad, or trackball to navigate the full menu.

Inflating the Menu

Actually using the menu, once it's defined in XML, is easy. Just create a `MenuInflater` and tell it to inflate your menu.

The Menus/Inflation project is a clone of the Menus/Menus project, with the menu creation converted to use menu XML resources and `MenuInflater`. The options menu was converted to the XML shown previously in this section; here is the context menu:

```
<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android">
    <item android:id="@+id/cap"
        android:title="Capitalize" />
    <item android:id="@+id/remove"
        android:title="Remove" />
</menu>
```

The Java code is nearly identical, changing mostly in the implementation of `onCreateOptionsMenu()` and `onCreateContextMenu()`:

```
@Override
public boolean onCreateOptionsMenu(Menu menu) {
    new MenuInflater(this).inflate(R.menu.option, menu);

    return(super.onCreateOptionsMenu(menu));
}

@Override
public void onCreateContextMenu(ContextMenu menu, View v,
    ContextMenu.ContextMenuItemInfo menuInfo) {
    new MenuInflater(this).inflate(R.menu.context, menu);
}
```

Here, we see how `MenuInflater` “pours” the menu items specified in the menu resource (e.g., `R.menu.option`) into the supplied `Menu` or `ContextMenu` object.

We also need to change `onOptionsItemSelected()` and `onContextItemSelected()` to use the `android:id` values specified in the XML:

```
@Override
public boolean onOptionsItemSelected(MenuItem item) {
    switch (item.getItemId()) {
        case R.id.add:
            add();
            return(true);

        case R.id.reset:
            initAdapter();
            return(true);
    }

    return(super.onOptionsItemSelected(item));
}

@Override
public boolean onContextItemSelected(MenuItem item) {
    AdapterView.AdapterContextMenuInfo info=
        (AdapterView.AdapterContextMenuInfo)item.getMenuInfo();
    ArrayAdapter<String> adapter=(ArrayAdapter<String>)getListAdapter();

    switch (item.getItemId()) {
        case R.id.cap:
            String word=words.get(info.position);

            word=word.toUpperCase();

            adapter.remove(words.get(info.position));
            adapter.insert(word, info.position);

            return(true);

        case R.id.remove:
            adapter.remove(words.get(info.position));

            return(true);
    }

    return(super.onContextItemSelected(item));
}
```

In the Land of Menus and Honey

Android 3.0 (a.k.a. Honeycomb) introduced a new look and feel for Android applications, particularly on tablets. Options menus in particular change from being something triggered by a Menu button to a drop-down menu from the action bar. Fortunately, this is backward-compatible, so your existing menus will not need to change to adopt this new look. The concept of the new Honeycomb look is covered in Chapter 26, and the action bar itself is covered in Chapter 27.

Showing Pop-Up Messages

Sometimes, your activity (or other piece of Android code) will need to speak up.

Not every interaction with Android users will be tidy and containable in activities composed of views. Errors will crop up. Background tasks may take much longer than expected. Something asynchronous may occur, such as an incoming message. In these and other cases, you may need to communicate with the user outside the bounds of the traditional user interface.

Of course, this is nothing new. Error messages in the form of dialog boxes have been around for a long time. More subtle indicators also exist, from task tray icons to bouncing dock icons to vibrating cell phones.

Android has quite a few systems for letting you alert your users outside the bounds of an Activity-based UI. One, notifications, is tied heavily into intents and services and, as such, is covered Chapter 37. In this chapter, you will learn about two means of raising pop-up messages: toasts and alerts.

Raising Toasts

A Toast is a transient message, meaning that it displays and disappears on its own without user interaction. Moreover, it does not take focus away from the currently active Activity, so if the user is busy writing the next Great Programming Guide, keystrokes will not be “eaten” by the message.

Since a Toast is transient, you have no way of knowing if the user even notices it. You get no acknowledgment from the user, nor does the message stick around for a long time to pester the user. Hence, the Toast is mostly for advisory messages, such as indicating a long-running background task is completed, the battery has dropped to a low level, and so on.

Making a Toast is fairly easy. The `Toast` class offers a static `makeText()` method that accepts a `String` (or string resource ID) and returns a `Toast` instance. The `makeText()` method also needs the `Activity` (or other `Context`) plus a duration. The duration is expressed in the form of the `LENGTH_SHORT` constant or `LENGTH_LONG` constant to indicate, on a relative basis, how long the message should remain visible.

If you would prefer your `Toast` be made out of some other `View`, rather than be a boring old piece of text, simply create a new `Toast` instance via the constructor (which takes a `Context`), and then call `setView()` to supply it with the view to use and `setDuration()` to set the duration.

Once your `Toast` is configured, call its `show()` method, and the message will be displayed. You will see an example of this in action later in this chapter.

Alert! Alert!

If you would prefer something in the more classic dialog box style, what you want is an `AlertDialog`. As with any other modal dialog box, an `AlertDialog` pops up, grabs the focus, and stays there until closed by the user. You might use this for a critical error, a validation message that cannot be effectively displayed in the base activity UI, or some other situation where you are sure that the user needs to see the message immediately.

The simplest way to construct an `AlertDialog` is to use the `Builder` class. Following in true builder style, `Builder` offers a series of methods to configure an `AlertDialog`, each method returning the `Builder` for easy chaining. At the end, you call `show()` on the `Builder` to display the dialog.

Commonly used configuration methods on `Builder` include the following:

- `setMessage()`: Sets the “body” of the dialog to be a simple textual message, from either a supplied `String` or a supplied string resource ID
- `setTitle()` and `setIcon()`: Configure the text and/or icon to appear in the title bar of the dialog box
- `setPositiveButton()`,`setNegativeButton()`: Indicate which button(s) should appear across the bottom of the dialog, where they should be positioned (left, center, or right, respectively), what their captions should be, and what logic should be invoked when the button is clicked (besides dismissing the dialog).

If you need to configure the `AlertDialog` beyond what the builder allows, instead of calling `show()`, call `create()` to get the partially built `AlertDialog` instance, configure it the rest of the way, and then call one of the flavors of `show()` on the `AlertDialog` itself. Once `show()` is called, the dialog will appear and await user input.

Note that pressing any of the buttons will close the dialog, even if you have registered a listener for the button in question. Hence, if all you need a button to do is close the dialog, give it a caption and a null listener. There is no option, with `AlertDialog`, to have a button at the bottom invoke a listener yet not close the dialog.

Checking Them Out

To see how these work in practice, take a peek at `Messages/Message`, containing the following layout:

```
<?xml version="1.0" encoding="utf-8"?>
<Button xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/alert"
    android:text="Raise an alert"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:onClick="showAlert"
/>
```

The following is the Java code:

```
public void onCreate(Bundle icicle) {
    super.onCreate(icicle);

    setContentView(R.layout.main);
}

public void showAlert(View view) {
    new AlertDialog.Builder(this)
        .setTitle("MessageDemo")
        .setMessage("Let's raise a toast!")
        .setNeutralButton("Here, here!", new DialogInterface.OnClickListener() {
            public void onClick(DialogInterface dlg, int sumthin) {
                Toast
                    .makeText(MessageDemo.this, "<clink, clink>",
                        Toast.LENGTH_SHORT)
                    .show();
            }
        })
        .show();
}
```

The layout is unremarkable—just a really large Button to show the `AlertDialog`.

When you click the Button, we use a builder (`new Builder(this)`) to set the title (`setTitle("MessageDemo")`), message (`setMessage("Let's raise a toast!")`), and neutral button (`setNeutralButton("Here, here!", new OnClickListener() ...)`) before showing the dialog. When the button is clicked, the `OnClickListener` callback triggers the `Toast` class to make us a text-based toast (`makeText(this, "<clink, clink>", LENGTH_SHORT)`), which we then `show()`. The result is a typical dialog, as shown in Figure 17-1.

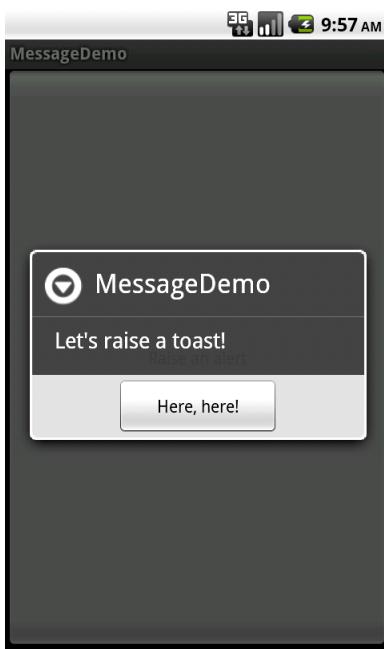


Figure 17–1. The *MessageDemo* sample application, after clicking the *Raise an alert* button

When you close the dialog via the button, it raises the toast, as shown in Figure 17–2.



Figure 17–2. The same application, after clicking the *Make a toast* button

Handling Activity Lifecycle Events

As you know, Android devices, by and large, are phones. As such, some activities are more important than others—taking a call is probably more important to users than playing Sudoku. And, since it is a phone, it probably has less RAM than your current desktop or notebook.

As a result of the phone's limited RAM, your activity may find itself being killed off because other activities are going on and the system needs your activity's memory. Think of it as the Android equivalent of the circle of life—your activity dies so others may live, and so on. You cannot assume that your activity will run until you think it is complete, or even until the user thinks it is complete. This is one example, perhaps the most important, of how an activity's life cycle will affect your own application logic.

This chapter covers the various states and callbacks that make up an activity's life cycle, and how you can hook into them appropriately.

Schroedinger's Activity

An activity, generally speaking, is in one of four states at any point in time:

- *Active*: The activity was started by the user, is running, and is in the foreground. This is what you are used to thinking of in terms of your activity's operation.
- *Paused*: The activity was started by the user, is running, and is visible, but a notification or something is overlaying part of the screen. During this time, the user can see your activity but may not be able to interact with it. For example, if a call comes in, the user will get the opportunity to take the call or ignore it.

- *Stopped*: The activity was started by the user, is running, but is hidden by other activities that have been launched or switched to. Your application will not be able to present anything meaningful to the user directly, but may communicate by way of a Notification.
- *Dead*: Either the activity was never started (e.g., just after a phone reset) or the activity was terminated, perhaps due to lack of available memory.

Life, Death, and Your Activity

Android uses the methods described in this section to call into your activity as the activity transitions between the four states listed in the previous section. Some transitions may result in multiple calls to your activity, and sometimes Android will kill your application without calling it. This whole area is rather murky and probably subject to change, so pay close attention to the official Android documentation as well as this section when deciding which events deserve attention and which you can safely ignore.

Note that for all of these methods, you should chain upward and invoke the superclass's edition of the method, or Android may raise an exception.

onCreate() and onDestroy()

We have been implementing `onCreate()` in all of our Activity subclasses in all the examples. This method will be called in three situations:

- When the activity is first started (e.g., since a system restart), `onCreate()` will be invoked with a null parameter.
- If the activity had been running, then sometime later was killed off, `onCreate()` will be invoked with the Bundle from `onSaveInstanceState()` as a parameter (as described in the next section).
- If the activity had been running and you have set up your activity to have different resources based on different device states (e.g., landscape versus portrait), your activity will be re-created and `onCreate()` will be called. Working with resources is covered in Chapter 23.

Here is where you initialize your UI and set up anything that needs to be done once, regardless of how the activity is used.

On the other end of the life cycle, `onDestroy()` may be called when the activity is shutting down, either because the activity called `finish()` (which “finishes” the activity) or because Android needs RAM and is closing the activity prematurely. Note that `onDestroy()` may not be called if the need for RAM is urgent (e.g., an incoming phone

call), but the activity will still be shut down. Hence, `onDestroy()` is mostly for cleanly releasing resources you obtained in `onCreate()` (if any).

onStart(), onRestart(), and onStop()

An activity can come to the foreground either because it is first being launched or because it is being brought back to the foreground after having been hidden (e.g., by another activity or by an incoming phone call). The `onStart()` method is called in either of those cases.

The `onRestart()` method is called in the case where the activity had been stopped and is now restarting.

Conversely, `onStop()` is called when the activity is about to be stopped.

onPause() and onResume()

The `onResume()` method is called just before your activity comes to the foreground, either after being initially launched, after being restarted from a stopped state, or after a pop-up dialog (e.g., an incoming call) is cleared. This is a great place to refresh the UI based on things that may have occurred since the user was last looking at your activity. For example, if you are polling a service for changes to some information (e.g., new entries for a feed), `onResume()` is a fine time to both refresh the current view and, if applicable, kick off a background thread to update the view (e.g., via a Handler).

Conversely, anything that steals your user away from your activity—typically, the activation of another activity—will result in your `onPause()` being called. Here, you should undo anything you did in `onResume()`, such as stopping background threads, releasing any exclusive-access resources you may have acquired (e.g., camera), and the like.

Once `onPause()` is called, Android reserves the right to kill off your activity's process at any point. Hence, you should not be relying on receiving any further events.

The Grace of State

Mostly, the aforementioned methods are for dealing with things at the application-general level (e.g., wiring together the last pieces of your UI in `onCreate()` or closing down background threads in `onPause()`).

However, a large part of the goal of Android is to have a patina of seamlessness. Activities may come and go as dictated by memory requirements, but ideally, users are unaware that this is going on. If, for example, a user was using a calculator, took a lunch break, and returned to that calculator, he should see whatever number he was working on before the break, unless he took some action to close down the calculator (e.g., pressed the Back button to exit it).

To make all this work, activities need to be able to save their application-instance state, and to do so quickly and cheaply. Since activities could be killed off at any time, activities may need to save their state more frequently than you might expect. Then, when the activity restarts, the activity should get its former state back, so it can restore the activity to the way it appeared previously. Think of it as establishing a bookmark, such that when the user returns to that bookmark, you can restore the application to the same state that it was in when the user left it.

Saving instance state is handled by `onSaveInstanceState()`. This supplies a `Bundle`, into which activities can pour whatever data they need (e.g., the number showing on the calculator's display). This method implementation needs to be speedy, so do not try to be fancy—just put your data in the `Bundle` and exit the method.

That instance state is provided to you again in two places: in `onCreate()` and in `onRestoreInstanceState()`. It is your choice when you wish to reapply the state data to your activity—either callback is a reasonable option.

The built-in implementation of `onSaveInstanceState()` will save likely mutable state from a subset of widgets. For example, it will save the text in an `EditText`, but it will not save the status of whether a `Button` is enabled or disabled. This works as long as the widgets are uniquely identified via their `android:id` attributes.

Hence, if you implement `onSaveInstanceState()`, you can either chain upward and leverage the inherited implementation or not and override the inherited implementation. Similarly, some activities may not need `onSaveInstanceState()` to be implemented at all, as the built-in one handles everything that is needed.

Handling Rotation

Some Android devices offer a slide-out keyboard that triggers rotating the screen from portrait to landscape orientation. Other devices use accelerometers to determine when the screen rotates. As a result, it is reasonable to assume that switching from portrait to landscape orientation and back again may be something that users of your application will want to do.

As this chapter describes, Android has a number of ways for you to handle screen rotation so that your application can properly handle either orientation. Keep in mind, though, that these facilities only help you to detect and manage the rotation process—you still must make sure your layouts look decent in each orientation.

A Philosophy of Destruction

By default, when there is a change in the device configuration that might affect resource selection, Android will destroy and re-create any running or paused activities the next time they are to be viewed. This could happen for a variety of different configuration changes, including these:

- Rotating the screen (i.e., orientation change)
- Extending or hiding a physical keyboard on devices that have a sliding keyboard
- Putting the device in a car or desk dock, or removing it from a dock
- Changing the locale, and thereby changing the preferred language

Screen rotation is the change most likely to trip you up, since a change in orientation can cause your application to load a different set of resources (e.g., layouts).

The key here is that Android's default behavior of destroying and re-creating any running or paused activities is probably the behavior that is best for most of your activities. You do have some control over the matter, though, and can tailor how your activities respond to orientation changes or similar configuration switches.

It's All the Same, Just Different

Since, by default, Android destroys and re-creates your activity on a rotation, you may only need to hook into the same `onSaveInstanceState()` that you would if your activity were destroyed for any other reason (e.g., low memory). Implement that method in your activity and fill in the supplied Bundle with enough information to get you back to your current state. Then, in `onCreate()` (or `onRestoreInstanceState()`, if you prefer), pick the data out of the Bundle and use it to restore your activity to the way it was.

To demonstrate this, let's take a look at the `Rotation/RotateOne` project. This and the other sample projects in this chapter use a pair of `main.xml` layouts, one in `res/layout/` for use in portrait mode and one in `res/layout-land/` for use in landscape mode. Here is the portrait layout:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button android:id="@+id/pick"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
        android:text="Pick"
        android:enabled="true"
        android:onClick="pickContact"
    />
    <Button android:id="@+id/view"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
        android:text="View"
        android:enabled="false"
        android:onClick="viewContact"
    />
</LinearLayout>
```

Here is the similar landscape layout:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="horizontal"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button android:id="@+id/pick"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
        android:text="Pick"
        android:enabled="true"
        android:onClick="pickContact"
    />
```

```
<Button android:id="@+id/view"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:layout_weight="1"
    android:text="View"
    android:enabled="false"
    android:onClick="viewContact"
/>
</LinearLayout>
```

Basically, both layouts contain a pair of buttons, each taking up half the screen. In portrait mode, the buttons are stacked; in landscape mode, they are side by side.

If you were to simply create a project, put in those two layouts, and compile it, the application would appear to work just fine—a rotation (Ctrl+F12 in the emulator) will cause the layout to change. And while buttons lack state, if you were using other widgets (e.g., EditText), you would even find that Android hangs onto some of the widget state for you (e.g., the text entered in the EditText).

What Android cannot help you with automatically is anything held outside the widgets.

Picking and Viewing a Contact

This application lets users pick a contact and then view the contact, via separate buttons. The View button is enabled only after the user picks a contact via the Pick button. Let's take a closer look at how this feat is accomplished.

When the user clicks the Pick button, we call `startActivityForResult()`. This is a variation on `startActivity()`, designed for activities that are set up to return some sort of result—a user's choice of file, contact, or whatever. Relatively few activities are set up this way, so you cannot expect to call `startActivityForResult()` and get answers from any activity you choose.

In this case, we want to pick a contact. There is an `ACTION_PICK` Intent action available in Android that is designed for this sort of scenario. An `ACTION_PICK` Intent indicates to Android that we want to pick...something. That “something” is determined by the Uri we put in the Intent.

In our case, it turns out that we can use an `ACTION_PICK` Intent for certain system-defined Uri values to let the user pick a contact from the device's list of contacts. In particular, on Android 2.0 and higher, we can use `android.provider.ContactsContract.Contacts.CONTENT_URI` for this purpose:

```
public void pickContact(View v) {
    Intent i=new Intent(Intent.ACTION_PICK,
        Contacts.CONTENT_URI);

    startActivityForResult(i, PICK_REQUEST);
}
```

For Android 1.6 and earlier, there is a separate `android.provider.Contacts.CONTENT_URI` that we could use.

The second parameter to `startActivityForResult()` is an identifying number, to help us distinguish this call to `startActivityForResult()` from any others we might make. Calling `startActivityForResult()` with an `ACTION_PICK` Intent for the `Contacts.CONTENT_URI` will bring up a contact-picker activity, supplied by Android.

When the user taps a contact, the picker activity ends (e.g., via `finish()`), and control returns to our activity. At that point, our activity is called with `onActivityResult()`. Android supplies us with three pieces of information:

- The identifying number we supplied to `startActivityForResult()`, so we can match this result to its original request
- A result status, either `RESULT_OK` or `RESULT_CANCELED`, to indicate whether the user made a positive selection or abandoned the picker (e.g., by pressing the Back button)
- An Intent that represents the result data itself, for a `RESULT_OK` response

The details of what is in the Intent will need to be documented by the activity that you called. In the case of an `ACTION_PICK` Intent for the `Contacts.CONTENT_URI`, the returned Intent has its own Uri (via `getData()`) that represents the chosen contact. In the `RotationOne` example, we stick that in a data member of the activity and enable the View button:

```
@Override  
protected void onActivityResult(int requestCode, int resultCode,  
                               Intent data) {  
    if (requestCode==PICK_REQUEST) {  
        if (resultCode==RESULT_OK) {  
            contact=data.getData();  
            viewButton.setEnabled(true);  
        }  
    }  
}
```

If the user clicks the now-enabled View button, we create an `ACTION_VIEW` Intent on the contact's Uri, and call `startActivity()` on that Intent:

```
public void viewContact(View v) {  
    startActivity(new Intent(Intent.ACTION_VIEW, contact));  
}
```

This will bring up an Android-supplied activity to view details of that contact.

Saving Your State

Given that we have used `startActivityForResult()` to pick a contact, now we need to hang onto that contact when the screen orientation changes. In the `RotationOne` example, we do this via `onSaveInstanceState()`:

```
package com.commonsware.android.rotation.one;  
  
import android.app.Activity;
```

```
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.provider.ContactsContract.Contacts;
import android.view.View;
import android.widget.Button;
import android.util.Log;

public class RotationOneDemo extends Activity {
    static final int PICK_REQUEST=1337;
    Button viewButton=null;
    Uri contact=null;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);

        viewButton=(Button)findViewById(R.id.view);
        restoreMe(savedInstanceState);

        viewButton.setEnabled(contact!=null);
    }

    @Override
    protected void onActivityResult(int requestCode, int resultCode,
                                    Intent data) {
        if (requestCode==PICK_REQUEST) {
            if (resultCode==RESULT_OK) {
                contact=data.getData();
                viewButton.setEnabled(true);
            }
        }
    }

    public void pickContact(View v) {
        Intent i=new Intent(Intent.ACTION_PICK,
                            Contacts.CONTENT_URI);

        startActivityForResult(i, PICK_REQUEST);
    }

    public void viewContact(View v) {
        startActivity(new Intent(Intent.ACTION_VIEW, contact));
    }

    @Override
    protected void onSaveInstanceState(Bundle outState) {
        super.onSaveInstanceState(outState);

        if (contact!=null) {
            outState.putString("contact", contact.toString());
        }
    }

    private void restoreMe(Bundle state) {
```

```
contact=null;

if (state!=null) {
    String contactUri=state.getString("contact");

    if (contactUri!=null) {
        contact=Uri.parse(contactUri);
    }
}
}
```

By and large, it looks like a normal activity...because it is. Initially, the “model”—a Uri named contact—is null. It is set as the result of spawning the ACTION_PICK subactivity. Its string representation is saved in onSaveInstanceState() and restored in restoreMe() (called from onCreate()). If the contact is not null, the View button is enabled and can be used to view the chosen contact.

Visually, it looks pretty much as you would expect, as shown in Figures 19–1 and 19–2.

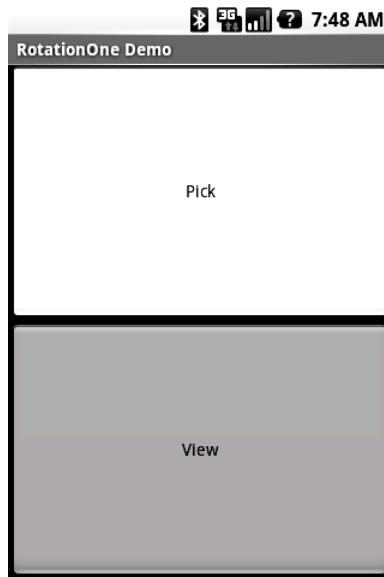


Figure 19–1. The *RotationOne* application, in portrait mode

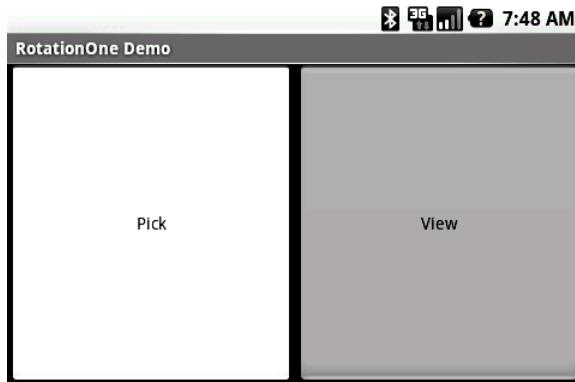


Figure 19–2. The *RotationOne* application, in landscape mode

The benefit to this implementation is that it handles a number of system events beyond mere rotation, such as being closed by Android due to low memory.

For fun, comment out the `restoreMe()` call in `onCreate()` and try running the application. You will see that the application “forgets” a contact selected in one orientation when you rotate the emulator or device.

Now with More Savings!

The problem with `onSaveInstanceState()` is that you are limited to a `Bundle`. That’s because this callback is also used in cases where your whole process might be terminated (e.g., low memory), so the data to be saved must be something that can be serialized and has no dependencies on your running process.

For some activities, that limitation is not a problem. For others, it is more annoying. Take an online chat, for example. You have no means of storing a socket in a `Bundle`, so by default, you have to drop your connection to the chat server and reestablish it. That not only may be a performance hit, but it might also affect the chat itself, such as showing in the chat logs that you are disconnecting and reconnecting.

One way to get past this is to use `onRetainNonConfigurationInstance()` instead of `onSaveInstanceState()` for “light” changes like a rotation. Your activity’s `onRetainNonConfigurationInstance()` callback can return an `Object`, which you can retrieve later via `getLastNonConfigurationInstance()`. The `Object` can be just about anything you want. Typically, it will be some kind of “context” object holding activity state, such as running threads, open sockets, and the like. Your activity’s `onCreate()` can call `getLastNonConfigurationInstance()`, and if you get a non-null response, you now have your sockets and threads and whatnot. The biggest limitation is that you do not want to put in the saved context anything that might reference a resource that will get swapped out, such as a `Drawable` loaded from a resource.

Let's take a look at the `Rotation/RotateTwo` sample project, which uses this approach to handling rotations. The layouts, and hence the visual appearance, is the same as with `Rotation/RotateOne`. Where things differ slightly is in the Java code:

```
package com.commonsware.android.rotation.two;

import android.app.Activity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.provider.ContactsContract.Contacts;
import android.view.View;
import android.widget.Button;
import android.util.Log;

public class RotationTwoDemo extends Activity {
    static final int PICK_REQUEST=1337;
    Button viewButton=null;
    Uri contact=null;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);

        viewButton=(Button)findViewById(R.id.view);
        restoreMe();

        viewButton.setEnabled(contact!=null);
    }

    @Override
    protected void onActivityResult(int requestCode, int resultCode,
                                    Intent data) {
        if (requestCode==PICK_REQUEST) {
            if (resultCode==RESULT_OK) {
                contact=data.getData();
                viewButton.setEnabled(true);
            }
        }
    }

    public void pickContact(View v) {
        Intent i=new Intent(Intent.ACTION_PICK,
                            Contacts.CONTENT_URI);

        startActivityForResult(i, PICK_REQUEST);
    }

    public void viewContact(View v) {
        startActivityForResult(new Intent(Intent.ACTION_VIEW, contact));
    }

    @Override
    public Object onRetainNonConfigurationInstance() {
        return(contact);
```

```
}

private void restoreMe() {
    contact=null;

    if (getLastNonConfigurationInstance()!=null) {
        contact=(Uri)getLastNonConfigurationInstance();
    }
}
}
```

In this case, we override `onRetainNonConfigurationInstance()`, returning the actual `Uri` for our contact, rather than a string representation of it. In turn, `restoreMe()` calls `getLastNonConfigurationInstance()`, and if it is not null, we hold onto it as our contact and enable the View button.

The advantage here is that we are passing around the `Uri` rather than a string representation. In this case, that is not a big saving. But our state could be much more complicated, including threads, sockets, and other things we cannot pack into a `Bundle`.

However, even the `onRetainNonConfigurationInstance()` approach to handling rotations may be too intrusive to your application. Suppose, for example, you are creating a real-time game, such as a first-person shooter. The “hiccup” your users experience as your activity is destroyed and re-created might be enough to get them shot, which they may not appreciate. While this would be less of an issue on the T-Mobile G1, since a rotation requires sliding open the keyboard and therefore is unlikely to be done mid-game, other devices might rotate based solely on the device’s position as determined by accelerometers. For applications such as this, there is a third possibility for handling rotations, which is to tell Android that you will handle them yourself, without any assistance from the framework.

DIY Rotation

To handle rotations without Android’s assistance, do the following:

1. Put an `android:configChanges` entry in your `AndroidManifest.xml` file, listing the configuration changes you want to handle yourself versus allowing Android to handle them for you.
2. Implement `onConfigurationChanged()` in your Activity, which will be called when one of the configuration changes you listed in `android:configChanges` occurs.

Now, for any configuration change you want, you can bypass the whole activity-destruction process and simply get a callback letting you know of the change.

To see this in action, turn to the `Rotation/RotateThree` sample application. Once again, our layouts are the same, so the application looks the same as the preceding two samples. However, the Java code is significantly different, because we are no longer concerned with saving our state, but rather with updating our UI to deal with the layout.

But first, we need to make a small change to our manifest:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android" ↵
    package="com.commonsware.android.rotation.three" android:versionCode="1" ↵
    android:versionName="1.0.0">
    <uses-sdk android:minSdkVersion="5" android:targetSdkVersion="6"/>
    <application android:label="@string/app_name" android:icon="@drawable/cw">
        <activity android:name=".RotationThreeDemo" android:label="@string/app_name" ↵
            android:configChanges="keyboardHidden|orientation">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
    </application>
    <supports-screens android:largeScreens="true" android:normalScreens="true" ↵
        android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

Here, we state that we will handle keyboardHidden and orientation configuration changes ourselves. This covers us for any cause of the rotation, whether it is a sliding keyboard or a physical rotation. Note that this is set on the activity, not the application. If you have several activities, you will need to decide for each which of the tactics outlined in this chapter you wish to use.

In addition, we need to add an android:id to our LinearLayout containers, such as follows:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/container"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button android:id="@+id/pick"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
        android:text="Pick"
        android:enabled="true"
        android:onClick="pickContact"
    />
    <Button android:id="@+id/view"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
        android:text="View"
        android:enabled="false"
        android:onClick="viewContact"
    />
</LinearLayout>
```

The Java code for this project is shown here:

```
package com.commonsware.android.rotation.three;
```

```
import android.app.Activity;
import android.content.Intent;
import android.content.res.Configuration;
import android.net.Uri;
import android.os.Bundle;
import android.provider.ContactsContract.Contacts;
import android.view.View;
import android.widget.Button;
import android.widget.LinearLayout;

public class RotationThreeDemo extends Activity {
    static final int PICK_REQUEST=1337;
    Button viewButton=null;
    Uri contact=null;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        setContentView(R.layout.main);
        viewButton=(Button)findViewById(R.id.view);
        viewButton.setEnabled(contact!=null);
    }

    @Override
    protected void onActivityResult(int requestCode, int resultCode,
                                    Intent data) {
        if (requestCode==PICK_REQUEST) {
            if (resultCode==RESULT_OK) {
                contact=data.getData();
                viewButton.setEnabled(true);
            }
        }
    }

    public void pickContact(View v) {
        Intent i=new Intent(Intent.ACTION_PICK,
                            Contacts.CONTENT_URI);

        startActivityForResult(i, PICK_REQUEST);
    }

    public void viewContact(View v) {
        startActivity(new Intent(Intent.ACTION_VIEW, contact));
    }

    public void onConfigurationChanged(Configuration newConfig) {
        super.onConfigurationChanged(newConfig);

        LinearLayout container=(LinearLayout)findViewById(R.id.container);

        if (newConfig.orientation==Configuration.ORIENTATION_LANDSCAPE) {
            container.setOrientation(LinearLayout.HORIZONTAL);
        }
        else {
```

```
        container.setOrientation(LinearLayout.VERTICAL);
    }
}
```

Our `onConfigurationChanged()` needs to update the UI to reflect the orientation change. Here, we find our `LinearLayout` and tell it to change its orientation to match that of the device. The `orientation` field on the `Configuration` object will tell us how the device is oriented.

...But Google Does Not Recommend This

You might think that `onConfigurationChanged()` and `android:configChanges` would be the ultimate solution. After all, we no longer have to worry about all that messy passing of data to the new activity as the old one is being destroyed. The `onConfigurationChanged()` approach is very sexy.

However, Google does not recommend it.

The primary concern is forgetting about resources. With the `onConfigurationChanged()` approach, you must ensure that every resource that might possibly have changed as a result of this configuration change gets updated. That includes strings, layouts, drawables, menus, animations, preferences, dimensions, colors, and all the others. If you fail to ensure that everything is updated completely, your app will have a whole series of little (or not so little) bugs as a result.

Allowing Android to destroy and re-create your activity guarantees you will get the proper resources. All you need to do is arrange to pass the proper data from the old activity to the new activity.

The `onConfigurationChanged()` approach is appropriate only where the user would be directly affected by a destroy-and-create cycle. For example, imagine a video-player application that is playing a streaming video. Destroying and re-creating the activity would necessarily cause the application to have to reconnect to the stream, losing buffered data in the process. Users will get frustrated if an accidental movement causes the device to change orientation and interrupt their video playback. In this case, since the user will perceive problems with a destroy-and-create cycle, `onConfigurationChanged()` is an appropriate choice.

Forcing the Issue

Some activities simply are not meant to change orientation. Games, camera previews, video players, and the like may make sense only in landscape orientation, for example. While most activities should allow the user to work in any desired orientation, for activities where only one orientation makes sense, you can control it.

To block Android from rotating your activity, all you need to do is add `android:screenOrientation = "portrait"` (or `"landscape"`, as you prefer) to your `AndroidManifest.xml` file, as follows (from the `Rotation/RotateFour` sample project):

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android">
    <package android:name="com.commonsware.android.rotation.four" android:versionCode="1" android:versionName="1.0.0">
        <uses-sdk android:minSdkVersion="5" android:targetSdkVersion="6"/>
        <application android:label="@string/app_name" android:icon="@drawable/cw">
            <activity android:name=".RotationFourDemo" android:screenOrientation="portrait" android:label="@string/app_name">
                <intent-filter>
                    <action android:name="android.intent.action.MAIN"/>
                    <category android:name="android.intent.category.LAUNCHER"/>
                </intent-filter>
            </activity>
        </application>
    <supports-screens android:largeScreens="true" android:normalScreens="true" android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

Since this is applied on a per-activity basis, you will need to decide which of your activities may need this turned on.

At this point, your activity is locked into whatever orientation you specified, regardless of what you do. Figures 19–3 and 19–4 show the same activity as in the previous three sections, but using the preceding manifest and with the emulator set for both portrait and landscape orientation. Note that the UI does not move a bit, but remains in portrait mode.



Figure 19–3. The *RotationFour* application, in portrait mode



Figure 19–4. The *RotationFour* application, in landscape mode

Note that Android will still destroy and re-create your activity, even if you have the orientation set to a specific value as shown here. If you wish to avoid that, you also need to set `android:configChanges` in the manifest, as described earlier in this chapter. Or, you can still use `onSaveInstanceState()` or `onRetainNonConfigurationInstance()` to save your activity's mutable state.

Making Sense of It All

As noted at the beginning of this chapter, devices with a slide-out keyboard (such as T-Mobile G1, Motorola DROID/Milestone, etc.) change screen orientation when the keyboard is exposed or hidden, whereas other devices change screen orientation based on the accelerometer. If you have an activity that should change orientation based on the accelerometer, even if the device has a slide-out keyboard, just add `android:screenOrientation = "sensor"` to your `AndroidManifest.xml` file as follows (from the `Rotation/RotationFive` sample project):

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android">
    <package name="com.commonsware.android.rotation.five" android:versionCode="1">
        <uses-sdk android:minSdkVersion="5" android:targetSdkVersion="6"/>
        <application android:label="@string/app_name" android:icon="@drawable/cw">
```

```
<activity android:name=".RotationFiveDemo" android:screenOrientation="sensor"←
    android:label="@string/app_name">
        <intent-filter>
            <action android:name="android.intent.action.MAIN"/>
            <category android:name="android.intent.category.LAUNCHER"/>
        </intent-filter>
    </activity>
</application>
<supports-screens android:largeScreens="true" android:normalScreens="true"←
    android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

The sensor, in this case, tells Android you want the accelerometers to control the screen orientation, so the physical shift in the device orientation controls the screen orientation.

Android 2.3 adds a number of other possible values for `android:screenOrientation`:

- `reverseLandscape` and `reversePortrait`: Indicate that you want the screen to be in landscape or portrait orientation, respectively, but upside down compared to the normal landscape and portrait orientations
- `sensorLandscape` and `sensorPortrait`: Indicate that you want the screen to be locked in landscape or portrait orientation, respectively, but the sensors can be used to determine which side is “up”
- `fullSensor`: Allows the sensors to put the screen in any of the four possible orientations (portrait, reverse portrait, landscape, reverse landscape), whereas `sensor` toggles only between portrait and landscape

Dealing with Threads

Users like snappy applications. Users do not like applications that feel sluggish. The way to help make your application feel snappy to users is to use the standard threading capabilities built into Android. This chapter will walk you through the issues involved with thread management in Android and some of the options for keeping the UI crisp and responsive.

The Main Application Thread

You might think that when you call `setText()` on a `TextView`, the screen is updated with the text you supply, right then and there. That is not how it works. Rather, everything that modifies the widget-based UI goes through a message queue. Calls to `setText()` do not update the screen; they just pop a message on a queue telling the operating system to update the screen. The operating system pops these messages off of this queue and does what the messages require.

The queue is processed by one thread, variously called the *main application thread* and the *UI thread*. As long as that thread can keep processing messages, the screen will update, user input will be handled, and so on.

However, the main application thread is also used for nearly all callbacks into your activity. Your `onCreate()`, `onClick()`, `onListItemClick()`, and similar methods are all called on the main application thread. While your code is executing in these methods, Android is not processing messages on the queue, meaning the screen does not update, user input is not handled, and so on.

This, of course, is bad. So bad, in fact, that if you take more than a few seconds to do work on the main application thread, Android may display the dreaded “application not responding” (ANR) error, and your activity may be killed off. Hence, you want to make sure that all of your work on the main application thread happens quickly. This means that anything slow should be done in a background thread, so as not to tie up the main application thread. This includes activities such as the following:

- Internet access, such as sending data to a web service or downloading an image

- Significant file operations, since flash storage can be remarkably slow at times
- Any sort of complex calculations

Fortunately, Android supports threads using the standard Thread class from Java, plus all the wrappers and control structures you would expect, such as the `java.util.concurrent` class package.

However, there is one big limitation: you cannot modify the UI from a background thread. You can modify the UI only from the main application thread. Hence, you need to move long-running work into background threads, but those threads need to do something to arrange to update the UI using the main application thread. Android provides a wide range of tools to do just that, and these tools are the primary focus of this chapter.

Making Progress with ProgressBars

If you are going to fork background threads to do work on behalf of the user, you should consider keeping the user informed that work is going on. This is particularly true if the user is effectively waiting for that background work to complete.

The typical approach to keeping users informed of progress is some form of progress bar, like you see when you copy a bunch of files from place to place in many desktop operating systems. Android supports this through the `ProgressBar` widget.

A `ProgressBar` keeps track of progress, defined as an integer, with 0 indicating no progress has been made. You can define the maximum end of the range—which value indicates progress is complete—via `setMax()`. By default, a `ProgressBar` starts with a progress of 0, though you can start from some other position via `setProgress()`. If you prefer your progress bar to be indeterminate, use `setIndeterminate()` and set it to true.

In your Java code, you can either positively set the amount of progress that has been made (via `setProgress()`) or increment the progress from its current amount (via `incrementProgressBy()`). You can find out how much progress has been made via `getProgress()`.

There are other alternatives for displaying progress—`ProgressDialog`, a progress indicator in the activity's title bar, and so on—but a `ProgressBar` is a good place to start.

Getting Through the Handlers

The most flexible means of making an Android-friendly background thread is to create an instance of a `Handler` subclass. You need only one `Handler` object per activity, and you do not need to manually register it. Merely creating the instance is sufficient to register it with the Android threading subsystem.

Your background thread can communicate with the Handler, which will do all of its work on the activity's UI thread. This is important, as UI changes, such as updating widgets, should occur only on the activity's UI thread.

You have two options for communicating with the Handler: messages and Runnable objects.

Messages

To send a Message to a Handler, first invoke `obtainMessage()` to get the Message object out of the pool. There are a few flavors of `obtainMessage()`, allowing you to create empty Message objects or ones populated with message identifiers and arguments. The more complicated your Handler processing needs to be, the more likely it is you will need to put data into the Message to help the Handler distinguish different events.

Then, you send the Message to the Handler via its message queue, using one of the `sendMessage...()` family of methods, such as the following:

- `sendMessage():` Puts the message on the queue immediately
- `sendMessageAtFrontOfQueue():` Puts the message on the queue immediately and places it at the front of the message queue (versus the back, which is the default), so your message takes priority over all others
- `sendMessageAtTime():` Puts the message on the queue at the stated time, expressed in the form of milliseconds based on system uptime (`SystemClock.uptimeMillis()`)
- `sendMessageDelayed():` Puts the message on the queue after a delay, expressed in milliseconds
- `sendEmptyMessage():` Sends an empty Message object to the queue, allowing you to skip the `obtainMessage()` step if you were planning on leaving it empty anyway

To process these messages, your Handler needs to implement `handleMessage()`, which will be called with each message that appears on the message queue. There, the Handler can update the UI as needed. However, it should still do that work quickly, as other UI work is suspended until the Handler is finished.

For example, let's create a `ProgressBar` and update it via a Handler. Here is the layout from the Threads/Handler sample project:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <ProgressBar android:id="@+id/progress"
        style="?android:attr/progressBarStyleHorizontal"
```

```
    android:layout_width="fill_parent"
    android:layout_height="wrap_content" />
</LinearLayout>
```

The `ProgressBar`, in addition to setting the width and height as normal, also employs the `style` property. This particular style indicates the `ProgressBar` should be drawn as the traditional horizontal bar showing the amount of work that has been completed.

And here is the Java:

```
package com.commonsware.android.threads;

import android.app.Activity;
import android.os.Bundle;
import android.os.Handler;
import android.os.Message;
import android.widget.ProgressBar;
import java.util.concurrent.atomic.AtomicBoolean;

public class HandlerDemo extends Activity {
    ProgressBar bar;
    Handler handler=new Handler() {
        @Override
        public void handleMessage(Message msg) {
            bar.incrementProgressBy(5);
        }
    };
    AtomicBoolean isRunning=new AtomicBoolean(false);

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        bar=(ProgressBar)findViewById(R.id.progress);
    }

    public void onStart() {
        super.onStart();
        bar.setProgress(0);

        Thread background=new Thread(new Runnable() {
            public void run() {
                try {
                    for (int i=0;i<20 && isRunning.get();i++) {
                        Thread.sleep(1000);
                        handler.sendMessage(handler.obtainMessage());
                    }
                } catch (Throwable t) {
                    // just end the background thread
                }
            }
        });
        isRunning.set(true);
        background.start();
    }
}
```

```
}

public void onStop() {
    super.onStop();
    isRunning.set(false);
}
}
```

As part of constructing the Activity, we create an instance of Handler, with our implementation of handleMessage(). Basically, for any message received, we update the ProgressBar by 5 points, and then exit the message handler.

We then take advantage of onStart() and onStop(). In onStart(), we set up a background thread. In a real system, this thread would do something meaningful. Here, we just sleep 1 second, post a Message to the Handler, and repeat for a total of 20 passes. This, combined with the 5-point increase in the ProgressBar position, will march the bar clear across the screen, as the default maximum value for ProgressBar is 100. You can adjust that maximum via setMax(). For example, you might set the maximum to be the number of database rows you are processing, and update once per row.

Note that we then *leave* onStart(). This is crucial. The onStart() method is invoked on the activity UI thread, so it can update widgets and such. However, that means we need to get out of onStart(), both to let the Handler get its work done and to inform Android that our activity is not stuck.

The resulting activity is simply a horizontal progress bar, as shown in Figure 20–1.

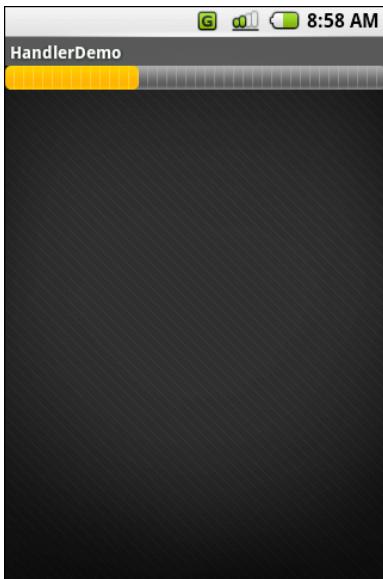


Figure 20–1. The HandlerDemo sample application

Note, though, that while ProgressBar samples like this one show your code arranging to update the progress on the UI thread, for this specific widget, that is not necessary. At

least as of Android 1.5, `ProgressBar` is now UI thread safe, in that you can update it from any thread, and it will handle the details of performing the actual UI update on the UI thread.

Runnables

If you would rather not fuss with `Message` objects, you can also pass `Runnable` objects to the `Handler`, which will run those `Runnable` objects on the activity UI thread. `Handler` offers a set of `post...` methods for passing `Runnable` objects in for eventual processing.

Just as `Handler` supports `post()` and `postDelayed()` to add `Runnable` objects to the event queue, you can use those same methods on any `View` (i.e., any widget or container). This slightly simplifies your code, in that you can then skip the `Handler` object.

Where Oh Where Has My UI Thread Gone?

Sometimes, you may not know if you are currently executing on the UI thread of your application. For example, if you package some of your code in a JAR for others to reuse, you might not know whether your code is being executed on the UI thread or from a background thread.

To help combat this problem, `Activity` offers `runOnUiThread()`. This works similar to the `post()` methods on `Handler` and `View`, in that it queues up a `Runnable` to run on the UI thread, if you are not on the UI thread right now. If you already are on the UI thread, it invokes the `Runnable` immediately. This gives you the best of both worlds: no delay if you are on the UI thread, yet safety in case you are not.

Syncing Feeling

Android 1.5 introduced a new way of thinking about background operations: `AsyncTask`. In one (reasonably) convenient class, Android will handle all of the chores of doing work on the UI thread versus on a background thread. Moreover, Android itself allocates and removes that background thread. And, it maintains a small work queue, further accentuating the fire-and-forget feel to `AsyncTask`.

The Theory

There is a saying, popular in marketing circles, “When a man buys a 1/4-inch drill bit at a hardware store, he does not want a 1/4-inch drill bit—he wants 1/4-inch holes.” Hardware stores cannot sell holes, so they sell the next-best thing: devices (drills and drill bits) that make creating holes easy.

Similarly, Android developers who have struggled with background thread management do not strictly want background threads. Rather, they want work to be done off the UI

thread, so users are not stuck waiting and activities do not get the dreaded ANR error. And while Android cannot magically cause work to not consume UI thread time, it can offer things that make such background operations easier and more transparent. AsyncTask is one such example.

To use AsyncTask, you must do the following:

- Create a subclass of AsyncTask, commonly as a private inner class of something that uses the task (e.g., an activity)
- Override one or more AsyncTask methods to accomplish the background work, plus whatever work associated with the task that needs to be done on the UI thread (e.g., update progress)
- When needed, create an instance of the AsyncTask subclass and call execute() to have it begin doing its work

What you do *not* have to do is

- Create your own background thread
- Terminate that background thread at an appropriate time
- Call all sorts of methods to arrange for bits of processing to be done on the UI thread

AsyncTask, Generics, and Varargs

Creating a subclass of AsyncTask is not quite as easy as, say, implementing the Runnable interface. AsyncTask uses generics, and so you need to specify three data types:

- The type of information that is needed to process the task (e.g., URLs to download)
- The type of information that is passed within the task to indicate progress
- The type of information that is passed when the task is completed to the post-task code

What makes this all the more confusing is that the first two data types are actually used as varargs, meaning that an array of these types is used within your AsyncTask subclass.

This should become clearer as we work our way toward an example.

The Stages of AsyncTask

There are four methods you can override in AsyncTask to accomplish your ends.

The one you must override, for the task class to be useful, is doInBackground(). This will be called by AsyncTask on a background thread. It can run as long as is necessary to

accomplish whatever work needs to be done for this specific task. Note, though, that tasks are meant to be finite; using `AsyncTask` for an infinite loop is not recommended.

The `doInBackground()` method will receive, as parameters, a varargs array of the first of the three data types listed in the preceding section—the data needed to process the task. So, if your task's mission is to download a collection of URLs, `doInBackground()` will receive those URLs to process. The `doInBackground()` method must return a value of the third data type listed in the preceding section—the result of the background work.

You may wish to override `onPreExecute()`. This method is called, from the UI thread, before the background thread executes `doInBackground()`. Here, you might initialize a `ProgressBar` or otherwise indicate that background work is commencing.

Also, you may wish to override `onPostExecute()`. This method is called, from the UI thread, after `doInBackground()` completes. It receives, as a parameter, the value returned by `doInBackground()` (e.g., success or failure flag). Here, you might dismiss the `ProgressBar` and make use of the work done in the background, such as updating the contents of a list.

In addition, you may wish to override `onProgressUpdate()`. If `doInBackground()` calls the task's `publishProgress()` method, the object(s) passed to that method are provided to `onProgressUpdate()`, but in the UI thread. That way, `onProgressUpdate()` can alert the user as to the progress that has been made on the background work, such as updating a `ProgressBar` or continuing an animation. The `onProgressUpdate()` method will receive a varargs of the second data type from the preceding list—the data published by `doInBackground()` via `publishProgress()`.

A Sample Task

As mentioned earlier, implementing an `AsyncTask` is not quite as easy as implementing a `Runnable`. However, once you get past the generics and varargs, it is not too bad.

For example, the following is an implementation of a `ListActivity` that uses an `AsyncTask`, from the `Threads/Asyncer` sample project:

```
package com.commonsware.android.async;

import android.app.ListActivity;
import android.os.AsyncTask;
import android.os.Bundle;
import android.os.SystemClock;
import android.widget.ArrayAdapter;
import android.widget.Toast;
import java.util.ArrayList;

public class AsyncDemo extends ListActivity {
    private static final String[] items={"lorem", "ipsum", "dolor",
        "sit", "amet", "consectetuer",
        "adipiscing", "elit", "morbi",
        "vel", "ligula", "vitae",
        "arcu", "aliquet", "mollis",
        "etiam", "vel", "erat",
```

```
        "placerat", "ante",
        "porttitor", "sodales",
        "pellentesque", "augue",
        "purus"};
```

```
@Override
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.main);

    setListAdapter(new ArrayAdapter<String>(this,
        android.R.layout.simple_list_item_1,
        new ArrayList()));

    new AddStringTask().execute();
}

class AddStringTask extends AsyncTask<Void, String, Void> {
    @Override
    protected Void doInBackground(Void... unused) {
        for (String item : items) {
            publishProgress(item);
            SystemClock.sleep(200);
        }
        return(null);
    }

    @Override
    protected void onProgressUpdate(String... item) {
        ((ArrayAdapter)getListAdapter()).add(item[0]);
    }

    @Override
    protected void onPostExecute(Void unused) {
        Toast
            .makeText(AsyncDemo.this, "Done!", Toast.LENGTH_SHORT)
            .show();
    }
}
```

This is another variation on the *lorem ipsum* list of words, used frequently throughout this book. This time, rather than simply hand the list of words to an `ArrayAdapter`, we simulate having to work to create these words in the background using `AddStringTask`, our `AsyncTask` implementation.

Let's examine this project's code piece by piece.

The `AddStringTask` Declaration

The `AddStringTask` declaration is as follows:

```
class AddStringTask extends AsyncTask<Void, String, Void> {
```

Here, we use the generics to set up the specific types of data we are going to leverage in AddStringTask:

- We do not need any configuration information in this case, so our first type is Void.
- We want to pass each string generated by our background task to `onProgressUpdate()`, to allow us to add it to our list, so our second type is String.
- We do not have any results, strictly speaking (beyond the updates), so our third type is Void.

The `doInBackground()` Method

The `doInBackground()` method is next in the code:

```
@Override  
protected Void doInBackground(Void... unused) {  
    for (String item : items) {  
        publishProgress(item);  
        SystemClock.sleep(200);  
    }  
  
    return(null);  
}
```

The `doInBackground()` method is invoked in a background thread. Hence, we can take as long as we like. In a production application, we might be doing something like iterating over a list of URLs and downloading each. Here, we iterate over our static list of *lorem ipsum* words, call `publishProgress()` for each, and then sleep 200 milliseconds to simulate real work being done.

Since we elected to have no configuration information, we should not need parameters to `doInBackground()`. However, the contract with `AsyncTask` says we must accept a varargs of the first data type, which is why our method parameter is `Void... unused`.

Since we elected to have no results, we should not need to return anything. Again, though, the contract with `AsyncTask` says we must return an object of the third data type. Since that data type is `Void`, our returned object is `null`.

The `onProgressUpdate()` Method

Next up is the `onProgressUpdate()` method:

```
@Override  
protected void onProgressUpdate(String... item) {  
    ((ArrayAdapter)getListAdapter()).add(item[0]);  
}
```

The `onProgressUpdate()` method is called on the UI thread, and we want to do something to let the user know we are making progress on loading these strings. In this

case, we simply add the string to the ArrayAdapter, so it is appended to the end of the list.

The `onProgressUpdate()` method receives a `String...` varargs because that is the second data type in our class declaration. Since we are passing only one string per call to `publishProgress()`, we need to examine only the first entry in the varargs array.

The `onPostExecute()` Method

The next method is `onPostExecute()`:

```
@Override  
protected void onPostExecute(Void unused) {  
    Toast  
        .makeText(AsyncDemo.this, "Done!", Toast.LENGTH_SHORT)  
        .show();  
}
```

The `onPostExecute()` method is called on the UI thread, and we want to do something to indicate that the background work is complete. In a real system, there may be some `ProgressBar` to dismiss or some animation to stop. Here, we simply raise a `Toast`.

Since we elected to have no results, we should not need any parameters. The contract with `AsyncTask` says we must accept a single value of the third data type. Since that data type is `Void`, our method parameter is `Void unused`.

The Activity

The activity is as follows:

```
new AddStringTask().execute();
```

To use `AddStringTask`, we simply create an instance and call `execute()` on it. That starts the chain of events eventually leading to the background thread doing its work.

If `AddStringTask` required configuration parameters, we would have not used `Void` as our first data type, and the constructor would accept zero or more parameters of the defined type. Those values would eventually be passed to `doInBackground()`.

The Results

If you build, install, and run this project, you will see the list being populated in real time over a few seconds, followed by a `Toast` indicating completion, as shown in Figure 20–2.

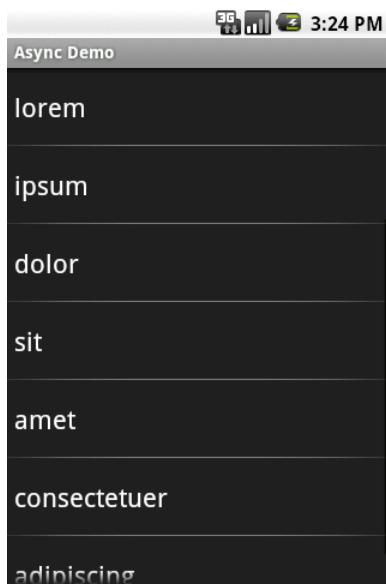


Figure 20–2. The *AsyncDemo*, partway through loading the list of words

Threads and Rotation

One problem with the default destroy-and-create cycle that activities go through on an orientation change comes from background threads. If the activity has started some background work—through an `AsyncTask`, for example—and then the activity is destroyed and re-created, the `AsyncTask` needs to know about this somehow. Otherwise, the `AsyncTask` might well send updates and final results to the *old* activity, with the new activity none the wiser. In fact, the new activity might start the background work *again*, wasting resources.

One way to deal with this is to disable the destroy-and-create cycle, by taking over configuration changes, as described in a previous section. Another alternative is to have a smarter activity and `AsyncTask`. You can see an example of that in the `Rotation/RotationAsync` sample project. As shown next, this project uses a `ProgressBar`, much like the `Handler` demo from earlier in this chapter. It also has a `TextView` to indicate when the background work is completed, initially invisible.

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <ProgressBar android:id="@+id/progress"
        style="?android:attr/progressBarStyleHorizontal"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
    />
```

```
<TextView android:id="@+id/completed"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:text="Work completed!"
    android:visibility="invisible"
/>
</LinearLayout>
```

The “business logic” is for an `AsyncTask` to do some (fake) work in the background, updating the `ProgressBar` along the way, and making the `TextView` visible when it is finished. More importantly, it needs to do this in such a way as to behave properly if the screen is rotated. This means the following:

- We cannot “lose” our `AsyncTask`, having it continue doing work and updating the wrong activity.
- We cannot start a second `AsyncTask`, thereby doubling our workload.
- We need to have the UI correctly reflect our work’s progress or completion.

Manual Activity Association

Earlier, this chapter showed the use of an `AsyncTask` that was implemented as a regular inner class of the `Activity` class. That works well when you are not concerned about rotation. For example, if the `AsyncTask` is not affecting the UI—such as uploading a photo—rotation will not be an issue for you. Having the `AsyncTask` as an inner class of the `Activity` means you get ready access to the `Activity` for any place where you need a `Context`.

However, for the rotation scenario, a regular inner class will work poorly. The `AsyncTask` will think it knows which `Activity` it is supposed to work with, but in reality it will be holding onto an implicit reference to the old activity, not one after an orientation change.

So, in `RotationAsync`, the `RotationAwareTask` class is a static inner class. This means `RotationAwareTask` does not have any implicit reference to any `RotationAsync` `Activity` (old or new):

```
import android.app.Activity;
import android.os.AsyncTask;
import android.os.Bundle;
import android.os.SystemClock;
import android.util.Log;
import android.view.View;
import android.widget.ProgressBar;

public class RotationAsync extends Activity {
    private ProgressBar bar=null;
    private RotationAwareTask task=null;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);
```

```
bar=(ProgressBar)findViewById(R.id.progress);

task=(RotationAwareTask)getLastNonConfigurationInstance();

if (task==null) {
    task=new RotationAwareTask(this);
    task.execute();
}
else {
    task.attach(this);
    updateProgress(task.getProgress());

    if (task.getProgress()>=100) {
        markAsDone();
    }
}

@Override
public Object onRetainNonConfigurationInstance() {
    task.detach();

    return(task);
}

void updateProgress(int progress) {
    bar.setProgress(progress);
}

void markAsDone() {
    findViewById(R.id.completed).setVisibility(View.VISIBLE);
}

static class RotationAwareTask extends AsyncTask<Void, Void, Void> {
    RotationAsync activity=null;
    int progress=0;

    RotationAwareTask(RotationAsync activity) {
        attach(activity);
    }

    @Override
    protected Void doInBackground(Void... unused) {
        for (int i=0;i<20;i++) {
            SystemClock.sleep(500);
            publishProgress();
        }

        return(null);
    }

    @Override
    protected void onProgressUpdate(Void... unused) {
        if (activity==null) {
            Log.w("RotationAsync", "onProgressUpdate() skipped - no activity");
        }
    }
}
```

```
        }
    else {
        progress+=5;
        activity.updateProgress(progress);
    }
}

@Override
protected void onPostExecute(Void unused) {
    if (activity==null) {
        Log.w("RotationAsync", "onPostExecute() skipped - no activity");
    }
    else {
        activity.markAsDone();
    }
}

void detach() {
    activity=null;
}

void attach(RotationAsync activity) {
    this.activity=activity;
}

int getProgress() {
    return(progress);
}
}
```

Since we want `RotationAwareTask` to update the current `RotationAsync` Activity, we supply that Activity when we create the task, via the constructor. `RotationAwareTask` also has `attach()` and `detach()` methods to change which Activity the task knows about, as we will see shortly.

Flow of Events

When `RotationAsync` starts up for the first time, it creates a new instance of the `RotationAwareTask` class and executes it. At this point, the task has a reference to the `RotationAsync` Activity and can do its (fake) work, telling `RotationAsync` to update the progress along the way.

Now, suppose that during the middle of the `doInBackground()` processing, the user rotates the screen. Our Activity will be called with `onRetainNonConfigurationInstance()`. Here, we want to do two things:

- Since this Activity instance is being destroyed, we need to make sure the task no longer holds onto a reference to it. Hence, we call `detach()`, causing the task to set its `RotationAsync` data member (`activity`) to null.
- We return the `RotationAwareTask` object, so that our new `RotationAsync` instance can get access to it.

Eventually, the new `RotationAsync` instance will be created. In `onCreate()`, we try to get access to any current `RotationAwareTask` instance via `getLastNonConfigurationInstance()`. If that was null, then we know that this is a newly created activity, and so we create a new task. If, however, `getLastNonConfigurationInstance()` returned the task object from the old `RotationAsync` instance, we hold onto it and update our UI to reflect the current progress that has been made. We also attach() the new `RotationAsync` to the `RotationAwareTask`, so as further progress is made, the task can notify the proper activity.

The net result is that our `ProgressBar` smoothly progresses from 0 to 100, even while rotations are going on.

Why This Works

Most callback methods in Android are driven by messages on the message queue being processed by the main application thread. Normally, this queue is being processed whenever the main application thread is not otherwise busy, such as running our code. However, when a configuration change occurs, like a screen rotation, that no longer holds true. In between the call to the `onRetainNonConfigurationInstance()` instance of the old activity and the completion of `onCreate()` of the new activity, the message queue is left alone.

So, let's suppose that, in between `onRetainNonConfigurationInstance()` activity and the subsequent `onCreate()`, our `AsyncTask`'s background work completes. This will trigger `onPostExecute()` to be called...eventually. However, since `onPostExecute()` is actually launched from a message on the message queue, `onPostExecute()` will not be called until after our `onCreate()` has completed. Hence, our `AsyncTask` can keep running during the configuration change, as long as we do two things:

- In `onCreate()` of the new activity instance, we update the `AsyncTask` to have it work with our new activity, rather than the old one.
- We do not attempt to use the activity from `doInBackground()`.

And Now, the Caveats

Background threads, while eminently possible using the Android Handler system, are not all happiness and warm puppies. Background threads not only add complexity, but also have real-world costs in terms of available memory, CPU, and battery life. Hence, you need to account for a wide range of scenarios with your background thread, including the following:

- The possibility that users will interact with your activity's UI while the background thread is chugging along. If the work that the background thread is doing is altered or invalidated by the user input, you will need to communicate this to the background thread. Android includes many classes in the `java.util.concurrent` package that will help you communicate safely with your background thread.
- The possibility that the activity will be killed off while background work is going on. For example, after starting your activity, the user might have a call come in, followed by a text message, followed by a need to look up a contact—all of which might be sufficient to kick your activity out of memory. Chapter 18 covers the various events Android will take your activity through; hook to the proper ones, and be sure to shut down your background thread cleanly when you have the chance.
- The possibility that users will get irritated if you chew up a lot of CPU time and battery life without giving any payback. Tactically, this means using `ProgressBar` or other means of letting users know that something is happening. Strategically, this means you still need to be efficient at what you do—background threads are no panacea for sluggish or pointless code.
- The possibility that you will encounter an error during background processing. For example, if you are gathering information from the Internet, the device might lose connectivity. Alerting the user of the problem via a notification (covered in Chapter 37) and shutting down the background thread may be your best option.

Creating Intent Filters

Up to now, the focus of this book has been on activities opened directly by the user from the device's launcher. This is the most obvious case for getting your activity up and visible to the user. And, in many cases, it is the primary way the user will start using your application.

However, remember that the Android system is based on many loosely coupled components. The things that you might accomplish in a desktop GUI via dialog boxes, child windows, and the like are mostly supposed to be independent activities. While one activity will be "special," in that it shows up in the launcher, the other activities all need to be reached...somehow.

The "somehow" is via intents.

An intent is basically a message that you pass to Android saying, "Yo! I want to do...er...something! Yeah!" How specific the "something" is depends on the situation—sometimes you know exactly what you want to do (e.g., open one of your other activities), and sometimes you do not.

In the abstract, Android is all about intents and receivers of those intents. So, now that you are well-versed in creating activities, let's dive into intents, so we can create more complex applications while simultaneously being "good Android citizens."

What's Your Intent?

When Sir Tim Berners-Lee cooked up the Hypertext Transfer Protocol (HTTP), he set up a system of verbs plus addresses in the form of URLs. The address indicates a resource, such as a web page, graphic, or server-side program. The verb indicates what should be done: GET to retrieve it, POST to send form data to it for processing, and so on.

Intents are similar, in that they represent an action plus context. There are more actions and more components to the context with Android intents than there are with HTTP verbs and resources, but the concept is still the same. Just as a web browser knows how to process a verb+URL pair, Android knows how to find activities or other application logic that will handle a given intent.

Pieces of Intents

The two most important pieces of an intent are the action and what Android refers to as the *data*. These are almost exactly analogous to HTTP verbs and URLs: the action is the verb, and the data is a Uri, such as `content://contacts/people/1`, representing a contact in the contacts database. Actions are constants, such as `ACTION_VIEW` (to bring up a viewer for the resource), `ACTION_EDIT` (to edit the resource), or `ACTION_PICK` (to choose an available item given a Uri representing a collection, such as `content://contacts/people`).

If you were to create an intent combining `ACTION_VIEW` with a content Uri of `content://contacts/people/1`, and pass that intent to Android, Android would know to find and open an activity capable of viewing that resource.

There are other criteria you can place inside an intent (represented as an `Intent` object), besides the action and data Uri, such as the following:

- *Category*: Your “main” activity will be in the `LAUNCHER` category, indicating it should appear on the launcher menu. Other activities will probably be in the `DEFAULT` or `ALTERNATIVE` categories.
- *MIME type*: This indicates the type of resource you want to operate on, if you do not know a collection Uri.
- *Component*: This is the class of the activity that is supposed to receive this intent. Using components this way obviates the need for the other properties of the intent. However, it does make the intent more fragile, as it assumes specific implementations.
- *Extras*: A `Bundle` of other information you want to pass along to the receiver with the intent, that the receiver might want to take advantage of. Which pieces of information a given receiver can use is up to the receiver and (hopefully) is well-documented.

You will find rosters of the standard actions and categories in the Android SDK documentation for the `Intent` class.

Intent Routing

As noted in the previous section, if you specify the target component in your intent, Android has no doubt where the intent is supposed to be routed to, and it will launch the named activity. This might be fine if the target intent is in your application. It definitely is not recommended for sending intents to other applications. Component names, by and large, are considered private to the application and are subject to change. Content Uri templates and MIME types are the preferred ways of identifying services you wish third-party code to supply.

If you do not specify the target component, then Android has to figure out which activities (or other receivers) are eligible to receive the intent. Note the use of the plural

activities, as a broadly written intent might well resolve to several activities. That is the...ummm...intent (pardon the pun), as you will see later in this chapter. This routing approach is referred to as *implicit routing*.

Basically, there are three rules, all of which must be true for a given activity to be eligible for a given intent:

- The activity must support the specified action.
- The activity must support the stated MIME type (if supplied).
- The activity must support all of the categories named in the intent.

The upshot is that you want to make your intents specific enough to find the right receiver(s), and no more specific than that. This will become clearer as we work through some examples later in this chapter.

Stating Your Intent(ions)

All Android components that wish to be notified via intents must declare intent filters, so Android knows which intents should go to that component. To do this, you need to add intent-filter elements to your `AndroidManifest.xml` file.

All of the example projects have intent filters defined, courtesy of the Android application-building script (`android create project` or the IDE equivalent). They look something like this:

```
<?xml version="1.0"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.skeleton">
    <application>
        <activity android:name=".Now" android:label="Now">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
    </application>
</manifest>
```

Note the `intent-filter` element under the `activity` element. Here, we declare that this activity:

- Is the main activity for this application
- Is in the LAUNCHER category, meaning it gets an icon in the Android main menu

Because this activity is the main one for the application, Android knows this is the component it should launch when somebody chooses the application from the main menu.

You are welcome to have more than one action or more than one category in your intent filters. That indicates that the associated component (e.g., activity) handles multiple different sorts of intents.

More than likely, you will also want to have your secondary (non-MAIN) activities specify the MIME type of data they work on. Then, if an intent is targeted for that MIME type—either directly, or indirectly by the Uri referencing something of that type—Android will know that the component handles such data.

For example, you could have an activity declared like this:

```
<activity android:name=".TourViewActivity">
    <intent-filter>
        <action android:name="android.intent.action.VIEW" />
        <category android:name="android.intent.category.DEFAULT" />
        <data android:mimeType="vnd.android.cursor.item/vnd.commonware.tour" />
    </intent-filter>
</activity>
```

This activity will be launched by an intent requesting to view a Uri representing a vnd.android.cursor.item/vnd.commonware.tour piece of content. That Intent could come from another activity in the same application (e.g., the MAIN activity for this application) or from another activity in another Android application that happens to know a Uri that this activity handles.

Narrow Receivers

In the preceding examples, the intent filters were set up on activities. Sometimes, tying intents to activities is not exactly what you want, as in the following cases:

- Some system events might cause you to want to trigger something in a service rather than an activity.
- Some events might need to launch different activities in different circumstances, where the criteria are not solely based on the intent itself, but some other state (e.g., if we get intent X and the database has a Y, then launch activity M; if the database does not have a Y, then launch activity N).

For these cases, Android offers the receiver, defined as a class implementing the BroadcastReceiver interface. Broadcast receivers are disposable objects designed to receive intents—specifically, broadcast intents—and take action.

The BroadcastReceiver interface has only one method: `onReceive()`. Receivers implement that method, where they do whatever it is they wish to do upon an incoming intent. To declare a receiver, add a `receiver` element to your `AndroidManifest.xml` file:

```
<receiver android:name=".MyIntentReceiverClassName" />
```

A receiver is alive for only as long as it takes to process `onReceive()`—as soon as that method returns, the receiver instance is subject to garbage collection and will not be reused. This means receivers are somewhat limited in what they can do, mostly to avoid

anything that involves any sort of callback. For example, they cannot bind to a service, and they cannot open a dialog box.

The exception is if the `BroadcastReceiver` is implemented on some longer-lived component, such as an activity or service. In that case, the receiver lives as long as its “host” does (e.g., until the activity is frozen). However, in this case, you cannot declare the receiver via `AndroidManifest.xml`. Instead, you need to call `registerReceiver()` on your Activity’s `onResume()` callback to declare interest in an intent, and then call `unregisterReceiver()` from your Activity’s `onPause()` when you no longer need those intents.

The Pause Caveat

There is one hiccup with using Intent objects to pass arbitrary messages around: it works only when the receiver is active. To quote from the documentation for `BroadcastReceiver`:

If registering a receiver in your Activity.onResume() implementation, you should unregister it in Activity.onPause(). (You will not receive intents when paused, and this will cut down on unnecessary system overhead). Do not unregister in Activity.onSaveInstanceState(), because this will not be called if the user moves back in the history stack.

Hence, you can use the Intent framework as an arbitrary message bus only in the following situations:

- Your receiver does not care if it misses messages because it was not active.
- You provide some means of getting the receiver “caught up” on messages it missed while it was inactive.
- Your receiver is registered in the manifest.

Launching Activities and Subactivities

The theory behind the Android UI architecture is that developers should decompose their application into distinct activities. For example, a calendar application could have activities for viewing the calendar, viewing a single event, editing an event (including adding a new one), and so forth. This implies that one of your activities has the means to start up another activity. For example, if a user selects an event from the view-calendar activity, you might want to show the view-event activity for that event. This means that you need to be able to cause the view-event activity to launch and show a specific event (the one the user chose).

This can be further broken down into two scenarios:

- You know what activity you want to launch, probably because it is another activity in your own application.
- You have a content Uri to do something, and you want your users to be able to do something with it, but you do not know up front what the options are.

This chapter covers the first scenario; the second is beyond the scope of this book.

Peers and Subs

One key question you need to answer when you decide to launch an activity is this: does your activity need to know when the launched activity ends?

For example, suppose you want to spawn an activity to collect authentication information for some web service you are connecting to—maybe you need to authenticate with OpenID in order to use an OAuth service. In this case, your main activity will need to know when the authentication is complete so it can start to use the web service.

On the other hand, imagine an e-mail application in Android. When the user elects to view an attachment, neither you nor the user necessarily expects the main activity to know when the user is done viewing that attachment.

In the first scenario, the launched activity is clearly subordinate to the launching activity. In that case, you probably want to launch the child as a subactivity, which means your activity will be notified when the child activity is complete.

In the second scenario, the launched activity is more a peer of your activity, so you probably want to launch the child just as a regular activity. Your activity will not be informed when the child is done, but, then again, your activity really does not need to know.

Start 'Em Up

The two pieces for starting an activity are an intent and your choice of how to start it up.

Make an Intent

As discussed in the previous chapter, intents encapsulate a request, made to Android, for some activity or other receiver to do something. If the activity you intend to launch is one of your own, you may find it simplest to create an explicit intent, naming the component you wish to launch. For example, from within your activity, you could create an intent like this:

```
new Intent(this, HelpActivity.class);
```

This stipulates that you want to launch the HelpActivity. This activity would need to be named in your `AndroidManifest.xml` file, though not necessarily with any intent filter, since you are trying to request it directly.

Or, you could put together an intent for some Uri, requesting a particular action:

```
Uri uri=Uri.parse("geo:"+lat.toString()+","+lon.toString());
Intent i=new Intent(Intent.ACTION_VIEW, uri);
```

Here, given that you have the latitude and longitude of some position (`lat` and `lon`, respectively) of type `Double`, you construct a geo scheme Uri and create an intent requesting to view this Uri (`ACTION_VIEW`).

Make the Call

Once you have your intent, you need to pass it to Android and get the child activity to launch. You have two choices:

- The simplest option is to call `startActivity()` with the Intent. This will cause Android to find the best-match activity and pass the intent to it for handling. Your activity will not be informed when the child activity is complete.

- You can call `startActivityForResult()`, passing it the Intent and a number (unique to the calling activity). Android will find the best-match activity and pass the intent to it for handling. Your activity will be notified when the child activity is complete, via the `onActivityResult()` callback.

With `startActivityForResult()`, as noted, you can implement the `onActivityResult()` callback to be notified when the child activity has completed its work. The callback receives the unique number supplied to `startActivityForResult()`, so you can determine which child activity is the one that has completed. You also get the following:

- A result code, from the child activity calling `setResult()`. Typically, this is `RESULT_OK` or `RESULT_CANCELED`, though you can create your own return codes (pick a number starting with `RESULT_FIRST_USER`).
- An optional String containing some result data, possibly a URL to some internal or external resource. For example, a `ACTION_PICK` intent typically returns the selected bit of content via this data string.
- An optional Bundle containing additional information beyond the result code and data string.

To demonstrate launching a peer activity, take a peek at the Activities/Launch sample application. The XML layout is fairly straightforward: two fields for the latitude and longitude, plus a button.

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <TableLayout
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:stretchColumns="1,2"
        >
        <TableRow>
            <TextView
                android:layout_width="wrap_content"
                android:layout_height="wrap_content"
                android:paddingLeft="2dip"
                android:paddingRight="4dip"
                android:text="Location:"
                />
            <EditText android:id="@+id/lat"
                android:layout_width="fill_parent"
                android:layout_height="wrap_content"
                android:cursorVisible="true"
                android:editable="true"
                android:singleLine="true"
                android:layout_weight="1"
                />
            <EditText android:id="@+id/lon"
                android:layout_width="fill_parent"
                android:layout_height="wrap_content"
                android:cursorVisible="true"
                android:editable="true"
                android:singleLine="true"
                android:layout_weight="1"
                />
        </TableRow>
    </TableLayout>
</LinearLayout>
```

```
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:cursorVisible="true"
        android:editable="true"
        android:singleLine="true"
        android:layout_weight="1"
    />
</TableRow>
</TableLayout>
<Button android:id="@+id/map"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:text="Show Me!"
    android:onClick="showMe"
/>
</LinearLayout>
```

The button's `showMe()` callback method simply takes the latitude and longitude, pours them into a geo scheme Uri, and then starts the activity:

```
package com.commonsware.android.activities;

import android.app.Activity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.view.View;
import android.widget.EditText;

public class LaunchDemo extends Activity {
    private EditText lat;
    private EditText lon;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        lat=(EditText)findViewById(R.id.lat);
        lon=(EditText)findViewById(R.id.lon);
    }

    public void showMe(View v) {
        String _lat=lat.getText().toString();
        String _lon=lon.getText().toString();
        Uri uri=Uri.parse("geo:"+_lat+","+_lon);

        startActivityForResult(new Intent(Intent.ACTION_VIEW, uri));
    }
}
```

The activity is not much to look at, as shown in Figure 22–1.

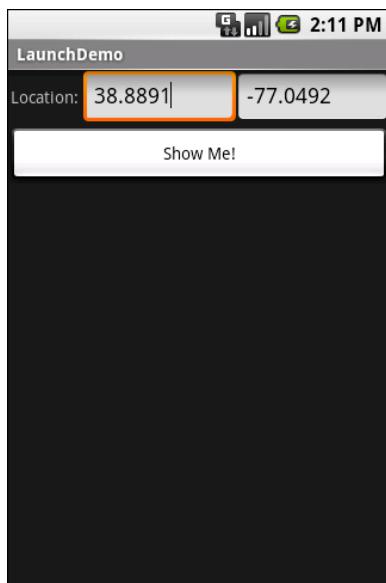


Figure 22–1. The *LaunchDemo* sample application, with a location filled in

If you fill in a location (e.g., 38.8891 latitude and -77.0492 longitude) and click the button, the resulting map is more interesting, as shown in Figure 22–2. Note that this is the built-in Android map activity—we did not create our own activity to display this map.

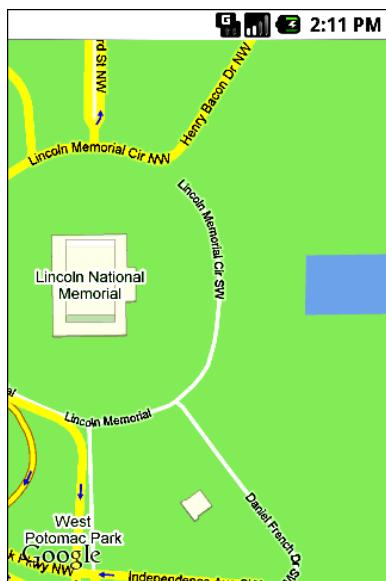


Figure 22–2. The map launched by *LaunchDemo*, showing the Lincoln Memorial in Washington DC

In Chapter 40, you will see how you can create maps in your own activities, in case you need greater control over how the map is displayed.

NOTE: This geo: Intent will work only on devices or emulators that have Google Maps installed, or on devices that have some other mapping application that supports the geo: URL.

Tabbed Browsing, Sort Of

One of the main features of the modern desktop web browser is tabbed browsing, where a single browser window can show several pages split across a series of tabs. On a mobile device, this may not make a lot of sense, given that you lose screen real estate for the tabs themselves. In this book, however, we do not let little things like sensibility stop us, so this section demonstrates a tabbed browser, using TabActivity and Intent objects.

As you may recall from the Chapter 14 section “Putting It on My Tab,” a tab can have either a View or an Activity as its content. If you want to use an Activity as the content of a tab, you provide an Intent that will launch the desired Activity; Android’s tab-management framework will then pour the Activity’s UI into the tab.

Your natural instinct might be to use an http: Uri the way we used a geo: Uri in the previous example:

```
Intent i=new Intent(Intent.ACTION_VIEW);
i.setData(Uri.parse("http://commonsware.com"));
```

That way, you could use the built-in browser application and get all the features that it offers. Alas, this does not work. You cannot host other applications’ activities in your tabs; only your own activities are allowed, for security reasons. So, we dust off our WebView demos from Chapter 15 and use those instead, repackaged as Activities/IntentTab.

Here is the source to the main activity, the one hosting the TabView:

```
package com.commonsware.android.intenttab;

import android.app.Activity;
import android.app.TabActivity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.webkit.WebView;
import android.widget.TabHost;

public class IntentTabDemo extends TabActivity {
    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        TabHost host=getTabHost();
        Intent i=new Intent(this, CWebBrowser.class);

        i.putExtra(CWebBrowser.URL, "http://commonsware.com");
```

```
host.addTab(host.newTabSpec("one")
    .setIndicator("CW")
    .setContent(i));

i=new Intent(i);
i.putExtra(CWBrowser.URL, "http://www.android.com");
host.addTab(host.newTabSpec("two")
    .setIndicator("Android")
    .setContent(i));
}
}
```

As you can see, we are using TabActivity as the base class, and so we do not need our own layout XML—TabActivity supplies it for us. All we do is get access to the TabHost and add two tabs, each specifying an Intent that directly refers to another class. In this case, our two tabs will each host a CWBrowser, with a URL to load supplied via an Intent extra.

The CWBrowser activity is a simple modification to the earlier browser demos:

```
package com.commonsware.android.intenttab;

import android.app.Activity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.webkit.WebView;

public class CWBrowser extends Activity {
    public static final String URL="com.commonsware.android.intenttab.URL";
    private WebView browser;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);

        browser=new WebView(this);
        setContentView(browser);
        browser.loadUrl(getIntent().getStringExtra(URL));
    }
}
```

They simply load a different URL into the browser: the CommonsWare home page in one, the Android home page in the other.

The resulting UI shows what tabbed browsing could look like on Android, as shown in Figures 22–3 and 22–4.

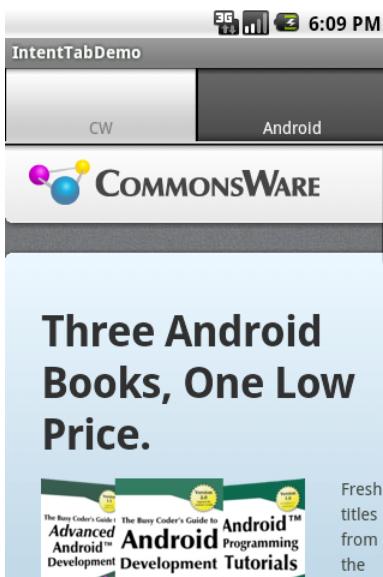


Figure 22–3. The IntentTabDemo sample application, showing the first tab



Figure 22–4. The IntentTabDemo sample application, showing the second tab

However, this approach is rather wasteful. There is a fair bit of overhead in creating an activity that you do not need just to populate tabs in a TabHost. In particular, it increases the amount of stack space needed by your application, and running out of stack space is a significant problem in Android, as will be described in a later chapter.

Working with Resources

Resources are static bits of information held outside the Java source code. You have seen one type of resource—the layout—frequently in the examples in this book. There are many other types of resources, such as images and strings, that you can take advantage of in your Android applications.

The Resource Lineup

Resources are stored as files under the `res/` directory in your Android project layout. With the exception of raw resources (`res/raw/`), all the other types of resources are parsed for you, either by the Android packaging system or by the Android system on the device or emulator. So, for example, when you lay out an activity's UI via a layout resource (`res/layout/`), you do not have to parse the layout XML yourself because Android handles that for you.

In addition to layout resources (introduced in Chapter 8), there are several other types of resource available to you, including the following:

- Images (`res/drawable/`), for putting static icons or other pictures in a user interface
- Raw (`res/raw/`), for arbitrary files that have meaning to your application but not necessarily to Android frameworks
- Strings, colors, arrays, and dimensions (`res/values/`), to both give these sorts of constants symbolic names and to keep them separate from the rest of the code (e.g., for internationalization and localization)
- XML (`res/xml/`), for static XML files containing your own data and structure

String Theory

Keeping your labels and other bits of text outside the main source code of your application is generally considered to be a very good idea. In particular, it helps with

internationalization and localization, covered in the “Different Strokes for Different Folks” section later in this chapter. Even if you are not going to translate your strings to other languages, it is easier to make corrections if all the strings are in one spot instead of scattered throughout your source code.

Android supports regular externalized strings, along with *string formats*, where the string has placeholders for dynamically inserted information. On top of that, Android supports simple text formatting, called *styled text*, so you can make your words be bold or italic intermingled with normal text.

Plain Strings

Generally speaking, all you need for plain strings is an XML file in the `res/values` directory (typically named `res/values/strings.xml`), with a `resources` root element, and one child `string` element for each string you wish to encode as a resource. The `string` element takes a `name` attribute, which is the unique name for this string, and a single `text` element containing the text of the string, as shown in this example:

```
<resources>
    <string name="quick">The quick brown fox...</string>
    <string name="laughs">He who laughs last...</string>
</resources>
```

The only tricky part is if the string value contains a quote mark ("") or an apostrophe (''). In those cases, you will want to escape those values, by preceding them with a backslash (e.g., These are the times that try men's souls). Or, if it is just an apostrophe, you could enclose the value in quote marks (e.g., "These are the times that try men's souls.").

You can then reference this string from a layout file (as `@string/...`, where the ellipsis is the unique name, such as `@string/laughs`). Or you can get the string from your Java code by calling `getString()` with the resource ID of the string resource, which is the unique name prefixed with `R.string.` (e.g., `getString(R.string.quick)`).

String Formats

As with other implementations of the Java language, Android’s Dalvik virtual machine supports string formats. Here, the string contains placeholders representing data to be replaced at runtime by variable information (e.g., My name is %1\$s). Plain strings stored as resources can be used as string formats:

```
String strFormat=getString(R.string.my_name);
String strResult=String.format(strFormat, "Tim");
((TextView)findViewById(R.id.some_label)).setText(strResult);
```

There is also a flavor of `getString()` that does the `String.format()` call for you:

```
String strResult=getString(R.string.my_name, "Tim");
((TextView)findViewById(R.id.some_label)).setText(strResult);
```

It is very important that you use the version of the placeholders that takes an index—%1\$s instead of just %. Strategically, translations of your string resources may cause you to apply the variable data in a different order than did your original translation, and using nonindexed placeholders lock you into a particular order. Tactically, your project will fail to compile, as the Android build tools reject nonindexed placeholders nowadays.

Styled Text

If you want really rich text, you should have raw resources containing HTML, and then pour those into a WebKit widget. However, for light HTML formatting, using inline elements such as , <i>, and <u>, you can just use them in a string resource:

```
<resources>
    <string name="b">This has <b>bold</b> in it.</string>
    <string name="i">Whereas this has <i>italics</i>!</string>
</resources>
```

You can access these via `getText()`, which gives you back an object supporting the `android.text.Spanned` interface and therefore has all of the formatting applied:

```
((TextView)findViewById(R.id.another_label))
    .setText(getText(R.string.b));
```

Styled Text and Formats

Where styled text gets tricky is with styled string formats, as `String.format()` works on `String` objects, not `Spanned` objects with formatting instructions. If you really want to have styled string formats, here is the workaround:

1. Entity-escape the angle brackets in the string resource (e.g., this is %1\$s).
2. Retrieve the string resource as normal, though it will not be styled at this point (e.g., `getString(R.string.funky_format)`).
3. Generate the format results, being sure to escape any string values you substitute, in case they contain angle brackets or ampersands:

```
String.format(getString(R.string.funky_format),
    TextUtils.htmlEncode(strName));
```

4. Convert the entity-escaped HTML into a `Spanned` object via `Html.fromHtml()`:

```
someTextView.setText(Html
    .fromHtml(resultFromStringFormat));
```

To see this in action, let's look at the `Resources/Strings` demo. Here is the layout file:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
```

```
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
  >
<LinearLayout
    android:orientation="horizontal"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
  >
  <Button android:id="@+id/format"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="@string/btn_name"
    android:onClick="applyFormat"
  />
  <EditText android:id="@+id/name"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
  />
</LinearLayout>
<TextView android:id="@+id/result"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
  />
</LinearLayout>
```

As you can see, it is just a button, a field, and a label. The idea is for users to enter their name in the field, and then click the button to cause the label to be updated with a formatted message containing their name.

The Button in the layout file references a string resource (@string/btn_name), so we need a string resource file (`res/values/strings.xml`):

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
  <string name="app_name">StringsDemo</string>
  <string name="btn_name">Name:</string>
  <string name="funky_format">My name is &lt;b&gt;%1$s&lt;/b&gt;</string>
</resources>
```

The `app_name` resource is automatically created by the `android create project` command. The `btn_name` string is the caption of the Button, while our styled string format is in `funky_format`.

Finally, to hook all this together, we need a pinch of Java:

```
package com.commonsware.android.strings;

import android.app.Activity;
import android.os.Bundle;
import android.text.TextUtils;
import android.text.Html;
import android.view.View;
import android.widget.EditText;
import android.widget.TextView;

public class StringsDemo extends Activity {
  EditText name;
  TextView result;
```

```
@Override  
public void onCreate(Bundle icicle) {  
    super.onCreate(icicle);  
    setContentView(R.layout.main);  
  
    name=(EditText)findViewById(R.id.name);  
    result=(TextView)findViewById(R.id.result);  
}  
  
public void applyFormat(View v) {  
    String format=getString(R.string.funky_format);  
    String simpleResult=String.format(format,  
        TextUtils.htmlEncode(name.getText().toString()));  
    result.setText(Html.fromHtml(simpleResult));  
}
```

The string resource manipulation can be found in `applyFormat()`, which is called when the button is clicked. First, we get our format via `getString()`—something we could have done at `onCreate()` time for efficiency. Next, we format the value in the field using this format, getting a `String` back, since the string resource is in entity-encoded HTML. Note the use of `TextUtils.htmlEncode()` to entity-encode the entered name, in case somebody decides to use an ampersand or something. Finally, we convert the simple HTML into a styled text object via `Html.fromHtml()` and update our label.

When the activity is first launched, we have an empty label, as shown in Figure 23–1.

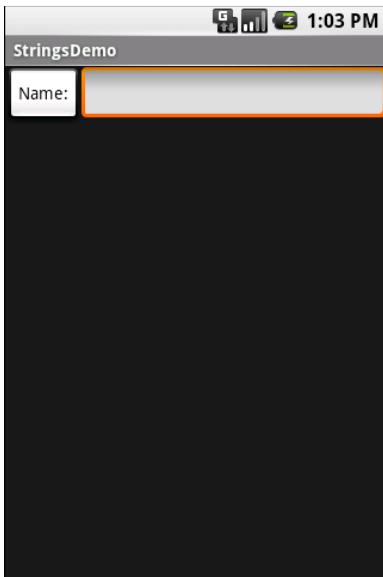


Figure 23–1. The *StringsDemo* sample application, as initially launched

If we fill in a name and click the button, we get the result shown in Figure 23–2.

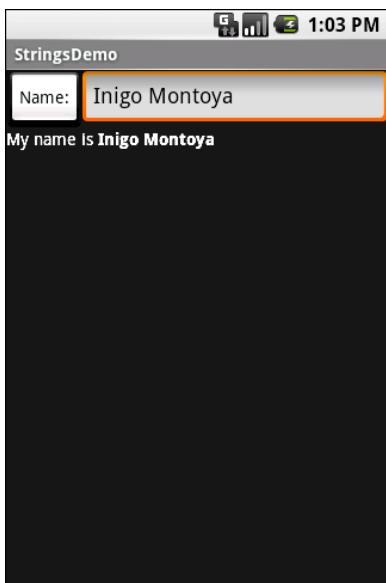


Figure 23–2. The same application, after filling in some heroic figure's name

Got the Picture?

Android supports images in the PNG, JPEG, and GIF formats. GIF is officially discouraged, however. PNG is the overall preferred format. Images can be used anywhere that you require a Drawable, such as the image and background of an ImageView.

Using images is simply a matter of putting your image files in `res/drawable/` and then referencing them as a resource. Within layout files, images are referenced as `@drawable/...`, where the ellipsis is the base name of the file (e.g., for `res/drawable/foo.png`, the resource name is `@drawable/foo`). In Java, where you need an image resource ID, use `R.drawable.` plus the base name (e.g., `R.drawable.foo`).

So, let's update the previous example to use an icon for the button instead of the string resource. This can be found as `Resources/Images`. We slightly adjust the layout file, using an ImageButton and referencing a drawable named `@drawable/icon`, which refers to an image file in `res/drawable` with a base name of `icon`. In this case, we use a 32-by-32 PNG file from the Nuvola icon set.

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <LinearLayout
        android:orientation="horizontal"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        >
```

```
>
<ImageButton android:id="@+id/format"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:src="@drawable/icon"
    android:onClick="applyFormat"
/>
<EditText android:id="@+id/name"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
/>
</LinearLayout>
<TextView android:id="@+id/result"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
/>
</LinearLayout>
```

Now, our button has the desired icon, as shown in Figure 23–3.

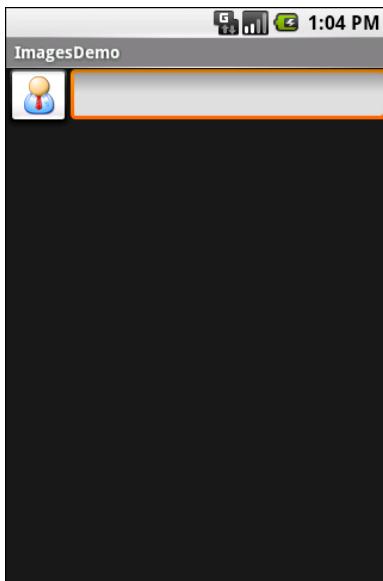


Figure 23–3. The *ImagesDemo* sample application

XML: The Resource Way

If you wish to package static XML with your application, you can use an XML resource. Simply put the XML file in `res/xml/`, and you can access it by `getXml()` on a `Resources` object, supplying it a resource ID of `R.xml.+` plus the base name of your XML file. For example, in an activity, with an XML file of `words.xml`, you could call `getResources().getXml(R.xml.words)`. This returns an instance of an `XmlPullParser`, found in the `org.xmlpull.v1` Java namespace.

An XML pull parser is event-driven: you keep calling `next()` on the parser to get the next event, which could be `START_TAG`, `END_TAG`, `END_DOCUMENT`, and so on. On a `START_TAG` event, you can access the tag's name and attributes; a single `TEXT` event represents the concatenation of all text nodes that are direct children of this element. By looping, testing, and invoking per-element logic, you parse the file.

To see this in action, let's rewrite the Java code for the `Files/Static` sample project to use an XML resource. This new project, `Resources/XML`, requires that you place the `words.xml` file from `Static` not in `res/raw/`, but in `res/xml/`. The layout stays the same, so all that needs to be replaced is the Java source:

```
package com.commonsware.android.resources;

import android.app.Activity;
import android.os.Bundle;
import android.app.ListActivity;
import android.view.View;
import android.widget.AdapterView;
import android.widget.ArrayAdapter;
import android.widget.ListView;
import android.widget.TextView;
import android.widget.Toast;
import java.io.InputStream;
import java.util.ArrayList;
import org.xmlpull.v1.XmlPullParser;
import org.xmlpull.v1.XmlPullParserException;

public class XMLResourceDemo extends ListActivity {
    TextView selection;
    ArrayList<String> items=new ArrayList<String>();

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        selection=(TextView)findViewById(R.id.selection);

        try {
            XmlPullParser xpp=getResources().getXml(R.xml.words);

            while (xpp.getEventType()!=XmlPullParser.END_DOCUMENT) {
                if (xpp.getEventType()==XmlPullParser.START_TAG) {
                    if (xpp.getName().equals("word")) {
                        items.add(xpp.getAttributeValue(0));
                    }
                }

                xpp.next();
            }
        } catch (Throwable t) {
            Toast
                .makeText(this, "Request failed: "+t.toString(), Toast.LENGTH_LONG)
                .show();
        }
    }
}
```

```
    setListAdapter(new ArrayAdapter<String>(this,
        android.R.layout.simple_list_item_1,
        items));
}

public void onListItemClick(ListView parent, View v, int position,
    long id) {
    selection.setText(items.get(position).toString());
}
}
```

Now, inside our try...catch block, we get our `XmlPullParser` and loop until the end of the document. If the current event is `START_TAG` and the name of the element is `word` (`xpp.getName().equals("word")`), then we get the one and only attribute and pop that into our list of items for the selection widget. Since we have complete control over the XML file, it is safe enough to assume there is exactly one attribute. In other cases, if you are not sure that the XML is properly defined, you might consider checking the attribute count (`getattributeCount()`) and the name of the attribute (`getAttributeName()`), instead of assuming the 0-index attribute is what you think it is.

The result looks the same as before, albeit with a different name in the title bar, as shown in Figure 23–4.

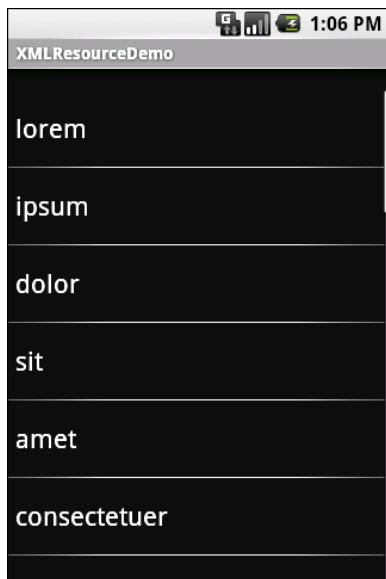


Figure 23–4. The `XMLResourceDemo` sample application

Miscellaneous Values

In the `res/values/` directory, in addition to string resources, you can place one or more XML files describing other simple resources, such as dimensions, colors, and arrays. You have already seen uses of dimensions and colors in previous examples, where they

were passed as simple strings (e.g., "10dip") as parameters to calls. You could set these up as Java static final objects and use their symbolic names, but that works only inside Java source, not in layout XML files. By putting these values in resource XML files, you can reference them from both Java and layouts, plus have them centrally located for easy editing.

Resource XML files have a root element of resources; everything else is a child of that root.

Dimensions

Dimensions are used in several places in Android to describe distances, such as a widget's padding. There are several different units of measurement available to you:

- in and mm for inches and millimeters, respectively. These are based on the actual size of the screen.
- pt for points. In publishing terms, a point is 1/72 inch (again, based on the actual physical size of the screen)
- dip and sp for device-independent pixels and scale-independent pixels, respectively. One pixel equals one dip for a 160-dpi resolution screen, with the ratio scaling based on the actual screen pixel density. Scale-independent pixels also take into account the user's preferred font size.

To encode a dimension as a resource, add a dimen element, with a name attribute for your unique name for this resource, and a single child text element representing the value:

```
<resources>
    <dimen name="thin">10px</dimen>
    <dimen name="fat">1in</dimen>
</resources>
```

In a layout, you can reference dimensions as @dimen/..., where the ellipsis is a placeholder for your unique name for the resource (e.g., thin and fat from the preceding sample). In Java, you reference dimension resources by the unique name prefixed with R.dimen. (e.g., Resources.getDimen(R.dimen.thin)).

Colors

Colors in Android are hexadecimal RGB values, with the option to also specify an alpha channel. You have your choice of single-character hex values or double-character hex values, providing four styles:

- #RGB
- #ARGB
- #RRGGBB
- #AARRGGBB

These work similarly to their counterparts in Cascading Style Sheets (CSS).

You can, of course, put these RGB values as string literals in Java source or layout resources. If you wish to turn them into resources, though, all you need to do is add `color` elements to the resource file, with a name attribute for your unique name for this color, and a single text element containing the RGB value itself:

```
<resources>
    <color name="yellow_orange">#FFD555</color>
    <color name="forest_green">#005500</color>
    <color name="burnt_umber">#8A3324</color>
</resources>
```

In a layout, you can reference colors as `@color/...`, replacing the ellipsis with your unique name for the color (e.g., `burnt_umber`). In Java, you reference color resources by the unique name prefixed with `R.color.` (e.g., `Resources.getColor(R.color.forest_green)`).

Arrays

Array resources are designed to hold lists of simple strings, such as a list of honorifics (Mr., Mrs., Ms., Dr., etc.).

In the resource file, you need one `string-array` element per array, with a `name` attribute for the unique name you are giving the array. Then, add one or more child `item` elements, each with a single text element containing the value for that entry in the array:

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
    <string-array name="cities">
        <item>Philadelphia</item>
        <item>Pittsburgh</item>
        <item>Allentown/Bethlehem</item>
        <item>Erie</item>
        <item>Reading</item>
        <item>Scranton</item>
        <item>Lancaster</item>
        <item>Altoona</item>
        <item>Harrisburg</item>
    </string-array>
    <string-array name="airport_codes">
        <item>PHL</item>
        <item>PIT</item>
        <item>ABE</item>
        <item>ERI</item>
        <item>RDG</item>
        <item>AVP</item>
        <item>LNS</item>
        <item>AOO</item>
        <item>MDT</item>
    </string-array>
</resources>
```

From your Java code, you can then use `Resources.getStringArray()` to get a `String[]` of the items in the list. The parameter to `getStringArray()` is your unique name for the array, prefixed with `R.array`. (e.g., `Resources.getStringArray(R.array.honorifics)`).

Different Strokes for Different Folks

One set of resources may not fit all situations where your application may be used. One obvious area comes with string resources and dealing with internationalization (I18N) and localization (L10N). Putting strings all in one language works fine—at least for the developer—but covers only one language.

That is not the only scenario where resources might need to differ, though. Here are others:

- *Screen orientation*: Is the screen in a portrait or landscape orientation? Or is the screen square and, therefore, without an orientation?
- *Screen size*: How many pixels does the screen have, so you can size your resources accordingly (e.g., large versus small icons)?
- *Touchscreen*: Does the device have a touchscreen? If so, is the touchscreen set up to be used with a stylus or a finger?
- *Keyboard*: Which keyboard does the user have (QWERTY, numeric, neither), either now or as an option?
- *Other input*: Does the device have some other form of input, like a D-pad or click-wheel?

The way Android currently handles this is by having multiple resource directories, with the criteria for each embedded in their names.

Suppose, for example, you want to support strings in both English and Spanish. Normally, for a single-language setup, you would put your strings in a file named `res/values/strings.xml`. To support both English and Spanish, you would create two folders, `res/values-en/` and `res/values-es/`, where the value after the hyphen is the ISO 639-1 two-letter code for the language. Your English strings would go in `res/values-en/strings.xml` and the Spanish ones would go in `res/values-es/strings.xml`. Android will choose the proper file based on the user's device settings.

An even better approach is for you to consider some language to be your default, and put those strings in `res/values/strings.xml`. Then, create other resource directories for your translations (e.g., `res/values-es/strings.xml` for Spanish). Android will try to match a specific language set of resources; failing that, it will fall back to the default of `res/values/strings.xml`.

Seems easy, right?

Where things start to get complicated is when you need to use multiple disparate criteria for your resources. For example, suppose you want to develop for the following devices:

- T-Mobile G1, which has a normal-size, medium-density screen and a hardware keyboard
- Samsung Galaxy Tab, which has a large-size, high-density screen and no hardware keyboard
- Motorola Charm, which has a small-size, medium-density screen and a hardware keyboard

You may want to have somewhat different layouts for these devices, to take advantage of different screen real estate and different input options. Specifically, you may want the following:

- Different layouts for each combination of size, orientation, and keyboard
- Different drawables for each density

Once you get into these sorts of situations, though, all sorts of rules come into play, such as the following:

- The configuration options (e.g., -en) have a particular order of precedence, and they must appear in the directory name in that order. The Android documentation outlines the specific order in which these options can appear. For the purposes of this example, screen size is more important than screen orientation, which is more important than screen density, which is more important than whether or not the device has a keyboard.
- There can be only one value of each configuration option category per directory.
- Options are case sensitive.

So, for the sample scenario, in theory, we would need the following directories, representing the possible combinations:

- res/layout-large-port-mdpi-qwerty
- res/layout-large-port-mdpi-nokeys
- res/layout-large-port-hdpi-qwerty
- res/layout-large-port-hdpi-nokeys
- res/layout-large-land-mdpi-qwerty
- res/layout-large-land-mdpi-nokeys
- res/layout-large-land-hdpi-qwerty
- res/layout-large-land-hdpi-nokeys
- res/layout-normal-port-mdpi-qwerty
- res/layout-normal-port-mdpi-nokeys

- res/layout-normal-port-finger-qwerty
- res/layout-normal-port-hdpi-nokeys
- res/layout-normal-land-mdpi-qwerty
- res/layout-normal-land-mdpi-nokeys
- res/layout-normal-land-hdpi-qwerty
- res/layout-normal-land-hdpi-nokeys
- res/drawable-large-port-mdpi-qwerty
- res/drawable-large-port-mdpi-nokeys
- res/drawable-large-port-hdpi-qwerty
- res/drawable-large-port-hdpi-nokeys
- res/drawable-large-land-mdpi-qwerty
- res/drawable-large-land-mdpi-nokeys
- res/drawable-large-land-hdpi-qwerty
- res/drawable-large-land-hdpi-nokeys
- res/drawable-normal-port-mdpi-qwerty
- res/drawable-normal-port-mdpi-nokeys
- res/drawable-normal-port-finger-qwerty
- res/drawable-normal-port-hdpi-nokeys
- res/drawable-normal-land-mdpi-qwerty
- res/drawable-normal-land-mdpi-nokeys
- res/drawable-normal-land-hdpi-qwerty
- res/drawable-normal-land-hdpi-nokeys

Don't panic! We will shorten this list in just a moment!

Note that there is nothing preventing you from also having a directory with the unadorned base name (res/layout). In fact, this is really a good idea, in case future editions of the Android runtime introduce other configuration options you did not consider—having a default layout might make the difference between your application working or failing on that new device.

As promised, we can cut the number of required directories substantially. We do so by decoding the rules Android uses for determining which, among a set of candidates, is the correct resource directory to use:

1. Android tosses out directories that are specifically invalid. So, for example, if the screen size of the device is normal, Android drops the -large directories as candidates, since they call for some other size.

2. Android counts the number of matches for each folder, and pays attention to only those with the most matches.
3. Android goes in the order of precedence of the options; in other words, it goes from left to right in the directory name.

Also, our drawables vary only by density, and our layouts do not vary by density, so we can clear out a lot of combinations by focusing on only the relevant platform differences.

So, we could skate by with only the following configurations:

- res/layout-large-land-qwerty
- res/layout-large-qwerty
- res/layout-large-land
- res/layout-large
- res/layout-normal-land-qwerty
- res/layout-normal-qwerty
- res/layout-normal-land
- res/layout
- res/drawable-hdpi
- res/drawable

Here, we take advantage of the fact that specific matches take precedence over unspecified values. So, a device with a QWERTY keyboard will choose a resource with `qwerty` in the directory over a resource that does not specify its keyboard type.

We could refine this even further, to cover only the specific devices we are targeting (e.g., there is no large device with `qwerty`):

- res/layout-large-land
- res/layout-large
- res/layout-land-qwerty
- res/layout-qwerty
- res/layout-land
- res/layout
- res/drawable-hdpi
- res/drawable

If we did not care about having different layouts depending on whether the device had a hardware keyboard, we could drop the two `-qwerty` resource sets.

We will see these resource sets again in Chapter 25, which describes how to support multiple screen sizes.

RTL Languages: Going Both Ways

Android 2.3 added support for many more languages than it supported in previous versions of the platform. As such, you now have greater opportunity to localize your application where it is needed.

In particular, Android 2.3 added support for right-to-left (RTL) languages, notably Hebrew and Arabic. Previously, Android supported only languages written horizontally from left to right, such as English. This means you may create localized versions for RTL languages, but first you need to consider whether your UI in general will work properly for RTL languages. For example:

- Are your TextView widgets aligned on the left side with other widgets or containers? If so, is that the right configuration for your RTL users?
- Will there be any issues with your EditText widgets when users start entering RTL text, such as inappropriate scrolling because you have not properly constrained the EditText widget's width?
- If you created your own forms of text input, outside of EditText and the input method framework (e.g., custom onscreen virtual keyboards), will they support RTL languages?

Defining and Using Styles

Every now and then, you will find some code with a cryptic style attribute in a layout element. For example, in the chapter on threading, the following ProgressBar was presented:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <ProgressBar android:id="@+id/progress"
        style="?android:attr/progressBarStyleHorizontal"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content" />
</LinearLayout>
```

Something about that magic style attribute changed our ProgressBar from a normal circle to a horizontal bar.

This chapter will briefly explore the concept of styles, including how you create them and how you apply them to your own widgets.

Styles: DIY DRY

The purpose of styles is to encapsulate a set of attributes that you intend to use repeatedly, conditionally, or otherwise keep separate from your layouts proper. The primary use case is “don’t repeat yourself” (DRY)—if you have a bunch of widgets that look the same, use a style to use a single definition for “look the same,” rather than copying the look from widget to widget.

That paragraph will make a bit more sense if we look at an example, specifically the Styles/NowStyled sample project. This is the same project we examined in an earlier chapter, with a full-screen button that shows the date and time at which the activity was launched or the button was pushed. In this example, we want to change the appearance of the text on the face of the button, which we will accomplish by using a style.

The res/layout/main.xml file in this project is the same as it was in Chapter 20, but with the addition of a style attribute:

```
<?xml version="1.0" encoding="utf-8"?>
<Button xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/button"
    android:text=""
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    style="@style/bigred"
/>
```

NOTE: Because the style attribute is part of stock XML, and therefore is not in the android namespace, it does not get the android: prefix.

The value, @style/bigred, points to a style resource. Style resources are values resources and can be found in the res/values/ directory in your project, or in other resource sets (e.g., res/values-v11/ for values resources to be used only on API level 11 or higher). The convention is to keep style resources in a styles.xml file, such as the following from the NowStyled project:

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
    <style name="bigred">
        <item name="android:textSize">30sp</item>
        <item name="android:textColor">#FFFF0000</item>
    </style>
</resources>
```

The `<style>` element supplies the name of the style, which is what we use when referring to the style from a layout. The `<item>` children of the `<style>` element represent values of attributes to be applied to whatever the style is applied to—in our example, our Button widget. So, our Button will have a comparatively large font (`android:textSize` set to 30sp) and its text will appear in red (`android:textColor` set to #FFFF0000).

No changes are needed elsewhere in the project—nothing needs to be adjusted in the manifest, in the Java code of the activity, and so on. Just defining the style and applying it to the widget gives us the result shown in Figure 24–1.

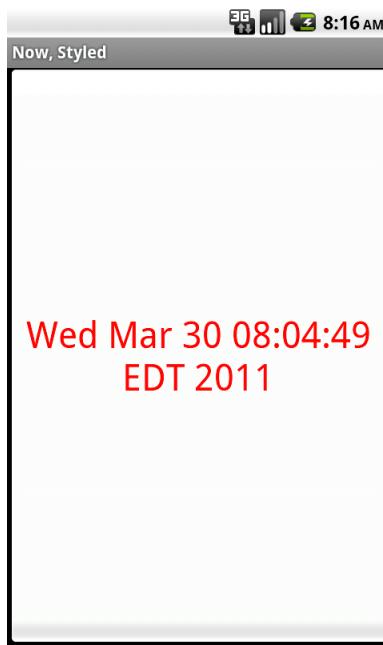


Figure 24–1. The Styles/NowStyled sample application

Elements of Style

There are four questions to consider when applying a style:

- Where do you put the style attributes to say you want to apply a style?
- Which attributes can you define via a style?
- How do you inherit from a previously defined style (your own or one from Android)?
- What values can the attributes have in a style definition?

Where to Apply a Style

The style attribute can be applied to a widget, which affects only that widget.

The style attribute can also be applied to a container, which affects only that container. However, doing this does not automatically style its children. For example, suppose res/layout/main.xml looked instead like this:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    style="@style/bigred"
>
```

```
<Button  
    android:id="@+id/button"  
    android:text=""  
    android:layout_width="fill_parent"  
    android:layout_height="fill_parent"  
/>  
</LinearLayout>
```

The resulting UI would not have the Button text in a big red font, despite the style attribute. The style affects only the container, not the contents of the container.

You can also apply a style to an activity or an application as a whole, in which case it is referred to as a *theme*, as covered a bit later in this chapter.

The Available Attributes

When styling a widget or container, you can apply any of that widget's or container's attributes in the style itself. So, if it appears in the "XML Attributes" or "Inherited XML Attributes" section of the Android JavaDocs, you can put it in a style.

Note that Android will ignore invalid styles. So, had we applied the `bigred` style to the `LinearLayout` as shown above, everything would run fine, just with no visible results. Despite the fact that `LinearLayout` has no `android:textSize` or `android:textColor` attribute, no compile-time failure or runtime exception occurs.

Also, layout directives, such as `android:layout_width`, can be put in a style.

Inheriting a Style

You can also indicate that you want to inherit style attributes from another style, by specifying a `parent` attribute on the `<style>` element. For example, take a look at this style resource (which you will see again in Chapter 28, which covers the new fragment UI framework):

```
<?xml version="1.0" encoding="utf-8"?>  
<resources>  
    <style name="activated" parent="android:Theme.Holo">  
        <item name="android:background">?android:attr/activatedBackgroundIndicator</item>  
    </style>  
</resources>
```

Here, we are indicating that we want to inherit the `Theme.Holo` style from within Android. Hence, in addition to specifying all of our own attribute definitions, we are specifying that we want all the attribute definitions from `Theme.Holo` as well.

In many cases, this will not be necessary. If you do not specify a parent, your attribute definitions will be blended into whatever default style is being applied to the widget or container.

The Possible Values

Typically, the value that you will give the attributes in the style will be some constant, like 30sp or #FFFF0000. Sometimes, though, you may want to perform a bit of indirection, by applying some other attribute value from the theme you are inheriting from. In that case, you need to use the somewhat cryptic ?android:attr/ syntax, along with a few related magic incantations.

For example, let's look again at this style resource:

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
    <style name="activated" parent="android:Theme.Holo">
        <item name="android:background">?android:attr/activatedBackgroundIndicator</item>
    </style>
</resources>
```

Here, we are indicating that the value of android:background is not some constant value, or even a reference to a drawable resource (e.g., @drawable/my_background). Instead, we are referring to the value of some other attribute—activatedBackgroundIndicator—from our inherited theme. Whatever the theme defines as being the activatedBackgroundIndicator is what our background should be.

Sometimes this is applied to a style as a whole. For example, let's look again at the ProgressBar:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <ProgressBar android:id="@+id/progress"
        style="?android:attr/progressBarStyleHorizontal"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content" />
</LinearLayout>
```

Here, our style attribute—not a style resource—is pointing to a theme-supplied attribute (progressBarStyleHorizontal). If you poke through the Android source code, you will see that this is defined as being a style resource, specifically @android:style/Widget.ProgressBar.Horizontal. Hence, we are saying to Android that we want our ProgressBar styled as @android:style/Widget.ProgressBar.Horizontal, via the indirection of ?android:attr/progressBarStyleHorizontal.

This portion of the Android style system is very underdocumented, to the point where Google itself recommends that you look at the Android source code listing the various styles to see what is possible.

This is one place where inheriting a style becomes important. In the first example shown in this section, we inherited from Theme.Holo, because we specifically wanted the activatedBackgroundIndicator value from Theme.Holo. That value might not exist in other styles, or it might not have the value we want.

Themes: A Style by Any Other Name...

Themes are styles, applied to an activity or application, via an `android:theme` attribute on the `<activity>` or `<application>` element. If the theme you are applying is your own, simply reference it as `@style/...`, just as you would in a style attribute of a widget. If the theme you are applying comes from Android, though, typically you will use a value with `@android:style/` as the prefix, such as `@android:style/Theme.Dialog` or `@android:style/Theme.Light`.

In a theme, your focus is not so much on styling widgets, but styling the activity itself. For example, here is the definition of `@android:style/Theme.NoTitleBar.Fullscreen`:

```
<!-- Variant of the default (dark) theme that has no title bar and
fills the entire screen -->
<style name="Theme.NoTitleBar.Fullscreen">
    <item name="android:windowFullscreen">true</item>
    <item name="android:windowContentOverlay">@null</item>
</style>
```

It specifies that the activity should take over the entire screen, removing the status bar on Android 1.x and 2.x devices (`android:windowFullscreen` set to `true`). It also specifies that the content overlay—a layout that wraps around your activity’s content view—should be set to nothing (`android:windowContentOverlay` set to `@null`), having the effect of removing the title bar.

A theme might also specify other styles that are applied to specific widgets. For example, we see the following in the root theme (Theme):

```
<item name="progressBarStyleHorizontal">@android:style/Widget.ProgressBar-
.Horizontal</item>
```

Here, `progressBarStyleHorizontal` is pointing to `@android:style/Widget.ProgressBar.Horizontal`. This is how we are able to reference `?android:attr/progressBarStyleHorizontal` in our `ProgressBar` widget, and we could create our own theme that redefines `progressBarStyleHorizontal` to point to some other style (e.g., if we want to change the rounded rectangle used for the actual progress bar image itself).

Handling Multiple Screen Sizes

For the first year or so after Android 1.0 was released, all production Android devices had the same screen resolution (HVGA, 320×480) and size (around 3.5 inches, or 9 centimeters). Starting in the fall of 2009, though, devices started arriving with widely disparate screen sizes and resolutions, from tiny QVGA (240×320) screens to much larger WVGA (480×800) screens. And, in the fall of 2010, tablets and Google TV devices appeared, offering yet more screen sizes.

Of course, users will expect your application to be functional on all of these screens, and perhaps take advantage of larger screen sizes to add greater value. To that end, Android 1.6 added new capabilities to help better support these differing screen sizes and resolutions, and these capabilities have been extended in subsequent Android releases. The Android documentation has extensive coverage of the mechanics of handling multiple screen sizes. You are encouraged to read that documentation along with this chapter, to get the best understanding of how best to cope with, and perhaps take advantage of, multiple screen sizes.

After a number of sections discussing the screen size options and theory, the chapter provides an in-depth look at how to make a fairly simple application handle multiple screen sizes well.

Taking the Default

Let's suppose that you start off by totally ignoring the issue of screen sizes and resolutions. What happens?

If your application is compiled for Android 1.5 or lower, Android will assume your application was designed to look good on the classic screen size and resolution. Android will then automatically do the following:

- If your application is installed on a device with a larger screen, Android will run your application in compatibility mode, scaling everything based on the actual screen size. So, suppose you have a 24-pixel square PNG file, and Android installs and runs your application on a device with the standard physical size but a WVGA resolution (a so-called high-density screen). Android might scale your PNG file to be 36 pixels when it displays it, so it will take up the same visible space on the screen. On the plus side, Android handles this automatically; on the minus side, bitmap-scaling algorithms tend to make the images a bit fuzzy.
- If your application is installed on a device with a smaller screen, Android will block your application from running. Hence, QVGA devices, like the HTC Tattoo, will be unable to get your application, even if it is available on the Android Market.

To give you an example of how this affects your app, Figure 25–1 shows the Containers/Table sample application as viewed on an HTC Tattoo, with its QVGA screen.

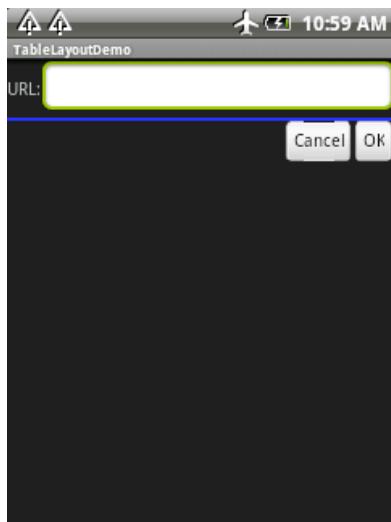


Figure 25–1. Table sample in QVGA via compatibility mode

If your application is compiled for Android 1.6 or higher, Android assumes that you are properly handling all screen sizes, and therefore will not run your application in compatibility mode. You will see how to tailor this in a later section.

Whole in One

The simplest approach to handling multiple screen sizes in Android is to design your user interface (UI) so that it automatically scales for the screen size, without any size-specific code or resources. In other words, “it just works.”

This implies, though, that everything you use in your UI can be gracefully scaled by Android and that everything will fit, even on a QVGA screen.

The following sections provide some tips for achieving this all-in-one solution.

Think About Rules, Not Positions

Some developers, perhaps those coming from the drag-and-drop school of UI development, think first and foremost about the positions of widgets. They think that they want certain widgets to be certain fixed sizes at certain fixed locations. They get frustrated with Android layout managers (containers) and gravitate to the deprecated `AbsoluteLayout` as a way to design UIs in the way they are used to doing it.

That approach rarely works well, even on desktops, as can be seen by applications that do not handle window resizing very well. Similarly, that approach will not work on mobile devices, particularly Android, with their wide range of screen sizes and resolutions.

Instead of thinking about positions, think about rules. You need to teach Android the “business rules” about where widgets should be sized and placed, and then Android will interpret those rules based upon what the device’s screen actually supports in terms of resolution.

The simplest rules are the `fill_parent` and `wrap_content` values for `android:layout_width` and `android:layout_height`. They do not specify specific sizes, but rather adapt to the space available.

The richest environment for easily specifying rules is `RelativeLayout`. While complicated on the surface, `RelativeLayout` does an excellent job of letting you control your layout while still adapting it to other screen sizes. For example, you can do the following:

- Explicitly anchor widgets to the bottom or right side of the screen, rather than hoping they will wind up there courtesy of some other layout
- Control the distances between widgets that are connected (e.g., a label for a field should be to the left of the field) without having to rely on padding or margins

The greatest control for specifying rules is to create your own layout class. For example, suppose you are creating a series of applications that implement card games. You may want to have a layout class that knows the following about playing cards: how they overlap, which are face up versus face down, how big to be to handle varying numbers of cards, and so forth. While you could achieve the desired look with, say, a `RelativeLayout`, you may be better served implementing a `PlayingCardLayout` or a `HandOfCardsLayout` or something that is more explicitly tailored for your application. Unfortunately, creating custom layout classes is underdocumented at this point in time.

Consider Physical Dimensions

Android offers a wide range of available units of measure for dimensions. The most popular has been the pixel (px), because it is easy to wrap your head around the concept. After all, every Android device has a screen with a certain number of pixels in each direction.

However, pixels start to become troublesome as screen density changes. As the number of pixels in a given screen size increases, the pixels effectively shrink. A 32-pixel icon on a traditional Android device might be finger-friendly, but on a high-density device (say, WVGA in a mobile phone form factor), 32 pixels may be a bit small for use with a finger.

If you have something intrinsically scalable (e.g., a Button) where you had been specifying a size in pixels, you might consider switching to using millimeters (mm) or inches (in) as the unit of measure. 10 millimeters is 10 millimeters regardless of the screen resolution or the screen size. This way, you can ensure that your widget is sized to be finger-friendly, regardless of the number of pixels that might take.

Avoid “Real” Pixels

In some circumstances, using millimeters for dimensions does not make sense. In such cases, you may want to consider using other units of measure while still avoiding “real” pixels.

Android offers dimensions measured in density-independent pixels (dip). These map 1:1 to pixels for a 160-dpi screen (e.g., a classic HVGA Android device) and scale from there. For example, on a 240-dpi device (e.g., a phone-sized WVGA device), the ratio is 2:3, so $50\text{dip} = 50\text{px}$ at 160 dpi = 75px at 240 dpi. The advantage to the user of going with dip is that the actual size of the dimension stays the same, so visibly there is no difference between 50dip at 160 dpi and 50dip at 240 dpi.

Android also offers dimensions measured in scaled pixels (sp). Scaled pixels, in theory, are scaled based on the user’s choice of font size (FONT_SCALE value in `System.Settings`).

Choose Scalable Drawables

Classic bitmaps—PNG, JPG, and GIF—are not intrinsically scalable. If you are not running in compatibility mode, Android will not even try to scale them for you based on screen resolution and size. Whatever size of bitmap you supply is the size it will be, even if that makes the image too large or too small on some screens.

One way to address this is to try to avoid static bitmaps, using nine-patch bitmaps and XML-defined drawables (e.g., `GradientDrawable`) as alternatives. A nine-patch bitmap is a PNG file specially encoded to have rules indicating how that image can be stretched to take up more space. XML-defined drawables use a quasi-SVG XML language to define shapes, their strokes and fills, and so on.

Tailor-Made, Just for You (and You, and You, and...)

There will be times when you want to have different looks or behaviors based upon screen size or density. Android has techniques that you can use to switch out resources or code blocks based on the environment in which your application runs. When these techniques are properly used in combination with the techniques described in the preceding section, achieving screen size- and density-independence is eminently possible, at least for devices running Android 1.6 and newer.

Adding the <supports-screens> Element

The first step to proactively supporting different screen sizes is to add the `<supports-screens>` element to your `AndroidManifest.xml` file. This specifies which screen sizes your application explicitly supports and which it does not support. Those that it does not explicitly support will be handled by the automatic compatibility mode, described previously.

Here is a manifest containing a `<supports-screens>` element:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.eu4you"
    android:versionCode="1"
    android:versionName="1.0">
    <supports-screens
        android:largeScreens="true"
        android:normalScreens="true"
        android:smallScreens="true"
        android:anyDensity="true"
    />
    <application android:label="@string/app_name"
        android:icon="@drawable/cw">
        <activity android:name=".EU4You"
            android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />
                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>
        </activity>
    </application>
</manifest>
```

The `android:smallScreens`, `android:normalScreens`, and `android:largeScreens` attributes are fairly self-explanatory: each takes a Boolean value that indicates whether your application explicitly supports screens of that size (`true`) or requires compatibility mode assistance (`false`). Android 2.3 has also added `android:xlargeScreens` for larger tablets and (perhaps) televisions.

The `android:anyDensity` attribute indicates whether you are taking density into account in your calculations (`true`) or not (`false`). If `false`, Android will treat all of your dimensions (e.g., `4px`) as if they were for a normal-density (160-dpi) screen. If your

application is running on a screen with lower or higher density, Android will scale your dimensions accordingly. If you indicate that `android:anyDensity = "true"`, you are telling Android not to do that, putting the onus on you to use density-independent units, such as dip, mm, or in.

Resources and Resource Sets

The primary way to toggle different things based on screen size or density is to create resource sets. By creating resource sets that are specific to different device characteristics, you teach Android how to render each, and Android then switches among those sets automatically.

Default Scaling

By default, Android scales all drawable resources. Those that are intrinsically scalable, as previously described, will scale nicely. Ordinary bitmaps are scaled using a normal scaling algorithm, which may or may not give you great results. It also may slow down your application a bit. To avoid this, you need to set up separate resource sets containing your nonscalable bitmaps.

Density-Based Sets

If you wish to have different layouts, dimensions, or the like based upon different screen densities, you can use the -ldpi, -mdpi, -hdpi, and -xhdpi resource set labels. For example, `res/values-hdpi/dimens.xml` would contain dimensions used in high-density devices.

Note that there is a bug in Android 1.5 (API level 3) when it comes to working with these screen-density resource sets. Even though all Android 1.5 devices are medium density, Android 1.5 might pick one of the other densities by accident. If you intend to support Android 1.5 and use screen-density resource sets, you need to clone the contents of your -mdpi set, with the clone named -mdpi-v3. This version-based set is described in greater detail a bit later in this section.

Size-Based Sets

Similarly, if you wish to have different resource sets based upon screen size, Android offers -small, -normal, and -large resource set labels. Creating `res/layout-large-land/` would indicate layouts to use on large screens (e.g., WVGA) in landscape orientation.

Version-Based Sets

There may be times when earlier versions of Android get confused by newer resource set labels. To help with that, you can include a version label to your resource set, of the

form -vN, where N is an API level. Hence, res/drawable-large-v4/ indicates these drawables should be used on large screens at API level 4 (Android 1.6) and newer.

So, if you find that Android 1.5 emulators or devices are grabbing the wrong resource sets, consider adding -v4 to their resource set names to filter them out.

Finding Your Size

If you need to take different actions in your Java code based on screen size or density, you have a few options.

If there is something distinctive in your resource sets, you can “sniff” on that and branch accordingly in your code. For example, as you will see in the code sample later in this chapter, you can have extra widgets in some layouts (e.g., res/layout-large/main.xml); simply seeing if an extra widget exists will tell you if you are running a large screen or not.

You can also find out your screen size class via a Configuration object, typically obtained by an Activity via getResources().getConfiguration(). A Configuration object has a public field named screenLayout that is a bitmask indicating the type of screen the application is running on. You can test to see if your screen is small, normal, or large, or if it is long (where “long” indicates a 16:9 or similar aspect ratio, compared to 4:3). For example, here we test to see if we are running on a large screen:

```
if (getResources().getConfiguration().screenLayout  
    & Configuration.SCREENLAYOUT_SIZE_LARGE)  
    ==Configuration.SCREENLAYOUT_SIZE_LARGE) {  
    // yes, we are large  
}  
else {  
    // no, we are not  
}
```

Similarly, you can find out your screen density, or the exact number of pixels in your screen size, using the DisplayMetrics class.

Ain't Nothing Like the Real Thing

The Android emulators will help you test your application on different screen sizes. However, that will only get you so far, because mobile device LCDs have different characteristics than your desktop or notebook, such as the following:

- Mobile device LCDs may have a much higher density than that of your development machine.
- A mouse allows for much more precise touchscreen input than does an actual fingertip.

Where possible, you are going to need to either use the emulator in new and exciting ways or try to get your hands on actual devices with alternative screen resolutions.

Density Differs

The Motorola DROID has a 240-dpi, 3.7-inch, 480×854-pixel screen (an FWVGA display). To emulate a DROID screen, based on pixel count, takes up one-third of a 19-inch, 1280×1024-pixel LCD monitor, because the LCD monitor's density is much lower than that of the DROID—around 96 dpi. So, when you fire up your Android emulator for an FWVGA display like that of the DROID, you will get a massive emulator window.

This is still perfectly fine for determining the overall look of your application in an FWVGA environment. Regardless of density, widgets will still align the same, sizes will have the same relationships (e.g., widget A might be twice as tall as widget B, and that will be true regardless of density), and so on.

However, keep the following in mind:

- Things that might appear to be a suitable size when viewed on a 19-inch LCD may be entirely too small on a mobile device screen of the same resolution.
- Things that you can easily click with a mouse in the emulator may be much too small to pick out on a physically smaller and denser screen when used with a finger.

Adjusting the Density

By default, the emulator keeps the pixel count accurate at the expense of density, which is why you get the really big emulator window. You do have an option, though, of having the emulator keep the density accurate at the expense of pixel count.

The easiest way to do this is to use the Android AVD Manager, introduced in Android 1.6. The Android 2.0 edition of this tool has a Launch Options dialog box that pops up when you start an emulator instance via the Start button, as shown in Figure 25–2.

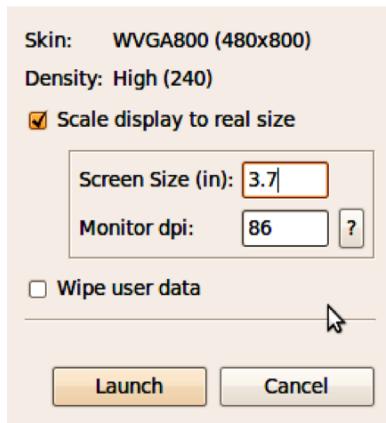


Figure 25–2. The Launch Options dialog box

By default, the “Scale display to real size” check box is unchecked, and Android will open the emulator window normally. You can check that check box and then provide two bits of scaling information:

- The screen size of the device you wish to emulate, in inches (e.g., 3.7 inches for the Motorola DROID)
- The dpi of your monitor (click the ? button to open a calculator that helps you determine what your dpi value is)

This gives you an emulator window that more accurately depicts what your user interface will look like on a physical device, at least in terms of sizes. However, since the emulator is using far fewer pixels than will a device, fonts may be difficult to read, images may be blocky, and so forth.

Ruthlessly Exploiting the Situation

So far, we have focused on how you can ensure that your layouts look decent on other screen sizes. For screens that are smaller than the norm (e.g., QVGA), that is perhaps all you can hope to achieve.

Once you get into larger screens, though, another possibility emerges: using different layouts designed to take advantage of the extra screen space. This is particularly useful when the physical screen size is larger (e.g., a 5-inch LCD like that on the Dell Streak Android tablet, or a 7-inch LCD like that on the Samsung Galaxy Tab), rather than simply having more pixels in the same physical space.

The following sections describe some ways you might take advantage of additional space.

Replace Menus with Buttons

An options menu selection requires two physical actions: press the Menu button, and then tap on the appropriate menu choice. A context menu selection requires two physical actions as well: long-tap on the widget, and then tap on the menu choice. Context menus have the additional problem of being effectively invisible; for example, users may not realize that your ListView has a context menu.

You might consider augmenting your UI to provide direct onscreen ways of accomplishing things that might otherwise be hidden away on a menu. This not only reduces the number of steps a user needs to take to do things, but also makes those options more obvious.

For example, suppose you are creating a media player application, and you want to offer manual playlist management. You have an activity that displays the songs in a playlist in a ListView. On an options menu, you have an Add choice, to add a new song from the ones on the device to the playlist. On a context menu on the ListView, you have a Remove choice, plus Move Up and Move Down choices to reorder the songs in the list. For large screens, though, you might consider adding four ImageButton widgets to your

UI for these four options, with the three from the context menu enabled only when a row is selected by the D-pad or trackball. On regular or small screens, you would stick with just using the menus.

Replace Tabs with a Simple Activity

You may have introduced a TabHost into your UI to allow you to display more widgets in the available screen space. As long as the widget space you save by moving them to a separate tab is more than the space taken up by the tabs themselves, you win.

However, having multiple tabs means more user steps to navigate your UI, particularly if the user needs to flip back and forth between tabs frequently.

If you have only two tabs, consider changing your UI to offer a large-screen layout that removes the tabs and puts all the widgets on one screen. This enables the user to see everything without having to switch tabs all the time.

If you have three or more tabs, you probably lack screen space to put all those tabs' contents on one activity. However, you might consider going half and half: have popular widgets be on the activity all of the time, leaving your TabHost to handle the rest on (roughly) half of the screen.

Consolidate Multiple Activities

The most powerful technique is to use a larger screen to get rid of activity transitions outright. For example, if you have a ListActivity where clicking on an item brings up that item's details in a separate activity, consider supporting a large-screen layout where the details are on the same activity as the ListView (e.g., ListView on the left, details on the right, in a landscape layout). This eliminates the user having to constantly press the Back button to leave one set of details before viewing another.

You will see this technique applied in the sample code presented in the following section.

Example: EU4You

To examine how to use some of the techniques introduced in the previous sections, let's look at the ScreenSizes/EU4You sample application. This application has one activity (EU4You) that contains a ListView with the roster of European Union members and their respective flags. Clicking on one of the countries brings up the mobile Wikipedia page for that country.

In the source code to this book, you will find four versions of this application. We start with an application that is ignorant of screen size and slowly add in more screen-related features.

The First Cut

First, here is our `AndroidManifest.xml` file, which looks distinctly like the one shown earlier in this chapter:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.eu4you"
    android:versionCode="1"
    android:versionName="1.0">
    <supports-screens
        android:largeScreens="true"
        android:normalScreens="true"
        android:smallScreens="true"
        android:anyDensity="true"
    />
    <application android:label="@string/app_name"
        android:icon="@drawable/cw">
        <activity android:name=".EU4You"
            android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />
                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>
        </activity>
    </application>
</manifest>
```

Note that we have included the `<supports-screens>` element, saying that we do indeed support all screen sizes. This blocks most of the automatic scaling that Android would do if we did not specify that we support certain screen sizes.

Our main layout is size-independent, as it is just a full-screen `ListView`:

```
<?xml version="1.0" encoding="utf-8"?>
<ListView xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/list"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
/>
```

Our row, though, will eventually need some tweaking:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:padding="2dip"
    android:minHeight="?android:attr/listPreferredItemHeight"
>
    <ImageView android:id="@+id/flag"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center_vertical|left"
        android:paddingRight="4dip"
    />
```

```
<TextView android:id="@+id/name"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_gravity="center_vertical|right"
    android:textSize="20dip"
/>
</LinearLayout>
```

For example, right now, our font size is set to 20dp, which will not vary by screen size or density.

Our EU4You activity is a bit verbose, mostly because there are a lot of EU members, so we need to have the smarts to display the flag and the text in the row:

```
package com.commonsware.android.eu4you;
```

```
EU.add(new Country(R.string.ireland, R.drawable.ireland,
                    R.string.ireland_url));
EU.add(new Country(R.string.italy, R.drawable.italy,
                    R.string.italy_url));
EU.add(new Country(R.string.latvia, R.drawable.latvia,
                    R.string.latvia_url));
EU.add(new Country(R.string.lithuania, R.drawable.lithuania,
                    R.string.lithuania_url));
EU.add(new Country(R.string.luxembourg, R.drawable.luxembourg,
                    R.string.luxembourg_url));
EU.add(new Country(R.string.malta, R.drawable.malta,
                    R.string.malta_url));
EU.add(new Country(R.string.netherlands, R.drawable.netherlands,
                    R.string.netherlands_url));
EU.add(new Country(R.string.poland, R.drawable.poland,
                    R.string.poland_url));
EU.add(new Country(R.string.portugal, R.drawable.portugal,
                    R.string.portugal_url));
EU.add(new Country(R.string.romania, R.drawable.romania,
                    R.string.romania_url));
EU.add(new Country(R.string.slovakia, R.drawable.slovakia,
                    R.string.slovakia_url));
EU.add(new Country(R.string.slovenia, R.drawable.slovenia,
                    R.string.slovenia_url));
EU.add(new Country(R.string.spain, R.drawable.spain,
                    R.string.spain_url));
EU.add(new Country(R.string.sweden, R.drawable.sweden,
                    R.string.sweden_url));
EU.add(new Country(R.string.united_kingdom,
                    R.drawable.united_kingdom,
                    R.string.united_kingdom_url));
}

@Override
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.main);
    setListAdapter(new CountryAdapter());
}

@Override
protected void onListItemClick(ListView l, View v,
                              int position, long id) {
    startActivity(new Intent(Intent.ACTION_VIEW,
                            Uri.parse(getString(EU.get(position).url))));
}

static class Country {
    int name;
    int flag;
    int url;

    Country(int name, int flag, int url) {
        this.name=name;
        this.flag=flag;
        this.url=url;
    }
}
```

```
        }

    }

    class CountryAdapter extends ArrayAdapter<Country> {
        CountryAdapter() {
            super(EU4You.this, R.layout.row, R.id.name, EU);
        }

        @Override
        public View getView(int position, View convertView,
                            ViewGroup parent) {
            CountryWrapper wrapper=null;

            if (convertView==null) {
                convertView=getLayoutInflater().inflate(R.layout.row, null);
                wrapper=new CountryWrapper(convertView);
                convertView.setTag(wrapper);
            }
            else {
                wrapper=(CountryWrapper)convertView.getTag();
            }

            wrapper.populateFrom(getItem(position));

            return(convertView);
        }
    }

    class CountryWrapper {
        private TextView name=null;
        private ImageView flag=null;
        private View row=null;

        CountryWrapper(View row) {
            this.row=row;
        }

        TextView getName() {
            if (name==null) {
                name=(TextView)row.findViewById(R.id.name);
            }

            return(name);
        }

        ImageView getFlag() {
            if (flag==null) {
                flag=(ImageView)row.findViewById(R.id.flag);
            }

            return(flag);
        }

        void populateFrom(Country nation) {
            getName().setText(nation.name);
            getFlag().setImageResource(nation.flag);
        }
    }
}
```

```
    }  
}  
}
```

Figures 25–3, 25–4, and 25–5 show what the activity looks like in an ordinary HVGA emulator, a WVGA emulator, and a QVGA screen, respectively.



Figure 25–3. EU4You, original version, HVGA

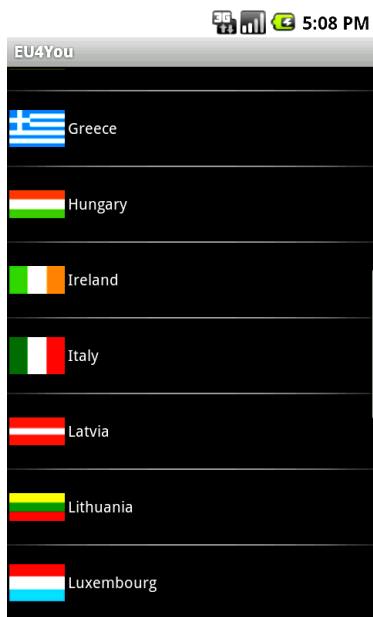


Figure 25–4. EU4You, original version, WVGA (800×480 pixels)



Figure 25–5. EU4You, original version, QVGA

Fixing the Fonts

The first problem that should be fixed is the font size. As you can see, with a fixed 20-pixel size, the font ranges from big to tiny, depending on screen size and density. For a WVGA screen, the font may be rather difficult to read.

We could put the dimension as a resource (`res/values/dimens.xml`) and have different versions of that resource based on screen size or density. However, it is simpler to just specify a density-independent size, such as 5mm, as seen in the `ScreenSizes/EU4You_2` project:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:padding="2dip"
    android:minHeight="?android:attr/listPreferredItemHeight"
>
    <ImageView android:id="@+id/flag"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center_vertical|left"
        android:paddingRight="4dip"
    />
    <TextView android:id="@+id/name"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center_vertical|right"
        android:textSize="5mm"
    />
</LinearLayout>
```

Figures 25–6, 25–7, and 25–8 show what the new activity looks like on HVGA, WVGA, and QVGA screens, respectively.



Figure 25–6. EU4You, 5mm font version, HVGA



Figure 25–7. EU4You, 5mm font version, WVGA (800×480 pixels)



Figure 25–8. EU4You, 5mm font version, QVGA

Now our font is a consistent size and large enough to match the flags.

Fixing the Icons

So, what about those icons? They should vary in size as well, since they are the same for all three emulators.

However, Android automatically scales bitmap resources, even with `<supports-screens>` and its attributes set to true. On the plus side, this means you may not have to do anything with these bitmaps. However, you are relying on a device to do the scaling, which definitely costs CPU time (and, hence, battery life). Also, the scaling algorithms that the device uses may not be optimal, compared to what you can do with graphics tools on your development machine.

The ScreenSizes/EU4You_3 project creates `res/drawable-ldpi` and `res/drawable-hdpi`, putting in smaller and larger renditions of the flags, respectively. This project also renames `res/drawable` to `res/drawable-mdpi`. Android will use the flags for the appropriate screen density, depending on what the device or emulator needs.

Because this effect is subtle and will not show up well in this book, screenshots aren't provided.

Using the Space

While the activity looks fine on WVGA in portrait mode, it really wastes a lot of space in landscape mode, as shown in Figure 25–9.



Figure 25–9. EU4You, landscape WVGA (800×480 pixels)

We can put that to better use by having the Wikipedia content appear directly on the main activity when in large-screen landscape mode; that saves having to spawn a separate browser activity.

To do this, we first must clone the `main.xml` layout into a `res/layout-large-land` rendition that incorporates a `WebView` widget, as seen in `ScreenSizes/EU4You_4`:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
>
    <ListView
        android:id="@+id/list"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
    />
    <WebView
        android:id="@+id/browser"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
    />
</LinearLayout>
```

Then, we need to adjust our activity to look for that `WebView` and use it if found, and otherwise to default to launching a browser activity:

```
@Override
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.main);

    browser=(WebView)findViewById(R.id.browser);

    setListAdapter(new CountryAdapter());
}

@Override
protected void onListItemClick(ListView l, View v,
```

```

        int position, long id) {
String url=getString(EU.get(position).url);

if (browser==null) {
    startActivityForResult(new Intent(Intent.ACTION_VIEW,
                                         Uri.parse(url)));
}
else {
    browser.loadUrl(url);
}
}

```

This gives us a more space-efficient edition of the activity, as shown in Figure 25–10.

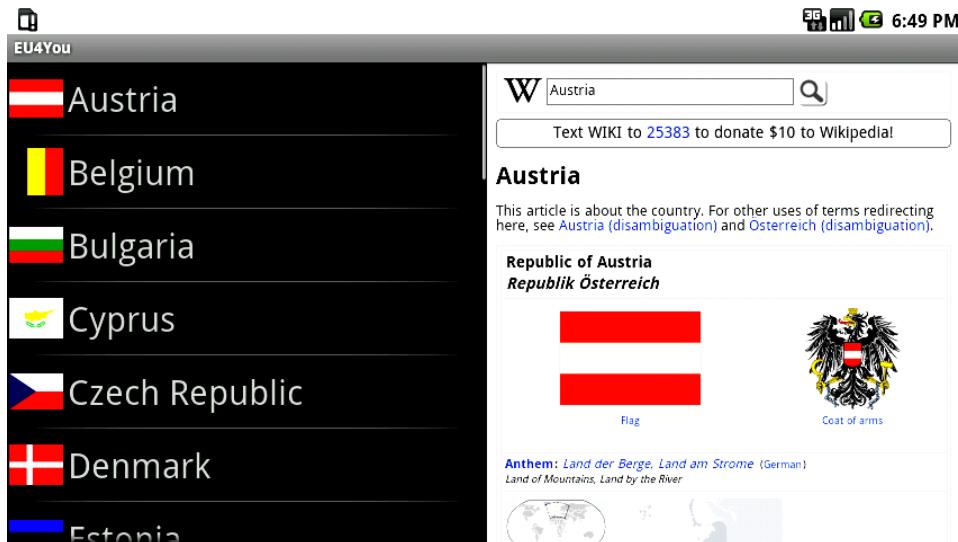


Figure 25–10. EU4You, landscape WVGA (800×480 pixels), set for normal density, and showing the embedded WebView

If the user clicks a link in the Wikipedia page, the full browser opens, for easier surfing.


Note that testing this version of the activity, to see this behavior, requires a bit of extra emulator work. By default, Android sets up WVGA devices as being high-density, meaning WVGA is not large in terms of resource sets, but rather normal. You will need to create a different emulator AVD that is set for normal (medium) density, which will result in a large screen size.

What If It Is Not a Browser?

Of course, EU4You does cheat a bit. The second activity is a browser (or WebView in the embedded form), not some activity of your own creation. Things get slightly more complicated if the second activity is some activity of yours, with many widgets in a layout, and you want to both use it as an activity (for smaller screens) and have it embedded in your main activity UI (for larger screens).

The best way to approach this problem, for Android 1.6 and newer, is to employ the new fragments system. Although this was introduced with Android 3.0, the Android Compatibility Library makes fragments available in earlier versions of Android. The basic use of fragments—complete with another edition of the EU4You sample—will be covered later in this book.

Part



Honeycomb and Tablets

Introducing the Honeycomb UI

February 2011 saw the introduction of Android 3.0 and a UI paradigm that, for now, we will refer to by the Android 3.0 codename, Honeycomb. Android 3.0 itself is exclusively targeted at tablets, though elements of the Honeycomb UI system will make it into future versions of Android that support phones as well. The Honeycomb UI is perhaps the biggest single change in Android since Android 0.9, before the first phones were available. The impacts of Honeycomb will resound throughout the Android ecosystem for a long time as people adjust to make use of its features.

Leading off a series of chapters on the Honeycomb capabilities, this chapter is focused more on the big picture of Honeycomb and its place within Android.

Why Honeycomb?

In principle, Android's original phone-centric UI can run on tablets. After all, a few tablets shipped with Android 2.2 support, such as the Samsung Galaxy Tab. Clearly, those manufacturers thought the Android of the time was strong enough for their tablet devices.

That being said, as you get into larger tablets (e.g., the Motorola XOOM with its 10-inch diagonal screen), the Android phone UI starts to become clunkier. Although applications can scale up to use the larger screen, the default way to scale up is just to make everything bigger, frequently resulting in a lot of wasted space. Whereas an e-mail client on a phone might dedicate an activity to showing the list of e-mails in the inbox, an e-mail client on a tablet really ought to show the list of e-mails plus something else, such as the content of a selected e-mail. We have the room, so we may as well use it.

Similarly, the dependence on menus, while reasonable on a phone, makes less sense on a tablet. We have the space to show more of those functions right on the screen. Hiding them in menus makes them less discoverable to users and requires extra taps to access.

So, Honeycomb is designed to retain the essence of the Android user experience, while allowing applications to (relatively) gracefully take advantage of the space that is available.

What the User Sees

An Android 3.0 screen looks a bit different from an Android 2.x screen, as shown in Figure 26–1.

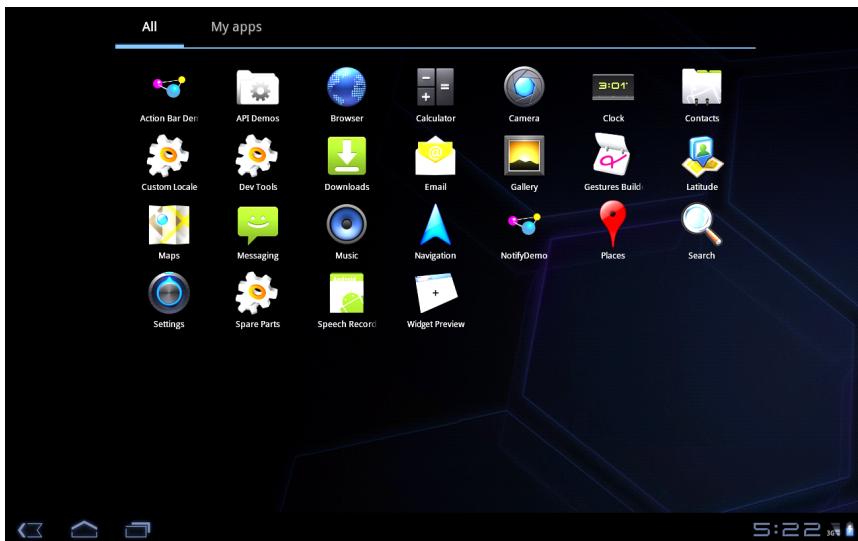


Figure 26–1. The Android 3.0 app launcher, as seen on the emulator

The status bar at the top of the screen has been moved to the bottom of the screen and is now called the system bar. On the left end of the system bar are onscreen buttons for Back, Home, and recent tasks (which formerly would take a long-press of the Home button). Notification icons appear on the right, along with the clock and the signal and battery strength indicators (the concept of notifications will be covered later in this book).

The UI of an application that has not been optimized for Android 3.x appears much the same, as shown in Figure 26–2.

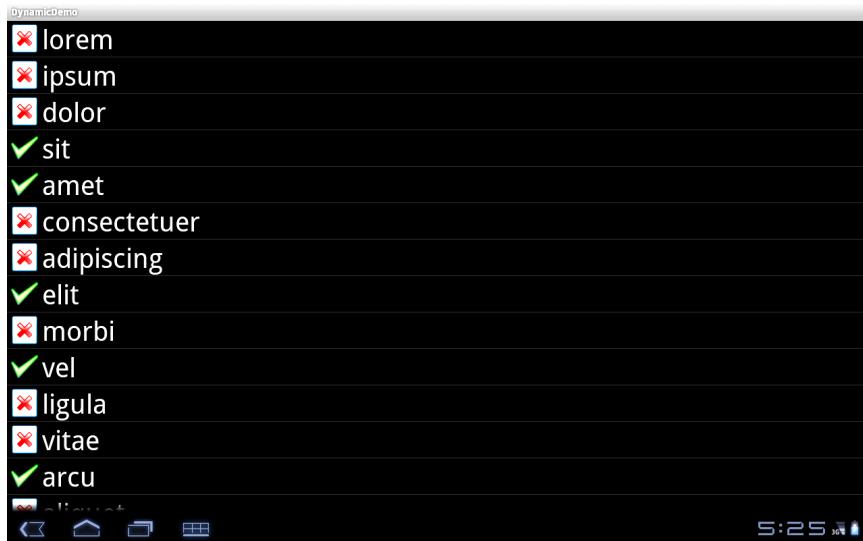


Figure 26–2. The FancyLists/Dynamic sample project, on Android 3.0

The only substantive difference is the new icon in the system bar, which will open an Android 2.x options menu, if the application has one.

Android 3.0-optimized applications will look a bit different, as shown in Figure 26–3.

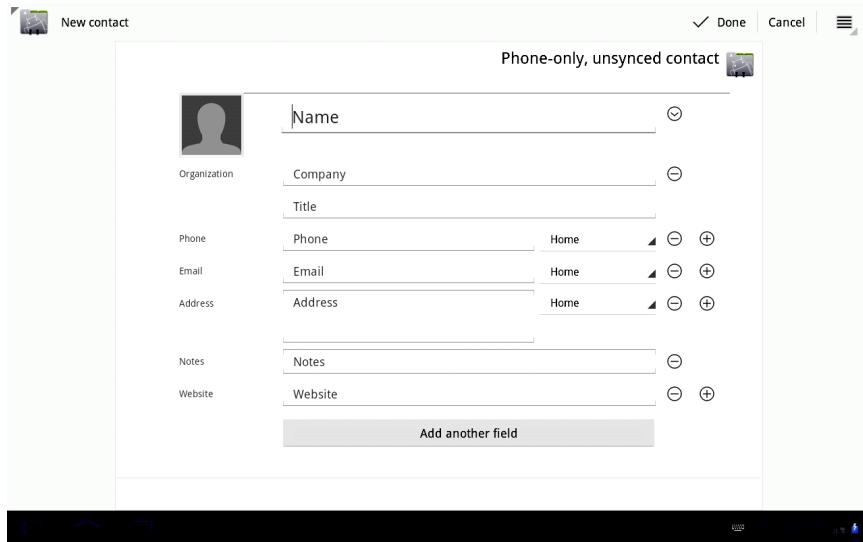


Figure 26–3. Adding a contact on Android 3.0

At the top of the screen is the action bar. The action bar largely replaces options menus, though you define the action bar in the same way as you define an options menu. In Figure 26–3, Done and Cancel are the first two options menu choices. The icon to the

right of them represents other options menu choices, which appear when the user taps that icon, as shown in Figure 26–4.

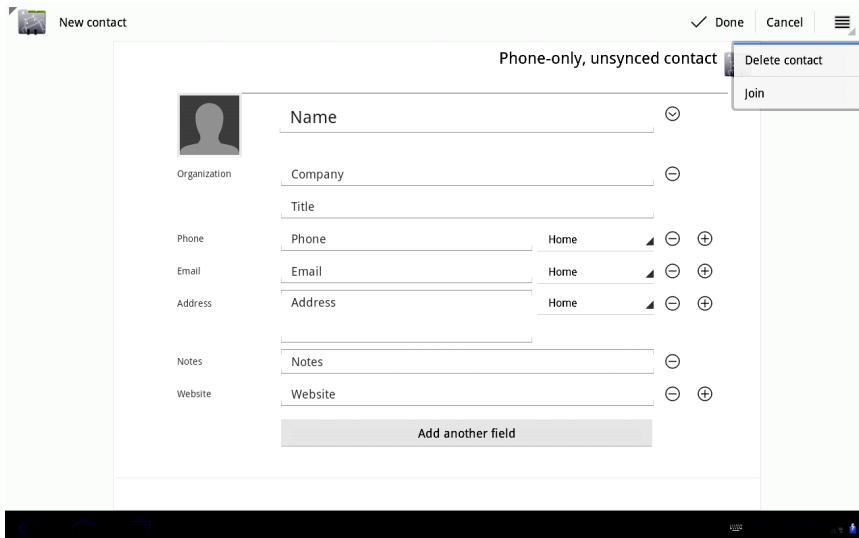


Figure 26–4. The options menu portion (right side) of the action bar in Android 3.0

The icon on the left end of the action bar is tappable, and in this case takes the user up in the hierarchy of actions in this application, as indicated by the northwest-pointing arrowhead. In this case, going “up” from adding a new contact takes you to the list of existing contacts, as shown in Figure 26–5.

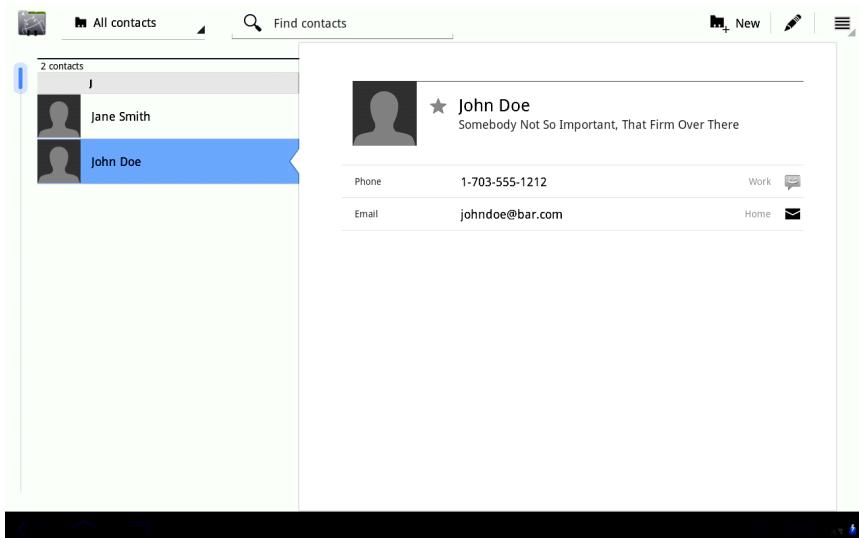


Figure 26–5. The roster of available contacts as displayed in Android 3.0

In Android 2.x, the contacts UI would have one activity with the list of contacts, and a separate activity to view the details of that contact. In Android 3.0, these are combined into a single activity. In the future, when the Honeycomb UI is applied to phones, the same code base will revert to the one-activity-per-operation mode. This is accomplished through the use of fragments, which will be covered later in this book.

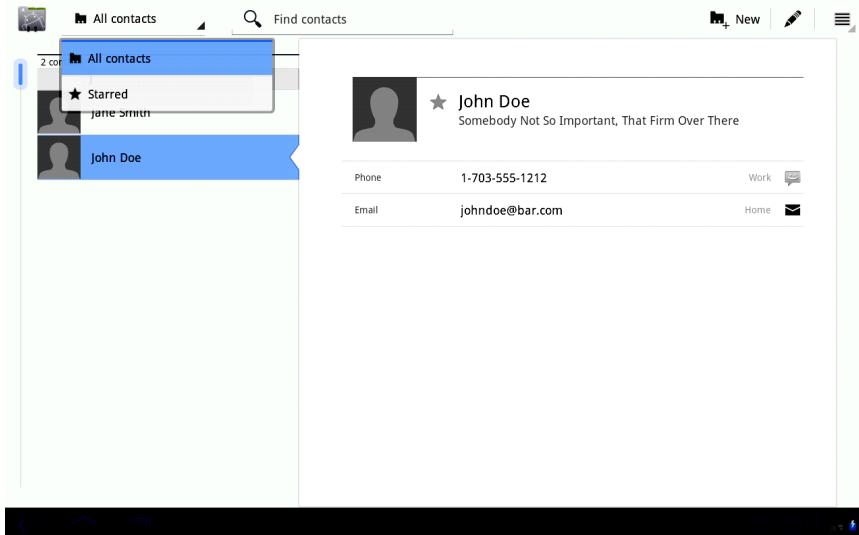


Figure 26–6. The contact filter spinner in Android 3.0

To the right of “All contacts” is a “Find contacts” search field, built into the action bar. Also, the menu items on the right side of the action bar now represent a mix of options menu items (e.g., add a new contact) and context menu items for the selected contact (e.g., edit the contact).

Functionally, everything is there that you would see in Android 2.x. It has been reorganized for Android 3.x, with an emphasis on taking formerly hidden things like menus and adding them to the main screen for ease of discovery and use.

The Holographic Theme

Android applications that are updated for Android 3.0 will have a different look and feel, not only for the activity as a whole, but for individual widgets. The so-called Holographic theme is applied by default to Honeycomb-capable applications. This can have some significant impact on the way widgets look. While they work the same, they look different, so you may want to update documentation and such to show the classic theme as well as the new Holographic look.

For example, the “All contacts” item in the action bar of Figure 26–6 is a Spinner, one that opens to show the available options. The former pop-up dialog box for choosing the Spinner value is gone, replaced by a true drop-down menu.

Similarly, tabs, as implemented with TabWidget, will look substantially different, as shown in Figure 26–7.

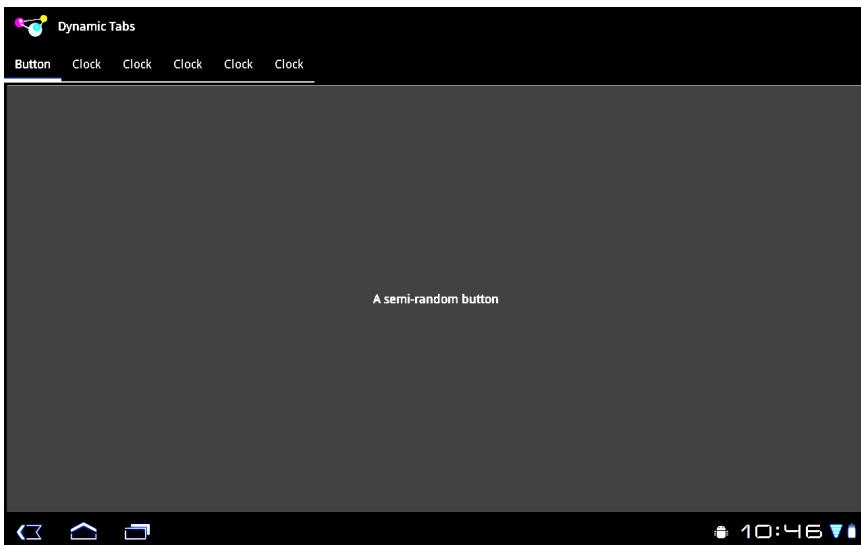


Figure 26–7. The Fancy/DynamicTabs sample application, updated for Android 3.0

If you are creating your own custom styles, there are two that you will want to consider inheriting from:

- Theme.Holo is the standard dark Holographic theme (dark background, light text).
- Theme.Holo.Light is the light equivalent (light background, dark text).

Dealing with the Rest of the Devices

Of course, all the Android phones in the world haven't up and vanished just because Android 3.0 has been released. The goal is for you to create an application that supports both phones and tablets from a single code base.

Your phone-centric app will run just fine on a tablet, though you may wish to do some things to take advantage of larger screen sizes, as was discussed earlier in this book. If you want to adopt the general look and feel of the Honeycomb UI, you will need to include `android:targetSdkVersion="11"` in your `<uses-sdk>` element in the manifest. Also, if you want the gradient background for your Honeycomb activities, add the `android:hardwareAccelerated="true"` attribute to the `<application>` or `<activity>` elements in the manifest to turn on hardware acceleration for 2D graphics. For example, from the ScreenSizes/EU4You_5 sample project, here is the `AndroidManifest.xml` file, showing both of these changes:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
```

```
package="com.commonsware.android.eu4you"
    android:versionCode="1"
    android:versionName="1.0">
<uses-permission android:name="android.permission.INTERNET" />
<supports-screens
    android:largeScreens="true"
    android:normalScreens="true"
    android:smallScreens="true"
    android:anyDensity="true"
/>
<uses-sdk android:minSdkVersion="4" android:targetSdkVersion="11" />
<application android:label="@string/app_name"
    android:icon="@drawable/cw"
    android:hardwareAccelerated="true">
    <activity android:name=".EU4You"
        android:label="@string/app_name">
        <intent-filter>
            <action android:name="android.intent.action.MAIN" />
            <category android:name="android.intent.category.LAUNCHER" />
        </intent-filter>
    </activity>
</application>
</manifest>
```

The resulting application works fine on older devices, but with no other changes, we get the result shown in Figure 26–8 on a Motorola XOOM.

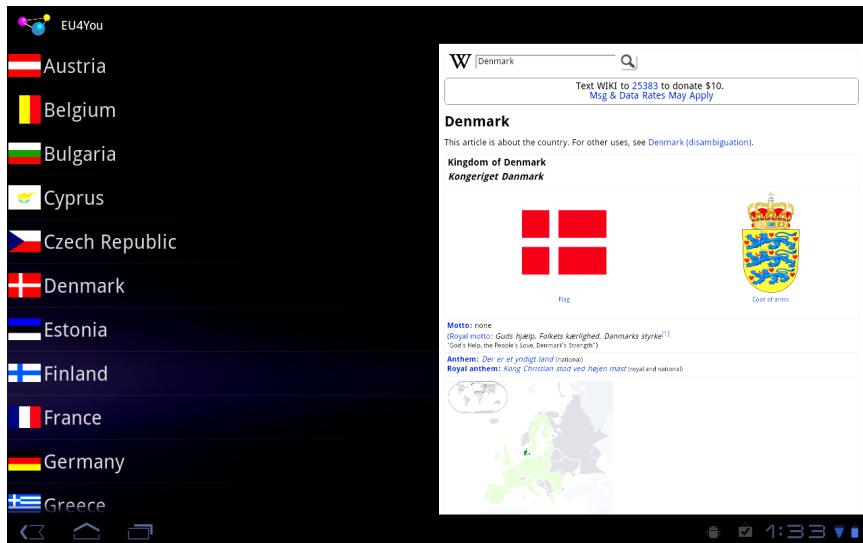


Figure 26–8. The EU4You sample application, lightly updated for Android 3.0

If you want to take advantage of some of the newer features described in this set of Honeycomb chapters, you will also need to think about backward compatibility, to make sure that what you implement in your application will work successfully on both newer and older versions of Android. This topic is also covered later in this book.

If you have resources, such as styles, that need to be version-specific, you can use the -v11 resource set suffix. For example, you could have a `res/values/styles.xml` and a `res/values-v11/styles.xml`—the latter would be used on Honeycomb, and the former would be used on older versions of Android. But first, you need to explore all the Honeycomb UI features that you can take advantage of, which is the point of the next few chapters.

Using the Action Bar

One of the easiest ways to make your application blend in better with the Honeycomb UI is to enable the action bar, introduced in Chapter 26. What makes it “easy” is that most of the basic functionality of the action bar is backward compatible—the Honeycomb settings will not cause the application to crash on earlier versions of Android.

The sample project shown in this chapter is `Menus/ActionBar`, which extends the `Menus/Inflation` project shown in a previous chapter.

Enabling the Action Bar

By default, your Android application will not use the action bar. In fact, it will not even be displayed on the screen. If you want the action bar to appear on the screen, you need to include `android:targetSdkVersion="11"` in your `<uses-sdk>` element in the manifest, such as the manifest for the `Menus/ActionBar` project:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.inflation">
    <application android:label="@string/app_name"
        android:icon="@drawable/cw"
        android:hardwareAccelerated="true">
        <activity android:name=".InflationDemo" android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
    </application>
    <uses-sdk android:minSdkVersion="4" android:targetSdkVersion="11" />
    <supports-screens android:xlargeScreens="true"
        android:largeScreens="true"
        android:normalScreens="true"
        android:smallScreens="true"
        android:anyDensity="true"/>
</manifest>
```

This will cause your options menu to appear in the upper-right corner of the screen, under a menu icon in the action bar, as shown in Chapter 26. Also, your activity's icon will appear in the upper-left corner, with your activity's name (from the android:label attribute in the manifest) alongside of it.

While this gives you the basic Honeycomb look and feel—including the Honeycomb-themed widgets, such as the new Spinner with the southeast-pointing arrowhead—it does not really change the user experience all that much.

Promoting Menu Items to the Action Bar

The next step for integrating with the action bar is to promote certain options menu items from being part of the options menu to being always visible on the action bar itself. This makes them easier to find and saves the user a tap when the time comes to use them.

To do this, in your menu XML resource, you can add the android:showAsAction attribute to an `<item>` element. A value of `ifRoom` means that the menu item will appear in the action bar if there is space for it, while a value of `always` means that the menu item will always be put in the action bar. All else being equal, `ifRoom` is the better choice, as it will adapt better to smaller screens, once the Honeycomb UI moves onto phones. You can also combine this with the `withText` value (e.g., `ifRoom|withText`) to make the title of the menu item appear adjacent to the item's icon (otherwise, only the icon appears in the action bar).

For example, the Menus/ActionBar project's `options.xml` menu resource has `android:showAsAction` on the first two menu items:

```
<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android">
    <item android:id="@+id/add"
        android:title="Add"
        android:icon="@drawable/ic_menu_add"
        android:actionLayout="@layout/add"
        android:showAsAction="ifRoom"/>
    <item android:id="@+id/reset"
        android:title="Reset"
        android:icon="@drawable/ic_menu_refresh"
        android:showAsAction="ifRoom|withText"/>
    <item android:id="@+id/about"
        android:title="About"
        android:icon="@drawable/ic_menu_info_details" />
</menu>
```

The second menu item, Reset—for resetting the contents of the list—is a normal “with text” action bar button. The first menu item, Add, does something a bit different, which we will examine later in this chapter. The fact that the third menu item, About, does not have `android:showAsAction` means that it will remain in the menu, even if there is room in the action bar.

Note that the Java code does not change—`onCreateOptionsMenu()` and `onOptionsItemSelected()` for our `InflationDemo` activity do not need to be adjusted because menu items are promoted into the action bar via the menu XML resource alone.

Responding to the Logo

The activity icon in the upper-left corner of the screen is tappable. If the user taps it, it triggers `onOptionsItemSelected()`...but not for one of the options menu items you may have defined yourself. Rather, the magic value of `android.R.id.home` is used. In the `Menus/ActionBar` project, we wire it to the same code that is invoked if the user chooses the About options menu item—displaying a `Toast`:

```
@Override  
public boolean onOptionsItemSelected(MenuItem item) {  
    switch (item.getItemId()) {  
        case R.id.add:  
            add();  
            return(true);  
  
        case R.id.reset:  
            initAdapter();  
            return(true);  
  
        case R.id.about:  
        case android.R.id.home:  
            Toast  
                .makeText(this,  
                    "Action Bar Sample App",  
                    Toast.LENGTH_LONG)  
                .show();  
            return(true);  
    }  
  
    return(super.onOptionsItemSelected(item));  
}
```

In a project with multiple activities, though, the expectation is that tapping the logo will take you to the “home” activity for the application, whatever that might mean.

Adding Custom Views to the Action Bar

You can do more with the action bar than simply convert options menu items into what amount to toolbar buttons. You can add your own custom UI to the action bar. In the case of `Menus/ActionBar`, we’ll replace the Add menu choice and resulting dialog box with an Add field right in the action bar itself.

This, however, is a bit tricky to implement, as described next.

Defining the Layout

To put something custom in the action bar, we need to define what the “something custom” is, in the form of a layout XML file. Fortunately, we already have a layout XML file for adding a word to the list—it is the one that the Menus/Inflation sample wrapped in a custom AlertDialog for when the Add options menu item was tapped. That original layout looked like this:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="horizontal"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    >
    <TextView
        android:text="Word:"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        />
    <EditText
        android:id="@+id/title"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:layout_marginLeft="4dip"
        />
</LinearLayout>
```

We need to make some minor adjustments to this layout to use it for the action bar:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="horizontal"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    >
    <TextView
        android:text="Word:"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:textAppearance="@android:style/TextAppearance.Medium"
        />
    <EditText
        android:id="@+id/title"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:layout_marginLeft="4dip"
        android:width="160sp"
        android:inputType="text"
        android:imeActionId="1337"
        android:imeOptions="actionDone"
        />
</LinearLayout>
```

Specifically, we made these minor adjustments:

- We added an `android:textAppearance` attribute to the `TextView` representing our `Add` caption. The `android:textAppearance` attribute allows us to define the font type, size, color, and weight (e.g., bold) in one shot. We specifically used a magic value of `@android:style/TextAppearance.Medium` so that the caption matches the styling of the `Reset` label on the other menu item we promoted to the action bar.
- We specified `android:width="160sp"` for the `EditText` widget, because `android:layout_width="fill_parent"` is ignored in the action bar—otherwise, we would take up the rest of the bar.
- We specified `android:inputType="text"` on the `EditText` widget, which, among other things, restricts us to a single line of text.
- We specified `android:imeActionId` and `android:imeOptions` on the `EditText` widget to control the action button of the soft keyboard, so we get control when the user presses the Enter key on the soft keyboard.

Putting the Layout in the Menu

Next, we need to teach Android to use this layout for our `Add` options menu item if we are running on Honeycomb. To do this, we use the `android:actionLayout` attribute on our `<item>` element, referencing our layout resource (`@layout/add`), as was shown earlier in this chapter. This attribute will be ignored on earlier versions of Android, so it is safe to use.

If we did nothing else, we would get the desired UI, shown in Figure 27–1.



Figure 27–1. The `Menus/ActionBar` sample application

However, while the user could type something in, we have no way to find out what they type in, when they are done, and so forth.

Getting Control of User Input

Given our soft keyboard settings we put on the EditText widget, we can arrange to find out when the user presses the Enter key either on the soft keyboard or on a hardware keyboard. To do that, though, we need to get our hands on the EditText widget itself. You might think it is added when the UI is inflated in `onCreate()`...but you would be mistaken.

In a Honeycomb environment, with an action bar, `onCreateOptionsMenu()` is called after `onCreate()` as part of setting up the UI. On classic versions of Android, `onCreateOptionsMenu()` would not be called until the user pressed the Menu button. But, since some of the options menu items might be promoted into the action bar, Android calls `onCreateOptionsMenu()` automatically now. The EditText will exist after we inflate our `options.xml` menu resource.

However, the best way to get the EditText is not to use `findViewById()` on the activity. Rather, we should call `getActionView()` on the MenuItem associated with our Add option. This will return the root of the view hierarchy inflated from the layout resource we defined in the `android:actionLayout` attribute in the menu resource. In this case, that is the LinearLayout from `res/layout/add.xml`, so we need to call `findViewById()` on it to get the EditText:

```
@Override  
public boolean onCreateOptionsMenu(Menu menu) {  
    new MenuInflater(this).inflate(R.menu.option, menu);  
  
    EditText add=(EditText)menu  
        .findItem(R.id.add)  
        .getActionView()  
        .findViewById(R.id.title);  
  
    add.setOnEditorActionListener(onSearch);  
  
    return(super.onCreateOptionsMenu(menu));  
}
```

Then, we can call `setOnEditorActionListener()` on the EditText, to register an `OnEditorActionListener` object that will get control when the user presses Enter on the hard or soft keyboard:

```
private TextView.OnEditorActionListener onSearch=  
    new TextView.OnEditorActionListener() {  
        public boolean onEditorAction(TextView v, int actionId,  
                                     KeyEvent event) {  
            if (event==null || event.getAction()==KeyEvent.ACTION_UP) {  
                addWord(v);  
  
                InputMethodManager imm=(InputMethodManager) getSystemService(INPUT_METHOD_SERVICE);
```

```
        imm.hideSoftInputFromWindow(v.getWindowToken(), 0);
    }

    return(true);
};

};
```

That in turn calls an `addWord()` method, supplying the `EditText`, which adds the word to the list via the `ArrayAdapter`:

```
private void addWord(TextView title) {
    ArrayAdapter<String> adapter=(ArrayAdapter<String>)getListAdapter();
    adapter.add(title.getText().toString());
}
```

That same `addWord()` method can also be used from the `add()` method that displays the `AlertDialog`, even though that will not be used on a Honeycomb tablet, since the Add menu choice no longer exists as a menu choice:

```
private void add() {
    final View addView=getLayoutInflater().inflate(R.layout.add, null);

    new AlertDialog.Builder(this)
        .setTitle("Add a Word")
        .setView(addView)
        .setPositiveButton("OK",
            new DialogInterface.OnClickListener() {
                public void onClick(DialogInterface dialog,
                    int whichButton) {
                    addWord((TextView)addView.findViewById(R.id.title));
                }
            })
        .setNegativeButton("Cancel", null)
        .show();
}
```

The net result is that when the user types something in the Add field and presses the Enter key, the word is added to the bottom of the list. This saves some taps over the phone UI, as the user does not have to open the options menu, does not have to tap the options menu item, and does not have to tap a button on the dialog box.

Note that our `OnEditorActionListener` does something more than simply add the word to the list: it hides the soft keyboard. It does this using the `InputMethodManager`, as was seen in a previous chapter.

Don't Forget the Phones!

With the exception of the custom view feature described in the preceding section, everything shown in this chapter regarding the action bar is automatically backward compatible. The code and resources that work on Honeycomb-flavored versions of Android will work on classic versions of Android unmodified.

If, however, you want to use the custom view feature, you have a problem—the `getActionView()` method is new to API Level 11 and will be unavailable on older versions of Android. This means you will need to compile for API Level 11 (e.g., set your Eclipse target or Ant `default.properties` to reference `android-11`), and you will need to take steps to avoid calling `getActionView()` on older devices. We will explore how to pull off this feat in a later chapter.

Fragments

Perhaps the largest change in Android 3.0 facing Android developers is the introduction of the fragment system. This is an optional layer you can put between your activities and your widgets, designed to help you reconfigure your activities to support screens both large (e.g., tablets) and small (e.g., phones). However, the fragment system also adds an extra layer of complexity, one that will take the Android developer community some time to adjust to. Hence, for the time being, you will find few blog posts or sample apps using fragments because they were introduced so long after Android itself was.

This chapter covers basic uses of fragments, including supporting fragments on pre-Android 3.0 devices.

Introducing Fragments

Fragments are not widgets, like Button or EditText.

Fragments are not containers, like LinearLayout or RelativeLayout.

Fragments are not activities.

Rather, fragments aggregate widgets and containers. Fragments then can be placed into activities—sometimes several fragments for one activity, sometimes one fragment per activity.

And the reason for this is the variation in Android screen sizes.

The Problem Addressed by Fragments

A tablet has a larger screen than does a phone. A TV has a larger screen than does a tablet. Taking advantage of that extra screen space makes sense, as outlined in Chapter 25, which explained how to handle multiple screen sizes. In that chapter, we profiled an EU4You sample application, eventually winding up with an activity that would load in a different layout for larger-sized screens, one that had an embedded WebView widget. The activity would detect that widget's existence and use it to load web content related to a

selected country, rather than launching a separate browser activity or some activity containing only a `WebView`.

However, the scenario outlined in Chapter 25 was fairly trivial. Imagine that, instead of a `WebView`, we have a `TableLayout` containing 28 widgets. On larger-sized screens, we want the `TableLayout` in the same activity as an adjacent `ListView`; on smaller screens, we want the `TableLayout` to be in a separate activity, since there would not be enough room otherwise. To do this using pre-Honeycomb technology, we would either need to duplicate all of the `TableLayout`-handling logic in both activities, or create an activity base class and hope they can both inherit from it, or turn the `TableLayout` and its contents into a custom `ViewGroup`, or something. And that would just be for *one* such scenario—multiply that by many activities in a larger application, and the complexity mounts.

The Fragments Solution

Fragments reduce, but do not eliminate, that complexity.

With fragments, each discrete chunk of user interface that could be used in multiple activities (based on screen size) goes in a fragment. The activities in question determine, based on screen size, who gets the fragment.

In the case of EU4You, we have two fragments. One fragment represents the list of countries. The other fragment represents the details for that country (in our case, a `WebView`). On a larger-screen device, we want both fragments to be in one activity, while on a smaller-screen device, we will house those fragments in two separate activities. This provides to users with larger screens the same benefits they got with the last version of EU4You: getting more information in fewer clicks. Yet the techniques we demonstrate with fragments will be more scalable, able to handle more complex UI patterns than the simple `WebView`-or-not scenario of EU4You.

In this case, our entire UI will be inside of fragments. That is not necessary. Fragments are an opt-in technology—you need them only for the parts of your UI that could appear in different activities in different scenarios. In fact, your activities that do not change at all (say, a help screen) might not use fragments whatsoever.

Fragments also give us a few other bells and whistles, including the following:

- *Capability to add fragments dynamically based on user interaction:* For example, the Gmail application initially shows a `ListFragment` of the user's mail folders. Tapping a folder adds a second `ListFragment` to the screen, showing the conversations in that folder. Tapping a conversation adds a third Fragment to the screen, showing the messages in that conversation.

- *Capability to animate dynamic fragments as they move on and off the screen:* For example, when the user taps a conversation in Gmail, the folders ListFragment slides off the screen to the left, the conversations ListFragment slides left and shrinks to take up less room, and the messages Fragment slides in from the right.
- *Automatic Back button management for dynamic fragments:* For example, when the user presses Back while viewing the messages Fragment, that Fragment slides off to the right, the conversations ListFragment slides right and expands to fill more of the screen, and the folders ListFragment slides back in from the left. None of that has to be managed by developers—simply adding the dynamic fragment via a FragmentTransaction allows Android to automatically handle the Back button, including reversing all animations.
- *Capability to add options to the options menu, and therefore to the action bar:* Call `setHasOptionsMenu()` in `onCreate()` of your fragment to register an interest in this, and then override `onCreateOptionsMenu()` and `onOptionsItemSelected()` in the fragment the same way you might in an activity. A fragment can also register widgets to have context menus, and handle those context menus the same way as an activity would.
- *Capability to add tabs to the action bar:* The action bar can have tabs, replacing a TabHost, where each tab's content is a fragment. Similarly, the action bar can have a navigation mode, with a Spinner to switch between modes, where each mode is represented by a fragment.

The Android Compatibility Library

If fragments were available only for Android 3.0 and higher, we would be right back where we started, as not all Android devices today run Android 3.0 and higher.

However, this is not the case, because Google has released the Android Compatibility Library (ACL), which is available via the Android SDK and AVD Manager (where you install the other SDK support files, create and start your emulator AVDs, and so forth). The ACL gives you access to the fragment system on versions of Android going back to Android 1.6. Since the vast majority of Android devices are running 1.6 or higher, this allows you to start using fragments while maintaining backward compatibility. Over time, this library may add other features to help with backward compatibility, for applications that wish to use it.

The material in this chapter focuses on using the ACL when employing fragments. Generally speaking, using the ACL for fragments is almost identical to using the native Android 3.0 fragment classes directly.

Since the ACL only supports versions back to Android 1.6, Android 1.5 devices will not be able to use fragment-based applications. This is a very small percentage of the Android device spectrum at this time—3 percent as of the time of this writing.

Creating Fragment Classes

The first step toward setting up a fragment-based application is to create fragment classes for each of your fragments. Just as you inherit from `Activity` (or a subclass) for your activities, you inherit from `Fragment` (or a subclass) for your fragments.

Here, we will examine the `Fragments/EU4You_6` sample project and the fragments that it defines.

NOTE: The convention of this book will be to use “fragment” as a generic noun and `Fragment` to refer to the actual `Fragment` class.

General Fragments

Besides inheriting from `Fragment`, the only thing required of a fragment is to override `onCreateView()`. This will be called as part of putting the fragment on the screen. You need to return a `View` that represents the body of the fragment. Most likely, you will create your fragment’s UI via an XML layout file, and `onCreateView()` will inflate that fragment layout file.

For example, here is `DetailsFragment` from `EU4You_6`, which will wrap around our `WebView` to show the web content for a given country:

```
import android.support.v4.app.Fragment;
import android.os.Bundle;
import android.view.LayoutInflater;
import android.view.View;
import android.view.ViewGroup;
import android.webkit.WebView;

public class DetailsFragment extends Fragment {
    @Override
    public View onCreateView(LayoutInflater inflater, ViewGroup container,
                           Bundle savedInstanceState) {
        return(inflater.inflate(R.layout.details_fragment, container, false));
    }

    public void loadUrl(String url) {
        ((WebView)(getView().findViewById(R.id.browser))).loadUrl(url);
    }
}
```

Note that we are inheriting not from `android.app.Fragment` but from `android.support.v4.app.Fragment`. The latter is the `Fragment` implementation from the ACL, so it can be used across Android versions.

The `onCreateView()` implementation inflates a layout that happens to have a `WebView` in it:

```
<?xml version="1.0" encoding="utf-8"?>
<WebView
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/browser"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
/>
```

It also exposes a `loadUrl()` method, to be used by a hosting activity both to tell the fragment that it is time to display some web content and to supply the URL for doing the same. The implementation of `loadUrl()` in `DetailsFragment` uses `getView()` to retrieve the View created in `onCreateView()`, finds the `WebView` in it, and delegates the `loadUrl()` call to the `WebView`.

There are a myriad of other lifecycle methods available on `Fragment`. The more important ones include mirrors of the standard

`onCreate()`,`onStart()`,`onResume()`,`onPause()`,`onStop()`, and `onDestroy()` methods of an activity. Since the fragment is the one with the widgets, it will implement more of the business logic that formerly might have resided in the activity for these methods. For example, in `onPause()` or `onStop()`, since the user may not be returning to your application, you may wish to save any unsaved edits to some temporary storage. In the case of `DetailsFragment`, there was nothing that really qualified here, so those lifecycle methods were left alone.

ListFragment

One `Fragment` subclass that is sure to be popular is `ListFragment`. This wraps a `ListView` in a `Fragment`, designed to simplify setting up lists of things such as countries, mail folders, mail conversations, and so forth. Similar to a `ListActivity`, all you need to do is call `setListAdapter()` with your chosen and configured `ListAdapter`, plus override `onListItemClick()` to respond to when the user clicks on a row in the list.

In `EU4You_6`, we have a `CountriesFragment` that represents the list of available countries. It initializes the `ListAdapter` in `onActivityCreated()`, which is called after `onCreate()` has wrapped up in the activity that holds the fragment:

```
@Override
public void onActivityCreated(Bundle state) {
    super.onActivityCreated(state);

    setListAdapter(new CountryAdapter());

    if (state!=null) {
        int position=state.getInt(STATE_CHECKED, -1);

        if (position>-1) {
            getListView().setItemChecked(position, true);
        }
    }
}
```

The code dealing with the Bundle supplied to `onCreate()` will be explained a bit later in this chapter.

The `CountryAdapter` is nearly identical to the one from previous EU4You samples, except that there is no `getLayoutInflater()` method on a Fragment, so we have to use the static `from()` method on `LayoutInflater` and supply our activity via `getActivity()`:

```
class CountryAdapter extends ArrayAdapter<Country> {
    CountryAdapter() {
        super(getActivity(), R.layout.row, R.id.name, EU);
    }

    @Override
    public View getView(int position, View convertView,
                        ViewGroup parent) {
        CountryWrapper wrapper=null;

        if (convertView==null) {
            convertView=LayoutInflater
                .from(getActivity())
                .inflate(R.layout.row, null);
            wrapper=new CountryWrapper(convertView);
            convertView.setTag(wrapper);
        }
        else {
            wrapper=(CountryWrapper)convertView.getTag();
        }

        wrapper.populateFrom(getItem(position));

        return(convertView);
    }
}
```

Similarly, the `CountryWrapper` is no different from previous EU4You samples:

```
static class CountryWrapper {
    private TextView name=null;
    private ImageView flag=null;
    private View row=null;

    CountryWrapper(View row) {
        this.row=row;
        name=(TextView)row.findViewById(R.id.name);
        flag=(ImageView)row.findViewById(R.id.flag);
    }

    TextView getName() {
        return(name);
    }

    ImageView getFlag() {
        return(flag);
    }

    void populateFrom(Country nation) {
```

```
    getName().setText(nation.name);
    getFlag().setImageResource(nation.flag);
}
}
```

The list of countries is the same as well:

```
static {
    EU.add(new Country(R.string.austria, R.drawable.austria,
                       R.string.austria_url));
    EU.add(new Country(R.string.belgium, R.drawable.belgium,
                       R.string.belgium_url));
    EU.add(new Country(R.string.bulgaria, R.drawable.bulgaria,
                       R.string.bulgaria_url));
    EU.add(new Country(R.string.cyprus, R.drawable.cyprus,
                       R.string.cyprus_url));
    EU.add(new Country(R.string.czech_republic,
                       R.drawable.czech_republic,
                       R.string.czech_republic_url));
    EU.add(new Country(R.string.denmark, R.drawable.denmark,
                       R.string.denmark_url));
    EU.add(new Country(R.string.estonia, R.drawable.estonia,
                       R.string.estonia_url));
    EU.add(new Country(R.string.finland, R.drawable.finland,
                       R.string.finland_url));
    EU.add(new Country(R.string.france, R.drawable.france,
                       R.string.france_url));
    EU.add(new Country(R.string.germany, R.drawable.germany,
                       R.string.germany_url));
    EU.add(new Country(R.string.greece, R.drawable.greece,
                       R.string.greece_url));
    EU.add(new Country(R.string.hungary, R.drawable.hungary,
                       R.string.hungary_url));
    EU.add(new Country(R.string.ireland, R.drawable.ireland,
                       R.string.ireland_url));
    EU.add(new Country(R.string.italy, R.drawable.italy,
                       R.string.italy_url));
    EU.add(new Country(R.string.latvia, R.drawable.latvia,
                       R.string.latvia_url));
    EU.add(new Country(R.string.lithuania, R.drawable.lithuania,
                       R.string.lithuania_url));
    EU.add(new Country(R.string.luxembourg, R.drawable.luxembourg,
                       R.string.luxembourg_url));
    EU.add(new Country(R.string.malta, R.drawable.malta,
                       R.string.malta_url));
    EU.add(new Country(R.string.netherlands, R.drawable.netherlands,
                       R.string.netherlands_url));
    EU.add(new Country(R.string.poland, R.drawable.poland,
                       R.string.poland_url));
    EU.add(new Country(R.string.portugal, R.drawable.portugal,
                       R.string.portugal_url));
    EU.add(new Country(R.string.romania, R.drawable.romania,
                       R.string.romania_url));
    EU.add(new Country(R.string.slovakia, R.drawable.slovakia,
                       R.string.slovakia_url));
    EU.add(new Country(R.string.slovenia, R.drawable.slovenia,
```

```
        R.string.slovenia_url));
EU.add(new Country(R.string.spain, R.drawable.spain,
                  R.string.spain_url));
EU.add(new Country(R.string.sweden, R.drawable.sweden,
                  R.string.sweden_url));
EU.add(new Country(R.string.united_kingdom,
                  R.drawable.united_kingdom,
                  R.string.united_kingdom_url));
}
```

...as is the definition of a `Country`, from a separate public class:

```
public class Country {
    int name;
    int flag;
    int url;

    Country(int name, int flag, int url) {
        this.name=name;
        this.flag=flag;
        this.url=url;
    }
}
```

Persistent Highlight

One thing leaps out at you when you use fragment-based applications like Gmail. When you tap on a row in a list, and another fragment is shown (or updated) within the same activity, the row you tapped remains highlighted. This runs counter to the traditional use of a `ListView`, where the list selector is present only when using a D-pad, trackball, or similar pointing device. The purpose is to show the user the context of the adjacent fragment.

The actual implementation differs from what you might expect.

These `ListView` widgets are actually implementing `CHOICE_MODE_SINGLE`, what normally would be rendered using a `RadioButton` along the right side of the rows. In a `ListFragment`, though, the typical styling for a single-choice `ListFragment` is via an “activated” background.

In `EU4You_6`, this is handled via the row layout (`res/layout/row.xml`) used by our `CountryAdapter`:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:padding="2dip"
    android:minHeight="?android:attr/listPreferredItemHeight"
    style="@style/activated">
    <ImageView android:id="@+id/flag"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center_vertical|left"
```

```
    android:paddingRight="4dip"
  />
<TextView android:id="@+id/name"
  android:layout_width="wrap_content"
  android:layout_height="wrap_content"
  android:layout_gravity="center_vertical|right"
  android:textSize="5mm"
/>
</LinearLayout>
```

Notice the style attribute, pointing to an activated style. That is defined by EU4You_6 as a local style, versus one provided by the operating system. In fact, it has to have two implementations of the style, because the “activated” concept is new to Android 3.0 and cannot be used in previous versions of Android.

So, EU4You_6 has `res/values/styles.xml` with a backward-compatible empty style:

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
  <style name="activated">
  </style>
</resources>
```

It also has `res/values-v11/styles.xml`. The `-v11` resource set suffix means that this will be used only on API Level 11 (Android 3.0) and higher. Here, the style inherits from the standard Android Holographic theme and uses the standard activated background color:

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
  <style name="activated" parent="android:Theme.Holo">
    <item name="android:background">?android:attr/activatedBackgroundIndicator</item>
  </style>
</resources>
```

In `CountriesFragment`, the activity will let us know if `CountriesFragment` appears alongside `DetailsFragment`—therefore requiring single-choice mode—via a `enablePersistentSelection()` method:

```
public void enablePersistentSelection() {
  getListView().setChoiceMode(ListView.CHOICE_MODE_SINGLE);
}
```

Also, in `onListItemClick()`, `CountriesFragment` “checks” the row the user clicked upon, thereby enabling the persistent highlight:

```
@Override
public void onListItemClick(ListView l, View v, int position,
                           long id) {
  l.setItemChecked(position, true);

  if (listener!=null) {
    listener.onCountrySelected(EU.get(position));
  }
}
```

The listener object and call to `onCountrySelected()` will be explained later in this chapter.

Other Fragment Base Classes

The ACL has one other subclass of `Fragment`: `DialogFragment`. This is used to help coordinate between a modal Dialog and a fragment-based UI.

Android 3.0 itself has two more subclasses of `Fragment`, which are not available in the ACL as of the time of this writing:

- `PreferenceFragment`: For use in the new Honeycomb-style `PreferenceActivity` (covered in a later chapter)
-
- `WebViewFragment`: A `Fragment` wrapped around a `WebView`

Fragments, Layouts, Activities, and Multiple Screen Sizes

Having some fragment classes and their accompanying layouts is all well and good, but we need to hook them up to activities and get them on the screen. Along the way, we have to think about dealing with multiple screen sizes, much like we went with the `WebView`-or-browser approach with the previous version of the EU4You sample.

In Android 3.0 and higher, any activity can host a fragment. However, for the ACL, you need to inherit from `FragmentActivity` to use fragments. This limitation of the ACL definitely causes challenges, particularly if you were aiming to put a map in a fragment, a topic we will discuss later in this book. Other activity base classes pose less of an issue—`ListActivity` would be replaced by `ListFragment`, for example.

Fragments can be added in either of two ways to an activity:

- You can define them via `<fragment>` elements in the activity's layout. These fragments are fixed and will always exist for the lifetime of this activity instance.
- You can add them on-the-fly via `FragmentManager` and a `FragmentTransaction`. This gives you more flexibility, but adds a degree of complexity. This technique is not covered in this book.

One big limitation of dealing with multiple screen sizes is that the layouts need to have the same starting fragments for any configuration change. So, a small-screen version of an activity and a large-screen version of an activity can have different mixes of fragments, but a portrait layout and a landscape layout for the same screen size must have the same fragments defined. Otherwise, when the screen is rotated, Android will have problems, trying to work with a fragment that does not exist, for example.

We also need to work out communications between our fragments and our activities. The activities define what fragments they hold, so they typically know which classes implement those fragments and can call methods on them directly. The fragments, though, only know that they are hosted by *some* activity, and that activity may differ from case to case. Hence, the typical pattern is to use interfaces for fragment-to-activity communication:

- Define an interface for the methods that the fragment will want to call on its activity (or some other object supplied by that activity).
- The activity provides an implementation of that interface via some setter method on the fragment when the fragment is created.
- The fragment uses that interface implementation as needed.

We will see all of this as we work through the EU4You_6 activities and their corresponding layouts.

EU4You

In the earlier versions of the EU4You project, we had only one activity, also named EU4You. In EU4You_6, though, we have two activities:

- EU4You: Handles displaying the CountriesFragment in all screen sizes, plus the DetailsFragment on larger screens
- DetailsActivity: Hosts the DetailsFragment on smaller screens

While we could probably get away with having EU4You launch the browser activity for smaller screens, rather than have a DetailsActivity host a WebView-only DetailsFragment, the latter approach is more realistic for more fragment-based applications.

With that in mind, let's take a look at the pieces of the EU4You activity.

The Layout

For normal-screen devices, we want to display only the CountriesFragment. That is accomplished via `res/layout/main.xml` just having the appropriate `<fragment>` element:

```
<?xml version="1.0" encoding="utf-8"?>
<fragment xmlns:android="http://schemas.android.com/apk/res/android"
    class="com.commonsware.android.eu4you.CountriesFragment"
    android:id="@+id/countries"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
/>
```

The `class` attribute indicates what Java class implements the fragment. Otherwise, this layout is unremarkable.

Note that fragments do not get listed in the manifest file the way activities do.

The Other Layout

For large-screen devices, in the landscape mode, we want to have both the `CountriesFragment` and the `DetailsFragment`, side by side. That way, users can tap on a country and view the details without flipping back and forth between activities. It also enables us to take advantage of the screen space better.

However, there is a catch. If we want to predefine those two fragments in our layout file, we have to use that same pair of fragments for *both* landscape and portrait modes—despite the fact that we do not want to use the `DetailsFragment` in `EU4You` in portrait mode (having a list vertically stacked over the `WebView` would be odd looking, at best). As a workaround, we will use the same layout file for both orientations and then make adjustments in our Java code. Another approach to the problem would be to have the layout file only have the `CountriesFragment` and to use `FragmentManager` and a `FragmentTransaction` to add in the `DetailsFragment`. Here, though, we will use other tricks.

Hence, in `res/layout-large/` (not `res/layout-large-land/`), we have this layout:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="horizontal"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent">
    <fragment
        class="com.commonsware.android.eu4you.CountriesFragment"
        android:id="@+id/countries"
        android:layout_weight="30"
        android:layout_width="0px"
        android:layout_height="fill_parent"
    />
    <fragment
        class="com.commonsware.android.eu4you.DetailsFragment"
        android:id="@+id/details"
        android:layout_weight="70"
        android:layout_width="0px"
        android:layout_height="fill_parent"
    />
</LinearLayout>
```

Note that we are responsible for the positioning of the fragments, so here we use a horizontal `LinearLayout` to wrap around the two `<fragment>` elements.

The Listener Interface

When the user chooses a country in the `CountriesFragment`, we want to let our containing activity know about that. In this case, it so happens that the only activity that will ever host `CountriesFragment` is `EU4You`. However, perhaps in the future that will not be the case. So, we should abstract out the communications from `CountriesFragment` to its hosting activity via a listener interface.

Hence, the `EU4You_6` project has a `CountryListener` interface:

```
package com.commonsware.android.eu4you;

public interface CountryListener {
    void onCountrySelected(Country c);
}
```

The CountriesFragment holds onto an instance of CountryListener, supplied by the hosting activity:

```
public void setCountryListener(CountryListener listener) {
    this.listener=listener;
}
```

And, when the user clicks on a country and triggers onListItemClick(), CountriesFragment calls the onCountrySelected() method on the interface:

```
@Override
public void onListItemClick(ListView l, View v, int position,
                           long id) {
    l.setItemChecked(position, true);

    if (listener!=null) {
        listener.onCountrySelected(EU.get(position));
    }
}
```

The Activity

The EU4You activity is not long, though it is a bit tricky:

```
package com.commonsware.android.eu4you;

import android.content.Intent;
import android.content.res.Configuration;
import android.net.Uri;
import android.os.Bundle;
import android.support.v4.app.Fragment;
import android.support.v4.app.FragmentActivity;
import android.view.View;

public class EU4You extends FragmentActivity implements CountryListener {
    private boolean detailsInline=false;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);

        CountriesFragment countries
            =(CountriesFragment)getSupportFragmentManager()
                .findFragmentById(R.id.countries);

        countries.setCountryListener(this);

        Fragment f=getSupportFragmentManager().findFragmentById(R.id.details);
```

```

detailsInline=(f!=null &&
              (getResources().getConfiguration().orientation==
               Configuration.ORIENTATION_LANDSCAPE));

if (detailsInline) {
    countries.enablePersistentSelection();
}
else if (f!=null) {
    f.getView().setVisibility(View.GONE);
}
}

@Override
public void onCountrySelected(Country c) {
    String url=getString(c.url);

    if (detailsInline) {
        ((DetailsFragment) getSupportFragmentManager()
            .findFragmentById(R.id.details))
            .loadUrl(url);
    }
    else {
        Intent i=new Intent(this, DetailsActivity.class);
        i.putExtra(DetailsActivity.EXTRA_URL, url);
        startActivity(i);
    }
}
}

```

Our mission in `onCreate()` is to wire up our fragments. The fragments themselves are created by our call to `setContentView()`, inflating our layout and the fragments defined therein. In addition, though, EU4You does the following:

- Finds the `CountriesFragment` and registers itself as the `CountryListener`, since EU4You implements that interface.
- Finds the `DetailsFragment`, if it exists. If it exists and we are in landscape mode, we tell the `CountriesFragment` to enable the persistent highlight, to remind the user what details are being loaded on the right. If it exists and we are in portrait mode, we actually do not want `DetailsFragment` but need it to be consistent with the layout mode, so we mark the fragment's contents as being `GONE`. If the `DetailsFragment` does not exist, we do not have to do anything special.

In Android 3.0, getting the `FragmentManager` for calls like `findFragmentById()` is accomplished via `getFragmentManager()`. The ACL, however, defines a separate `getSupportFragmentManager()`, to ensure you are working with the ACL's implementation of `FragmentManager` and to work across the wider range of Android versions.

In addition, since EU4You implements the `CountryListener` interface, it must implement `onCountrySelected()`. Here, EU4You notes whether or not we should be routing to an

inline edition of `DetailsFragment`. If we should be, then `onCountrySelected()` passes the Country to the `DetailsFragment`, so it loads that country's web page. Otherwise, we launch the `DetailsActivity`, supplying the URL as an extra.

DetailsActivity

The `DetailsActivity` will be used where the `DetailsFragment` is not being shown in the `EU4You` activity, including in the following cases:

- When the device has a normal screen size and therefore does not have the `DetailsFragment` in the layout
- When the device has a large screen in the portrait size and therefore `EU4You` is hiding its own `DetailsFragment`

The Layout

The layout just has our `<fragment>` element in it, since there is nothing else to show:

```
<?xml version="1.0" encoding="utf-8"?>
<fragment xmlns:android="http://schemas.android.com/apk/res/android"
    class="com.commonsware.android.eu4you.DetailsFragment"
    android:id="@+id/details"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
/>
```

The Activity

`DetailsActivity` simply passes the URL from the Intent extra on to the `DetailsFragment`, telling it what web content to display:

```
package com.commonsware.android.eu4you;

import android.support.v4.app.FragmentActivity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;

public class DetailsActivity extends FragmentActivity {
    public static final String EXTRA_URL="com.commonsware.android.eu4you.EXTRA_URL";

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.details);

        DetailsFragment details
            =(DetailsFragment)getSupportFragmentManager()
                .findFragmentById(R.id.details);

        details.loadUrl(getIntent().getStringExtra(EXTRA_URL));
```

```
}
```

Fragments and Configuration Changes

In a previous chapter, we reviewed how activities can deal with configuration changes, such as screen rotations. How does this translate into a world of fragments?

Well, as is typical, there is good news, and there is other news.

The good news is that fragments have `onSaveInstanceState()` methods that they can override, behaving much like their activity counterparts. The Bundle then is made available in a variety of places, such as `onCreate()` and `onActivityCreated()`, though there is no dedicated `onRestoreInstanceState()`.

The other news is that not only do fragments lack `onRetainNonConfigurationInstance()`, but the ACL's `FragmentActivity` does not allow you to extend `onRetainNonConfigurationInstance()`, as that is used internally. Applications using the Android 3.0 implementation of fragments directly do not suffer from this problem. This limitation is substantial, and it remains to be seen what techniques the developer community collectively works out to get past the limitation.

Designing for Fragments

The overall design approach for fragments favors having business logic in the fragment, with activities serving as an orchestration layer for interfragment navigation and things that fragments are incapable of (e.g., `onRetainNonConfigurationInstance()`). For example, the Gmail application originally probably had much of its business logic implemented in each activity (e.g., an activity for folders, an activity for a list of conversations, an activity for a single conversation). Nowadays, that application is probably built around having that business logic delegated to fragments, with the activities merely choosing which fragments to display based upon available screen size.

This will cause some amount of restructuring of an existing application, above and beyond the simple act of refactoring the code. For example, a `ListActivity` might have launched another activity from `onListItemClick()`. The first-cut refactoring of that would have the fragment's `onListItemClick()` launch an activity. However, the fragment does not know whether or not the content requested by the user should be shown in another activity—it might go to another fragment within the current activity. Hence, the fragment should not blindly call `startActivity()` but rather should call a method on its container activity (or, more likely, a listener interface implemented by that activity), telling it of the click event and letting it decide the right course of action.

Right now, fragments are very new, so there are few well-established patterns to follow. Over time, the Android developer community, in conjunction with Google, will figure out those patterns, in some cases packaging them in prefabricated activities and fragments for reuse in the form of libraries and JARs.

Handling Platform Changes

Android has been rapidly evolving since its initial release, and will continue to do so over the next few years. Perhaps, in time, the rate of change will decline some. However, for the present, you should assume that there will be significant Android releases every 6 to 12 months, and changes to the lineup of possible Android hardware on an ongoing basis. So, while right now the focus of Android is phones, soon you will see Android netbooks, Android tablets, Android media players, and so on.

Many of these changes will have little impact on your existing code. Some, though, will necessitate at least new rounds of testing for your applications, and perhaps changes to those applications based upon the test results.

This chapter covers several issues that may cause you trouble in the future as Android evolves, and provides some recommendations on how to deal with them.

Things That Make You Go Boom

Android *will* change, not only in terms of what Google introduces, but also in how device manufacturers tweak Android for their own hardware. This section points out a couple of places where these changes can affect your application if you're not prepared for them.

View Hierarchy

Android is not designed to handle arbitrarily complicated view hierarchies. Here, *view hierarchy* means containers holding containers holding containers holding widgets. The *hierarchyviewer* program, described in a later chapter, depicts such view hierarchies well.

Android has always had limits as to how deep the view hierarchy can be. In Android 1.5, though, the limit was reduced, so some applications that worked fine on Android 1.1 would crash with a *StackOverflowException* in the newer Android. This, of course, was

frustrating to developers who never realized there was an issue with view hierarchy depth and then got caught by this change.

The lessons to take from this are as follows:

- Keep your view hierarchies shallow. Once you drift into double-digit depth, you are increasingly likely to run out of stack space.
- If you encounter a `StackOverflowException` and the stack trace looks like it is somewhere in the middle of drawing your widgets, your view hierarchy is probably too complex.

Changing Resources

The core Android team may change resources with an Android upgrade, and those may have unexpected effects in your application. For example, in Android 1.5, the Android team changed the stock Button background, to allow for smaller buttons. However, applications that implicitly relied on the former larger minimum size wound up breaking and needing some UI adjustment.

Similarly, applications can reuse public resources, such as icons, available inside of Android proper. While doing so saves some storage space, many of these resources are public by necessity and are not considered part of the SDK. For example, hardware manufacturers may change the icons to fit some alternative UI look and feel. Relying on the existing ones to always look as they do is a bit dangerous. You are better served by copying those resources out of the Android open source project into your own code base.

Handling API Changes

The core Android team has generally done a good job of keeping APIs stable, and supporting a deprecation model when they do change APIs. In Android, when a feature is *deprecated*, that does not mean the feature is going away, just that its continued use is discouraged. And, of course, new APIs are released with every new Android update. Changes to the APIs are well documented with each release via an API differences report.

Unfortunately, the Android Market—the primary distribution channel for Android applications—allows you to upload only one Android package (APK) file for each application. Hence, you need that one APK file to deal with as many Android versions as possible. Many times, your code will “just work” and not require changing. Other times, though, you will need to make adjustments, particularly if you want to support new APIs on new versions while not breaking on old versions. Let’s examine some techniques for handling these cases.

Minimum, Maximum, Target, and Build Versions

Android goes to great lengths to help you deal with the fact that at any point in time, there will be many Android OS versions out on the market. Unfortunately, the tools supplied by Android have given us a somewhat confusing set of overlapping concepts, such as targets and SDK versions. This section attempts to clarify those concepts.

Targets vs. SDK Versions vs. OS Versions

The concept of targets was introduced toward the beginning of this book. Targets are used when defining AVDs, to determine what sort of device those AVDs support. Targets are also used when creating new projects, primarily to determine what version of the SDK build tools will be used to build your project.

A target combines an API level with an indicator of whether or not the target includes Google APIs (e.g., Google Maps support).

An API level is an integer representing a version of the Android API. Each Android OS release that makes changes to the Android API triggers a new API level. Following are the API levels:

- 3: Android 1.5r1, 1.5r2, and 1.5r3
- 4: Android 1.6r1 and 1.6r2
- 5: Android 2.0
- 6: Android 2.0.1
- 7: Android 2.1
- 8: Android 2.2
- 9: Android 2.3
- 10: Android 2.3.3
- 11: Android 3.0

Google maintains a web page that outlines which versions of Android are in use today, based on requests made to the Android Market.

Minimum SDK Version

In your `AndroidManifest.xml` file, you should add a `<uses-sdk>` element. This element describes how your application relates to the various SDK versions.

The most critical attribute to have in `<uses-sdk>` is `android:minSdkVersion`. This indicates what the lowest API level is that your application supports. Devices running Android OS versions associated with lower API levels will not be able to install your

application. Your application may not even appear to those devices in the Android Market listings, should you elect to publish via that distributor.

If you skip this attribute, Android assumes your application works on *all* Android API versions. That may be true, but it is rather dangerous to assume if you have not tested it. Hence, set `android:minSdkVersion` to the lowest level you are testing and are willing to support.

Target SDK Version

Another `<uses-sdk>` attribute is `android:targetSdkVersion`. This represents the version of the Android API that you are primarily developing for. Any Android device running a newer version of the OS may elect to apply some compatibility settings that will help apps like yours, targeting an older API, run on the newer version.

Most of the time, you should set this to be the current Android API version, as of the time you are publishing your application.

In particular, with Honeycomb, you need to specify a target of 11 to get the new look and feel.

Maximum SDK Version

The third `<uses-sdk>` attribute is `android:maxSdkVersion`. Any Android device running a newer Android OS than is indicated by this API level will be prohibited from running your application.

On the plus side, this ensures that your application will not be used on API levels you have not tested, particularly if you set this to be the current Android API version as of your publication date.

However, bear in mind that your application will be filtered out of the Android Market for these newer devices. Over time, this will limit the reach of your application, if you do not release an update with a higher maximum SDK version.

The core Android team recommends that you not use this option and instead rely on Android's intrinsic backward compatibility—particularly leveraging your `android:targetSdkVersion` value—to allow your application to continue to run on new Android OS versions.

Detecting the Version

If you simply want to take different branches in your code based on version, the easiest thing to do is inspect `android.os.Build.VERSION.SDK_INT`. This public static integer value will reflect the same API level as you use when creating AVDs and specifying API levels in the manifest. So, you can compare that value to, say, `android.os.Build.VERSION_CODES.DONUT` to see whether you are running on Android 1.6 or newer.

Wrapping the API

So long as the APIs you try to use exist across all Android versions you are supporting, just branching may be sufficient. Where things get troublesome is when the APIs change, such as when there are new parameters to methods, new methods, or even new classes. You need code that will work regardless of Android version, while also letting you take advantage of new APIs where available.

The challenge is that if you try loading code into the virtual machine that refers to classes, methods, and such that do not exist in the version of Android that the device is running on, your application will crash with a `VerifyError`. You need to *compile* against the version of Android that contains the latest APIs you are trying to use—you just cannot load that code into an older Android device.

Note that the key phrase here is “load that code.” You don’t necessarily have a problem just because a class exists in your application that uses a newer-than-available API. It is only if you execute code that triggers Android to load that class into your running process that you will encounter the `VerifyError`.

With that in mind, there are three primary tricks to deal with this situation, outlined in the following sections.

Detecting Classes

Perhaps all you need to do is disable some features in your app that lead to things that are not possible on a given device. For example, suppose you have an activity that uses the new Android 3.0 fragments feature. You cannot successfully start that activity on a pre-3.0 device. Stopping that activity may just be a matter of disabling a menu choice or Button or something.

To see if a certain class (say, `ListFragment`) is available to you, you can call `Class.forName()`. This will either return a `Class` object representing the requested class or throw an `Exception` if it is not available. You can use the exception handler as the spot to disable the UI paths that would cause your application to try to start an activity that uses the unavailable class.

Reflection

If you need limited access to a class that will not exist on older versions of Android, you can use a bit of reflection.

For example, in the chapter on rotation, we used a series of sample applications that allowed the user to pick a contact. That relied on an `ACTION_PICK` Intent, using a specific Uri for the contact’s content provider. In those samples, we specifically used `ContactsContract`, the revised contacts API offered in Android 2.0 and beyond. That means those projects will not work on older versions of Android.

However, all we really need is this magic Uri value. If we can devise a way to get the right Uri for older versions of Android, as well as the right Uri for newer versions of Android, without causing problems, we can be more backward compatible.

Fortunately, this is fairly easy to do with some reflection:

```
static {
    int sdk=new Integer(Build.VERSION.SDK.intValue());

    if (sdk>=5) {
        try {
            Class clazz=Class.forName("android.provider.ContactsContract$Contacts");

            CONTENT_URI=(Uri)clazz.getField("CONTENT_URI").get(clazz);
        }
        catch (Throwable t) {
            Log.e("PickDemo", "Exception when determining CONTENT_URI", t);
        }
    } else {
        CONTENT_URI=android.provider.Contacts.People.CONTENT_URI;
    }
}
```

Here, we examine the API level of the device by looking at Build.VERSION.SDK (we could use Build.VERSION.SDK_INT, but that wasn't added until Android 1.6—the code shown here works on Android 1.5 as well). If we are at Android 2.0 (API level 5) or higher, we use Class.forName() to get at the new ContactsContract.Contacts class, and then use reflection to get at the CONTENT_URI static data member on that class. If we are on an older version of Android, we simply use the Uri published by the older Contacts.People class.

Since we are not directly referencing ContactsContract.Contacts in our code, we can safely execute this, even on older versions of Android.

Conditional Class Loading

Reflection works but is a pain for anything complex. Also, it is slower than calling code directly.

The most powerful technique, therefore, is simply to organize your code such that you have regular classes using newer APIs, but you do not load those classes on older devices. We will examine this technique later in this book.

Patterns for Honeycomb

More so than any previous Android release, Honeycomb (Android 3.0) makes supporting multiple Android versions a significant challenge. The UI changes required to support the Honeycomb UI will, in many cases, require you to take steps to make sure that you still work successfully on older versions of Android. This section outlines some patterns for dealing with this area of backward compatibility.

The Action Bar

As noted in Chapter 27, many of the action bar's basic features will work in a backward-compatible fashion. For example, indicating than an options menu item can be shown in the action bar requires just an attribute in the menu resource XML, an attribute that will be ignored on older versions of Android. Honeycomb-capable devices will put the item in the action bar, while devices running previous Android versions will not.

However, not all of the action bar's features are backward compatible. In the Menus/ActionBar sample application in Chapter 27, we added a custom View to the action bar, to allow people to add words to our list without dealing with menus and dialog boxes. However, this required some code that works only on API level 11 (Android 3.0) and higher. More advanced action bar capabilities—ones beyond the scope of this book—will have similar requirements.

You need to arrange to use those action bar methods only on devices that run API level 11 or higher. Conditional class loading, outlined earlier in this chapter, is one such technique, and is the technique used in the Menus/ActionBarBC sample application. Let's take a look at how this works.

Checking the API Level

Our original implementation of `onCreateOptionsMenu()` looked like this:

```
@Override  
public boolean onCreateOptionsMenu(Menu menu) {  
    new MenuInflater(this).inflate(R.menu.option, menu);  
  
    EditText add=(EditText)menu  
        .findItem(R.id.add)  
        .getActionView()  
        .findViewById(R.id.title);  
  
    add.setOnEditorActionListener(onSearch);  
  
    return(super.onCreateOptionsMenu(menu));  
}
```

This is fine, but it will work only on API level 11 and higher, as `getActionView()` only exists from that API level onward. Hence, we cannot run this code, or even load this class, on older versions of Android without getting a `VerifyError`.

The new version of `onCreateOptionsMenu()` hides the offending code and checks the API level:

```
@Override  
public boolean onCreateOptionsMenu(Menu menu) {  
    new MenuInflater(this).inflate(R.menu.option, menu);  
  
    EditText add=null;
```

```
if (Build.VERSION.SDK_INT>=Build.VERSION_CODES.HONEYCOMB) {  
    View v=HoneycombHelper.getAddActionView(menu);  
  
    if (v!=null) {  
        add=(EditText)v.findViewById(R.id.title);  
    }  
  
    if (add!=null) {  
        add.setOnEditorActionListener(onSearch);  
    }  
  
    return(super.onCreateOptionsMenu(menu));  
}
```

We hide only the code that retrieves the View that we theoretically have put in the action bar. If we are on an older version of Android, the HONEYCOMB check will fail, and we will wind up with a null View, so we skip adding the OnEditorActionListener to the EditText inside of that View.

This has another benefit: it works if the Android device runs API level 11 or higher but does not have room for our custom View. Android tablets will have an action bar and sufficient room, but future Honeycomb-capable phones might have an action bar but lack sufficient room. In that case, the phone would leave the Add options menu item in place, and we still would wind up with a null View. This code handles that scenario; the original code did not.

Isolating the Honeycomb Code

Our Honeycomb-specific code is held in a separate HoneycombHelper class, one that will only be used on API level 11 (or higher) devices:

```
package com.commonsware.android.inflation;  
  
import android.view.Menu;  
import android.view.View;  
  
class HoneycombHelper {  
    static View getAddActionView(Menu menu) {  
        return(menu.findItem(R.id.add).getActionView());  
    }  
}
```

HoneycombHelper has a single getAddActionView() static method that finds the View for the Add action bar entry, if there is one.

Since we do not try to execute any code on this class except for inside the HONEYCOMB check, it is safe to have this class on older versions of Android. The Menus/ActionBarHC app works on Android 1.6 and newer.

Writing Tablet-Only Apps

Ideally, your Android applications work on all form factors: phones, tablets, and so forth. However, you may want to create an app that simply would be unusable on phones. Ideally, you would want to keep your app off of small-screen devices, so that users are not disappointed.

To do this, you can take advantage of the fact that Android will scale apps up but will not scale apps down. In other words, if you specify that your application does not support some larger screen sizes (e.g., `android:xlargeScreens="false"` appears in your `<supports-screens>` element in your `AndroidManifest.xml` file), Android still allows your app to run on such screens and takes steps to help your app run with the additional screen space. However, if you specify that your application does not support some smaller screen sizes (e.g., `android:smallScreens="false"` appears in your `<supports-screens>` element), Android will not run your app, and you will be filtered out of the Android Market for such devices.

Hence, if your application will work well only on larger-screen devices, use a `<supports-screens>` element like this:

```
<supports-screens android:xlargeScreens="true"
                  android:largeScreens="true"
                  android:normalScreens="false"
                  android:smallScreens="false"
                  android:anyDensity="true"/>
```

Accessing Files

While Android offers structured storage, via preferences and databases, sometimes a simple file will suffice. Android offers two models for accessing files: one for files prepackaged with your application and one for files created on-device by your application.

You and the Horse You Rode in On

Let's suppose you have some static data you want to ship with the application, such as a list of words for a spell checker. The easiest way to deploy that is to put the file in the `res/raw` directory, so that it will be put in the Android application APK file as part of the packaging process as a raw resource.

To access this file, you need to get yourself a `Resources` object. From an activity, that is as simple as calling `getResources()`. A `Resources` object offers `openRawResource()` to get an `InputStream` on the file you specify. Rather than a path, `openRawResource()` expects an integer identifier for the file as packaged. This works just like accessing widgets via `findViewById()`; for example, if you put a file named `words.xml` in `res/raw`, the identifier is accessible in Java as `R.raw.words`.

Since you can get only an `InputStream`, you have no means of modifying this file. Hence, it is useful really only for static reference data. Moreover, since it doesn't change until the user installs an updated version of your application package, either the reference data must be valid for the foreseeable future or you must provide some means of updating the data. The simplest way to handle that is to use the reference data to bootstrap some other modifiable form of storage (e.g., a database), but that results in two copies of the data in storage. An alternative is to keep the reference data as is and keep modifications in a file or database, and then merge them together when you need a complete picture of the information. For example, if your application ships a file of URLs, you could have a second file that tracks URLs added by the user or references URLs that were deleted by the user.

In the Files/Static sample project, you will find a reworking of the list box example from earlier, this time using a static XML file instead of a hardwired array in Java. The layout is the same:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent" >
    <TextView
        android:id="@+id/selection"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
    />
    <ListView
        android:id="@+id/list"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:drawSelectorOnTop="false"
    />
</LinearLayout>
```

In addition to that XML file, you also need an XML file with the words to show in the list:

```
<words>
    <word value="lorem" />
    <word value="ipsum" />
    <word value="dolor" />
    <word value="sit" />
    <word value="amet" />
    <word value="consectetuer" />
    <word value="adipiscing" />
    <word value="elit" />
    <word value="morbi" />
    <word value="vel" />
    <word value="ligula" />
    <word value="vitae" />
    <word value="arcu" />
    <word value="aliquet" />
    <word value="mollis" />
    <word value="etiam" />
    <word value="vel" />
    <word value="erat" />
    <word value="placerat" />
    <word value="ante" />
    <word value="porttitor" />
    <word value="sodales" />
    <word value="pellentesque" />
    <word value="augue" />
    <word value="purus" />
</words>
```

While this XML structure is not exactly a model of space efficiency, it will suffice for a demo.

The Java code now must read in that XML file, parse out the words, and put them someplace for the list to pick up:

```
public class StaticFileDemo extends ListActivity {
    TextView selection;
    ArrayList<String> items=new ArrayList<String>();

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        selection=(TextView)findViewById(R.id.selection);

        try {
            InputStream in=getResources().openRawResource(R.raw.words);
            DocumentBuilder builder=DocumentBuilderFactory
                .newInstance()
                .newDocumentBuilder();
            Document doc=builder.parse(in, null);
            NodeList words=doc.getElementsByTagName("word");

            for (int i=0;i<words.getLength();i++) {
                items.add(((Element)words.item(i)).getAttribute("value"));
            }

            in.close();
        }
        catch (Throwable t) {
            Toast
                .makeText(this, "Exception: "+t.toString(), Toast.LENGTH_LONG)
                .show();
        }

        setListAdapter(new ArrayAdapter<String>(this,
            android.R.layout.simple_list_item_1,
            items));
    }

    public void onListItemClick(ListView parent, View v, int position,
        long id) {
        selection.setText(items.get(position).toString());
    }
}
```

The differences mostly lie within `onCreate()`. We get an `InputStream` for the XML file (`getResources().openRawResource(R.raw.words)`), then use the built-in XML parsing logic to parse the file into a DOM Document, pick out the word elements, and then pour the value attributes into an `ArrayList` for use by the `ArrayAdapter`.

The resulting activity looks the same as before, as shown in Figure 30–1, since the list of words is the same, just relocated.



Figure 30–1. The *StaticFileDemo* sample application

Of course, there are even easier ways to have XML files available to you as prepackaged files, such as by using an XML resource. That is covered in Chapter 31. However, while this example used XML, the file could just as easily have been a simple one-word-per-line list, or in some other format not handled natively by the Android resource system.

Readin' 'n Writin'

Reading and writing your own, application-specific data files is nearly identical to what you might do in a desktop Java application. The key is to use `openFileInput()` and `openFileOutput()` on your Activity or other Context to get an `InputStream` and `OutputStream`, respectively. From that point forward, it is not much different from regular Java I/O logic:

- Wrap those streams as needed, such as by using an `InputStreamReader` or `OutputStreamWriter` for text-based I/O.
- Read or write the data.
- Use `close()` to release the stream when done.

If two applications both try to read a `notes.txt` file via `openFileInput()`, each will access its own edition of the file. If you need to have one file accessible from many places, you probably want to create a content provider, as will be described in an upcoming chapter.

Note that `openFileInput()` and `openFileOutput()` do not accept file paths (e.g., `path/to/file.txt`), just simple file names.

Following is the layout for the world's most trivial text editor, pulled from the Files/ReadWrite sample application:

```
<?xml version="1.0" encoding="utf-8"?>
<EditText xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/editor"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:singleLine="false"
    android:gravity="top"
    />
```

All we have here is a large text-editing widget...which is pretty boring.

The Java is only slightly more complicated:

```
package com.commonsware.android.readwrite;

import android.app.Activity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;
import java.io.BufferedReader;
import java.io.File;
import java.io.InputStream;
import java.io.InputStreamReader;
import java.io.OutputStream;
import java.io.OutputStreamWriter;

public class ReadWriteFileDemo extends Activity {
    private final static String NOTES="notes.txt";
    private EditText editor;

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
        editor=(EditText)findViewById(R.id.editor);
    }

    public void onResume() {
        super.onResume();

        try {
            InputStream in=openFileInput(NOTES);

            if (in!=null) {
                InputStreamReader tmp=new InputStreamReader(in);
                BufferedReader reader=new BufferedReader(tmp);
                String str;
                StringBuilder buf=new StringBuilder();

                while ((str = reader.readLine()) != null) {
                    buf.append(str+"\n");
                }
            }
        }
    }
}
```

```
        in.close();
        editor.setText(buf.toString());
    }
}
catch (java.io.FileNotFoundException e) {
    // that's OK, we probably haven't created it yet
}
catch (Throwable t) {
    Toast
        .makeText(this, "Exception: "+t.toString(), Toast.LENGTH_LONG)
        .show();
}
}

public void onPause() {
    super.onPause();

    try {
        OutputStreamWriter out=
            new OutputStreamWriter(openFileOutput(NOTES, 0));

        out.write(editor.getText().toString());
        out.close();
    }
    catch (Throwable t) {
        Toast
            .makeText(this, "Exception: "+t.toString(), Toast.LENGTH_LONG)
            .show();
    }
}
```

First, we hook into onResume(), so we get control when our editor is coming back to life, from a fresh launch or after having been frozen. We use openFileInput() to read in notes.txt and pour the contents into the text editor. If the file is not found, we assume this is the first time the activity was run (or the file was deleted by other means), and we just leave the editor empty.

Next, we hook into onPause(), so we get control as our activity gets hidden by another activity or is closed, such as via the device's Back button. Here, we use openFileOutput() to open notes.txt, into which we pour the contents of the text editor.

The net result is that we have a persistent notepad, as shown in Figures 30–2 and 30–3. Whatever is typed in will remain until deleted, surviving our activity being closed (e.g., via the Back button), the phone being turned off, or similar situations.

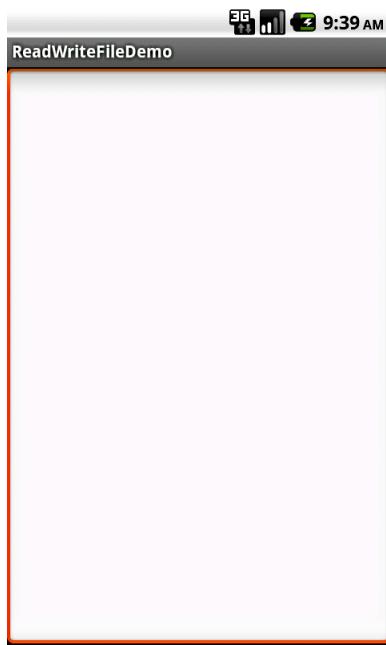


Figure 30–2. The *ReadWriteFileDemo* sample application, as initially launched

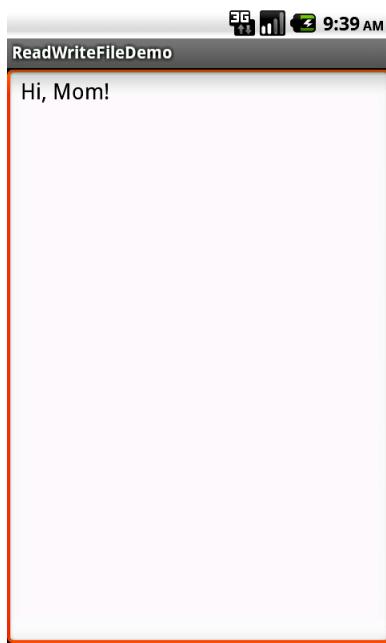


Figure 30–3. The same application, after entering some text

Another approach for working with application-local files is to use `getFilesDir()`. This returns a `File` object pointing to a place in the onboard flash where an application can store files. This directory is where `openFileInput()` and `openFileOutput()` work. However, while `openFileInput()` and `openFileOutput()` do not support subdirectories, the `File` from `getFilesDir()` can be used to create and navigate subdirectories if desired.

The files stored here are accessible only to your application, by default. Other applications on the device have no rights to read, let alone write, to this space. However, bear in mind that some users “root” their Android phones, gaining superuser access. These users will be able to read and write whatever files they wish. As a result, please consider application-local files to be secure against malware but not necessarily secure against interested users.

External Storage: Giant Economy-Size Space

In addition to application-local storage, you also have access to external storage. This may be in the form of a removable media card, like an SD card or microSD card, or in the form of additional onboard flash set aside to serve in the “external storage” role.

On the plus side, external storage tends to have more space available than onboard storage. Onboard storage can be rather limited; for example, the original T-Mobile G1 (HTC Dream) had a total of 70MB for all applications combined. Although newer phones offer more onboard space, external storage is usually at least 2GB and can be as big as 32GB.

On the minus side, all applications can, if they wish, read and write external storage, so these files are not very secure. Furthermore, external storage can be mounted on a host computer as a USB mass storage device—when it is in use in this mode, Android applications cannot access it. As a result, files on external storage may or may not be available to you at any given moment.

Where to Write

If you have files tied to your application that are simply too big to risk putting in the application-local file area, you can use `getExternalFilesDir()`, available on any activity or other Context. This gives you a `File` object pointing to an automatically created directory on external storage, unique for your application. While not secure against other applications, it does have one big advantage: when your application is uninstalled, these files are automatically deleted, just like the ones in the application-local file area.

If you have files that belong more to the user than to your app (for example, pictures taken by the camera, downloaded MP3 files, etc.), a better solution is to use `getExternalStoragePublicDirectory()`, available on the `Environment` class. This gives you a `File` object pointing to a directory set aside for a certain type of file, based on the type you pass into `getExternalStoragePublicDirectory()`. For example, you can ask for `DIRECTORY_MOVIES`, `DIRECTORY_MUSIC`, or `DIRECTORY_PICTURES` for storing MP4, MP3, or

JPEG files, respectively. These files will be left behind when your application is uninstalled.

You will also find a `getExternalStorageDirectory()` method on `Environment`, pointing to the root of the external storage. This is no longer the preferred approach—the methods previously described help keep the user's files better organized. However, if you are supporting older Android devices, you may need to use `getExternalStorageDirectory()`, simply because the newer options may not be available to you.

When to Write

Starting with Android 1.6, you also need to hold permissions to work with external storage (e.g., `WRITE_EXTERNAL_STORAGE`). The concept of permissions will be covered in a later chapter.

Also, external storage may be tied up if the user has mounted it as a USB storage device. You can use `getExternalStorageState()` (a static method on `Environment`) to determine whether or not the external storage is presently available.

StrictMode: Avoiding Janky Code

Users are more likely to like your application if, to them, it feels responsive. By “responsive,” we mean that it reacts swiftly and accurately to user operations, like taps and swipes.

Conversely, users are less likely to be happy with your application if they perceive that your UI is “janky”—sluggish to respond to their requests. For example, perhaps your lists do not scroll as smoothly as users would like, or tapping a button does not yield the immediate results they seek.

While threads and `AsyncTask` and the like can help, it may not always be obvious where you should apply them. A full-scale performance analysis, using `Traceview` or similar Android tools, is certainly possible. However, there are a few standard sorts of things that developers do, sometimes quite by accident, on the main application thread that tend to cause sluggishness:

- Flash I/O, both for the onboard storage and for external storage (e.g., the SD card)
- Network I/O

However, even here, it may not be obvious that you are performing these operations on the main application thread. This is particularly true when the operations are really being done by Android’s code that you are simply calling.

That is where `StrictMode` comes in. Its mission is to help you determine when you are doing things on the main application thread that might cause a janky user experience.

Setting Up StrictMode

StrictMode works on a set of policies. There are presently two categories of policies: VM policies and thread policies. VM policies represent bad coding practices that pertain to your entire application, notably leaking SQLite Cursor objects and kin. Thread policies represent things that are bad when performed on the main application thread, notably flash I/O and network I/O.

Each policy dictates what StrictMode should watch for (e.g., flash reads are OK but flash writes are not) and how StrictMode should react when you violate the rules, such as

- Log a message to LogCat
- Display a dialog
- Crash your application (seriously!)

The simplest thing to do is call the static `enableDefaults()` method on StrictMode from `onCreate()` of your first activity. This will set up normal operation, reporting all violations by simply logging to LogCat. However, you can set your own custom policies via `Builder` objects if you so choose.

Seeing StrictMode in Action

The `Threads/ReadWriteStrict` sample application is a reworking of the `Files/ReadWrite` sample application shown earlier in this chapter. All it adds is a custom StrictMode thread policy:

```
StrictMode.setThreadPolicy(new StrictMode.ThreadPolicy.Builder()  
    .detectAll()  
    .penaltyLog()  
    .build());
```

If you run the application, the user will see no difference. However, you will have a debug-level log message in LogCat with the following stack trace:

```
12-28 17:19:40.009: DEBUG/StrictMode(480): StrictMode policy violation; ~duration=169←  
ms: android.os.StrictMode$StrictModeDiskReadViolation: policy=23 violation=2  
12-28 17:19:40.009: DEBUG/StrictMode(480): at←  
    android.os.StrictMode$AndroidBlockGuardPolicy.onReadFromDisk(StrictMode.java:745)  
12-28 17:19:40.009: DEBUG/StrictMode(480): at←  
    dalvik.system.BlockGuard$WrappedFileSystem.open(BlockGuard.java:228)  
12-28 17:19:40.009: DEBUG/StrictMode(480): at←  
    android.app.ContextImpl.openFileOutput(ContextImpl.java:410)  
12-28 17:19:40.009: DEBUG/StrictMode(480): at←  
    android.content.ContextWrapper.openFileOutput(ContextWrapper.java:158)  
12-28 17:19:40.009: DEBUG/StrictMode(480): at←  
    com.commonsware.android.readwrite.ReadWriteFileDemo.onPause(ReadWriteFileDemo.java:82)  
...
```

Here, StrictMode is warning us that we attempted a flash write on the main application thread (the thread on which we set the StrictMode policy). Ideally, we would rewrite this project to use an AsyncTask or something for writing out the data.

Development Only, Please!

Do not use StrictMode in production code. It is designed for use when you are building, testing, and debugging your application. It is not designed to be used in the field.

To deal with this, you could

- Simply comment out or remove the StrictMode setup code when you prepare your production builds
- Use some sort of production flag to skip the StrictMode setup code when needed

Conditionally Being Strict

StrictMode is only for Android 2.3 and higher. Hence, if we have it in our code, even in development mode, it might interfere when we try testing on older emulators or devices. As we saw in an earlier chapter, there are techniques for dealing with this, but using reflection for configuring StrictMode would be rather painful.

The right approach, therefore, is simply to organize your code such that you have regular classes using newer APIs, but you do not load those classes on older devices. The APIVersions/ReadWriteStrict project demonstrates this, allowing an application to use Android 2.3's StrictMode where available and skip it where it is not available.

When we examined StrictMode earlier in this section, we configured StrictMode right in the onCreate() method of our sample activity. This works, but only on Android 2.3 and newer.

To allow this to work on older versions of Android, we use StrictWrapper:

```
package com.commonsware.android.readwrite;

import android.os.Build;

abstract class StrictWrapper {
    static private StrictWrapper INSTANCE=null;

    static public void init() {
        if (Build.VERSION.SDK_INT>=Build.VERSION_CODES.GINGERBREAD) {
            INSTANCE=new StrictForRealz();
        }
        else {
            INSTANCE=new NotAllThatStrict();
        }
    }

    static class NotAllThatStrict extends StrictWrapper {
```

```
    } // no methods needed
}
```

This odd-looking class encapsulates our “do-we-or-don’t-we” logic for dealing with StrictMode. It contains an `init()` method that, when called, checks to see what version of Android the application is running on, and creates a singleton instance of a `StrictWrapper` subclass based upon it—`StrictForRealz` for Android 2.3 and higher, `NotAllThatStrict` for older versions of Android. The latter class, a static inner class of `StrictWrapper`, does nothing, reflecting that there is no StrictMode in newer versions of Android.

`StrictForRealz` contains the StrictMode initialization logic:

```
package com.commonsware.android.readwrite;

import android.os.StrictMode;

class StrictForRealz extends StrictWrapper {
    StrictForRealz() {
        StrictMode.setThreadPolicy(new StrictMode.ThreadPolicy.Builder()
            .detectAll()
            .penaltyLog()
            .build());
    }
}
```

And, our `onCreate()` method of our activity calls `init()` on `StrictWrapper`, to trigger creating the proper object:

```
@Override
public void onCreate(Bundle icicle) {
    super.onCreate(icicle);
    setContentView(R.layout.main);

    StrictWrapper.init();

    editor=(EditText)findViewById(R.id.editor);
}
```

When the activity first starts up, neither `StrictWrapper` nor `StrictForRealz` is loaded in the process. As soon as we reach the `init()` statement in `onCreate()`, Android loads `StrictWrapper` into the process, but this is safe, as it does not refer to any potentially nonexistent classes. The `init()` method on `StrictWrapper` then executes a statement involving `StrictForRealz` only if we are safely on a supported version of Android. Hence, `StrictForRealz` will be loaded into the process only if we are on a newer Android release, so our use of StrictMode in `StrictForRealz` will not trigger a `VerifyError`.

Here, all we needed was a bit of initialization. The singleton pattern is used to demonstrate that you could expose a version-dependent API implementation if you desired. Simply define the API as abstract methods on the abstract class (`StrictWrapper`) and have version-dependent concrete implementations of those abstract methods on the concrete subclasses (`StrictForRealz`, `NotAllThatStrict`).

Linux File Systems: You Sync, You Win

Android is built atop a Linux kernel and uses Linux file systems for holding its files. Classically, Android used YAFFS (Yet Another Flash File System), optimized for use on low-power devices for storing data to flash memory. Many devices still use YAFFS today.

YAFFS has one big problem: only one process can write to the file system at a time. Rather than offering file-level locking, YAFFS has partition-level locking. This can become a bit of a bottleneck, particularly as Android devices grow in power and start wanting to do more things at the same time, like their desktop and notebook brethren.

Android is starting to move toward ext4, another Linux file system aimed more at desktops/notebooks. Your applications will not directly perceive the difference. However, ext4 does a fair bit of buffering, and it can cause problems for applications that do not take this buffering into account. Linux application developers ran headlong into this in 2008 and 2009, when ext4 started to become popular. As an Android developer, you will need to think about it now...for your own file storage.

If you are using SQLite or SharedPreferences, you do not need to worry about this problem. Android (and SQLite, if you are using it) handles all the buffering issues for you. If, however, you write your own files, you may wish to contemplate an extra step as you flush your data to disk. Specifically, you need to trigger a Linux system call known as `fsync()`, which tells the file system to ensure all buffers are written to disk.

If you are using `java.io.RandomAccessFile` in a synchronous mode, this step is handled for you as well, so you will not need to worry about it. However, Java developers tend to use `FileOutputStream`, which does not trigger an `fsync()`, even when you call `close()` on the stream. Instead, you call `getFD().sync()` on the `FileOutputStream` to trigger the `fsync()`. Note that this may be time consuming, and so disk writes should be done off the main application thread wherever practical, such as via an `AsyncTask`.

Part **IV**

Data Stores, Network Services, and APIs

Using Preferences

Android has many different ways for you to store data for long-term use by your activity. The simplest to use is the preferences system, which is the focus of this chapter.

Android allows activities and applications to keep preferences, in the form of key/value pairs (akin to a Map), that will hang around between invocations of an activity. As the name suggests, the primary purpose of preferences is to enable you to store user-specified configuration details, such as the last feed the user looked at in your feed reader, the sort order to use by default on a list, or whatever. Of course, you can store in the preferences whatever you like, as long as it is keyed by a String and has a primitive value (boolean, String, etc.).

Preferences can be either for a single activity or shared among all activities in an application. Other components, such as services, also can work with shared preferences.

Getting What You Want

To get access to the preferences, you have three APIs to choose from:

- `getPreferences()` from within your Activity, to access activity-specific preferences
- `getSharedPreferences()` from within your Activity (or other application Context), to access application-level preferences
- `getDefaultSharedPreferences()`, on PreferenceManager, to get the shared preferences that work in concert with Android's overall preference framework

The first two methods take a security mode parameter—the right choice is `MODE_PRIVATE`, so that no other applications can access the file. The `getSharedPreferences()` method also takes a name of a set of preferences. `getPreferences()` effectively calls `getSharedPreferences()` with the activity's class name as the preference set name. The `getDefaultSharedPreferences()` method takes the Context for the preferences (e.g., your Activity).

All of these methods return an instance of `SharedPreferences`, which offers a series of getters to access named preferences, returning a suitably typed result (e.g., `getBoolean()` to return a Boolean preference). The getters also take a default value, which is returned if there is no preference set under the specified key.

Unless you have a good reason to do otherwise, you are best served using the third option—`getSharedPreferences()`—as that will give you the `SharedPreferences` object that works with a `PreferenceActivity` by default, as will be described later in this chapter.

Stating Your Preference

Given the appropriate `SharedPreferences` object, you can use `edit()` to get an editor for the preferences. This object has a set of setters that mirror the getters on the parent `SharedPreferences` object. It also has the following methods:

- `remove()`: Deletes a single named preference
- `clear()`: Deletes all preferences
- `commit()`: Persists your changes made via the editor

The `commit()` method is important, because if you modify preferences via the editor and fail to `commit()` the changes, those changes will evaporate once the editor goes out of scope. Note that Android 2.3 has an `apply()` method, which works like `commit()` but runs faster.

Conversely, since the preferences object supports live changes, if one part of your application (say, an activity) modifies shared preferences, another part of your application (say, a service) will have access to the changed value immediately.

Introducing PreferenceActivity

You could roll your own activity to collect preferences from the user. On the whole, this is a bad idea. Instead, use preference XML resources and a `PreferenceActivity`. Why? One of the common complaints about Android developers is that they lack discipline, not following any standards or conventions inherent in the platform. For other operating systems, the device manufacturer might prevent you from distributing apps that violate their human interface guidelines. With Android, that is not the case—but this is not a blanket permission to do whatever you want. Where there is a standard or convention, please follow it, so that users will feel more comfortable with your app and their device. Using a `PreferenceActivity` for collecting preferences is one such convention.

The lynchpin to the preferences framework and `PreferenceActivity` is yet another XML data structure. You can describe your application's preferences in an XML file stored in your project's `res/xml/` directory. Given that, Android can present a pleasant UI for manipulating those preferences, which are then stored in the `SharedPreferences` you get back from `getSharedPreferences()`.

The following is the preference XML for the Prefs/Simple preferences sample project:

```
<PreferenceScreen
    xmlns:android="http://schemas.android.com/apk/res/android">
    <CheckBoxPreference
        android:key="checkbox"
        android:title="Checkbox Preference"
        android:summary="Check it on, check it off" />
    <RingtonePreference
        android:key="ringtone"
        android:title="Ringtone Preference"
        android:showDefault="true"
        android:showSilent="true"
        android:summary="Pick a tone, any tone" />
</PreferenceScreen>
```

The root of the preference XML is a `PreferenceScreen` element. We will explain why it is named that later in this chapter; for now, take it on faith that it is a sensible name.

Some of the things you can have inside a `PreferenceScreen` element, not surprisingly, are preference definitions. These are subclasses of `Preference`, such as `CheckBoxPreference` or `RingtonePreference`, as shown in the preceding XML. As you might expect, these allow you to check a check box or choose a ringtone, respectively. In the case of `RingtonePreference`, you have the option of allowing users to choose the system default ringtone or choose Silent as a ringtone.

Letting Users Have Their Say

Given that you have set up the preference XML, you can use a nearly built-in activity for allowing your users to set their preferences. The activity is “nearly built-in” because you merely need to subclass it and point it to your preference XML, plus hook the activity into the rest of your application.

For example, here is the `EditPreferences` activity of the Prefs/Simple project:

```
package com.commonsware.android.simple;

import android.app.Activity;
import android.os.Bundle;
import android.preference.PreferenceActivity;

public class EditPreferences extends PreferenceActivity {
    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        addPreferencesFromResource(R.xml.preferences);
    }
}
```

As you can see, there is not much *to see*. All you need to do is call `addPreferencesFromResource()` and specify the XML resource containing your preferences.

You will also need to add this as an activity to your `AndroidManifest.xml` file:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.simple">
    <application android:label="@string/app_name" android:icon="@drawable/cw">
        <activity android:name=".SimplePrefsDemo" android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
        <activity android:name=".EditPreferences" android:label="@string/app_name">
        </activity>
    </application>
    <supports-screens android:largeScreens="true" android:normalScreens="true"
        android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

And you will need to arrange to invoke the activity, such as from a menu option. The following is pulled from `SimplePrefsDemo`:

```
public boolean onCreateOptionsMenu(Menu menu) {
    menu.add(Menu.NONE, EDIT_ID, Menu.NONE, "Edit Prefs")
        .setIcon(R.drawable.misc)
        .setAlphabeticShortcut('e');

    return(super.onCreateOptionsMenu(menu));
}

@Override
public boolean onOptionsItemSelected(MenuItem item) {
    switch (item.getItemId()) {
        case EDIT_ID:
            startActivity(new Intent(this, EditPreferences.class));
            return(true);
    }

    return(super.onOptionsItemSelected(item));
}
```

That is all that is required, and it really is not that much code outside of the preferences XML. What you get for your effort is an Android-supplied preference UI, as shown in Figure 31–1.

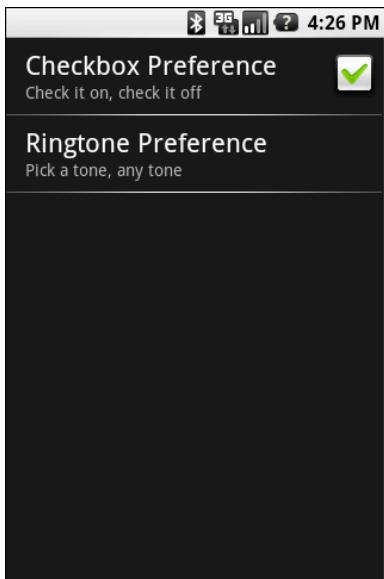


Figure 31–1. The Simple project’s preferences UI

The check box can be directly checked or unchecked. To change the ringtone preference, just select the entry in the preference list to bring up a selection dialog box, as shown in Figure 31–2.

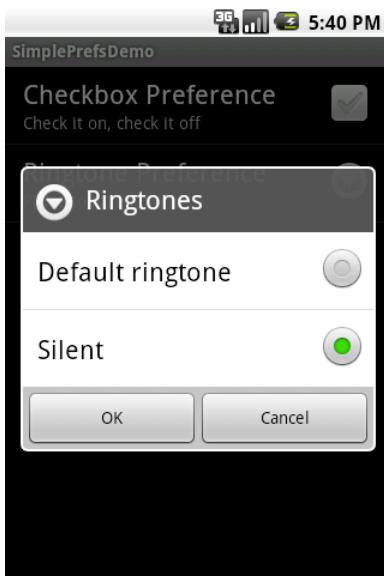


Figure 31–2. Choosing a ringtone preference

Note that there is no explicit save or commit button or menu on the `PreferenceActivity`—changes are persisted automatically.

The SimplePrefsDemo activity, beyond having the aforementioned menu, also displays the current preferences via a TableLayout:

```
<?xml version="1.0" encoding="utf-8"?>
<TableLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
>
    <TableRow>
        <TextView
            android:text="Checkbox:"
            android:paddingRight="5dip"
        />
        <TextView android:id="@+id/checkbox"
        />
    </TableRow>
    <TableRow>
        <TextView
            android:text="Ringtone:"
            android:paddingRight="5dip"
        />
        <TextView android:id="@+id/ringtone"
        />
    </TableRow>
</TableLayout>
```

The fields for the table are found in `onCreate()`:

```
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.main);

    checkbox=(TextView)findViewById(R.id.checkbox);
    ringtone=(TextView)findViewById(R.id.ringtone);
}
```

The fields are updated on each `onResume()`:

```
public void onResume() {
    super.onResume();

    SharedPreferences prefs=PreferenceManager
        .getDefaultSharedPreferences(this);

    checkbox.setText(new Boolean(prefs
        .getBoolean("checkbox", false))
        .toString());
    ringtone.setText(prefs.getString("ringtone", "<unset>"));
}
```

This means the fields will be updated when the activity is opened and after the preferences activity is left (e.g., via the Back button), as shown in Figure 31-3.

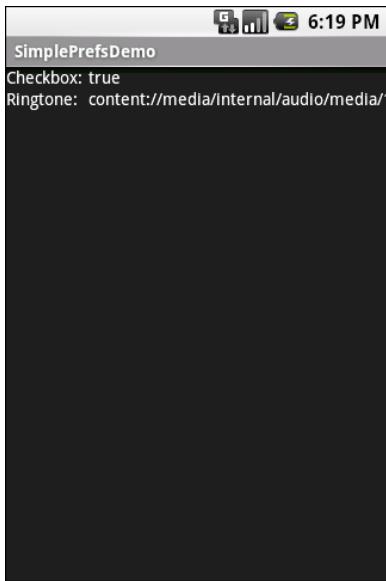


Figure 31–3. The Simple project’s list of saved preferences

Adding a Wee Bit o’ Structure

If you have a lot of preferences for users to set, having them all in one big list may become troublesome. Android’s preference UI gives you a few ways to impose a bit of structure on your bag of preferences, including categories and screens.

Categories are added via a `PreferenceCategory` element in your preference XML and are used to group together related preferences. Rather than have your preferences all as children of the root `PreferenceScreen`, you can put a few `PreferenceCategory` elements in the `PreferenceScreen`, and then put your preferences in their appropriate categories. Visually, this adds a divider with the category title between groups of preferences.

If you have lots and lots of preferences—more than are convenient for users to scroll through—you can also put them on separate “screens” by introducing the `PreferenceScreen` element. Yes, *that* `PreferenceScreen` element.

Any children of `PreferenceScreen` go on their own screen. If you nest `PreferenceScreen` elements, the parent screen displays the screen as a placeholder entry, and tapping that entry brings up the child screen.

For example, from the `Prefs/Structured` sample project, here is a preference XML file that contains both `PreferenceCategory` and nested `PreferenceScreen` elements:

```
<PreferenceScreen  
    xmlns:android="http://schemas.android.com/apk/res/android">  
    <PreferenceCategory android:title="Simple Preferences">  
        <CheckBoxPreference  
            android:key="checkbox"  
            android:title="Checkbox Preference"
```

```
        android:summary="Check it on, check it off"
    />
    <RingtonePreference
        android:key="ringtone"
        android:title="Ringtone Preference"
        android:showDefault="true"
        android:showSilent="true"
        android:summary="Pick a tone, any tone"
    />
</PreferenceCategory>
<PreferenceCategory android:title="Detail Screens">
    <PreferenceScreen
        android:key="detail"
        android:title="Detail Screen"
        android:summary="Additional preferences held in another page">
        <CheckBoxPreference
            android:key="checkbox2"
            android:title="Another Checkbox"
            android:summary="On. Off. It really doesn't matter."
        />
    </PreferenceScreen>
</PreferenceCategory>
</PreferenceScreen>
```

The result, when you use this preference XML with your `PreferenceActivity` implementation, is a categorized list of elements, as shown in Figure 31–4.

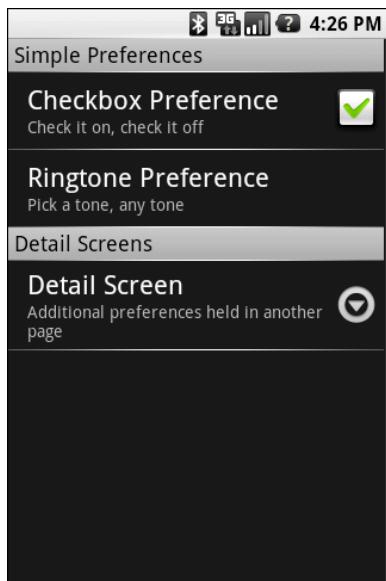


Figure 31–4. The Structured project's preference UI, showing categories and a screen placeholder

If you tap the Detail Screen entry, you are taken to the child preference screen, as shown in Figure 31–5.

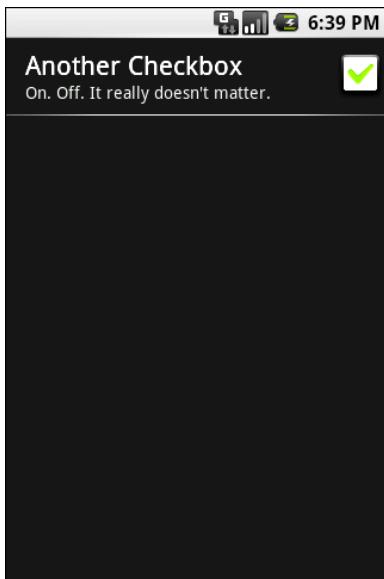


Figure 31–5. The child preference screen of the Structured project's preference UI

The Kind of Pop-Ups You Like

Of course, not all preferences are check boxes and ringtones. For others, like entry fields and lists, Android uses pop-up dialog boxes. Users do not enter their preference directly in the preference UI activity, but rather tap a preference, fill in a value, and tap OK to commit the change.

Structurally, in the preference XML, fields and lists are not significantly different from other preference types, as seen in this preference XML from the Prefs/Dialogs sample project:

```
<PreferenceScreen
    xmlns:android="http://schemas.android.com/apk/res/android">
    <PreferenceCategory android:title="Simple Preferences">
        <CheckBoxPreference
            android:key="checkbox"
            android:title="Checkbox Preference"
            android:summary="Check it on, check it off"
        />
        <RingtonePreference
            android:key="ringtone"
            android:title="Ringtone Preference"
            android:showDefault="true"
            android:showSilent="true"
            android:summary="Pick a tone, any tone"
        />
    </PreferenceCategory>
    <PreferenceCategory android:title="Detail Screens">
        <PreferenceScreen
            android:key="detail"
```

```
        android:title="Detail Screen"
        android:summary="Additional preferences held in another page">
    <CheckBoxPreference
        android:key="checkbox2"
        android:title="Another Checkbox"
        android:summary="On. Off. It really doesn't matter."
    />
</PreferenceScreen>
</PreferenceCategory>
<PreferenceCategory android:title="Other Preferences">
    <EditTextPreference
        android:key="text"
        android:title="Text Entry Dialog"
        android:summary="Click to pop up a field for entry"
        android:dialogTitle="Enter something useful"
    />
    <ListPreference
        android:key="list"
        android:title="Selection Dialog"
        android:summary="Click to pop up a list to choose from"
        android:entries="@array/cities"
        android:entryValues="@array/airport_codes"
        android:dialogTitle="Choose a Pennsylvania city" />
</PreferenceCategory>
</PreferenceScreen>
```

With the field (EditTextPreference), in addition to the title and summary you put on the preference itself, you can also supply the title to use for the dialog box.

With the list (ListPreference), you supply both a dialog box title and two string-array resources: one for the display names and one for the values. These need to be in the same order, because the index of the chosen display name determines which value is stored as the preference in the SharedPreferences. For example, here are the arrays for use by the ListPreference shown in the preceding example:

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
    <string-array name="cities">
        <item>Philadelphia</item>
        <item>Pittsburgh</item>
        <item>Allentown/Bethlehem</item>
        <item>Erie</item>
        <item>Reading</item>
        <item>Scranton</item>
        <item>Lancaster</item>
        <item>Altoona</item>
        <item>Harrisburg</item>
    </string-array>
    <string-array name="airport_codes">
        <item>PHL</item>
        <item>PIT</item>
        <item>ABE</item>
        <item>ERI</item>
        <item>RDG</item>
        <item>AVP</item>
        <item>LNS</item>
        <item>A00</item>
    </string-array>
```

```
<item>MDT</item>
</string-array>
</resources>
```

When you bring up the preference UI, you start with another category with another pair of preference entries, as shown in Figure 31–6.

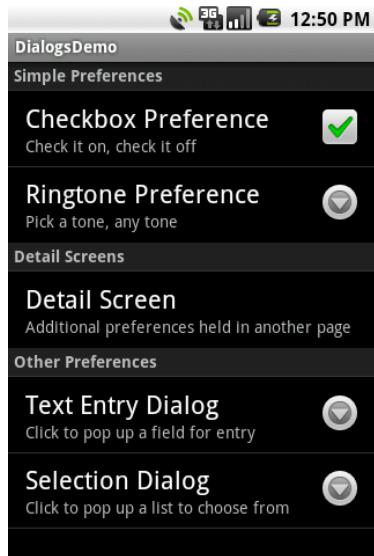


Figure 31–6. The preference screen of the Dialogs project's preference UI

Tapping Text Entry Dialog brings up a text entry dialog box—in this case, with the prior preference entry filled in, as shown in Figure 31–7.

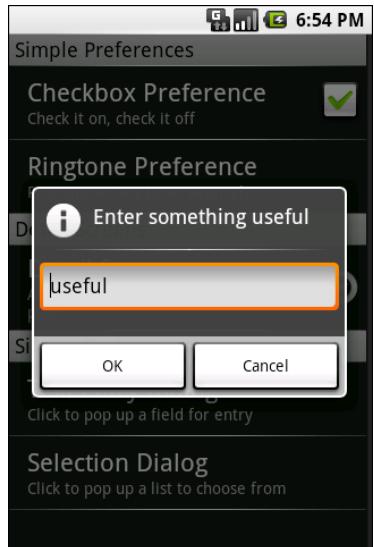


Figure 31–7. Editing a text preference

Tapping Selection Dialog brings up a selection dialog box showing the display names from the one array, as shown in Figure 31–8.

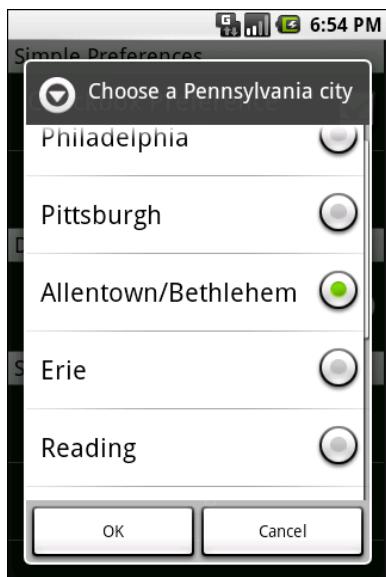


Figure 31–8. Editing a list preference

Preferences via Fragments

Android 3.0 revamped PreferenceScreen and PreferenceActivity. On the plus side, the new system looks great, providing rapid access to a large number of settings, as shown in Figure 31–9.

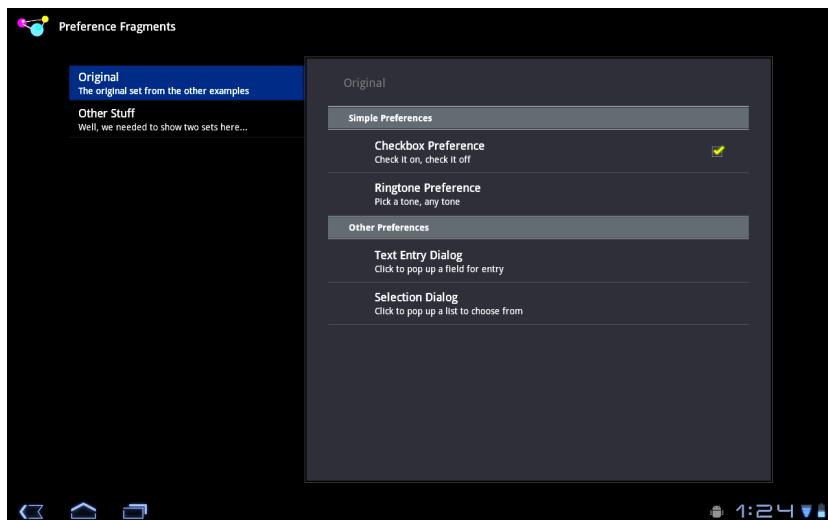


Figure 31–9. A Honeycomb-based PreferenceActivity

On the minus side, the new system is not part of the Android Compatibility Library, and as such cannot be used directly on pre-Honeycomb versions of Android. That being said, it is possible to work out a backward-compatible solution, though it may require some redesign of your preferences, if you have a lot of them and have been using nested PreferenceScreen elements. In fact, this is pretty much required, as the nested PreferenceScreen approach looks lousy on Honeycomb devices.

The Honeycomb Way

In pre-Honeycomb versions of Android, a PreferenceActivity subclass loads preferences from resource files, to indicate what should go on the screen. In Honeycomb, a PreferenceActivity subclass loads preference *headers* from resource files, to indicate what should go on the screen.

Preference Headers

Visually, preference headers are not preference categories (placing a header over a set of preferences). Rather, preference headers are the major clusters of preferences. The headers are listed on the left, with the preferences for the selected header shown on the right, as depicted in Figure 31–9. So, instead of calling addPreferencesFromResource(), a Honeycomb PreferenceActivity calls loadHeadersFromResource(), pointing to another XML resource, this time describing the preference headers. For example, here is res/xml/preference_headers.xml from the Prefs/Fragments sample project:

```
<preference-headers xmlns:android="http://schemas.android.com/apk/res/android">
    <header android:fragment="com.commonsware.android.prefsfrags.StockPreferenceFragment"
            android:title="Original"
            android:summary="The original set from the other examples">
        <extra android:name="resource" android:value="preferences" />
    </header>
    <header android:fragment="com.commonsware.android.prefsfrags.StockPreferenceFragment"
            android:title="Other Stuff"
            android:summary="Well, we needed to show two sets here...">
        <extra android:name="resource" android:value="preferences2" />
    </header>
</preference-headers>
```

Each `<header>` element indicates the PreferenceFragment subclass that will describe the preferences that belong to the header. In addition, the `<header>` describes the title and summary for the header, along with an optional icon (`android:icon` attribute). A `<header>` element may also have one or more `<extra>` child elements, providing a key/value pair of extra data that a PreferenceFragment can use for configuration. In the preceding example, each `<header>` element has one `<extra>` element defining the name of an XML resource that will hold the preferences for that header.

Hence, the PreferenceActivity is still as short as before, just with a slightly different structure:

```
package com.commonsware.android.prefsfrag;

import android.os.Bundle;
import android.preference.PreferenceActivity;
import java.util.List;

public class EditPreferences extends PreferenceActivity {
    @Override
    public void onBuildHeaders(List<Header> target) {
        loadHeadersFromResource(R.xml.preference_headers, target);
    }
}
```

Instead of defining the headers in `onCreate()`, you override an `onLoadHeaders()` method and call `loadHeadersFromResource()` there.

PreferenceFragment and StockPreferenceFragment

As previously mentioned, the preference headers point to subclasses of `PreferenceFragment`. The job of `PreferenceFragment` is to do what `PreferenceActivity` does in older versions of Android—call `addPreferencesFromResource()` to define the preferences to be displayed on the right when the associated header is tapped on the left.

What is odd about `PreferenceFragment` is that it requires subclasses. Considering that the vast majority of such fragments would simply call `addPreferencesFromResource()` once on a single resource, it would seem logical to have that built into Android, allowing subclasses of `PreferenceFragment` for more complicated cases. Yet, that is not presently supported. Official Android samples would have you create one `PreferenceFragment` subclass for each preference header, which seems wasteful.

Another approach is to use `StockPreferenceFragment`, a `PreferenceFragment` subclass that is implemented in the Prefs/Fragments project but can be used wherever. It assumes that you have added an `<extra>` to the `<header>` identifying the name of the preference XML resource to load, and it loads it. No extra subclasses are required. That is how both headers shown in the previous section can point to the single `StockPreferenceFragment` implementation.

`StockPreferenceFragment` is not especially long, but it does employ one trick:

```
package com.commonsware.android.prefsfrag;

import android.os.Bundle;
import android.preference.PreferenceFragment;

public class StockPreferenceFragment extends PreferenceFragment {
    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        int res=getActivity()
            .getResources()
            .getIdentifier(getArguments().getString("resource"),
```

```
        "xml",
        getActivity().getPackageName());

    addPreferencesFromResource(res);
}
}
```

To get at the extras, a PreferenceFragment can call `getArguments()`, which returns a `Bundle`. In our case, we can get the `resources` extra value via `getArguments().getString("resource")`. The problem is, this is a `String`, not a resource ID. In order to call `addPreferencesFromResource()`, we need the resource ID of the preference that we know only by name.

The trick is to use `getIdentifier()`. The `getIdentifier()` method on the `Resources` object—itself obtained by calling `getResources()` on an `Activity`—will use reflection to find the resource ID when given three pieces of information:

- The name of the resource (in this case, the value from the arguments)
- The type of the resource (in this case, `xml`)
- The package where this ID should reside (typically, your own package, obtained by calling `getPackageName()` on an `Activity`)

So, `StockPreferenceFragment` uses `getIdentifier()` to convert the resource extra into a resource ID, which it then uses with `addPreferencesFromResource()`.

Note that `getIdentifier()` is not particularly fast, since it uses reflection. Do not use this in a tight loop, in `getView()` of an Adapter, or any place where it may be called thousands of times.

Avoiding Nested PreferenceScreen Elements

In pre-Honeycomb Android, if you have a lot of preferences, you might consider turning them into nested `PreferenceScreen` elements. It is better, on Honeycomb, to break them out into separate preference headers. Partly, this is to provide a better user experience—users can directly see and access the various headers, versus having to wade through your preferences to find ones that lead to nested `PreferenceScreens`. It is also partly because the nested `PreferenceScreen` UI does not adopt the Honeycomb look and feel (e.g., there are no nested preference headers), so there will be a visual clash.

Intents for Headers or Preferences

If you need to collect some preferences that are beyond what the standard preferences can handle, you have some choices.

One choice is to create a custom Preference. Extending `DialogPreference` to create your own Preference implementation is not especially hard. However, it does constrain you to something that can fit in a dialog box.

Another option is to specify an <intent> element as a child of a <header> element. When the user taps this header, your specified Intent is used with `startActivity()`, giving you a gateway to your own activity for collecting things that are beyond what the preference UI can handle. For example, you could have the following <header>:

```
<header android:icon="@drawable/something"
        android:title="Fancy Stuff"
        android:summary="Click here to transcend your plane of existence">
    <intent android:action="com.commonsware.android.MY_CUSTOM_ACTION" />
</header>
```

Then, as long as you have an activity with an <intent-filter> specifying your desired action (`com.commonsware.android.MY_CUSTOM_ACTION`), that activity will get control when the user taps the associated header.

Adding Backward Compatibility

Of course, everything described in this section works only on Android 3.0 and higher. What about the millions of other Android devices? Are they chopped liver? No. For one thing, chopped liver has notoriously bad cellular reception. However, they will have to retreat to the original `PreferenceActivity` approach. Since older versions of Android cannot load classes that refer to other classes or methods that are from newer versions of Android, the simplest approach is to have two `PreferenceActivity` classes, one new and one old.

For example, the `Prefs/FragmentsBC` sample project has all the code from `Prefs/Fragments`, with a few alterations. First, the Honeycomb-specific `EditPreferences` class is renamed `EditPreferencesHC`. Another `EditPreferences` class, based on our original prefragment implementation, is added:

```
package com.commonsware.android.prefsfrag;

import android.os.Bundle;
import android.preference.PreferenceActivity;

public class EditPreferences extends PreferenceActivity {
    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        addPreferencesFromResource(R.xml.preferences);
        addPreferencesFromResource(R.xml.preferences2);
    }
}
```

Here, we take advantage of the fact that `addPreferencesFromResource()` can be called multiple times to simply chain together our two preference headers' worth of preferences. And, the options menu choice for opening our `PreferenceActivity` changes to choose the right one, based on our `Build.VERSION.SDK_INT` value:

```
@Override
public boolean onOptionsItemSelected(MenuItem item) {
```

```
        switch (item.getItemId()) {
            case EDIT_ID:
                if (Build.VERSION.SDK_INT<Build.VERSION_CODES.HONEYCOMB)
{
                    startActivity(new Intent(this,
EditPreferences.class));
                }
                else {
                    startActivity(new Intent(this,
EditPreferencesHC.class));
                }
                return(true);
        }
        return(super.onOptionsItemSelected(item));
    }
}
```

Hence, we use the `EditPreferencesHC` class only when that is known to be safe. Otherwise, we use the older one.

Managing and Accessing Local Databases

SQLite is a very popular embedded database, as it combines a clean SQL interface with a very small memory footprint and decent speed. Moreover, it is public domain, so everyone can use it. Many firms (e.g., Adobe, Apple, Google, Sun, and Symbian) and open source projects (e.g., Mozilla, PHP, and Python) ship products with SQLite.

For Android, SQLite is “baked into” the Android runtime, so every Android application can create SQLite databases. Since SQLite uses a SQL interface, it is fairly straightforward to use for people with experience in other SQL-based databases. However, its native API is not JDBC, and JDBC might be too much overhead for a memory-limited device like a phone, anyway. Hence, Android programmers have a different API to learn. The good news is that it is not that difficult.

This chapter will cover the basics of SQLite use in the context of working on Android. It by no means is a thorough coverage of SQLite as a whole. If you want to learn more about SQLite and how to use it in environments other than Android, a fine book is *The Definitive Guide to SQLite* by Michael Owens (Apress, 2006).

Much of the sample code shown in this chapter comes from the Database/Constants application. This application presents a list of physical constants, with names and values culled from Android’s SensorManager, as shown in Figure 32–1.



Figure 32–1. The Constants sample application, as initially launched

You can pop up a menu to add a new constant, which brings up a dialog to fill in the name and value of the constant, as shown in Figure 32–2.

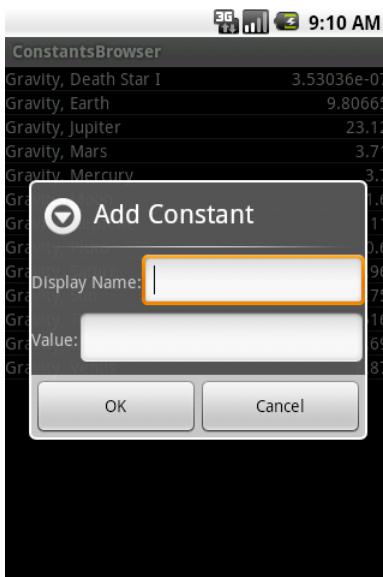


Figure 32–2. The Constants sample application's add-constant dialog

The constant is then added to the list. A long-tap on an existing constant will bring up a context menu with a Delete option, which, after confirmation, will delete the constant.

And, of course, all of this is stored in a SQLite database.

A Quick SQLite Primer

SQLite, as the name suggests, uses a dialect of SQL for queries (SELECT), data manipulation (INSERT, et al.), and data definition (CREATE TABLE, et al.). SQLite has a few places where it deviates from the SQL-92 standard, which is no different from most SQL databases. The good news is that SQLite is so space-efficient that the Android runtime can include all of SQLite, not some arbitrary subset to trim it down to size.

The biggest difference between SQLite and other SQL databases is the data typing. While you can specify the data types for columns in a CREATE TABLE statement, and SQLite will use those as a hint, that is as far as it goes. You can put whatever data you want in whatever column you want. Put a string in an INTEGER column? Sure, no problem! Vice versa? That works, too! SQLite refers to this as *manifest typing*, as described in the documentation:

In manifest typing, the datatype is a property of the value itself, not of the column in which the value is stored. SQLite thus allows the user to store any value of any datatype into any column regardless of the declared type of that column.

Start at the Beginning

No databases are automatically supplied to you by Android. If you want to use SQLite, you will need to create your own database, and then populate it with your own tables, indexes, and data.

To create and open a database, your best option is to craft a subclass of SQLiteOpenHelper. This class wraps up the logic to create and upgrade a database, per your specifications, as needed by your application. Your subclass of SQLiteOpenHelper will need three methods:

- The constructor, chaining upward to the SQLiteOpenHelper constructor. This takes the Context (e.g., an Activity), the name of the database, an optional cursor factory (typically, just pass null), and an integer representing the version of the database schema you are using.
- onCreate(), which passes you a SQLiteDatabase object that you populate with tables and initial data, as appropriate.
- onUpgrade(), which passes you a SQLiteDatabase object and the old and new version numbers, so you can figure out how best to convert the database from the old schema to the new one. The simplest, albeit least friendly, approach is to drop the old tables and create new ones.

For example, here is a DatabaseHelper class from Database/Constants that, in onCreate(), creates a table and adds a number of rows, and in onUpgrade() cheats by dropping the existing table and executing onCreate():

```
package com.commonsware.android.constants;

import android.content.ContentValues;
import android.content.Context;
import android.database.Cursor;
import android.database.SQLException;
import android.database.sqlite.SQLiteOpenHelper;
import android.database.sqlite.SQLiteDatabase;
import android.hardware.SensorManager;

public class DatabaseHelper extends SQLiteOpenHelper {
    private static final String DATABASE_NAME="db";
    static final String TITLE="title";
    static final String VALUE="value";

    public DatabaseHelper(Context context) {
        super(context, DATABASE_NAME, null, 1);
    }

    @Override
    public void onCreate(SQLiteDatabase db) {
        db.execSQL("CREATE TABLE constants (_id INTEGER PRIMARY KEY AUTOINCREMENT, title←
TEXT, value REAL);");

        ContentValues cv=new ContentValues();

        cv.put(TITLE, "Gravity, Death Star I");
        cv.put(VALUE, SensorManager.GRAVITY_DEATH_STAR_I);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Earth");
        cv.put(VALUE, SensorManager.GRAVITY_EARTH);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Jupiter");
        cv.put(VALUE, SensorManager.GRAVITY_JUPITER);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Mars");
        cv.put(VALUE, SensorManager.GRAVITY_MARS);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Mercury");
        cv.put(VALUE, SensorManager.GRAVITY_MERCURY);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Moon");
        cv.put(VALUE, SensorManager.GRAVITY_MOON);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Neptune");
    }

    @Override
    public void onUpgrade(SQLiteDatabase db, int oldVersion, int newVersion) {
        db.execSQL("DROP TABLE IF EXISTS constants");
        onCreate(db);
    }
}
```

```
        cv.put(VALUE, SensorManager.GRAVITY_NEPTUNE);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Pluto");
        cv.put(VALUE, SensorManager.GRAVITY_PLUTO);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Saturn");
        cv.put(VALUE, SensorManager.GRAVITY_SATURN);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Sun");
        cv.put(VALUE, SensorManager.GRAVITY_SUN);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, The Island");
        cv.put(VALUE, SensorManager.GRAVITY_THE_ISLAND);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Uranus");
        cv.put(VALUE, SensorManager.GRAVITY_URANUS);
        db.insert("constants", TITLE, cv);

        cv.put(TITLE, "Gravity, Venus");
        cv.put(VALUE, SensorManager.GRAVITY_VENUS);
        db.insert("constants", TITLE, cv);
    }

@Override
public void onUpgrade(SQLiteDatabase db, int oldVersion, int newVersion) {
    android.util.Log.w("Constants", "Upgrading database, which will destroy all←
old data");
    db.execSQL("DROP TABLE IF EXISTS constants");
    onCreate(db);
}
}
```

We will take a closer look at what `onCreate()` is doing—in terms of `execSQL()` and `insert()` calls—later in this chapter.

To use your `SQLiteOpenHelper` subclass, create and hold onto an instance of it. Then, when you need a `SQLiteDatabase` object to do queries or data modifications, ask your `SQLiteOpenHelper` to `getReadableDatabase()` or `getWritableDatabase()`, depending on whether or not you will be changing its contents. For example, our `ConstantsBrowser` activity opens the database in `onCreate()` as part of doing a query:

```
constantsCursor=db
    .getReadableDatabase()
    .rawQuery("SELECT _ID, title, value "+
              "FROM constants ORDER BY title",
              null);
```

When you are done with the database (e.g., your activity is being closed), simply call `close()` on your `SQLiteOpenHelper` to release your connection.

For `onUpgrade()` to work properly, your version numbers for your database schema must increase as you move forward. A typical pattern is to start with 1 and work your way up from there.

There are two other methods you can elect to override in your `SQLiteOpenHelper`, if you feel the need:

- `onOpen()`: You can override this to get control when somebody opens this database. Usually, this is not required.
- `onDowngrade()`: Introduced in Android 3.0, this method will be called if the code requests a schema that is older than what is in the database presently. This is the converse of `onUpgrade()`. If your version numbers differ, one of these two methods will be invoked. Since normally you are moving forward with updates, you can usually skip `onDowngrade()`.

Setting the Table

For creating your tables and indexes, you will need to call `execSQL()` on your `SQLiteDatabase`, providing the Data Definition Language (DDL) statement you wish to apply against the database. Barring a database error, this method returns nothing.

So, for example, you can call `execSQL()` to create the constants table, as shown in the `DatabaseHelper` `onCreate()` method:

```
db.execSQL("CREATE TABLE constants (_id INTEGER PRIMARY KEY AUTOINCREMENT, title TEXT, value REAL);");
```

This will create a table, named `constants`, with a primary key column named `_id` that is an autoincremented integer (i.e., SQLite will assign the value for you when you insert rows), plus two data columns: `title` (text) and `value` (a float, or *real* in SQLite terms). SQLite will automatically create an index for you on your primary key column. You could add other indexes here via some `CREATE INDEX` statements.

Most likely, you will create tables and indexes when you first create the database, or possibly when the database needs upgrading to accommodate a new release of your application. If you do not change your table schemas, you might never drop your tables or indexes, but if you do, just use `execSQL()` to invoke `DROP INDEX` and `DROP TABLE` statements as needed.

Makin' Data

Given that you have a database and one or more tables, you probably want to put some data in them. You have two major approaches for doing this:

- Use `execSQL()`, just as you did for creating the tables. The `execSQL()` method works for any SQL that does not return results, so it can handle `INSERT`, `UPDATE`, `DELETE`, and so forth just fine.

- Use the `insert()`, `update()`, and `delete()` methods on the `SQLiteDatabase` object, which eliminates much of the SQL syntax required to do basic operations.

For example, here we `insert()` a new row into our constants table:

```
private void processAdd(DialogWrapper wrapper) {  
    ContentValues values=new ContentValues(2);  
  
    values.put(DatabaseHelper.TITLE, wrapper.getTitle());  
    values.put(DatabaseHelper.VALUE, wrapper.getValue());  
  
    db.getWritableDatabase().insert("constants", DatabaseHelper.TITLE, values);  
    constantsCursor.requery();  
}
```

These methods make use of `ContentValues` objects, which implement a Map-esque interface, albeit one that has additional methods for working with SQLite types. For example, in addition to `get()` to retrieve a value by its key, you have `getAsInteger()`, `getAsString()`, and so forth.

The `insert()` method takes the name of the table, the name of one column as the “null column hack,” and a `ContentValues` with the initial values you want put into this row. The null column hack is for the case where the `ContentValues` instance is empty—the column named as the null column hack will be explicitly assigned the value `NONE` in the SQL `INSERT` statement generated by `insert()`. This is required due to a quirk in SQLite’s support for the SQL `INSERT` statement.

The `update()` method takes the name of the table, a `ContentValues` representing the columns and replacement values to use, an optional `WHERE` clause, and an optional list of parameters to fill into the `WHERE` clause, to replace any embedded question marks (?). Since `update()` replaces only columns with fixed values, versus ones computed based on other information, you may need to use `execSQL()` to accomplish some ends. The `WHERE` clause and parameter list work akin to the positional SQL parameters you may be used to from other SQL APIs.

The `delete()` method works akin to `update()`, taking the name of the table, the optional `WHERE` clause, and the corresponding parameters to fill into the `WHERE` clause. For example, here we `delete()` a row from our constants table, given its `_ID`:

```
private void processDelete(long rowId) {  
    String[] args={String.valueOf(rowId)};  
  
    db.getWritableDatabase().delete("constants", "_ID=?", args);  
    constantsCursor.requery();  
}
```

What Goes Around, Comes Around

As with INSERT, UPDATE, and DELETE, you have two main options for retrieving data from a SQLite database using SELECT:

- Use `rawQuery()` to invoke a SELECT statement directly
- Use `query()` to build up a query from its component parts

Confounding matters further is the `SQLiteQueryBuilder` class and the issue of cursors and cursor factories. Let's take all of this one piece at a time.

Raw Queries

The simplest solution, at least in terms of the API, is `rawQuery()`. Simply call it with your SQL SELECT statement. The SELECT statement can include positional parameters; the array of these forms your second parameter to `rawQuery()`. So, we wind up with this:

```
constantsCursor=db
    .getReadableDatabase()
    .rawQuery("SELECT _ID, title, value "+
              "FROM constants ORDER BY title",
              null);
```

The return value is a `Cursor`, which contains methods for iterating over results (discussed shortly, in the “Using Cursors” section).

If your queries are pretty much “baked into” your application, this is a very straightforward way to use them. However, it gets complicated if parts of the query are dynamic, beyond what positional parameters can really handle. For example, if the set of columns you need to retrieve is not known at compile time, putting around concatenating column names into a comma-delimited list can be annoying...which is where `query()` comes in.

Regular Queries

The `query()` method takes the discrete pieces of a SELECT statement and builds the query from them. The pieces, in the order they appear as parameters to `query()`, are as follows:

- The name of the table to query against
- The list of columns to retrieve
- The WHERE clause, optionally including positional parameters
- The list of values to substitute in for those positional parameters
- The GROUP BY clause, if any
- The HAVING clause, if any
- The ORDER BY clause, if any

These can be null when they are not needed (except the table name, of course):

```
String[] columns={"ID", "inventory"};
String[] parms={"snicklefritz"};
Cursor result=db.query("widgets", columns, "name=?",
    parms, null, null, null);
```

Using Cursors

No matter how you execute the query, you get a Cursor back. This is the Android/SQLite edition of the database cursor, a concept used in many database systems. With the cursor, you can do the following:

- Find out how many rows are in the result set via `getCount()`
- Iterate over the rows via `moveToFirst()`,`moveToNext()`, and `isAfterLast()`
- Find out the names of the columns via `getColumnNames()`, convert those into column numbers via `getColumnIndex()`, and get values for the current row for a given column via methods like `getString()`,`getInt()`, and so on
- Reexecute the query that created the cursor via `requery()`
- Release the cursor's resources via `close()`

For example, here we iterate over a `widgets` table entries:

```
Cursor result=
    db.rawQuery("SELECT ID, name, inventory FROM widgets", null);

while (!result.moveToFirst()) {
    int id=result.getInt(0);
    String name=result.getString(1);
    int inventory=result.getInt(2);

    // do something useful with these
}

result.close();
```

You can also wrap a Cursor in a `SimpleCursorAdapter` or other implementation, and then hand the resulting adapter to a `ListView` or other selection widget. Note, though, that if you are going to use `CursorAdapter` or its subclasses (such as `SimpleCursorAdapter`), the result set of your query *must* contain an integer column named `_ID` that is unique for the result set. This “id” value is then supplied to methods such as `onListItemClick()`, to identify which item the user clicked upon in the AdapterView.

For example, after retrieving the sorted list of constants, we pop those into the `ListView` for the `ConstantsBrowser` activity in just a few lines of code:

```
ListAdapter adapter=new SimpleCursorAdapter(this,
    R.layout.row, constantsCursor,
```

```
new String[] {DatabaseHelper.TITLE,
              DatabaseHelper.VALUE},
new int[] {R.id.title, R.id.value});
```

Custom CursorAdapters

You may recall from an earlier chapter that you can override `getView()` in `ArrayAdapter` to provide more custom control over how rows are displayed. However, `CursorAdapter` and its subclasses have a default implementation of `getView()`, which inspects the supplied `View` to recycle. If it is null, `getView()` calls `newView()` and then `bindView()`. If it is not null, `getView()` just calls `bindView()`. If you are extending `CursorAdapter`—used for displaying results of a database or content provider query—you should override `newView()` and `bindView()` instead of `getView()`.

All this does is remove your `if()` test you would have had in `getView()` and puts each branch of that test in an independent method, akin to the following:

```
public View newView(Context context, Cursor cursor,
                     ViewGroup parent) {
    LayoutInflator inflater=getLayoutInflator();
    View row=inflater.inflate(R.layout.row, null);
    ViewWrapper wrapper=new ViewWrapper(row);

    row.setTag(wrapper);

    return(row);
}

public void bindView(View row, Context context, Cursor cursor) {
    ViewWrapper wrapper=(ViewWrapper)row.getTag();

    // actual logic to populate row from Cursor goes here
}
```

Making Your Own Cursors

There may be circumstances in which you want to use your own `Cursor` subclass, rather than the stock implementation provided by Android. In those cases, you can use `queryWithFactory()` and `rawQueryWithFactory()`, which take a `SQLiteDatabase.CursorFactory` instance as a parameter. The factory, as you might expect, is responsible for creating new cursors via its `newCursor()` implementation.

Finding and implementing a valid use for this facility is left as an exercise for you. Suffice it to say that you should not need to create your own cursor classes much, if at all, in ordinary Android development.

Flash: Sounds Faster Than It Is

Your database will be stored on flash memory, normally the onboard flash for the device. Reading data off of flash is relatively quick. While the memory is not especially fast, there is no seek time to move hard drive heads around, as you find with magnetic media, so performing a query against a SQLite database tends to be speedy.

Writing data to flash is another matter entirely. Sometimes, this may happen fairly quickly, on the order of a couple of milliseconds. Sometimes, though, it may take hundreds of milliseconds, even for writing small amounts of data. Moreover, flash tends to get slower the fuller it is, so the speed your users will see varies even more.

The net result is that you should seriously consider doing all database write operations off the main application thread, such as via an `AsyncTask`, as is described in Chapter 20. That way, the database write operations will not slow down your UI.

Note that the emulator behaves differently, because it is typically using a file on your hard drive for storing data, rather than flash. While the emulator tends to be much slower than hardware for CPU and GPU operations, the emulator will tend to be much faster for writing data to flash. Hence, just because you are not seeing any UI slowdowns due to database I/O in the emulator, do not assume that will be the same when your code is running on a real Android device.

Data, Data, Everywhere

If you are used to developing for other databases, you are also probably used to having tools to inspect and manipulate the contents of the database, beyond merely the database's API. With Android's emulator, you have two main options for this.

First, the emulator is supposed to bundle in the `sqlite3` console program and make it available from the `adb shell` command. Once you are in the emulator's shell, just execute `sqlite3`, providing it the path to your database file. Your database file can be found at the following location:

```
/data/data/your.app.package/databases/your-db-name
```

Here, `your.app.package` is the Java package for your application (e.g., `com.commonsware.android`) and `your-db-name` is the name of your database, as supplied to `createDatabase()`.

The `sqlite3` program works, and if you are used to poking around your tables using a console interface, you are welcome to use it. If you prefer something a little friendlier, you can always copy the SQLite database off the device onto your development machine, and then use a SQLite-aware client program to putter around. Note, though, that you are working off a copy of the database; if you want your changes to go back to the device, you will need to transfer the database back over.

To get the database off the device, you can use the `adb pull` command (or the equivalent in your IDE, or the File Manager in the Dalvik Debug Monitor Service), which

takes the path to the on-device database and the local destination as parameters. To store a modified database on the device, use adb push, which takes the local path to the database and the on-device destination as parameters.

One of the most-accessible SQLite clients is the SQLite Manager extension for Firefox, shown in Figure 32–3, as it works across all platforms.

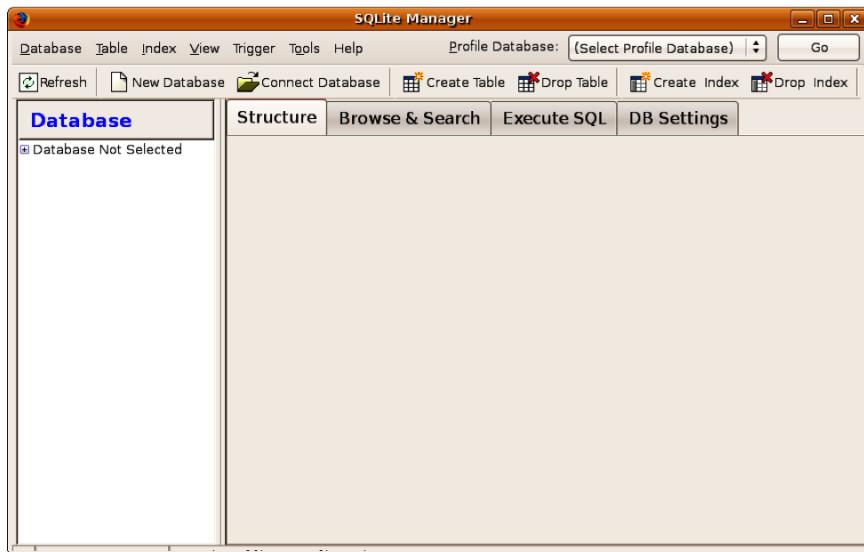


Figure 32–3. *SQLite Manager Firefox extension*

You can find other client tools on the SQLite web site.

Chapter **33**

Leveraging Java Libraries

Java has as many third-party libraries as any other modern programming language, if not more. These third-party libraries are the innumerable JARs that you can include in a server or desktop Java application—the things that the Java SDKs themselves do not provide.

In the case of Android, the Dalvik virtual machine (VM) at its heart is not precisely Java, and what it provides in its SDK is not precisely the same as any traditional Java SDK. That being said, many Java third-party libraries still provide capabilities that Android lacks natively, and therefore may be of use to you in your project, if you can get them to work with Android's flavor of Java.

This chapter explains what it will take for you to leverage such libraries and describes the limitations on Android's support for arbitrary third-party code.

Ants and JARs

You have two choices for integrating third-party code into your project: use the source code or use prepackaged JARs.

If you choose to use the source code, all you need to do is copy it into your own source tree (under `src/` in your project), so it can sit alongside your existing code, and then let the compiler perform its magic.

If you choose to use an existing JAR, perhaps one for which you do not have the source code, you will need to teach your build chain how to use the JAR. First, place the JAR in the `libs/` directory in your Android project. Then, if you are using an IDE, you probably need to add the JAR to your build path (Ant will automatically pick up all JARs found in `libs/`). This is definitely required for Eclipse.

And that's it. Adding third-party code to your Android application is fairly easy. Getting it to actually *work* may be somewhat more complicated, however.

The Outer Limits

Not all available Java code will work well with Android. There are a number of factors to consider, including the following:

- *Expected platform APIs*: Does the code assume a newer JVM than the one Android is based on? Or, does the code assume the existence of Java APIs that ship with Java 2 Platform, Standard Edition (J2SE) but not with Android, such as Swing?
- *Size*: Existing Java code designed for use on desktops or servers does not need to be concerned much about on-disk size or, to some extent, even in-RAM size. Android, of course, is short on both. Using third-party Java code, particularly when prepackaged as JARs, may balloon the size of your application.
- *Performance*: Does the Java code effectively assume a much more powerful CPU than what you may find on many Android devices? Just because a desktop can run it without issue does not mean your average mobile phone will handle it well.
- *Interface*: Does the Java code assume a console interface? Or is it a pure API that you can wrap your own interface around?
- *Operating system*: Does the Java code assume the existence of certain console programs? Does the Java code assume it can use a Windows DLL?
- *Language version*: Was the JAR compiled with an older version of Java (1.4.2 or older)? Was the JAR compiled with a different compiler than the official one from Sun (e.g., GCJ)?
- *Dependencies*: Does the Java code depend on other third-party JARs that might have some of these problems as well? Does the Java code depend on third-party libraries (e.g., the JSON library from <http://json.org>) that are built into Android, but expect a different version of those libraries?

One trick for addressing some of these concerns is to use open source Java code and actually work with the code to make it more Android-friendly. For example, if you are using only 10 percent of the third-party library, maybe it's worthwhile to recompile the subset of the project to be only what you need, or at least to remove the unnecessary classes from the JAR. The former approach is safer, in that you get compiler help to make sure you are not discarding some essential piece of code, although it may be more tedious to do.

Following the Script

Unlike other mobile device operating systems, Android has no restrictions on what you can run on it, as long as you can do it in Java using the Dalvik VM. This includes incorporating your own scripting language into your application, something that is expressly prohibited on some other devices.

One possible Java scripting language is BeanShell (www.beanshell.org/). BeanShell gives you Java-compatible syntax with implicit typing and no compilation required.

To add BeanShell scripting, you need to put the BeanShell interpreter's JAR file in your `libs/` directory. Unfortunately, the 2.0b4 JAR available for download from the BeanShell site does not work out of the box with the Android 0.9 and newer SDKs, perhaps due to the compiler that was used to build it. Instead, you should probably check out the source code from Subversion and execute `ant jarcore` to build it, and then copy the resulting JAR (in BeanShell's `dist/` directory) to your own project's `libs/`. Or, just use the BeanShell JAR that accompanies the source code for this book, up in the `Java/AndShell` project.

From there, using BeanShell on Android is no different from using BeanShell in any other Java environment:

1. Create an instance of the BeanShell Interpreter class.
2. Set any globals for the script's use via `Interpreter#set()`.
3. Call `Interpreter#eval()` to run the script and, optionally, get the result of the last statement.

For example, here is the XML layout for the world's smallest BeanShell IDE:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
<Button
    android:id="@+id/eval"
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:text="Go!"
    android:onClick="go"
    />
<EditText
    android:id="@+id/script"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:singleLine="false"
    android:gravity="top"
    />
</LinearLayout>
```

Couple that with the following activity implementation:

```
package com.commonsware.android.andshell;

import android.app.Activity;
import android.app.AlertDialog;
import android.os.Bundle;
import android.view.View;
import android.widget.EditText;
import android.widget.Toast;
import bsh.Interpreter;

public class MainActivity extends Activity {
    private Interpreter i=new Interpreter();

    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
    }

    public void go(View v) {
        EditText script=(EditText)findViewById(R.id.script);
        String src=script.getText().toString();

        try {
            i.set("context", MainActivity.this);
            i.eval(src);
        }
        catch (bsh.EvalError e) {
            AlertDialog.Builder builder=
                new AlertDialog.Builder(MainActivity.this);

            builder
                .setTitle("Exception!")
                .setMessage(e.toString())
                .setPositiveButton("OK", null)
                .show();
        }
    }
}
```

Compile and run it (including incorporating the BeanShell JAR as previously mentioned), and install it on the emulator. Fire it up, and you get a trivial IDE, with a large text area for your script and a big Go! button to execute it, as shown in Figure 33–1.

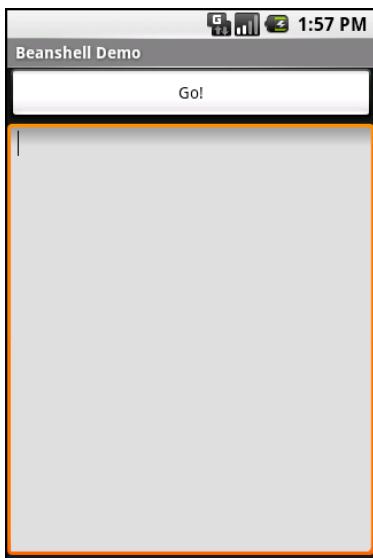


Figure 33–1. The AndShell BeanShell IDE

```
import android.widget.Toast;  
  
Toast.makeText(context, "Hello, world!", Toast.LENGTH_LONG).show();
```

Note the use of context to refer to the activity when making the Toast. That is the global set by the activity to reference back to itself. You could call this global variable anything you want, as long as the set() call and the script code use the same name.

Click the Go! button, and you get the result shown in Figure 33–2.

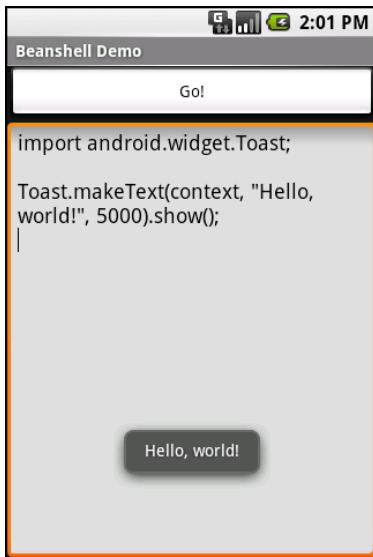


Figure 33–2. The AndShell BeanShell IDE, executing some code

And now, some caveats:

- Not all scripting languages will work. For example, those that implement their own form of just-in-time (JIT) compilation, generating Java bytecodes on-the-fly, would probably need to be augmented to generate Dalvik VM bytecodes instead of those for stock Java implementations. Simpler languages that execute from parsed scripts, calling Java reflection APIs to call back into compiled classes, will likely work better. Even there, though, not every feature of the language may work, if it relies on some facility in a traditional Java API that does not exist in Dalvik. For example, there could be stuff hidden inside BeanShell or the add-on JARs that does not work on today's Android.
- Scripting languages without JIT will inevitably be slower than compiled Dalvik applications. Slower may mean users experience sluggishness. Slower definitely means more battery life is consumed for the same amount of work. So, building a whole Android application in BeanShell, simply because you feel it is easier to program in, may cause your users to be unhappy.
- Scripting languages that expose the whole Java API, like BeanShell, can pretty much do anything the underlying Android security model allows. So, if your application has the READ_CONTACTS permission, expect any BeanShell scripts your application runs to have the same permission.
- Last, but certainly not least, is that language interpreter JARs tend to be...portly. The BeanShell JAR used in this example is 200KB. That is not ridiculous, considering what it does, but it will make applications that use BeanShell that much bigger to download, take up that much more space on the device, and so on.

Reviewing the Script

Since this chapter covers scripting in Android, you may be interested to know that you have options beyond embedding BeanShell directly in your project.

Some experiments have been conducted with other JVM-based programming languages, such as JRuby and Jython. At present, their support for Android is incomplete, but progress is being made.

Additionally, Scripting Layer for Android (SL4A), described at <http://code.google.com/p/android-scripting/>, allows you to write scripts in a wide range of scripting languages, beyond BeanShell, such as the following:

- Perl
- Python

- JRuby
- Lua
- JavaScript (implemented via Rhino, the Mozilla JavaScript interpreter written in Java)
- PHP

These scripts are not full-fledged applications, though the SL4A team is working on allowing you to turn them into APK files complete with basic UIs. For on-device development, SL4A is a fine choice.

Communicating via the Internet

The expectation is that most, if not all, Android devices will have built-in Internet access. That could be Wi-Fi, cellular data services (EDGE, 3G, etc.), or possibly something else entirely. Regardless, most people—or at least those with a data plan or Wi-Fi access—will be able to get to the Internet from their Android phone.

Not surprisingly, the Android platform gives developers a wide range of ways to make use of this Internet access. Some offer high-level access, such as the integrated WebKit browser component. If you want, you can drop all the way down to using raw sockets. In between, you can leverage APIs—both on-device and from third-party JARs—that give you access to specific protocols: HTTP, XMPP, SMTP, and so on.

The emphasis of this book is on the higher-level forms of access: the WebKit component, discussed in Chapter 15, and Internet-access APIs, , discussed in this chapter. As busy coders, we should be trying to reuse existing components wherever possible, versus rolling our own on-the-wire protocol.

REST and Relaxation

Android does not have built-in SOAP or XML-RPC client APIs. However, it does have the Apache HttpClient library baked in. You can either layer a SOAP/XML-RPC layer atop this library or use it “straight” for accessing REST-style web services. For the purposes of this book, REST-style web services are considered simple HTTP requests for ordinary URLs over the full range of HTTP verbs, with formatted payloads (XML, JSON, etc.) as responses.

More expansive tutorials, FAQs, and HOWTOs can be found at the HttpClient web site (<http://hc.apache.org/>). Here, we’ll cover the basics, while checking the weather.

HTTP Operations via Apache HttpClient

The first step to using HttpClient is, not surprisingly, to create an HttpClient object. The client object handles all HTTP requests on your behalf. Since HttpClient is an interface, you will need to actually instantiate some implementation of that interface, such as DefaultHttpClient.

Those requests are bundled up into HttpRequest instances, with different HttpRequest implementations for each different HTTP verb (e.g., HttpGet for HTTP GET requests). You create an HttpRequest implementation instance, fill in the URL to retrieve and other configuration data (e.g., form values if you are doing an HTTP POST via HttpPost), and then pass the method to the client to actually make the HTTP request via execute().

What happens at this point can be as simple or as complicated as you want. You can get an HttpResponse object back, with response code (e.g., 200 for OK), HTTP headers, and the like. Or, you can use a flavor of execute() that takes a ResponseHandler<String> as a parameter, with the net result being that execute() returns just the String representation of the response body. In practice, this is not a recommended approach, because you really should be checking your HTTP response codes for errors. However, for trivial applications, like book examples, the ResponseHandler<String> approach works just fine.

For example, let's take a look at the Internet/Weather sample project. This implements an activity that retrieves weather data for your current location from the National Weather Service. (Note that this probably works only for geographic locations in the United States.) That data is converted into an HTML page, which is poured into a WebKit widget for display. Rebuilding this demo using a ListView is left as an exercise for the reader. Also, since this sample is relatively long, we will show only relevant pieces of the Java code here in this chapter, though you can always download the full source from the CommonsWare web site.

To make this a bit more interesting, we use the Android location services to figure out where we are...sort of. The full details of how that works are provided in Chapter 39.

In the onResume() method, we toggle on location updates, so we will be informed where we are now and when we move a significant distance (10 kilometers). When a location is available—either at the start or based on movement—we retrieve the National Weather Service data via our updateForecast() method:

```
private void updateForecast(Location loc) {
    String url=String.format(format, loc.getLatitude(),
        loc.getLongitude());
    HttpGet getMethod=new HttpGet(url);

    try {
        ResponseHandler<String> responseHandler=new BasicResponseHandler();
        String responseBody=client.execute(getMethod,
            responseHandler);
        buildForecasts(responseBody);
    }
```

```
String page=generatePage();

browser.loadDataWithBaseUrl(null, page, "text/html",
    "UTF-8", null);
}
catch (Throwable t) {
    android.util.Log.e("WeatherDemo", "Exception fetching data", t);
    Toast
        .makeText(this, "Request failed: "+t.toString(), Toast.LENGTH_LONG)
        .show();
}
}
```

The `updateForecast()` method takes a `Location` as a parameter, obtained from the location update process. For now, all you need to know is that `Location` sports `getLatitude()` and `getLongitude()` methods that return the latitude and longitude of the device's position, respectively.

We hold the URL to the National Weather Service XML in a string resource, and pour in the latitude and longitude at runtime. Given our `HttpClient` object created in `onCreate()`, we populate an `HttpGet` with that customized URL, and then execute that method. Given the resulting XML from the REST service, we build the forecast HTML page, as described next, and pour that into the `WebKit` widget. If the `HttpClient` blows up with an exception, we provide that error as a `Toast`.

Note that we also shut down the `HttpClient` object in `onDestroy()`.

Parsing Responses

The response you get will be formatted using some system—HTML, XML, JSON, or whatever. It is up to you, of course, to pick out the information you need and do something useful with it. In the case of the `WeatherDemo`, we need to extract the forecast time, temperature, and icon (indicating sky conditions and precipitation) and generate an HTML page from it.

Android includes the following parsers:

- Three XML parsers: the traditional W3C DOM (`org.w3c.dom`), a SAX parser (`org.xml.sax`), and the XML pull parser (discussed in Chapter 23)
- A JSON parser (`org.json`)

You are also welcome to use third-party Java code, where possible, to handle other formats, such as a dedicated RSS/Atom parser for a feed reader. The use of third-party Java code is discussed in Chapter 33.

For `WeatherDemo`, we use the W3C DOM parser in our `buildForecasts()` method:

```
void buildForecasts(String raw) throws Exception {
    DocumentBuilder builder=DocumentBuilderFactory
        .newInstance()
        .newDocumentBuilder();
```

```
Document doc=builder.parse(new InputSource(new StringReader(raw)));
NodeList times=doc.getElementsByTagName("start-valid-time");

for (int i=0;i<times.getLength();i++) {
    Element time=(Element)times.item(i);
    Forecast forecast=new Forecast();

    forecasts.add(forecast);
    forecast.setTime(time.getFirstChild().getNodeValue());
}

NodeList temps=doc.getElementsByTagName("value");

for (int i=0;i<temps.getLength();i++) {
    Element temp=(Element)temps.item(i);
    Forecast forecast=forecasts.get(i);

    forecast.setTemp(new Integer(temp.getFirstChild().getNodeValue()));
}

NodeList icons=doc.getElementsByTagName("icon-link");

for (int i=0;i<icons.getLength();i++) {
    Element icon=(Element)icons.item(i);
    Forecast forecast=forecasts.get(i);

    forecast.setIcon(icon.getFirstChild().getNodeValue());
}
}
```

The National Weather Service XML format is curiously structured, relying heavily on sequential position in lists versus the more object-oriented style you find in formats like RSS or Atom. That being said, we can take a few liberties and simplify the parsing somewhat, taking advantage of the fact that the elements we want (`start-valid-time` for the forecast time, `value` for the temperature, and `icon-link` for the icon URL) are all unique within the document.

The HTML comes in as an `InputStream` and is fed into the DOM parser. From there, we scan for the `start-valid-time` elements and populate a set of `Forecast` models using those start times. Then, we find the temperature value elements and `icon-link` URLs and fill those in to the `Forecast` objects.

In turn, the `generatePage()` method creates a rudimentary HTML table with the forecasts:

```
String generatePage() {
    StringBuilder bufResult=new StringBuilder("<html><body><table>");

    bufResult.append("<tr><th width=\"50%\">Time</th>"+
                    "<th>Temperature</th><th>Forecast</th></tr>");

    for (Forecast forecast : forecasts) {
        bufResult.append("<tr><td align=\"center\">");
        bufResult.append(forecast.getTime());
```

```
bufResult.append("</td><td align=\"center\">");  
bufResult.append(forecast.getTemp());  
bufResult.append("</td><td><img src=\"\"");  
bufResult.append(forecast.getIcon());  
bufResult.append("\"></td></tr>");  
}  
  
bufResult.append("</table></body></html>");  
  
return(bufResult.toString());  
}
```

The result looks like Figure 34-1.

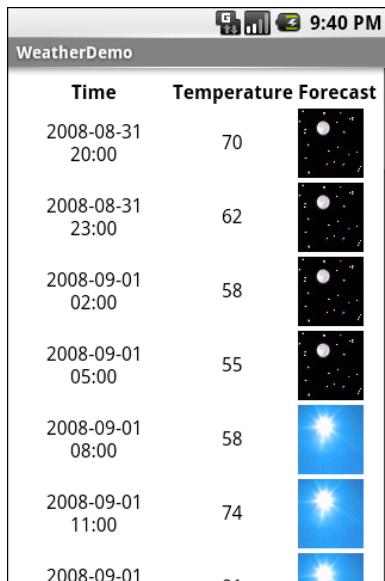


Figure 34-1. The WeatherDemo sample application

NOTE: You may have to set your location in Eclipse if you are using the emulator. Open the DDMS perspective with Window > Open Perspective > Other > DDMS. Select your emulator in the Devices > Name panel, and then set your emulator's location in the Emulator Control panel using the Longitude and Latitude boxes. When you are ready, click Send.

Stuff to Consider

If you need to use SSL, bear in mind that the default HttpClient setup does not include SSL support. Mostly, this is because you need to decide how to handle SSL certificate presentation: Do you blindly accept all certificates, even self-signed or expired ones? Or do you want to ask users if they really want to use some strange certificates?

Similarly, `HttpClient`, by default, is designed for single-threaded use. If you will be using `HttpClient` from some other place where multiple threads might be an issue, you can readily set up `HttpClient` to support multiple threads.

For these sorts of topics, you are best served by checking out the `HttpClient` web site for documentation and support.

AndroidHttpClient

Starting in Android 2.2 (API level 8), you can use the `AndroidHttpClient` class, found in the `android.net.http` package. This is an implementation of the `HttpClient` interface, like `DefaultHttpClient`. However, it is preconfigured with settings that the core Android team feels make sense for the platform.

What you gain are the following:

- SSL management
- A direct way to specify the user agent string, which is supplied in your call to the static `newInstance()` method to get an instance of `AndroidHttpClient`
- Utility methods for working with material compressed via GZIP, for parsing dates in HTTP headers, and so on

What you lose is automatic cookie storage. A regular `DefaultHttpClient` will cache cookies in memory and use them on subsequent requests where they are needed. `AndroidHttpClient` does not. There are ways to fix that, by using an `HttpContext` object, as is described in the `AndroidHttpClient` documentation.

Also, `AndroidHttpClient` prevents you from using it on the main application thread—requests can be made only on a background thread. This is a feature, even if some people might consider it to be a bug.

Since this class is available only in Android 2.2 and beyond, it may not make sense to do much with it until such time as you are supporting only API level 8 or higher.

Leveraging Internet-Aware Android Components

Wherever possible, use built-in Android components that can handle your Internet access for you. Such components will have been fairly rigorously tested and are more likely to handle edge cases well, such as dealing with users on Wi-Fi who move out of range of the access point and fail over to mobile data connections (e.g., 3G).

For example, the `WebView` widget (introduced in Chapter 15 "WebKit Browser") and the `MapView` widget (covered in Chapter 40 "Mapping with MapView and MapActivity") both handle Internet access for you. While you still need the `INTERNET` permission, you do not have to perform HTTP requests or the like yourself.

This section outlines some other ways you can take advantage of built-in Internet capability.

Downloading Files

Android 2.3 introduced a `DownloadManager`, designed to handle a lot of the complexities of downloading larger files, such as:

- Determining whether the user is on Wi-Fi or mobile data, and if so, whether the download should occur
- Handling when the user, previously on Wi-Fi, moves out of range of the access point and fails over to mobile data
- Ensuring the device stays awake while the download proceeds

`DownloadManager` itself is less complicated than the alternative of writing all of it yourself. However, it does present a few challenges. In this section, we will examine the Internet/Download sample project that uses `DownloadManager`.

The Permissions

To use `DownloadManager`, you will need to hold the `INTERNET` permission. Depending on where you elect to download the file, you may also need the `WRITE_EXTERNAL_STORAGE` permission.

However, at the time of this writing, if you lack sufficient permissions, you may get an error complaining that you are missing `ACCESS_ALL_DOWNLOADS`. This appears to be a bug in the `DownloadManager` implementation. It should be complaining about the lack of `INTERNET` or `WRITE_EXTERNAL_STORAGE`, or both. You do not need to hold the `ACCESS_ALL_DOWNLOADS` permission, which is not even documented as of Android 3.0.

For example, here is the manifest for the Internet/Download application:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android" <!--
  package="com.commonsware.android.download" android:versionCode="1" <!--
  android:versionName="1.0">
  <!-- <uses-permission android:name="android.permission.ACCESS_ALL_DOWNLOADS" /> -->
  <uses-permission android:name="android.permission.INTERNET"/>
  <uses-permission android:name="android.permission.WRITE_EXTERNAL_STORAGE"/>
  <application android:label="@string/app_name" android:icon="@drawable/cw">
    <activity android:name="DownloadDemo" android:label="@string/app_name">
      <intent-filter>
        <action android:name="android.intent.action.MAIN"/>
        <category android:name="android.intent.category.LAUNCHER"/>
      </intent-filter>
    </activity>
  </application>
  <supports-screens android:largeScreens="true" android:normalScreens="true"
    android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

NOTE: You need to make sure your emulator is configured with an SD card for this example. Open the Android SDK and AVD Manager and select your emulator, and then click Edit. You can then set the size of the SD card your emulator uses for storage.

The Layout

Our sample application has a simple layout, consisting of three buttons:

- One to kick off a download
- One to query the status of a download
- One to display a system-supplied activity containing the roster of downloaded files

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button
        android:id="@+id/start"
        android:text="Start Download"
        android:layout_width="fill_parent"
        android:layout_height="0dip"
        android:layout_weight="1"
        android:onClick="startDownload"
    />
    <Button
        android:id="@+id/query"
        android:text="Query Status"
        android:layout_width="fill_parent"
        android:layout_height="0dip"
        android:layout_weight="1"
        android:onClick="queryStatus"
        android:enabled="false"
    />
    <Button
        android:text="View Log"
        android:layout_width="fill_parent"
        android:layout_height="0dip"
        android:layout_weight="1"
        android:onClick="viewLog"
    />
</LinearLayout>
```

Requesting the Download

To kick off a download, we first need to get access to the `DownloadManager`. This is a system service. We can call `getSystemService()` on any activity (or other Context),

provide it the identifier of the system service you want, and receive the system service object back. However, since `getSystemService()` supports a wide range of these objects, we need to cast it to the proper type for the service we requested.

So, for example, here is a line from `onCreate()` of the `DownloadDemo` activity where we get the `DownloadManager`:

```
mgr=(DownloadManager) getSystemService(DOWNLOAD_SERVICE);
```

Most of these managers have no `close()`, `release()`, or `goAwayPlease()` sort of methods—we can just use them and let garbage collection take care of cleaning them up.

Given the `DownloadManager`, we can now call an `enqueue()` method to request a download. The name is relevant—do not assume that your download will begin immediately, though often times it will. The `enqueue()` method takes a `DownloadManager.Request` object as a parameter. The `Request` object uses the builder pattern, in that most methods return the `Request` itself, so we can chain a series of calls together with less typing.

For example, the topmost button in our layout is tied to a `startDownload()` method in `DownloadDemo`, shown here:

```
public void startDownload(View v) {
    Uri uri=Uri.parse("http://commonsware.com/misc/test.mp4");

    Environment
        .getExternalStoragePublicDirectory(Environment.DIRECTORY_DOWNLOADS)
        .mkdirs();

    lastDownload=
        mgr.enqueue(new DownloadManager.Request(uri)
            .setAllowedNetworkTypes(DownloadManager.Request.NETWORK_WIFI |
                DownloadManager.Request.NETWORK_MOBILE)
            .setAllowedOverRoaming(false)
            .setTitle("Demo")
            .setDescription("Something useful. No, really.")
            .setDestinationInExternalPublicDir(Environment.DIRECTORY_DOWNLOADS,
                "test.mp4"));

    v.setEnabled(false);
    findViewById(R.id.query).setEnabled(true);
}
```

We are downloading a sample MP4 file, and we want to download it to the external storage area. To do the latter, we are using `getExternalStoragePublicDirectory()` on `Environment`, which gives us a directory suitable for storing a certain class of content. In this case, we are going to store the download in `Environment.DIRECTORY_DOWNLOADS`, though we could just as easily have chosen `Environment.DIRECTORY_MOVIES`, since we are downloading a video clip. Note that the `File` object returned by `getExternalStoragePublicDirectory()` may point to a not-yet-created directory, which is why we call `mkdirs()` on it, to ensure the directory exists.

We then create the `DownloadManager.Request` object, with the following attributes:

- We are downloading the specific URL we want, courtesy of the Uri supplied to the Request constructor.
- We are willing to use either mobile data or Wi-Fi for the download (setAllowedNetworkTypes()), but we do not want the download to incur roaming charges (setAllowedOverRoaming()).
- We want the file downloaded as test.mp4 in the downloads area on the external storage (setDestinationInExternalPublicDir()).

We also provide a name (setTitle()) and description (setDescription()), which are used as part of the notification drawer entry for this download. The user will see these when they slide down the drawer while the download is progressing.

The enqueue() method returns an ID of this download, which we hold onto for use in querying the download status.

Keeping Track of Download Status

If the user presses the Query Status button, we want to find out the details of how the download is progressing. To do that, we can call query() on the DownloadManager. The query() method takes a DownloadManager.Query object, describing what download(s) we are interested in. In our case, we use the value we got from the enqueue() method when the user requested the download:

```
public void queryStatus(View v) {  
    Cursor c=mgr.query(new DownloadManager.Query().setFilterById(lastDownload));  
  
    if (c==null) {  
        Toast.makeText(this, "Download not found!", Toast.LENGTH_LONG).show();  
    }  
    else {  
        c.moveToFirst();  
  
        Log.d(getClass().getName(), "COLUMN_ID: "+  
            c.getLong(c.getColumnIndex(DownloadManager.COLUMN_ID)));  
        Log.d(getClass().getName(), "COLUMN_BYTES_DOWNLOADED_SO_FAR: "+  
            c.getLong(c.getColumnIndex(DownloadManager.COLUMN_BYTES_DOWNLOADED_SO_FAR)));  
        Log.d(getClass().getName(), "COLUMN_LAST_MODIFIED_TIMESTAMP: "+  
            c.getLong(c.getColumnIndex(DownloadManager.COLUMN_LAST_MODIFIED_TIMESTAMP)));  
        Log.d(getClass().getName(), "COLUMN_LOCAL_URI: "+  
            c.getString(c.getColumnIndex(DownloadManager.COLUMN_LOCAL_URI)));  
        Log.d(getClass().getName(), "COLUMN_STATUS: "+  
            c.getInt(c.getColumnIndex(DownloadManager.COLUMN_STATUS)));  
        Log.d(getClass().getName(), "COLUMN_REASON: "+  
            c.getInt(c.getColumnIndex(DownloadManager.COLUMN_REASON)));  
  
        Toast.makeText(this, statusMessage(c), Toast.LENGTH_LONG).show();  
    }  
}
```

The `query()` method returns a `Cursor`, containing a series of columns representing the details about our download. There are a series of constants on the `DownloadManager` class outlining what is possible. In our case, we retrieve (and dump to LogCat) the following:

- The ID of the download (`COLUMN_ID`)
- The amount of data that has been downloaded to date (`COLUMN_BYTES_DOWNLOADED_SO_FAR`)
- What the last-modified timestamp is on the download (`COLUMN_LAST_MODIFIED_TIMESTAMP`)
- Where the file is being saved to locally (`COLUMN_LOCAL_URI`)
- What the actual status is (`COLUMN_STATUS`)
- What the reason is for that status (`COLUMN_REASON`)

There are a number of possible status codes (e.g., `STATUS_FAILED`, `STATUS_SUCCESSFUL`, and `STATUS_RUNNING`). Some, like `STATUS_FAILED`, may have an accompanying reason providing more details.

What the User Sees

The user, upon launching the application, sees our three buttons, as shown in Figure 34–2.



Figure 34–2. The `DownloadDemo` sample application, as initially launched

Clicking the first button disables the button while the download is going on, and a download icon appears in the status bar (though it is a bit difficult to see, given the poor contrast between Android's icon and Android's status bar), as shown in Figure 34–3.

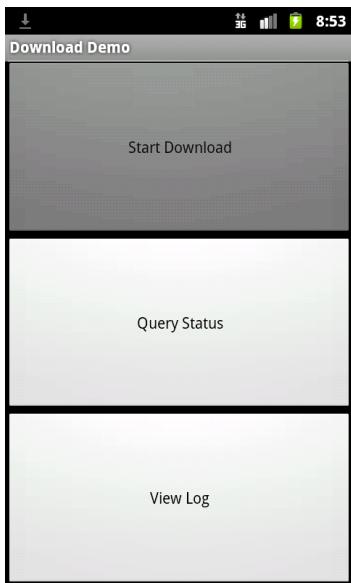


Figure 34–3. The *DownloadDemo* sample application, performing a download

Sliding down the notification drawer shows the user the progress of the download in the form of a `ProgressBar` widget, as shown in Figure 34–4.

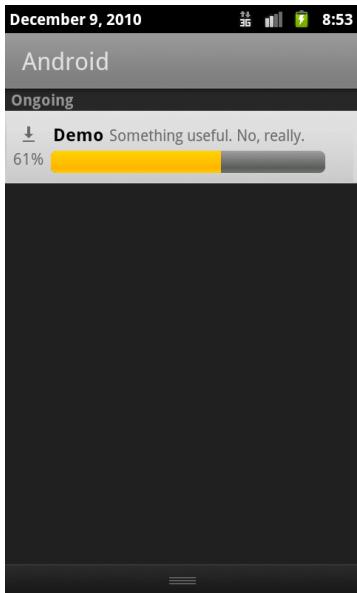


Figure 34–4. The notification drawer, during a download using *DownloadManager*

Tapping the entry in the notification drawer returns control to our original activity, where the user sees a Toast, as shown in Figure 34–5.

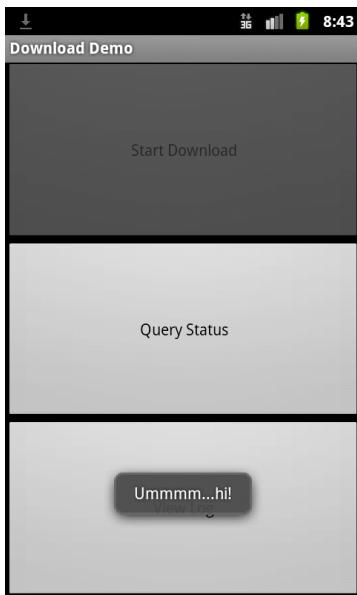


Figure 34–5. The DownloadDemo sample application, after coming to the foreground from the notification

If the user taps the middle button during the download, a Toast will appear indicating that the download is in progress, as shown in Figure 34–6.



Figure 34–6. The DownloadDemo sample application, showing the status mid-download

Additional details are also dumped to LogCat, visible via DDMS or adb logcat:

```
12-10 08:45:01.289: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_ID: 12  
12-10 08:45:01.289: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_BYTES_DOWNLOADED_SO_FAR: 615400  
12-10 08:45:01.289: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_LAST_MODIFIED_TIMESTAMP: 1291988696232  
12-10 08:45:01.289: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_LOCAL_URI: file:///mnt/sdcard/Download/test.mp4  
12-10 08:45:01.299: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_STATUS: 2  
12-10 08:45:01.299: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_REASON: 0
```

Once the download is complete, tapping the middle button will indicate that the download is, indeed, complete, and final information about the download is emitted to LogCat:

```
12-10 08:49:27.360: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_ID: 12  
12-10 08:49:27.360: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_BYTES_DOWNLOADED_SO_FAR: 6219229  
12-10 08:49:27.370: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_LAST_MODIFIED_TIMESTAMP: 1291988713409  
12-10 08:49:27.370: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_LOCAL_URI: file:///mnt/sdcard/Download/test.mp4  
12-10 08:49:27.370: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_STATUS: 8  
12-10 08:49:27.370: DEBUG/com.commonsware.android.download.DownloadDemo(372):←  
COLUMN_REASON: 0
```

Tapping the bottom button brings up the activity displaying all downloads, including both successes and failures, as shown in Figure 34–7.

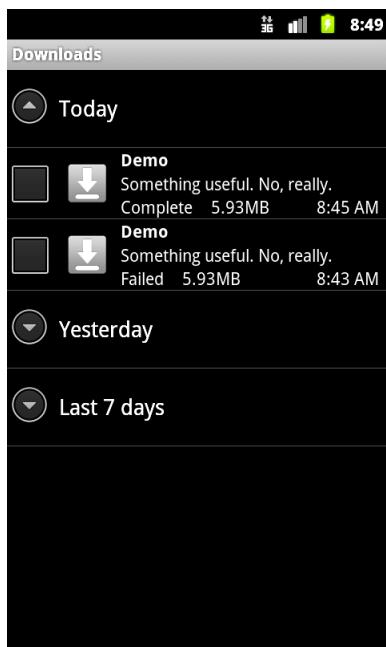


Figure 34–7. The Downloads screen, showing everything downloaded by the DownloadManager

And, of course, the file is downloaded. In Android 2.3, in the emulator, our chosen location maps to /mnt/sdcard/Downloads/test.mp4.

Limitations

DownloadManager works with HTTP URLs, but not HTTPS (SSL) URLs. This is unfortunate, as more and more sites are switching to SSL encryption across the board, to deal with various security challenges. Hopefully, in the future, DownloadManager will have more options here.

If you display the list of all downloads, and your download is among them, it is a really good idea to make sure that some activity (perhaps one of yours) is able to respond to an ACTION_VIEW Intent on that download's MIME type. Otherwise, when the user taps the entry in the list, they will get a Toast indicating that there is nothing available to view the download. This may confuse users. Alternatively, use setVisibleInDownloadsUi() on your request, passing in false, to suppress it from this list.

Continuing Our Escape from Janky Code

The rule is simple: do not access the Internet from the main application thread. Always use a background thread with HttpClient, HttpURLConnection, or any other Internet access API you wish to use.

StrictMode, introduced in an earlier chapter, will warn you if you attempt to access the Internet on the main application thread. `AndroidHttpClient` will simply crash if you attempt to make web requests on the main application thread. However, these capabilities are available only in newer versions of Android. That being said, there are ways to have StrictMode in your application but use it only in newer versions of Android using conditional class loading—this technique was covered earlier in this book.

Part V

Services

Services: The Theory

As noted previously, Android services are for long-running processes that may need to keep running even when decoupled from any activity. Examples include playing music even if the player activity gets garbage-collected, polling the Internet for RSS/Atom feed updates, and maintaining an online chat connection even if the chat client loses focus due to an incoming phone call.

Services are created when manually started (via an API call) or when some activity tries connecting to the service via interprocess communication (IPC). Services will live until specifically shut down or until Android is desperate for RAM and destroys them prematurely. Running for a long time has its costs, though, so services need to be careful not to use too much CPU or keep radios active too much of the time, lest the service cause the device's battery to get used up too quickly.

This chapter outlines the basic theory behind creating and consuming services. The next chapter presents a few specific patterns for services, ones that may closely match your particular needs. Hence, this chapter has limited code examples, whereas the next chapter serves up several code examples.

Why Services?

Services are a “Swiss Army knife” for a wide range of functions that do not require direct access to an activity’s user interface, such as the following:

- Performing operations that need to continue even if the user leaves the application’s activities, such as a long download (e.g., downloading an app from the Android Market) or playing music (e.g., an Android music app)
- Performing operations that need to exist regardless of activities coming and going, such as maintaining a chat connection in support of a chat application
- Providing a local API to remote APIs, such as might be provided by a web service

- Performing periodic work without user intervention, akin to cron jobs or Windows scheduled tasks

Even things like home screen app widgets often involve a service to assist with long-running work.

Many applications do not need any services. Very few applications need more than one. However, services are a powerful tool in an Android developer's toolbox and their functionality is a subject with which any qualified Android developer should be familiar.

Setting Up a Service

Creating a service implementation shares many characteristics with building an activity. You inherit from an Android-supplied base class, override some lifecycle methods, and hook the service into the system via the manifest.

Service Class

Just as an activity in your application extends either Activity or an Android-supplied Activity subclass, a service in your application extends either Service or an Android-supplied Service subclass. The most common Service subclass is IntentService, used primarily for the command pattern. That being said, many services simply extend Service.

Lifecycle Methods

Just as activities have `onCreate()`, `onResume()`, `onPause()` and similar methods, Service implementations have their own lifecycle methods, such as the following:

- `onCreate()`: As with activities, called when the service process is created, by any means
- `onStartCommand()`: Called each time the service is sent a command via `startService()`
- `onBind()`: Called whenever a client binds to the service via `bindService()`
- `onDestroy()`: Called as the service is being shut down

As with activities, services initialize whatever they need in `onCreate()` and clean up those items in `onDestroy()`. And, as with activities, the `onDestroy()` method of a service might not be called if Android terminates the entire application process, such as for emergency RAM reclamation.

The `onStartCommand()` and `onBind()` lifecycle methods will be implemented based on your choice of communicating to the client, as will be explained later in this chapter.

Manifest Entry

Finally, you need to add the service to your `AndroidManifest.xml` file, for it to be recognized as an available service for use. That is simply a matter of adding a `<service>` element as a child of the `application` element, providing `android:name` to reference your service class.

Since the service class is in the same Java namespace as everything else in this application, we can use the shorthand ("`WeatherService`" or "`.WeatherService`") to reference our class.

If you want to require some permission of those who wish to start or bind to the service, add an `android:permission` attribute naming the permission you are mandating—see the chapter on permissions for more details.

For example, here is a manifest showing the `<service>` element:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android" ↵
    package="com.commonsware.android.downloader" android:versionCode="1" ↵
    android:versionName="1.0">
    <uses-permission android:name="android.permission.INTERNET"/>
    <uses-permission android:name="android.permission.WRITE_EXTERNAL_STORAGE"/>
    <application android:label="@string/app_name" android:icon="@drawable/cw">
        <activity android:name="DownloaderDemo" android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
        <service android:name="Downloader"/>
    </application>
    <supports-screens android:largeScreens="true" android:normalScreens="true" ↵
        android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

Communicating to Services

Clients of services—frequently activities, though not necessarily—have two main ways to send requests or information to a service. One approach is to send a command, which creates no lasting connection to the service. The other approach is to bind to the service, establishing a bidirectional communications channel that lasts as long as the client needs it.

Sending Commands with `startService()`

The simplest way to work with a service is to call `startService()`. The `startService()` method takes an `Intent` parameter, much like `startActivity()` does. In fact, the `Intent` supplied to `startService()` has the same two-part role as it does with `startActivity()`:

- Identify the service to communicate with
- Supply parameters, in the form of Intent extras, to tell the service what it is supposed to do

For a local service (the focus of this book), the simplest form of Intent is one that identifies the class that implements the Intent (e.g., `new Intent(this, MyService.class);`).

The call to `startService()` is asynchronous, so the client will not block. The service will be created if it is not already running, and it will receive the Intent via a call to the `onStartCommand()` lifecycle method. The service can do whatever it needs to in `onStartCommand()`, but since `onStartCommand()` is called on the main application thread, it should do its work very quickly. Anything that might take a while should be delegated to a background thread.

The `onStartCommand()` method can return one of several values, mostly to indicate to Android what should happen if the service's process is killed while it is running. The most likely return values are the following:

- `START_STICKY`: The service should be moved back into the started state (as if `onStartCommand()` had been called), but the Intent should not be redelivered to `onStartCommand()`
- `START_REDELIVER_INTENT`: The service should be restarted via a call to `onStartCommand()`, supplying the same Intent as was delivered this time
- `START_NOT_STICKY`: The service should remain stopped until explicitly started by application code

By default, calling `startService()` not only sends the command, but tells Android to keep the service running until something tells it to stop. One way to stop a service is to call `stopService()`, supplying the same Intent used with `startService()`, or at least one that is equivalent (e.g., identifies the same class). At that point, the service will stop and will be destroyed. Note that `stopService()` does not employ any sort of reference counting, so three calls to `startService()` will result in a single service running, which will be stopped by a call to `stopService()`.

Another possibility for stopping a service is to have the service call `stopSelf()` on itself. You might do this if you use `startService()` to have a service begin running and doing some work on a background thread, then having the service stop itself when that background work is completed.

Binding with `bindService()`

Binding allows a service to expose an API to activities (or other services) that bind to it. When an activity (or other client) binds to a service, it primarily is requesting to be able to access the public API exposed by that service via the service's "binder," as returned by

the service's `onBind()` method. When doing this, the activity can also indicate, via the `BIND_AUTO_CREATE` flag, to have Android automatically start up the service if it is not already running.

The service's binder is usually a subclass of `Binder`, on which you can put whatever methods you want to expose to clients. For local services, you can have as many methods as you want, with whatever method signatures (parameters, return type, etc.) that you want. The service returns an instance of the `Binder` subclass in `onBind()`.

Clients call `bindService()`, supplying the Intent that identifies the service, a `ServiceConnection` object representing the client side of the binding, and an optional `BIND_AUTO_CREATE` flag. As with `startService()`, `bindService()` is asynchronous. The client will not know anything about the status of the binding until the `ServiceConnection` object is called with `onServiceConnected()`. This not only indicates the binding has been established, but, for local services, it provides the `Binder` object that the service returned via `onBind()`. At this point, the client can use the `Binder` to ask the service to do work on its behalf. Note that if the service is not already running and you provide `BIND_AUTO_CREATE`, the service will be created first before being bound to the client. If you skip `BIND_AUTO_CREATE`, `bindService()` will return false, indicating there was no existing service to bind to.

Eventually, the client will need to call `unbindService()`, to indicate it no longer needs to communicate with the service. For example, an activity might call `bindService()` in its `onCreate()` method, then call `unbindService()` in its `onDestroy()` method. The call to `unbindService()` eventually triggers `onServiceDisconnected()` to be called on the `ServiceConnection` object—at this point, the client can no longer safely use the `Binder` object.

If there are no other bound clients to the service, Android will shut down the service as well, releasing its memory. Hence, we do not need to call `stopService()` ourselves—Android handles that, if needed, as a side effect of unbinding.

If the client is an activity, there are two important steps to take to ensure that the binding survives a configuration change, like a screen rotation:

1. Instead of calling `bindService()` on the activity itself, call `bindService()` on the Application Context (obtained via `getApplicationContext()`).
2. Make sure the `ServiceConnection` gets from the old instance of the activity to the new one, probably via `onRetainNonConfigurationInstance()`.

This allows the binding to persist between activity instances.

Communicating from Services

Of course, the approaches listed in the previous section work only for a client calling out to a service. The reverse is also frequently needed, so the service can let an activity or something know about asynchronous events.

Callback/Listener Objects

An activity or other service client could provide some sort of callback or listener object to the service, which the service could then call when needed. To make this work, you would need to do the following:

1. Define a Java interface for that listener object.
2. Give the service a public API to register and retract listeners.
3. Have the service use those listeners at appropriate times, to notify those who registered the listener of some event.
4. Have the activity register and retract a listener as needed.
5. Have the activity respond to the listener-based events in some suitable fashion.

The biggest catch is to make sure that the activity retracts the listeners when it is done. Listener objects generally know their activity, explicitly (via a data member) or implicitly (by being implemented as an inner class). If the service is holding onto defunct listener objects, the corresponding activities will linger in memory, even if the activities are no longer being used by Android. This represents a big memory leak. You may wish to use WeakReferences, SoftReferences, or similar constructs to ensure that if an activity is destroyed, any listeners it registers with your service will not keep that activity in memory.

Broadcast Intents

An alternative approach, first mentioned in the chapter on Intent filters, is to have the service send a broadcast Intent that can be picked up by the activity...assuming the activity is still around and is not paused. The service can call `sendBroadcast()`, supplying an Intent that identifies the broadcast, designed to be picked up by a `BroadcastReceiver`. This could be a component-specific broadcast (e.g., `new Intent(this, MyReceiver.class)`), if the `BroadcastReceiver` is registered in the manifest. Or, it could be based on some action string, perhaps even one documented and designed for third-party applications to listen for.

The activity, in turn, can register a `BroadcastReceiver` via `registerReceiver()`, though this approach will work only for Intent objects specifying some action, not ones identifying a particular component. But, when the activity's `BroadcastReceiver` receives the broadcast, it can do what it wants to inform the user or otherwise update itself.

Pending Results

Your activity can call `createPendingResult()`. This returns a `PendingIntent`, an object that represents an Intent and the corresponding action to be performed upon that

Intent (e.g., use it to start an activity). In this case, the PendingIntent will cause a result to be delivered to your activity's implementation of `onActivityResult()`, just as if another activity had been called with `startActivityForResult()` and, in turn, called `setResult()` to send back a result.

Since a PendingIntent is Parcelable, and can therefore be put into an Intent extra, your activity can pass this PendingIntent to the service. The service, in turn, can call one of several flavors of the `send()` method on the PendingIntent, to notify the activity (via `onActivityResult()`) of an event, possibly even supplying data (in the form of an Intent) representing that event.

Messenger

Yet another possibility is to use a Messenger object. A Messenger sends messages to an activity's Handler. Within a single activity, a Handler can be used to send messages to itself, as was demonstrated in the chapter on threads. However, between components—such as between an activity and a service—you will need a Messenger to serve as the bridge.

As with a PendingIntent, a Messenger is Parcelable, and so can be put into an Intent extra. The activity calling `startService()` or `bindService()` would attach a Messenger as an extra on the Intent. The service would obtain that Messenger from the Intent. When it is time to alert the activity of some event, the service would do the following:

1. Call `Message.obtain()` to get an empty Message object.
2. Populate that Message object as needed, with whatever data the service wishes to pass to the activity.
3. Call `send()` on the Messenger, supplying the Message as a parameter.

The Handler would then receive the message via `handleMessage()`, on the main application thread, and thus would be able to update the UI or do whatever is necessary.

Notifications

Another approach is for the service to let the user know directly about the work that was completed. To do that, a service can raise a Notification—putting an icon in the status bar and optionally shaking or beeping or something. This technique is covered in an upcoming chapter.

Basic Service Patterns

Now that you have seen the pieces that make up services and their clients, let us examine a few scenarios that employ services and how those scenarios might be implemented.

The Downloader

If you elect to download something from the Android Market, you are welcome to back out of the Market application entirely. This does not cancel the download – the download and installation run to completion, despite no Market activity being on-screen.

You may have similar circumstances in your application, from downloading a purchased e-book to downloading a map for a game to downloading a file from some sort of “drop box” file-sharing service.

Android 2.3 introduced the `DownloadManager` (covered in a previous chapter), which would handle this for you. However, you might need that sort of capability on older versions of Android, at least through 2011.

The sample project reviewed in this section is `Services/Downloader`.

The Design

This sort of situation is a perfect use for the command pattern and an `IntentService`. The `IntentService` has a background thread, so downloads can take as long as needed. An `IntentService` will automatically shut down when the work is done, so the service will not linger and you do not need to worry about shutting it down yourself. Your activity can simply send a command via `startService()` to the `IntentService` to tell it to go do the work.

Admittedly, things get a bit trickier when you want to have the activity find out when the download is complete. This example will show the use of `Messenger` for this.

The Service Implementation

Here is the implementation of this IntentService, named Downloader:

```
package com.commonsware.android.downloader;

import android.app.Activity;
import android.app.IntentService;
import android.content.Intent;
import android.os.Bundle;
import android.os.Environment;
import android.os.Message;
import android.os.Messenger;
import android.util.Log;
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import org.apache.http.client.ResponseHandler;
import org.apache.http.client.HttpClient;
import org.apache.http.client.methods.HttpGet;
import org.apache.http.impl.client.BasicResponseHandler;
import org.apache.http.impl.client.DefaultHttpClient;

public class Downloader extends IntentService {
    public static final String
EXTRA_MESSENGER="com.commonsware.android.downloader.EXTRA_MESSENGER";
    private HttpClient client=null;

    public Downloader() {
        super("Downloader");
    }

    @Override
    public void onCreate() {
        super.onCreate();

        client=new DefaultHttpClient();
    }

    @Override
    public void onDestroy() {
        super.onDestroy();

        client.getConnectionManager().shutdown();
    }

    @Override
    public void onHandleIntent(Intent i) {
        HttpGet getMethod=new HttpGet(i.getData().toString());
        int result=Activity.RESULT_CANCELED;

        try {
            ResponseHandler<byte[]> responseHandler=new ByteArrayResponseHandler();
            byte[] responseBody=client.execute(getMethod, responseHandler);
            File output=new File(Environment.getExternalStorageDirectory(),
```

```
i.getData().getLastPathSegment());  
  
if (output.exists()) {  
    output.delete();  
}  
  
FileOutputStream fos=new FileOutputStream(output.getPath());  
  
fos.write(responseBody);  
fos.close();  
result=Activity.RESULT_OK;  
}  
catch (IOException e2) {  
    Log.e(getClass().getName(), "Exception in download", e2);  
}  
  
Bundle extras=i.getExtras();  
  
if (extras!=null) {  
    Messenger messenger=(Messenger)extras.get(EXTRA_MESSENGER);  
    Message msg=Message.obtain();  
  
    msg.arg1=result;  
  
    try {  
        messenger.send(msg);  
    }  
    catch (android.os.RemoteException e1) {  
        Log.w(getClass().getName(), "Exception sending message", e1);  
    }  
}  
}  
}
```

In `onCreate()`, we obtain a `DefaultHttpClient` object, as was described in the chapter on Internet access. In `onDestroy()`, we shut down the client. This way, if several download requests are invoked in sequence, we can use a single `DefaultHttpClient` object – the `IntentService` will only shut down after all enqueued work has been completed.

The bulk of the work is accomplished in `onHandleIntent()`, which is called on the `IntentService`, on a background thread, every time `startService()` is called. For the Intent, we obtain the URL of the file to download via a call to `getData()` on the supplied Intent. Actually downloading the file uses the `DefaultHttpClient` object, along with an `HttpGet` object. However, since the file might be binary (e.g., MP3) instead of text, we cannot use a `BasicResponseHandler`. Instead, we use a `ByteArrayResponseHandler` – a custom `ResponseHandler` cloned from the source for `BasicResponseHandler`, but one that returns a `byte[]` instead of a `String`:

```
package com.commonsware.android.downloader;  
  
import java.io.IOException;  
import org.apache.http.HttpEntity;  
import org.apache.http.HttpResponse;  
import org.apache.http.StatusLine;  
import org.apache.http.client.ResponseHandler;
```

```

import org.apache.http.client.HttpResponseException;
import org.apache.http.util.EntityUtils;

public class ByteArrayResponseHandler implements ResponseHandler<byte[]> {
    public byte[] handleResponse(final HttpResponse response)
        throws IOException, HttpResponseException {
        StatusLine statusLine=response.getStatusLine();

        if (statusLine.getStatusCode()>=300) {
            throw new HttpResponseException(statusLine.getStatusCode(),
                statusLine.getReasonPhrase());
        }

        HttpEntity entity=response.getEntity();

        if (entity==null) {
            return(null);
        }

        return(EntityUtils.toByteArray(entity));
    }
}

```

Once the file is downloaded to external storage, we need to alert the activity that the work is completed. If the activity is interested in this sort of message, it will have attached a Messenger object as EXTRA_MESSAGE to the Intent. Downloader gets the Messenger, creates an empty Message object, and puts a result code in the arg1 field of the Message. It then sends the Message to the activity. If the activity was destroyed before this point, the request to send the message will fail with a RemoteException.

Since this is an IntentService, it will automatically shut down when onHandleIntent() completes, if there is no more work queued to be done.

Using the Service

The activity demonstrating the use of Downloader has a trivial UI, consisting of one large button:

```

<?xml version="1.0" encoding="utf-8"?>
<Button xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/button"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:text="Do the Download"
    android:onClick="doTheDownload"
/>

```

That UI is initialized in onCreate(), as usual:

```

@Override
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.main);

    b=(Button)findViewById(R.id.button);
}

```

When the user clicks the button, `doTheDownload()` is called to disable the button (to prevent accidental duplicate downloads) and call `startService()`:

```
public void doTheDownload(View v) {
    b.setEnabled(false);

    Intent i=new Intent(this, Downloader.class);

    i.setData(Uri.parse("http://commonsware.com/Android/excerpt.pdf"));
    i.putExtra(Downloader.EXTRA_MESSENGER, new Messenger(handler));

    startService(i);
}
```

Here, the Intent we pass over has the URL of the file to download (in this case, a URL pointing to a PDF), plus a Messenger in the `EXTRA_MESSENGER` extra. That Messenger is created with an attachment to the activity's Handler:

```
private Handler handler=new Handler() {
    @Override
    public void handleMessage(Message msg) {
        b.setEnabled(true);

        Toast
            .makeText(DownloaderDemo.this, "Download complete!",
                    Toast.LENGTH_LONG)
            .show();
    }
};
```

If the activity is still around when the download is complete, the Handler enables the button and displays a Toast to let the user know that the download is complete. Note that the activity is ignoring the result code supplied by the service, though in principle it could do something different in both the success and failure cases.

The Music Player

Most audio player applications in Android – for music, audiobooks, or whatever – do not require the user to remain in the player application itself. Rather, the user can go on and do other things with their device, with the audio playing in the background. This is similar in many respects to the download scenario from the previous section. However, in this case, the *user* is the one that controls when the work (playing audio) ends.

The sample project reviewed in this section is Services/FakePlayer.

The Design

Once again, we will use `startService()`, since we want the service to run even when the activity starting it has been destroyed. However, this time, we will use a regular Service, rather than an IntentService. An IntentService is designed to do work and stop itself, whereas in this case, we want the user to be able to stop the music playback.

Since music playback is outside the scope of this book, the service will simply stub out those particular operations.

The Service Implementation

Here is the implementation of this Service, named PlayerService:

```
package com.commonsware.android.fakeplayer;

import android.app.Service;
import android.content.Intent;
import android.os.Bundle;
import android.os.IBinder;
import android.util.Log;

public class PlayerService extends Service {
    public static final String EXTRA_PLAYLIST="EXTRA_PLAYLIST";
    public static final String EXTRA_SHUFFLE="EXTRA_SHUFFLE";
    private boolean isPlaying=false;

    @Override
    public int onStartCommand(Intent intent, int flags, int startId) {
        String playlist=intent.getStringExtra(EXTRA_PLAYLIST);
        boolean useShuffle=intent.getBooleanExtra(EXTRA_SHUFFLE, false);

        play(playlist, useShuffle);

        return(START_NOT_STICKY);
    }

    @Override
    public void onDestroy() {
        stop();
    }

    @Override
    public IBinder onBind(Intent intent) {
        return(null);
    }

    private void play(String playlist, boolean useShuffle) {
        if (!isPlaying) {
            Log.w(getClass().getName(), "Got to play()!");
            isPlaying=true;
        }
    }

    private void stop() {
        if (isPlaying) {
            Log.w(getClass().getName(), "Got to stop()!");
            isPlaying=false;
        }
    }
}
```

In this case, we really do not need anything for `onCreate()`, so that lifecycle method is skipped. On the other hand, we have to implement `onBind()`, because that is a required method of Service subclasses. `IntentService` implements `onBind()` for us, which is why that was not needed for the Downloader sample.

When the client calls `startService()`, `onStartCommand()` is called in `PlayerService`. Here, we get the Intent and pick out some extras to tell us what to play back (`EXTRA_PLAYLIST`) and other configuration details (e.g., `EXTRA_SHUFFLE`). `onStartCommand()` calls `play()`, which simply flags that we are playing and logs a message to LogCat – a real music player would use `MediaPlayer` to start playing the first song in the playlist. `onStartCommand()` returns `START_NOT_STICKY`, indicating that if Android has to kill off this service (e.g., low memory), it should not restart it once conditions improve.

`onDestroy()` stops the music from playing – theoretically, anyway – by calling a `stop()` method. Once again, this just logs a message to LogCat, plus updates our internal are-we-playing flag.

In the upcoming chapter on notifications, we will revisit this sample and discuss the use of `startForeground()` to make it easier for the user to get back to the music player, plus let Android know that the service is delivering part of the foreground experience and therefore should not be shut down.

Using the Service

The `FakePlayer` activity demonstrating the use of `PlayerService` has a UI twice as complex as the previous sample, consisting of two large buttons:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <Button
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
        android:text="Start the Player"
        android:onClick="startPlayer"
        />
    <Button
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_weight="1"
        android:text="Stop the Player"
        android:onClick="stopPlayer"
        />
</LinearLayout>
```

The activity itself is not much more complex:

```
package com.commonsware.android.fakeplayer;
```

```
import android.app.Activity;
import android.content.Intent;
import android.os.Bundle;
import android.view.View;

public class FakePlayer extends Activity {
    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);
    }

    public void startPlayer(View v) {
        Intent i=new Intent(this, PlayerService.class);

        i.putExtra(PlayerService.EXTRA_PLAYLIST, "main");
        i.putExtra(PlayerService.EXTRA_SHUFFLE, true);

        startService(i);
    }

    public void stopPlayer(View v) {
        stopService(new Intent(this, PlayerService.class));
    }
}
```

The `onCreate()` method merely loads the UI. The `startPlayer()` method constructs an Intent with fake values for `EXTRA_PLAYLIST` and `EXTRA_SHUFFLE`, then calls `startService()`. After you press the top button, you will see the corresponding message in LogCat. Similarly, `stopPlayer()` calls `stopService()`, triggering the second LogCat message. Notably, you do not need to keep the activity running in between those button clicks – you can exit the activity via BACK and come back later to stop the service.

The Web Service Interface

If you are going to consume a REST-style Web service, you may wish to create a Java client-side API for that service. This allows you to isolate details about the Web service (URLs, authorization credentials, etc.) in one place, with the rest of your application just able to use the published API. If the client-side API might involve state, such as a session ID or cached results, you may wish to use a service to implement the client-side API. In this case, the most natural form of service would be one that publishes a Binder, so clients can call a “real” API, that the service translates into HTTP requests.

In this case, we want to create a client-side Java API for the US National Weather Service’s forecast Web service, so we can get a weather forecast (timestamps, projected temperatures, and projected precipitation) for a given latitude and longitude. As you may recall, we examined this Web service back in the chapter on Internet access.

The sample project reviewed in this section is `Services/WeatherAPI`.

The Design

To use the binding pattern, we will need to expose an API from a “binder” object. Since the weather forecast arrives in a singularly awful XML structure, we will have the binder be responsible for parsing the XML. Hence, we can say that the binder will have a `getForecast()` method to get us an `ArrayList` of `Forecast` objects, each `Forecast` representing one timestamp/temperature/precipitation triple.

Once again, to supply the latitude and longitude of the forecast roster to retrieve, we will use a `Location` object, which will be obtained from GPS. This part of the sample will be described in greater detail in the chapter on location management.

Since the Web service call may take a while, it is unsafe to do this on the main application thread. In this sample, we will have the service use an `AsyncTask` to call our weather API, so the activity largely can be ignorant of threading issues.

The Rotation Challenge

Back in the chapter on threading, we noted the issues involved with orientation changes (or other configuration changes) and background threads in activities. The solution was to use `onRetainNonConfigurationInstance()` with a static inner class `AsyncTask` implementation, which we would manually associate with the new, post-configuration-change activity.

That same problem crops up with the binding pattern as well, one of the reasons why binding is difficult to use. If you bind to a service from an activity, that binding will not magically pass to the new activity instance after an orientation change. Instead, you need to do two things:

- Bind to the service not using the activity as the Context, but rather by using `getApplicationContext()`, as that Context is one that will live for the lifetime of your process
- Pass the `ServiceConnection` representing this binding from the old activity instance to the new one as part of the configuration change

To accomplish the second feat, you will need to use the same `onRetainNonConfigurationInstance()` trick as was used with threads.

The Service Implementation

Our service-side logic is broken into three classes, `Forecast`, `WeatherBinder`, and `WeatherService`, plus one interface, `WeatherListener`.

The Forecast

The Forecast class merely encapsulates the three pieces of the forecast data triple: the timestamp, the temperature, and the icon indicating the expected precipitation (if any):

```
package com.commonsware.android.weather;

class Forecast {
    String time="";
    Integer temp=null;
    String iconUrl="";

    String getTime() {
        return(time);
    }

    void setTime(String time) {
        this.time=time.substring(0,16).replace('T', ' ');
    }

    Integer getTemp() {
        return(temp);
    }

    void setTemp(Integer temp) {
        this.temp=temp;
    }

    String getIcon() {
        return(iconUrl);
    }

    void setIcon(String iconUrl) {
        this.iconUrl=iconUrl;
    }
}
```

The Interface

Because we are going to fetch the actual weather forecast on a background thread in the service, we have a slight API challenge – calls on our binder are synchronous. Hence, we cannot have a `getForecast()` method that returns our forecast. Rather, we need to give some way for the service to get the forecast back to our activity. In this case, we will pass in a listener object (`WeatherListener`), that the service will use when a forecast is ready:

```
package com.commonsware.android.weather;

import java.util.ArrayList;

public interface WeatherListener {
    void updateForecast(ArrayList<Forecast> forecast);
    void handleError(Exception e);
}
```

The Binder

The WeatherBinder extends Binder, a requirement for the local binding pattern. Other than that, the API is up to us.

Hence, we expose three methods:

- `onCreate()`, to be called when the WeatherBinder is set up, so we can get a `DefaultHttpClient` object to use with the Web service
- `onDestroy()`, to be called when the WeatherBinder is no longer needed, so we can shut down that `DefaultHttpClient` object
- `getForecast()`, the main public API for use by our activity, to kick off the background work to create our `ArrayList` of `Forecast` objects given a `Location`

```
package com.commonsware.android.weather;

import android.app.Service;
import android.content.Context;
import android.content.Intent;
import android.location.Location;
import android.os.AsyncTask;
import android.os.Binder;
import android.os.Bundle;
import java.io.IOException;
import java.io.StringReader;
import java.util.ArrayList;
import javax.xml.parsers.DocumentBuilder;
import javax.xml.parsers.DocumentBuilderFactory;
import org.apache.http.client.ResponseHandler;
import org.apache.http.client.HttpClient;
import org.apache.http.client.methods.HttpGet;
import org.apache.http.impl.client.BasicResponseHandler;
import org.apache.http.impl.client.DefaultHttpClient;
import org.w3c.dom.Document;
import org.w3c.dom.Element;
import org.w3c.dom.NodeList;
import org.xml.sax.InputSource;

public class WeatherBinder extends Binder {
    private String forecast=null;
    private HttpClient client=null;
    private String format=null;

    void onCreate(Context ctxt) {
        client=new DefaultHttpClient();
        format=ctxt.getString(R.string.url);
    }

    void onDestroy() {
        client.getConnectionManager().shutdown();
    }
}
```

```
void getForecast(Location loc, WeatherListener listener) {
    new FetchForecastTask(listener).execute(loc);
}

private ArrayList<Forecast> buildForecasts(String raw) throws Exception {
    ArrayList<Forecast> forecasts=new ArrayList<Forecast>();
    DocumentBuilder builder=DocumentBuilderFactory
        .newInstance()
        .newDocumentBuilder();
    Document doc=builder.parse(new InputSource(new StringReader(raw)));
    NodeList times=doc.getElementsByTagName("start-valid-time");

    for (int i=0;i<times.getLength();i++) {
        Element time=(Element)times.item(i);
        Forecast forecast=new Forecast();

        forecasts.add(forecast);
        forecast.setTime(time.getFirstChild().getNodeValue());
    }

    NodeList temps=doc.getElementsByTagName("value");

    for (int i=0;i<temps.getLength();i++) {
        Element temp=(Element)temps.item(i);
        Forecast forecast=forecasts.get(i);

        forecast.setTemp(new Integer(temp.getFirstChild().getNodeValue()));
    }

    NodeList icons=doc.getElementsByTagName("icon-link");

    for (int i=0;i<icons.getLength();i++) {
        Element icon=(Element)icons.item(i);
        Forecast forecast=forecasts.get(i);

        forecast.setIcon(icon.getFirstChild().getNodeValue());
    }

    return(forecasts);
}

class FetchForecastTask extends AsyncTask<Location, Void, ArrayList<Forecast>> {
    Exception e=null;
    WeatherListener listener=null;

    FetchForecastTask(WeatherListener listener) {
        this.listener=listener;
    }

    @Override
    protected ArrayList<Forecast> doInBackground(Location... locs) {
        ArrayList<Forecast> result=null;

        try {
            Location loc=locs[0];
            String url=String.format(format, loc.getLatitude(),

```

```
        loc.getLongitude());
    HttpGet getMethod=new HttpGet(url);
    ResponseHandler<String> responseHandler=new BasicResponseHandler();
    String responseBody=client.execute(getMethod, responseHandler);

    result=buildForecasts(responseBody);
}
catch (Exception e) {
    this.e=e;
}

return(result);
}

@Override
protected void onPostExecute(ArrayList<Forecast> forecast) {
    if (listener!=null) {
        if (forecast!=null) {
            listener.updateForecast(forecast);
        }

        if (e!=null) {
            listener.handleError(e);
        }
    }
}
}
```

Most of this is merely doing the Web service request using `DefaultHttpClient` and an `HttpGet` object, plus using the DOM parser to convert the XML into the `Forecast` objects. However, this is wrapped in a `FetchForecastTask` – an `AsyncTask` that will do the HTTP operation and parsing on a background thread. In `onPostExecute()`, the task invokes our `WeatherListener`, either to supply the forecast (`updateForecast()`) or hand over an `Exception` that was raised (`handleError()`).

The Service

The `WeatherService`, therefore, is fairly short, with the business logic delegated to `WeatherBinder`:

```
package com.commonsware.android.weather;

import android.app.Service;
import android.content.Intent;
import android.os.IBinder;
import java.util.ArrayList;

public class WeatherService extends Service {
    private final WeatherBinder binder=new WeatherBinder();

    @Override
    public void onCreate() {
        super.onCreate();
    }
```

```
        binder.onCreate(this);
    }

@Override
public IBinder onBind(Intent intent) {
    return(binder);
}

@Override
public void onDestroy() {
    super.onDestroy();

    binder.onDestroy();
}
}
```

Our `onCreate()` and `onDestroy()` methods delegate to the `WeatherBinder`, and `onBind()` returns the `WeatherBinder` itself.

Using the Service

On the surface, the `WeatherDemo` activity should be simple:

- Bind to the service in `onCreate()`
- Arrange to get GPS fixes, in the form of `Location` objects
- When a fix comes in, use the `WeatherBinder` to get a forecast, convert it to HTML, and display it in a `WebView`
- Unbind from the service in `onDestroy()`

However, our decision to use the binding pattern and to have the activity deal with the background thread means there is more work involved than those bullet points.

First, here is the full `WeatherDemo` implementation:

```
package com.commonsware.android.weather;

import android.app.Activity;
import android.app.AlertDialog;
import android.content.ComponentName;
import android.content.Context;
import android.content.Intent;
import android.content.IntentFilter;
import android.content.ServiceConnection;
import android.location.Location;
import android.location.LocationListener;
import android.location.LocationManager;
import android.os.AsyncTask;
import android.os.Bundle;
import android.os.DeadObjectException;
import android.os.RemoteException;
import android.os.IBinder;
import android.util.Log;
```

```
import android.webkit.WebView;
import java.util.ArrayList;

public class WeatherDemo extends Activity {
    private WebView browser;
    private LocationManager mgr=null;
    private State state=null;
    private boolean isConfigurationChanging=false;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);

        browser=(WebView)findViewById(R.id.webkit);
        state=(State) getLastNonConfigurationInstance();

        if (state==null) {
            state=new State();
            getApplicationContext()
                .bindService(new Intent(this, WeatherService.class),
                            state.svcConn, BIND_AUTO_CREATE);
        }
        else if (state.lastForecast!=null) {
            showForecast();
        }
    }

    state.attach(this);

    mgr=(LocationManager) getSystemService(LOCATION_SERVICE);
    mgr.requestLocationUpdates(LocationManager.GPS_PROVIDER,
                               3600000, 1000, onLocationChange);
}

@Override
public void onDestroy() {
    super.onDestroy();

    if (mgr!=null) {
        mgr.removeUpdates(onLocationChange);
    }

    if (!isConfigurationChanging) {
        getApplicationContext().unbindService(state.svcConn);
    }
}

@Override
public Object onRetainNonConfigurationInstance() {
    isConfigurationChanging=true;

    return(state);
}

private void goBlooey(Throwable t) {
    AlertDialog.Builder builder=new AlertDialog.Builder(this);
```

```
builder
    .setTitle("Exception!")
    .setMessage(t.toString())
    .setPositiveButton("OK", null)
    .show();
}

static String generatePage(ArrayList<Forecast> forecasts) {
    StringBuilder bufResult=new StringBuilder("<html><body><table>");

    bufResult.append("<tr><th width=\"50%\">Time</th>" +
                    "<th>Temperature</th><th>Forecast</th></tr>");

    for (Forecast forecast : forecasts) {
        bufResult.append("<tr><td align=\"center\">");
        bufResult.append(forecast.getTime());
        bufResult.append("</td><td align=\"center\">");
        bufResult.append(forecast.getTemp());
        bufResult.append("</td><td><img src=\"\">");
        bufResult.append(forecast.getIcon());
        bufResult.append("</td></tr>");
    }

    bufResult.append("</table></body></html>");

    return(bufResult.toString());
}

void showForecast() {
    browser.loadDataWithBaseURL(null, state.lastForecast,
                               "text/html", "UTF-8", null);
}

LocationListener onLocationChange=new LocationListener() {
    public void onLocationChanged(Location location) {
        if (state.weather!=null) {
            state.weather.getForecast(location, state);
        }
        else {
            Log.w(getClass().getName(), "Unable to fetch forecast - no WeatherBinder");
        }
    }

    public void onProviderDisabled(String provider) {
        // required for interface, not used
    }

    public void onProviderEnabled(String provider) {
        // required for interface, not used
    }

    public void onStatusChanged(String provider, int status,
                               Bundle extras) {
        // required for interface, not used
    }
}
```

```
};

static class State implements WeatherListener {
    WeatherBinder weather=null;
    WeatherDemo activity=null;
    String lastForecast=null;

    void attach(WeatherDemo activity) {
        this.activity=activity;
    }

    public void updateForecast(ArrayList<Forecast> forecast) {
        lastForecast=generatePage(forecast);
        activity.showForecast();
    }

    public void handleError(Exception e) {
        activity.goBloody(e);
    }

    ServiceConnection svcConn=new ServiceConnection() {
        public void onServiceConnected(ComponentName className,
                                       IBinder rawBinder) {
            weather=(WeatherBinder)rawBinder;
        }

        public void onServiceDisconnected(ComponentName className) {
            weather=null;
        }
    };
}
```

Now, let us look at the highlights of the service connection and the background thread.

Managing the State

We need to ensure that our ServiceConnection can be passed between activity instances on a configuration change. Hence, we have a State static inner class to hold that, plus two other bits of information: the Activity the state is associated with, and a String showing the last forecast we retrieved:

```
static class State implements WeatherListener {
    WeatherBinder weather=null;
    WeatherDemo activity=null;
    String lastForecast=null;

    void attach(WeatherDemo activity) {
        this.activity=activity;
    }

    public void updateForecast(ArrayList<Forecast> forecast) {
        lastForecast=generatePage(forecast);
        activity.showForecast();
    }
```

```

public void handleError(Exception e) {
    activity.goBloooey(e);
}

ServiceConnection svcConn=new ServiceConnection() {
    public void onServiceConnected(ComponentName className,
                                   IBinder rawBinder) {
        weather=(WeatherBinder)rawBinder;
    }

    public void onServiceDisconnected(ComponentName className) {
        weather=null;
    }
};
}

```

The lastForecast String is to allow us to re-display the generated HTML after a configuration change. Otherwise, if the user rotates the screen, we will lose our forecast (only held in the old instance's WebView) and either have to retrieve a fresh one or wait for a GPS fix.

We return this State object from onRetainNonConfigurationInstance():

```

@Override
public Object onRetainNonConfigurationInstance() {
    isConfigurationChanging=true;

    return(state);
}

```

In onCreate(), if there is no non-configuration instance, we create a fresh State and bind to the service, since we do not have a service connection at present. On the other hand, if onCreate() gets a State from getLastNonConfigurationInstance(), it simply holds onto that state and reloads our forecast in the WebView. In either case, onCreate() indicates to the State that the new activity instance is the current one:

```

@Override
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.main);

    browser=(WebView)findViewById(R.id.webkit);
    state=(State)getLastNonConfigurationInstance();

    if (state==null) {
        state=new State();
        getApplicationContext()
            .bindService(new Intent(this, WeatherService.class),
                        state.svcConn, BIND_AUTO_CREATE);
    }
    else if (state.lastForecast!=null) {
        showForecast();
    }

    state.attach(this);
}

```

```
mgr=(LocationManager)getSystemService(LOCATION_SERVICE);
mgr.requestLocationUpdates(LocationManager.GPS_PROVIDER,
                           3600000, 1000, onLocationChange);
}
```

Time to Unbind

We bind to the service when `onCreate()` is called, if it did not receive a State via `getLastNonConfigurationInstance()` (in which case, we are already bound). This begs the question: when do we unbind from the service?

We want to unbind when the activity is destroyed...but not if the activity is being destroyed because of a configuration change.

Unfortunately, there is no built-in way to make that determination from `onDestroy()`. There is an `isFinishing()` method you can call on an Activity, which will return true if the activity is going away for good or false otherwise. This does return false for a configuration change, but it will also return false if the activity is being destroyed to free up RAM and the user might be able to return to it via the BACK button.

This is why `onRetainNonConfigurationInstance()` flips a `isConfigurationChanging` flag in `WeatherDemo` to true. That flag is initially false. We then check that flag to see if we should unbind from the service or not:

```
@Override
public void onDestroy() {
    super.onDestroy();

    if (mgr!=null) {
        mgr.removeUpdates(onLocationChange);
    }

    if (!isConfigurationChanging) {
        getApplicationContext().unbindService(state.svcConn);
    }
}
```

Alerting Users via Notifications

Pop-up messages, tray icons and their associated “bubble” messages, bouncing dock icons...you are no doubt used to programs trying to get your attention, sometimes for good reason. Your phone also probably chirps at you for more than just incoming calls: low battery, alarm clocks, appointment notifications, incoming text and e-mail messages, and so on.

Not surprisingly, Android has a whole framework for dealing with these sorts of things, collectively called *notifications*, as described in this chapter.

Notification Configuration

A service, running in the background, needs a way to let users know something of interest has occurred, such as when e-mail has been received. Moreover, the service may need some way to steer users to an activity where they can act upon the event, such as reading a received message. For this, Android supplies status bar icons, flashing lights, and other indicators collectively known as notifications.

Your current phone may already have such icons, to indicate battery life, signal strength, whether Bluetooth is enabled, and the like. With Android, applications can add their own status bar icons, with an eye toward having them appear only when needed (e.g., a message has arrived).

In Android, you can raise notifications via the `NotificationManager`, which is a system service. To use it, you need to get the service object via `getSystemService(NOTIFICATION_SERVICE)` from your activity. The `NotificationManager` gives you three methods: one to raise a `Notification` (`notify()`) and two to get rid of an existing `Notification` (`cancel()` and `cancelAll()`).

The `notify()` method takes a `Notification`, which is a data structure that spells out what form your pestering should take. The capabilities of this object are described in the following sections.

Hardware Notifications

You can flash LEDs on the device by setting lights to true, also specifying the color (as an `#ARGB` value in `ledARGB`) and what pattern the light should blink in (by providing off/on durations in milliseconds for the light via `ledOnMS` and `ledOffMS`). Note, however, that Android devices will apply best efforts to meet your color request, meaning that different devices may give you different colors, or perhaps no control over color at all. For example, the Motorola CLIQ has only a white LED, so you can ask for any color you want, and you will get white. Note that you will need to OR (`|`) the `Notification.FLAG_SHOW_LIGHTS` value into the public flags field on the `Notification` object for flashing of the LED to work.

You can play a sound, using a `Uri` to a piece of content held, perhaps, by a `ContentManager` (sound). Think of this as a ringtone for your application.

You can vibrate the device, controlled via a `long[]`, indicating the on/off patterns (in milliseconds) for the vibration (`vibrate`). You might do this by default, or you might make it an option the user can choose when circumstances require a more subtle notification than a ringtone. To use this, though, you will need to request the `VIBRATE` permission (permissions are discussed in Chapter 38).

All of these options, by default, happen once (e.g., one LED flash or one playback of the sound). If you want to have them persist until the `Notification` is canceled, you will need to set the `flags` public field in your `Notification` to include `FLAG_INSISTENT`.

Instead of manually specifying the hardware options, you can also use the `defaults` field in the `Notification`, setting it to `DEFAULT_LIGHTS`, `DEFAULT_SOUND`, `DEFAULT_VIBRATE`, or `DEFAULT_ALL`, which will use platform defaults for all hardware options.

Icons

While the flashing lights, sounds, and vibrations are aimed at getting somebody to look at the device, icons are designed to take them the next step and tell them what's so important.

To set up an icon for a `Notification`, you need to set two public fields: `icon`, where you provide the identifier of a `Drawable` resource representing the icon, and `contentIntent`, where you supply a `PendingIntent` to be raised when the icon is clicked. A `PendingIntent` is a wrapper around a regular `Intent` that allows the `Intent` to be invoked later, by another process, to start an activity or whatever. Typically, a `Notification` will trigger an activity, in which case you would create the `PendingIntent` via the static `getActivity()` method and give it an `Intent` that identifies one of your activities. That being said, you could have the `Notification` send a broadcast `Intent` instead, by using a `getBroadcast()` version of a `PendingIntent`.

You can also supply a text blurb to appear when the icon is put on the status bar (`tickerText`).

If you want all three, the simpler approach is to call `setLatestEventInfo()`, which wraps all three of those in a single call.

You can also set a value in the `number` public field of your `Notification`. This will cause the number you supply to be drawn over the top of the icon in one corner. This is used, for example, to show the number of unread e-mail messages, so that you don't need to have a bunch of different icons, one for each possible number of unread messages. By default, the `number` field will be ignored and not used.

Note that the size of the icons used with a `Notification` changed with Android 2.3. Before that version, 25-pixel square was the desired size. Now, per-density icons in a more rectangular shape are preferred:

- 24-pixel square (inside a 24-pixel wide by 38-pixel high bounding box) for high-density screens
- 16-pixel square (inside a 16×25-pixel bounding box) for medium-density screens
- 12-pixel square (inside a 12×19-pixel bounding box) for low-density screens

Applications following these rules will want to use specific resource sets for the new icons:

- `res/drawable-hdpi-v9/`: For high-density Android 2.3 editions
- `res/drawable-mdpi-v9/`: For medium-density Android 2.3 editions
- `res/drawable-ldpi-v9/`: For low-density Android 2.3 editions
- `res/drawable/`: For the icon to use on Android 2.2 and earlier

More details on guidelines for all icons, including status bar icons, can be found in the Android developer documentation.

Notifications in Action

Let's now take a peek at the `Notifications/Notify1` sample project, in particular the `NotifyDemo` class:

```
package com.commonsware.android.notify;

import android.app.Activity;
import android.app.Notification;
import android.app.NotificationManager;
import android.app.PendingIntent;
import android.content.Intent;
import android.os.Bundle;
import android.view.View;
```

```
public class NotifyDemo extends Activity {
    private static final int NOTIFY_ME_ID=1337;
    private int count=0;
    private NotificationManager mgr=null;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);

        mgr=(NotificationManager) getSystemService(NOTIFICATION_SERVICE);
    }

    public void notifyMe(View v) {
        Notification note=new Notification(R.drawable.stat_notify_chat,
            "Status message!",
            System.currentTimeMillis());
        PendingIntent i=PendingIntent.getActivity(this, 0,
            new Intent(this, NotifyMessage.class),
            0);

        note.setLatestEventInfo(this, "Notification Title",
            "This is the notification message", i);
        note.number=++count;
        note.vibrate=new long[] {500L, 200L, 200L, 500L};
        note.flags|=Notification.FLAG_AUTO_CANCEL;

        mgr.notify(NOTIFY_ME_ID, note);
    }

    public void clearNotification(View v) {
        mgr.cancel(NOTIFY_ME_ID);
    }
}
```

As shown in Figure 37–1, this activity sports two large buttons, one to kick off a notification after a 5-second delay and one to cancel that notification (if it is active).

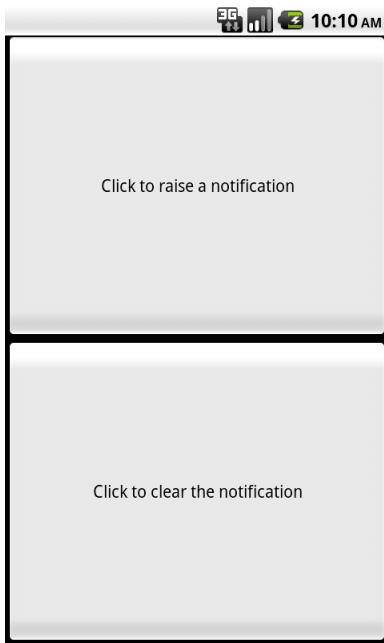


Figure 37–1. The *NotifyDemo* activity main view

Creating the notification, in `notifyMe()`, is accomplished in seven steps:

1. Create a `Notification` object with our icon, a message to flash on the status bar as the notification is raised, and the time associated with this event.
2. Create a `PendingIntent` that will trigger the display of another activity (`NotifyMessage`).
3. Use `setLatestEventInfo()` to specify that, when the notification is clicked, we are to display a certain title and message, and if that is clicked, we launch the `PendingIntent`.
4. Update the number associated with the notification.
5. Specify a vibration pattern: 500ms on, 200ms off, 200ms on, 500ms off.
6. Include `FLAG_AUTO_CANCEL` in the `Notification` object's `flags` field.
7. Tell the `NotificationManager` (obtained in `onCreate()`) to display the notification.

Hence, if we click the top button, our icon will appear in the status bar, briefly along with our status message, as shown in Figure 37–2.

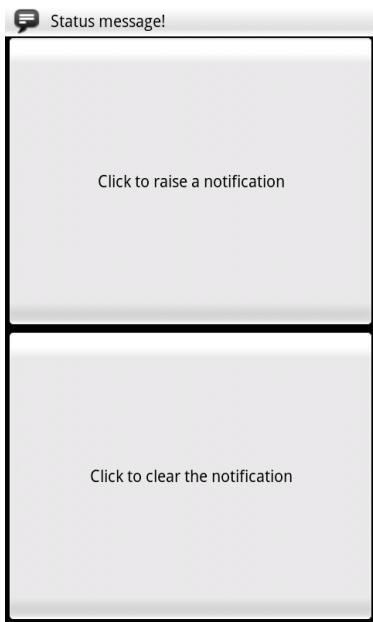


Figure 37–2. Our notification as it appears on the status bar, with our status message

After the status message goes away, the icon will have our number (initially 1) superimposed on its lower-right corner, as shown in Figure 37–3. You might use this to signify the number of unread messages, for example.

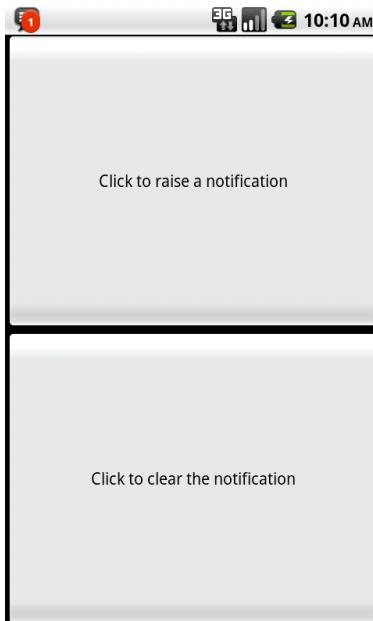


Figure 37–3. Our notification with the superimposed number

If you drag down the icon, a drawer will appear beneath the status bar. Drag that drawer all the way to the bottom of the screen to show the outstanding notifications, including our own, as shown in Figure 37–4.

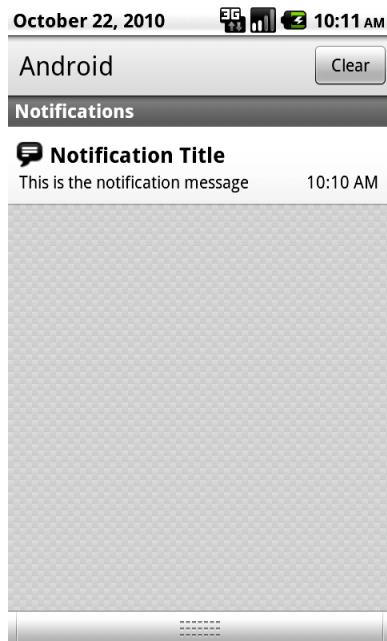


Figure 37–4. The notifications drawer, fully expanded, with our notification

If you click the notification entry in the drawer, you'll be taken to a trivial activity displaying a message. In a real application, this activity would do something useful based upon the event that occurred (e.g., take users to the newly arrived mail messages).

Clicking the cancel button, clicking the Clear button in the drawer, or clicking the notification entry in the drawer will remove the icon from the status bar. The latter occurs because we included `FLAG_AUTO_CANCEL` in the Notification, indicating that a tap on the drawer entry should cancel the Notification itself.

Staying in the Foreground

Notifications have another use: keeping select services around.

Services do not live forever. Android may terminate your application's process to free up memory in an emergency situation, or just because it seems to have been hanging around memory too long. Ideally, you design your services to deal with the fact that they may not run indefinitely.

However, some services will be missed by the user if they mysteriously vanish. For example, the default music player application that ships with Android uses a service for

the actual music playback. That way, users can listen to music while continuing to use their phone for other purposes. The service stops only when the user presses the stop button in the music player activity. If that service were to shut down unexpectedly, the user would wonder what is wrong.

Services like this can declare themselves as being part of the *foreground*. This will cause their priority to rise and make them less likely to be bumped out of memory. The trade-off is that the service has to maintain a Notification, so the user knows that this service is claiming part of the foreground. And, ideally, that Notification should provide an easy path back to some activity where the user can stop the service.

To do this, in `onCreate()` of your service (or wherever else in the service's life it would make sense), call `startForeground()`. This takes a `Notification` and a locally unique integer, just like the `notify()` method on `NotificationManager`. It causes the `Notification` to appear and moves the service into foreground priority. Later on, you can call `stopForeground()` to return to normal priority.

Note that this method was added with Android 2.0 (API level 5). There was an earlier method, `setForeground()`, that performed a similar function in earlier versions of Android.

FakePlayer, Redux

The previous chapter, covering service patterns, presented a fake music player, implemented with an Activity (`FakePlayer`) and a Service (`PlayerService`). The `PlayerService` is actually what plays the music, so the music can play even while the `FakePlayer` activity is not open.

However, Android may not consider PlayerService to be part of the user experience, since services normally interact very little directly with users. This means Android may run PlayerService in a way that caps CPU usage (not necessarily bad) and might elect to shut down the service if it thinks it has been running too long (probably bad).

The answer is to use `startForeground()` and `stopForeground()`. We can call `startForeground()` when we start the music playing in our `play()` method:

```
    note.setLatestEventInfo(this, "Fake Player",
                           "Now Playing: \"Ummmm, Nothing\"",
                           pi);
    note.flags |= Notification.FLAG_NO_CLEAR;

    startForeground(1337, note);
}
}
```

The plus side is that our service will have more CPU availability if needed and will be far less likely to be killed by Android. Users will see an icon in the status bar. If they slide down the notification drawer and tap our Notification's entry, they will be taken back to *FakePlayer*—the existing instance, if there is one, or a fresh instance otherwise, courtesy of our Intent flags (`Intent.FLAG_ACTIVITY_CLEAR_TOP` | `Intent.FLAG_ACTIVITY_SINGLE_TOP`). For a music player, this UI pattern makes it easy for users to quickly go back to stop the music when needed.

Stopping the music, via our `stop()` method, will call `stopForeground()`:

```
private void stop() {
    if (isPlaying) {
        Log.w(getClass().getName(), "Got to stop()!");
        isPlaying=false;
        stopForeground(true);
    }
}
```

The true value passed to `stopForeground()` tells Android to remove the Notification, which would be the typical approach for this pattern.

Notifications and Honeycomb

The Honeycomb UI introduced in Android 3.0 supports notifications, just like all previous versions of Android. However, the user experience is a bit different, owing to the tablet metaphor and its additional screen space.

Figure 37–5 shows the unmodified *Notifications/Notify1* project, as seen in the Android 3.0 emulator.

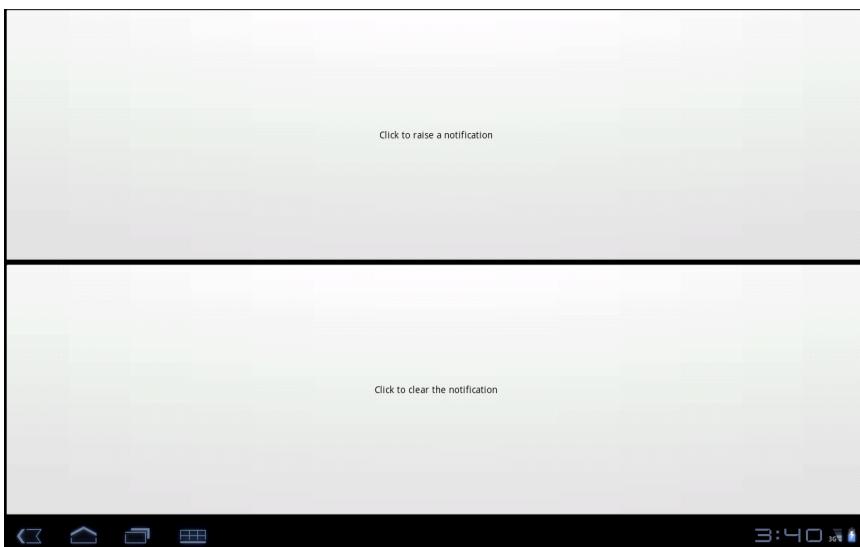


Figure 37–5. *Notify1 as seen on an Android 3.0 emulator*

Other than the Android 3.0 version of the status bar, and the extra-huge buttons, this is no different from what you would see on a pre-Honeycomb phone.

If we click the top button, our Notification appears, this time in the lower-right corner, with the icon and ticker text, as shown in Figure 37–6.

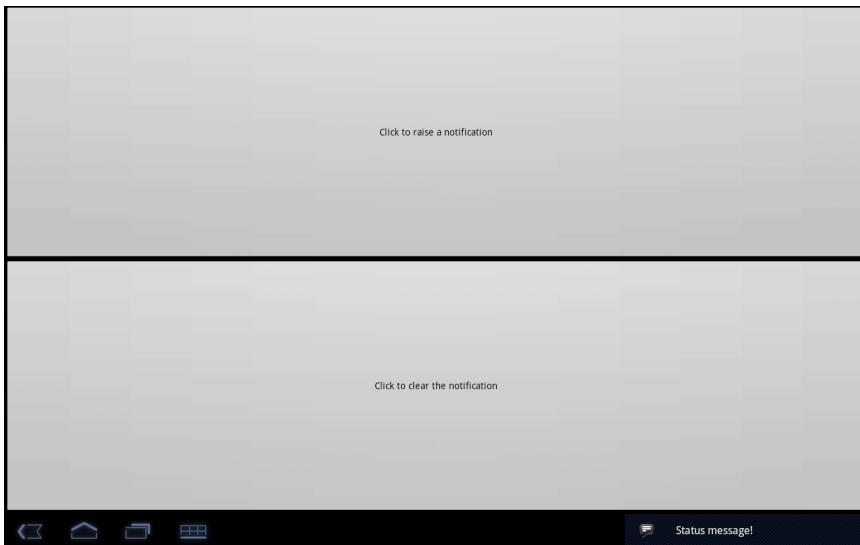


Figure 37–6. *Notify1 with a notification added*

Note that if the user taps the ticker, it triggers our PendingIntent, just as if they had tapped the notification drawer entry on a phone.

When the ticker is removed, our icon remains...without the number, as shown in Figure 37–7.

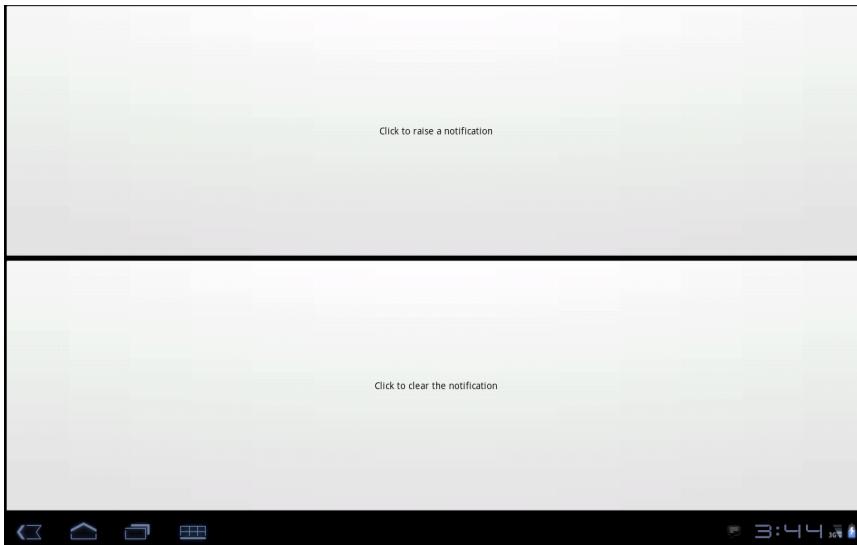


Figure 37–7. Notify1 with a numberless notification icon

If the user taps that icon, a notification drawer-style pop-up appears nearby, as shown in Figure 37–8.

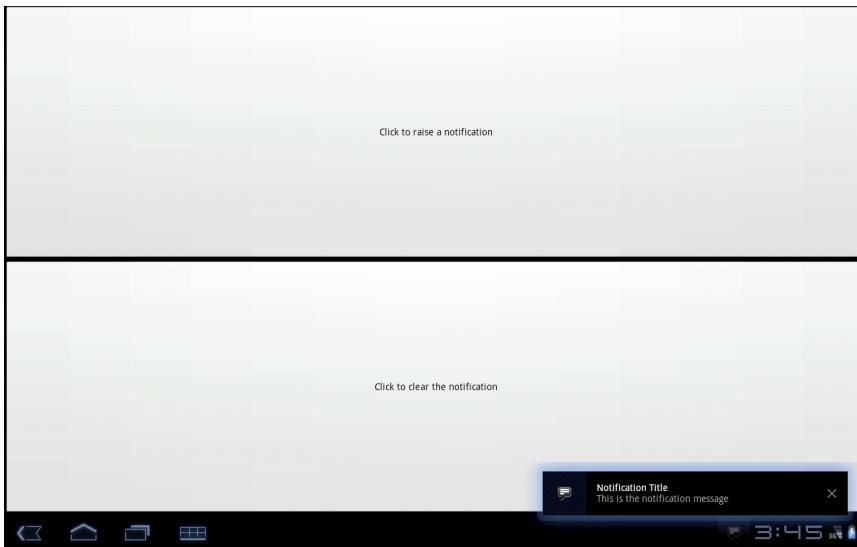


Figure 37–8. Notify1 with the notification content appearing

Tapping the icon or the text triggers the PendingIntent, while tapping the \times on the right cancels this Notification.

Part VI

Other Android Capabilities

Requesting and Requiring Permissions

In the late 1990s, a wave of viruses spread through the Internet, delivered via e-mail, using contact information culled from Microsoft Outlook. A virus would simply e-mail copies of itself to each of the Outlook contacts that had an e-mail address. This was possible because, at the time, Outlook did not take any steps to protect data from programs using the Outlook API, since that API was designed for ordinary developers, not virus authors.

Nowadays, many applications that hold onto contact data secure that data by requiring that a user explicitly grant rights for other programs to access the contact information. Those rights could be granted on a case-by-case basis or all at once at install time.

Android is no different, in that it requires permissions for applications to read or write contact data. Android's permission system is useful well beyond contact data, and for content providers and services beyond those supplied by the Android framework.

You, as an Android developer, will frequently need to ensure that your applications have the appropriate permissions to do what you want to do with other applications' data. You may also elect to require permissions for other applications to use your data or services, if you make those available to other Android components. This chapter covers how to accomplish both these ends.

Mother, May I?

Requesting the use of other applications' data or services requires the `uses-permission` element to be added to your `AndroidManifest.xml` file. Your manifest may have zero or more `uses-permission` elements, all as direct children of the root `manifest` element.

The `uses-permission` element takes a single attribute, `android:name`, which is the name of the permission your application requires:

```
<uses-permission  
    android:name="android.permission.ACCESS_LOCATION" />
```

All of the stock system permissions begin with android.permission and are listed in the Android SDK documentation for Manifest.permission. Third-party applications may have their own permissions, which, hopefully, they have documented for you. Here are some of the more useful permissions:

- INTERNET, if your application wishes to access the Internet through any means, from raw Java sockets through the WebView widget
- WRITE_EXTERNAL_STORAGE, for writing data to the SD card (or whatever the device has designated as external storage)
- ACCESS_COARSE_LOCATION and ACCESS_FINE_LOCATION, for determining where the device is
- CALL_PHONE, to allow the application to place phone calls directly, without user intervention

Permissions are confirmed at the time the application is installed. The user will be prompted to confirm that it is acceptable for your application to do what the permission calls for. Hence, it is important that you ask for as few permissions as possible and justify those you ask for, so users do not elect to skip installing your application because you ask for too many unnecessary permissions. This prompt will not appear when loading an application via USB, such as during development.

If you do not have the desired permission and try to do something that needs it, you should get a SecurityException informing you of the missing permission. Note that you will fail on a permission check only if you forgot to ask for the permission—it is impossible for your application to be running and *not* have been granted your requested permissions.

Halt! Who Goes There?

The other side of the coin is to secure your own application. If your application is mostly activities, security may be just an “outbound” thing, where you request the right to use resources of other applications. If, on the other hand, you put content providers or services in your application, you will want to implement “inbound” security to control which applications can do what with the data.

Note that the issue here is less about whether other applications might mess up your data, but rather about privacy of the user’s information or use of services that might incur expense. That is where the stock permissions for built-in Android applications are focused: whether you can read or modify contacts, send SMS messages, and so forth. If your application does not store information that might be considered private, security is less of an issue. If, on the other hand, your application stores private data, such as medical information, security is much more important.

The first step to securing your own application using permissions is to declare said permissions, once again in the `AndroidManifest.xml` file. In this case, instead of `uses-permission`, you add `permission` elements. Once again, you can have zero or more `permission` elements, all as direct children of the root `manifest` element.

Declaring a permission is slightly more complicated than using a permission. You need to supply three pieces of information:

- *The symbolic name of the permission:* To keep your permissions from colliding with those from other applications, you should use your application's Java namespace as a prefix.
- *A label for the permission:* Choose something short that would be understandable by users.
- *A description for the permission:* Choose something a wee bit longer that is understandable by your users.

Following is an example:

```
<permission  
    android:name="vnd.tlagency.sekrits.SEE_SEKRITS"  
    android:label="@string/see_sekrits_label"  
    android:description="@string/see_sekrits_description" />
```

This does not enforce the permission. Rather, it indicates that it is a possible permission; your application must still flag security violations as they occur.

There are two ways for your application to enforce permissions, dictating where and under what circumstances they are required. The easier option is to indicate in the manifest where permissions are required. The more difficult option is to enforce permissions in your code. Both options are discussed next.

Enforcing Permissions via the Manifest

Activities, services, and receivers can all declare an attribute named `android:permission`, whose value is the name of the permission that is required to access those items:

```
<activity  
    android:name=".SekritApp"  
    android:label="Top Sekrit"  
    android:permission="vnd.tlagency.sekrits.SEE_SEKRITS">  
    <intent-filter>  
        <action android:name="android.intent.action.MAIN" />  
        <category  
            android:name="android.intent.category.LAUNCHER" />  
    </intent-filter>  
</activity>
```

Only applications that have requested your indicated permission will be able to access the secured component. In this case, “access” means the following:

- Activities cannot be started without the permission.
- Services cannot be started, stopped, or bound to an activity without the permission.

- Intent receivers ignore messages sent via `sendBroadcast()` unless the sender has the permission.

Enforcing Permissions Elsewhere

In your code, you have two additional ways to enforce permissions:

First, your services can check permissions on a per-call basis via `checkCallingPermission()`. This returns `PERMISSION_GRANTED` or `PERMISSION_DENIED` depending on whether the caller has the permission you specified. For example, if your service implements separate read and write methods, you could require separate read and write permissions in code by checking those methods for the permissions you need from Java.

Second, you can include a permission when you call `sendBroadcast()`. This means that eligible broadcast receivers must hold that permission; those without the permission are ineligible to receive it. We will examine `sendBroadcast()` in greater detail elsewhere in this book.

May I See Your Documents?

There is no automatic discovery of permissions at compile time; all permission failures occur at runtime. Hence, it is important that you document the permissions required for your public APIs, including content providers, services, and activities intended for launching from other activities. Otherwise, programmers who are attempting to interface with your application will have to find out the permission rules by trial and error.

Furthermore, you should expect that users of your application will be prompted to confirm any permissions your application says it needs. Hence, you need to document for your users what they should expect, lest they get confused by the question posed by the device and elect to not install or use your application. You may wish to use string resources for this, so you can internationalize your permission details the way you internationalize all the other messages and prompts in your application.

New Permissions in Old Applications

Sometimes, Android introduces new permissions that govern behavior that formerly did not require permissions. `WRITE_EXTERNAL_STORAGE` is one example. Originally, applications could write to external storage without any permission at all. Android 1.6 introduced `WRITE_EXTERNAL_STORAGE`, which is required before you can write to external storage. However, applications that were written before Android 1.6 could not possibly request that permission, since it did not exist at the time. Breaking those applications would seem to be a harsh price for progress.

What Android does is grandfather in certain permissions for applications supporting earlier SDK versions. In particular, if you have `<uses-sdk android:minSdkVersion="3">` in

your manifest, saying that you support Android 1.5, your application will automatically request WRITE_EXTERNAL_STORAGE and READ_PHONE_STATE, even if you do not explicitly request those permissions. People installing your application on an Android 1.5 device will see these requests.

Eventually, when you drop support for the older version (e.g., switch to `<uses-sdk android:minSdkVersion="4">`), Android will no longer automatically request those permissions. Hence, if your code really *does* need those permissions, you will need to ask for them yourself.

Permissions: Up Front or Not at All

The permission system in Android is not especially flexible. Notably, you have to ask for all permissions you might ever need up front, and the user has to agree to all of them or abandon the installation of your app.

This means you cannot do the following:

- Create optional permissions, ones the user could say “no, thanks” to, that your application could react to dynamically
- Request new permissions after installation, which means that even if a permission is needed only for some lightly used feature, you have to ask for it anyway

Hence, as you determine the feature list for your app, it is important that you keep permissions in mind. Every additional permission that you request is a filter that will cost you some portion of your prospective audience. Certain combinations—such as INTERNET and READ_CONTACTS—will have a stronger effect, as users may fear what the combination can do. You will need to decide for yourself whether attracting additional users by offering the feature is worth the cost of requiring the permissions the feature needs to operate.

Chapter 39

Accessing Location-Based Services

A popular feature on current mobile devices is GPS capability, so the device can tell you where you are at any point in time. While the most popular uses of GPS service are for mapping and getting directions, there are other things you can do if you know your location. For example, you might set up a dynamic chat application based on physical location, so users can chat with those people who are nearest to them. Or, you could automatically geo-tag posts to Twitter or similar services.

GPS is not the only way a mobile device can identify your location. Alternatives include the following:

- The European equivalent to GPS, called Galileo, which is still under development at the time of this writing
- Cell tower triangulation, where your position is determined based on signal strength to nearby cell towers
- Proximity to public Wi-Fi hotspots that have known geographic locations

Android devices may have one or more of these services available to them. You, as a developer, can ask the device for your location, plus details on which providers are available. There are even ways for you to simulate your location in the emulator, for use in testing your location-enabled applications.

Location Providers: They Know Where You're Hiding

Android devices can have access to several different means of determining your location. Some will have better accuracy than others. Some may be free, while others may have a cost associated with them. Some may be able to tell you more than just your current position, such as your elevation over sea level or your current speed.

Android has abstracted all this out into a set of `LocationProvider` objects. Your Android environment will have zero or more `LocationProvider` instances, one for each distinct locating service that is available on the device. Providers know not only your location, but their own characteristics, in terms of accuracy, cost, and so on.

You, as a developer, will use a `LocationManager`, which holds the `LocationProvider` set, to figure out which `LocationProvider` is right for your particular circumstance. You will also need a permission in your application, or the various location APIs will fail due to a security violation. Depending on which location providers you wish to use, you may need `ACCESS_COARSE_LOCATION`, `ACCESS_FINE_LOCATION`, or both (see Chapter 38).

Finding Yourself

The obvious thing to do with a location service is to figure out where you are right now. To do that, you first need to get a `LocationManager`, so call `getSystemService(LOCATION_SERVICE)` from your activity or service and cast it to be a `LocationManager`. The next step is to get the name of the `LocationProvider` you want to use. Here, you have two main options:

- Ask the user to pick a provider
- Find the best-match provider based on a set of criteria

If you want the user to pick a provider, calling `getProviders()` on the `LocationManager` will give you a `List` of providers, which you can then present to the user for selection.

If you want to find the best-match provider based on a set of criteria, create and populate a `Criteria` object, stating the particulars of what you want out of a `LocationProvider`. Following are some of the methods that you can use to specify criteria:

- `setAltitudeRequired()`: Indicates whether or not you need the current altitude
- `setAccuracy()`: Sets a minimum level of accuracy, in meters, for the position
- `setCostAllowed()`: Controls whether the provider must be free or can incur a cost on behalf of the device user

Given a filled-in `Criteria` object, call `getBestProvider()` on your `LocationManager`, and Android will sift through the criteria and give you the best answer. Note that not all of your criteria may be met; all but the monetary cost criterion might be relaxed if nothing matches.

You are also welcome to hard-wire in a `LocationProvider` name (e.g., `GPS_PROVIDER`), perhaps just for testing purposes.

Once you know the name of the `LocationProvider`, you can call `getLastKnownPosition()` to find out where you were recently. However, unless something else is causing the desired provider to collect fixes (e.g., unless the GPS

radio is on), `getLastKnownPosition()` will return null, indicating that there is no known position. On the other hand, `getLastKnownPosition()` incurs no monetary or power cost, since the provider does not need to be activated to get the value.

These methods return a `Location` object, which can give you the latitude and longitude of the device in degrees as a Java double. If the particular location provider offers other data, you can get that as well:

- For altitude, `hasAltitude()` will tell you if there is an altitude value, and `getAltitude()` will return the altitude in meters.
- For bearing (i.e., compass-style direction), `hasBearing()` will tell you if there is a bearing available, and `getBearing()` will return it as degrees east of true north.
- For speed, `hasSpeed()` will tell you if the speed is known, and `getSpeed()` will return the speed in meters per second.

A more likely approach to getting the `Location` from a `LocationProvider`, though, is to register for updates, as described in the next section.

On the Move

Not all location providers are necessarily immediately responsive. GPS, for example, requires activating a radio and getting a fix from the satellites before you get a location. That is why Android does not offer a `getMyCurrentLocationNow()` method. Combine that with the fact that your users may want their movements to be reflected in your application, and you are probably best off registering for location updates and using that as your means of getting the current location.

The Internet/Weather and Service/WeatherAPI sample applications show how to register for updates—call `requestLocationUpdates()` on your `LocationManager` instance. This method takes four parameters:

- The name of the location provider you wish to use
- How long, in milliseconds, *should* have elapsed before we might get a location update
- How far, in meters, the device must have moved before we might get a location update
- A `LocationListener` that will be notified of key location-related events, as shown in the following example:

```
LocationListener onLocationChange=new LocationListener() {
    public void onLocationChanged(Location location) {
        if (state.weather!=null) {
            state.weather.getForecast(location, state);
        }
        else {
            Log.w(getClass().getName(), "Unable to fetch forecast - no WeatherBinder");
        }
    }
}
```

```
        }

    public void onProviderDisabled(String provider) {
        // required for interface, not used
    }

    public void onProviderEnabled(String provider) {
        // required for interface, not used
    }

    public void onStatusChanged(String provider, int status,
                               Bundle extras) {
        // required for interface, not used
    }
}
```

Here, all we do is trigger a `FetchForecastTask` with the `Location` supplied to the `onLocationChanged()` callback method.

Bear in mind that the time parameter is only a guide to help steer Android from a power consumption standpoint. You may get many more location updates than this. To get the maximum number of location updates, supply 0 for both the time and distance constraints.

When you no longer need the updates, call `removeUpdates()` with the `LocationListener` you registered. If you fail to do this, your application will continue receiving location updates even after all activities and such are closed up, which will also prevent Android from reclaiming your application's memory.

There is another version of `requestLocationUpdates()` that takes a `PendingIntent` rather than a `LocationListener`. This is useful if you want to be notified of changes in your position even when your code is not running. For example, if you are logging movements, you could use a `PendingIntent` that triggers a `BroadcastReceiver` (`getBroadcast()`) and have the `BroadcastReceiver` add the entry to the log. This way, your code is in memory only when the position changes, so you do not tie up system resources while the device is not moving.

Are We There Yet? Are We There Yet?

Sometimes, you are not interested in where you are now, or even when you move, but want to know when you get to where you are going. This could be an end destination, or it could be getting to the next step on a set of directions, so you can give the user the next instruction.

To accomplish this, `LocationManager` offers `addProximityAlert()`. This registers an `PendingIntent`, which will be fired off when the device gets within a certain distance of a certain location. The `addProximityAlert()` method takes the following as parameters:

- The latitude and longitude of the position of interest.
- A radius, specifying how close you should be to that position for the Intent to be raised.

- A duration for the registration, in milliseconds. After this period, the registration automatically lapses. A value of -1 means the registration lasts until you manually remove it via `removeProximityAlert()`.
- The `PendingIntent` to be raised when the device is within the target zone expressed by the position and radius.

Note that it is not guaranteed that you will actually receive an Intent. There may be an interruption in location services, or the device may not be in the target zone during the period of time the proximity alert is active. For example, if the position is off by a bit, and the radius is a little too tight, the device might only skirt the edge of the target zone, or it might go by the target zone so quickly that the device's location isn't sampled during that time.

It is up to you to arrange for an activity or receiver to respond to the Intent you register with the proximity alert. What you do when the Intent arrives is up to you. For example, you might set up a notification (e.g., vibrate the device), log the information to a content provider, or post a message to a web site. Note that you will receive the Intent whenever the position is sampled and you are within the target zone, not just upon entering the zone. Hence, you may get the Intent several times, perhaps quite a few times, depending on the size of the target zone and the speed of the device's movement.

Testing...Testing...

The Android emulator does not have the ability to get a fix from GPS, triangulate your position from cell towers, or identify your location by some nearby Wi-Fi signal. So, if you want to simulate a moving device, you will need to have some means of providing mock location data to the emulator.

For whatever reason, this particular area has undergone significant changes as Android itself has evolved. It used to be that you could provide mock location data within your application, which was very handy for demonstration purposes. Alas, those options have all been removed as of Android 1.0.

One likely option for supplying mock location data is the Dalvik Debug Monitor Service (DDMS). This is an external program, separate from the emulator, which can feed the emulator single location points or full routes to traverse, in a few different formats. DDMS is described in greater detail in Chapter 43.

Mapping with MapView and MapActivity

One of Google's most popular services—after Search, of course—is Google Maps, which enables you to map everything from the location of the nearest pizza parlor to directions from New York City to San Francisco (only 2,905 miles!), and includes street views and satellite imagery.

Most Android devices, not surprisingly, integrate Google Maps. For those that do, there is a mapping activity available to users straight from the main Android launcher. More relevant to you, as a developer, are `MapView` and `MapActivity`, which allow you to integrate maps into your own applications. Not only can you display maps, control the zoom level, and allow people to pan around, but you can tie in Android's location-based services to show where the device is and where it is going.

Fortunately, integrating basic mapping features into your Android project is fairly easy. And with a bit more effort, you can integrate more sophisticated mapping features.

Terms, Not of Endearment

Integrating Google Maps into third-party applications requires agreeing to a fairly lengthy set of legal terms. These terms include clauses that you may find unpalatable.

If you are considering Google Maps, please review these terms closely to determine if your intended use will run afoul of any clauses. You are strongly recommended to seek professional legal counsel if there are any potential areas of conflict.

Also, keep your eyes peeled for other mapping options, based on other sources of map data, such as OpenStreetMap.

Piling On

As of Android 1.5, Google Maps is not strictly part of the Android SDK. Instead, it is part of the Google APIs Add-On, an extension of the stock SDK. The Android add-on system provides hooks for other subsystems that may be part of some devices but not others.

NOTE: Because Google Maps is not part of the Android open source project, some devices lack Google Maps due to licensing issues. For example, at the time of this writing, the Archos 5 Android tablet does not have Google Maps.

By and large, the fact that Google Maps is in an add-on does not affect your day-to-day development. However, bear in mind the following:

- You will need to create your project with an appropriate target to ensure the Google Maps APIs will be available.
- To test your Google Maps integration, you will also need an AVD that uses an appropriate target.

The Key to It All

If you download the source code for this book, compile the Maps/NooYawk project, install it in your emulator, and run it, you will probably see a screen with a grid and a couple of pushpins, but no actual maps. That's because the API key in the source code is invalid for your development machine. Instead, you will need to generate your own API key(s) for use with your application. This also holds true for any map-enabled projects you create on your own from scratch.

Full instructions for generating API keys, for development and production use, can be found on the Android web site. In the interest of brevity, let's focus on the narrow case of getting NooYawk running in your emulator. Doing this requires the following steps:

1. Visit the API key signup page and review the terms of service.
2. Reread those terms of service and make really sure you want to agree to them.
3. Find the MD5 digest of the certificate used for signing your debug-mode applications (described in detail following this list).
4. On the API key signup page, paste in that MD5 signature and submit the form.
5. On the resulting page, copy the API key and paste it as the value of `apiKey` in your `MapView`-using layout.

The trickiest part is finding the MD5 signature of the certificate used for signing your debug-mode applications. Much of the complexity is merely in making sense of the concept.

All Android applications are signed using a digital signature generated from a certificate. You are automatically given a debug certificate when you set up the SDK, and there is a separate process for creating a self-signed certificate for use in your production applications. This signature process involves the use of the Java keytool and jarsigner utilities. For the purposes of getting your API key, you only need to worry about keytool.

To get your MD5 digest of your debug certificate, if you are on Mac OS X or Linux, use the following command:

```
keytool -list -alias androiddebugkey -keystore ~/.android/debug.keystore
        -storepass android -keypass android
```

On other development platforms, such as Windows, you will need to replace the value of the -keystore switch with the location for your platform and user account (where <user> is your account name):

- On Windows XP, use C:\Documents and Settings\<user>\.android\debug.keystore.
- On Windows Vista, use C:\Users\<user>\.android\debug.keystore.

The second line of the output contains your MD5 digest, as a series of pairs of hex digits separated by colons.

The Bare Bones

To put a map into your application, you need to create your own subclass of MapActivity. Like ListActivity, which wraps up some of the smarts behind having an activity dominated by a ListView, MapActivity handles some of the nuances of setting up an activity dominated by a MapView. A MapView can be used only by a MapActivity, not by any other type of Activity.

In your layout for the MapActivity subclass, you need to add an element named com.google.android.maps.MapView. This is the “longhand” way to spell out the names of widget classes, by including the full package name along with the class name. This is necessary because MapView is not in the android.widget namespace. You can give the MapView widget whatever android:id attribute value you want, plus handle all the layout details to have it render properly alongside your other widgets.

However, you do need to have the following items:

- android:apiKey, your Google Maps API key
- android:clickable = "true", if you want users to be able to click and pan through your map

For example, from the Maps/NooYawk sample application, here is the main layout:

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent">
    <com.google.android.maps.MapView android:id="@+id/map"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:apiKey="00yHj0k7_7vxbuQ9zwyXI4bNMJrAjYrJ9KKHgbQ"
        android:clickable="true" />
</RelativeLayout>
```

In addition, you will need a couple of extra things in your `AndroidManifest.xml` file:

- The `INTERNET` and `ACCESS_FINE_LOCATION` permissions (the latter for use with the `MyLocationOverlay` class, described later in this chapter)
- Inside your `<application>`, a `<uses-library>` element with `android:name = "com.google.android.maps"`, to indicate you are using one of the optional Android APIs

Here is the `AndroidManifest.xml` file for `NooYawk`:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android" ↵
    package="com.commonsware.android.maps">
    <uses-permission android:name="android.permission.INTERNET"/>
    <uses-permission android:name="android.permission.ACCESS_FINE_LOCATION"/>

    <application android:label="@string/app_name" android:icon="@drawable/cw">
        <uses-library android:name="com.google.android.maps"/>
        <activity android:name=".NooYawk" android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
    </application>
    <supports-screens android:largeScreens="true" android:normalScreens="true" ↵
        android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

That is pretty much all you need for starters, plus to subclass your activity from `MapActivity`. If you were to do nothing else, and built that project and tossed it in the emulator, you'd get a nice map of the world. Note, however, that `MapActivity` is abstract—you need to implement `isRouteDisplayed()` to indicate whether you are supplying some sort of driving directions. Since displaying driving directions is not supported by the current edition of the terms of service, you should have `isRouteDisplayed()` return `false`.

Optional Maps

While most mainstream Android devices have Google Maps, a small percentage do not, because their manufacturers did not elect to license it from Google. Therefore, you need to decide whether Google Maps is essential to your application's operation.

If Google Maps is essential, then include the `<uses-library>` element in your application, as shown previously, as that will require any device running your app to have Google Maps.

If Google Maps isn't essential, you can make it optional, via an undocumented `android:required` attribute available on `<uses-library>`. Set that to false, and Google Maps will be loaded into your application if it is available, but your application will run fine regardless. You will then need to use something like `Class.forName("com.google.android.maps.MapView")` to see if Google Maps is available to your application. If it is not, you can disable the menu items for it, or whatever would lead the user to your `MapActivity`.

NOTE: Although the `android:required` attribute currently is undocumented, Google has indicated that it is an available option. Hopefully, that means it will be officially documented in a future Android release.

Exercising Your Control

You can find your `MapView` widget by `findViewById()`, just as with any other widget. The widget itself then offers a `getController()` method. Between the `MapView` and `MapController`, you have a fair bit of capability to determine what the map shows and how it behaves. Zoom and center are two features you will likely want to use, so they are covered next.

Zoom

The map of the world you start with is rather broad. Usually, people looking at a map on a phone will be expecting something a bit narrower in scope, such as a few city blocks.

You can control the zoom level directly via the `setZoom()` method on the `MapController`. This takes an integer representing the level of zoom, where 1 is the world view and 21 is the tightest zoom you can get. Each level is a doubling of the effective resolution: 1 has the equator measuring 256 pixels wide, while 21 has the equator measuring 268,435,456 pixels wide. Since the phone's display probably does not have 268,435,456 pixels in either dimension, the user sees a small map focused on one tiny corner of the globe. A level of 17 will show several city blocks in each dimension, which is probably a reasonable starting point for you to experiment with.

If you wish to allow users to change the zoom level, call `setBuiltInZoomControls(true);`, and the user will be able to zoom in and out of the map via zoom controls found at the bottom center of the map.

Center

Typically, you will need to control what the map is showing, beyond the zoom level, such as the user's current location or a location saved with some data in your activity. To change the map's position, call `setCenter()` on the `MapController`.

The `setCenter()` method takes a `GeoPoint` as a parameter. A `GeoPoint` represents a location, via latitude and longitude. The catch is that the `GeoPoint` stores latitude and longitude as integers representing the actual latitude and longitude in *microdegrees* (degrees multiplied by 1E6). This saves a bit of memory versus storing a float or double, and it greatly speeds up some internal calculations Android needs to do to convert the `GeoPoint` into a map position. However, it does mean you have to remember to multiply the real-world latitude and longitude by 1E6.

Layers Upon Layers

If you have ever used the full-size edition of Google Maps, you are probably used to seeing things overlaid atop the map itself, such as pushpins indicating businesses near the location being searched. In map parlance (and, for that matter, in many serious graphic editors), the pushpins are on a separate layer from the map itself, and what you are seeing is the composition of the pushpin layer atop the map layer.

Android's mapping allows you to create layers as well, so you can mark up the maps as you need to based on user input and your application's purpose. For example, NooYawk uses a layer to show where select buildings are located on the island of Manhattan.

Overlay Classes

Any overlay you want to add to your map needs to be implemented as a subclass of `Overlay`. There is an `ItemizedOverlay` subclass available if you are looking to add pushpins or the like; `ItemizedOverlay` simplifies this process.

To attach an overlay class to your map, just call `getOverlays()` on your `MapView` and `add()` your `Overlay` instance to it, as we do here with a custom `SitesOverlay`:

```
marker.setBounds(0, 0, marker.getIntrinsicWidth(),
                 marker.getIntrinsicHeight());

map.getOverlays().add(new SitesOverlay(marker));
```

We will look at that `marker` in the next section.

Drawing the ItemizedOverlay

As the name suggests, `ItemizedOverlay` allows you to supply a list of points of interest to be displayed on the map—specifically, instances of `OverlayItem`. The overlay, then,

handles much of the drawing logic for you. Here are the minimum steps to make this work:

1. Override `ItemizedOverlay<OverlayItem>` as your own subclass (in this example, `SitesOverlay`).
2. In the constructor, build your roster of `OverlayItem` instances, and call `populate()` when they are ready for use by the overlay.
3. Implement `size()` to return the number of items to be handled by the overlay.
4. Override `createItem()` to return `OverlayItem` instances given an index.
5. When you instantiate your `ItemizedOverlay` subclass, provide it with a `Drawable` that represents the default icon (e.g., a pushpin) to display for each item, on which you call `boundCenterBottom()` to enable the drop-shadow effect.

The marker from the `NooYawk` constructor is the `Drawable` used for step 5, which shows a pushpin.

For example, here is `SitesOverlay`:

```
private class SitesOverlay extends ItemizedOverlay<OverlayItem> {  
    private List<OverlayItem> items=new ArrayList<OverlayItem>();  
    private Drawable marker=null;  
  
    public SitesOverlay(Drawable marker) {  
        super(marker);  
        this.marker=marker;  
  
        boundCenterBottom(marker);  
  
        items.add(new OverlayItem(getPoint(40.748963847316034,  
                                         -73.96807193756104),  
                               "UN", "United Nations"));  
        items.add(new OverlayItem(getPoint(40.76866299974387,  
                                         -73.98268461227417),  
                               "Lincoln Center",  
                               "Home of Jazz at Lincoln Center"));  
        items.add(new OverlayItem(getPoint(40.765136435316755,  
                                         -73.97989511489868),  
                               "Carnegie Hall",  
                               "Where you go with practice, practice, practice"));  
        items.add(new OverlayItem(getPoint(40.70686417491799,  
                                         -74.01572942733765),  
                               "The Downtown Club",  
                               "Original home of the Heisman Trophy"));  
  
        populate();  
    }  
  
    @Override  
    protected OverlayItem createItem(int i) {
```

```
        return(items.get(i));  
    }  
  
    @Override  
    protected boolean onTap(int i) {  
        Toast.makeText(NooYawk.this,  
                      items.get(i).getSnippet(),  
                      Toast.LENGTH_SHORT).show();  
  
        return(true);  
    }  
  
    @Override  
    public int size() {  
        return(items.size());  
    }  
}
```

Handling Screen Taps

An Overlay subclass can also implement `onTap()`, to be notified when the user taps the map, so the overlay can adjust what it draws. For example, in full-size Google Maps, clicking a pushpin pops up a bubble with information about the business at that pin's location. With `onTap()`, you can do much the same in Android.

The `onTap()` method for `ItemizedOverlay` receives the index of the `OverlayItem` that was tapped. It is up to you to do something worthwhile with this event.

In the case of `SitesOverlay`, as shown in the preceding section, `onTap()` looks like this:

```
@Override  
protected boolean onTap(int i) {  
    Toast.makeText(NooYawk.this,  
                  items.get(i).getSnippet(),  
                  Toast.LENGTH_SHORT).show();  
  
    return(true);  
}
```

Here, we just toss up a short `Toast` with the snippet from the `OverlayItem`, returning `true` to indicate we handled the tap.

My, Myself, and MyLocationOverlay

Android has a built-in overlay to handle two common scenarios:

- Showing where you are on the map, based on GPS or other location-providing logic
- Showing where you are pointed, based on the built-in compass sensor, where available

All you need to do is create a `MyLocationOverlay` instance, add it to your `MapView`'s list of overlays, and enable and disable the desired features at appropriate times.

The “at appropriate times” notion is for maximizing battery life. There is no sense in updating locations or directions when the activity is paused, so it is recommended that you enable these features in `onResume()` and disable them in `onPause()`.

For example, `NooYawk` will display a compass rose using `MyLocationOverlay`. To do this, we first need to create the overlay and add it to the list of overlays (where `me` is the `MyLocationOverlay` instance as a private data member):

```
me=new MyLocationOverlay(this, map);
map.getOverlays().add(me);
```

Then, we enable and disable the compass rose as appropriate:

```
@Override
public void onResume() {
    super.onResume();

    me.enableCompass();
}

@Override
public void onPause() {
    super.onPause();

    me.disableCompass();
}
```

This gives us a compass rose while the activity is onscreen, as shown in Figure 40–1.



Figure 40–1. The `NooYawk` map, showing a compass rose and two `OverlayItems`

Rugged Terrain

Just as the Google Maps you use on your full-size computer can display satellite imagery, so too can Android maps.

MapView offers `toggleSatellite()`, which, as the name suggests, toggles on and off the satellite perspective on the area being viewed. You can allow the user to trigger this via an options menu or, in the case of NooYawk, via key taps:

```
@Override  
public boolean onKeyDown(int keyCode, KeyEvent event) {  
    if (keyCode == KeyEvent.KEYCODE_S) {  
        map.setSatellite(!map.isSatellite());  
        return(true);  
    }  
    else if (keyCode == KeyEvent.KEYCODE_Z) {  
        map.displayZoomControls(true);  
        return(true);  
    }  
  
    return(super.onKeyDown(keyCode, event));  
}
```

Figure 40–2 shows a satellite view in NooYawk, courtesy of tapping the S key.

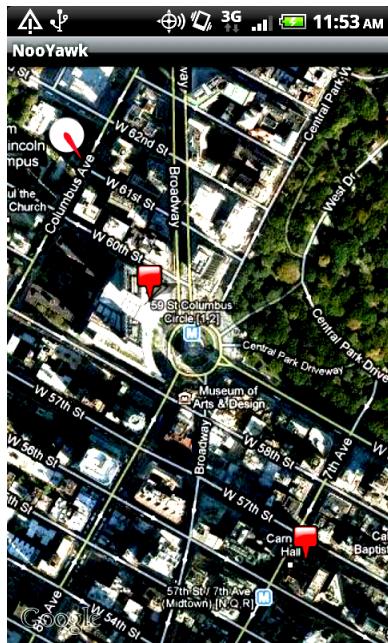


Figure 40–2. The NooYawk map, showing a compass rose and two OverlayItems, overlaid on the satellite view

Maps and Fragments

You might think that maps would be an ideal place to use fragments. After all, on a large tablet screen, you could allocate most of the space to the map but still have other stuff alongside it. Alas, as of the time of this writing, maps and fragments are two great tastes that do not taste so great together.

First, MapView requires you to inherit from MapActivity. This has a few ramifications:

- You cannot use the Android Compatibility Library (ACL), because that requires you to inherit from FragmentActivity, and Java does not support multiple inheritance. Hence, you can use maps in fragments only on Android 3.0 and higher, requiring that you fall back to some alternative implementation on older versions of Android.
- Any activity that might host a map in a fragment has to inherit from MapActivity, even if in some cases it might not host a map in a fragment.

Also, MapView makes some assumptions about the timing of various events, in a fashion that makes setting up a map-based fragment a bit more complex than it might otherwise have to be.

It is entirely possible that someday these problems will be resolved, through a combination of an updated Google APIs Add-On for Android with fragment support, and possibly an updated ACL. In the meantime, here is the recipe for getting maps to work, as well as they can, in fragments.

Limit Yourself to Android 3.0

In the manifest, make sure that you set both your android:minSdkVersion and your android:targetSdkVersion to 11, so your application runs only on Android 3.0 and newer. For example, here is the manifest from the Maps/NooYawkFragments sample project:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.android.maps">
    <uses-permission android:name="android.permission.INTERNET"/>
    <uses-permission android:name="android.permission.ACCESS_FINE_LOCATION"/>

    <application android:label="@string/app_name"
        android:icon="@drawable/cw"
        android:hardwareAccelerated="true">
        <uses-library android:name="com.google.android.maps"/>
        <activity android:name=".NooYawk" android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN"/>
                <category android:name="android.intent.category.LAUNCHER"/>
            </intent-filter>
        </activity>
```

```
</application>
<uses-sdk android:minSdkVersion="11" android:targetSdkVersion="11" />
<supports-screens android:largeScreens="true" android:normalScreens="true"
    android:smallScreens="true" android:anyDensity="true"/>
</manifest>
```

Use onCreateView() and onActivityCreated()

A map-based fragment is simply a Fragment that shows a MapView. By and large, this code can look and work much like a MapActivity would, configuring the MapView, setting up an ItemizedOverlay, and so on.

However, there is a timing problem: you cannot reliably return a MapView widget, or an inflated layout containing such a widget, from onCreateView(). For whatever reason, it works fine the first time, but on a configuration change (e.g., screen rotation) it fails.

The solution is to return a container from onCreateView(), such as a FrameLayout, as shown here in the MapFragment class from NooYawkFragments:

```
@Override
public View onCreateView(LayoutInflater inflater, ViewGroup container,
    Bundle savedInstanceState) {
    return(new FrameLayout(getActivity()));
}
```

Then, in onActivityCreated()—once onCreate() has been completed in the hosting MapActivity—you can add a MapView to that container and continue with the rest of your normal setup:

```
@Override
public void onActivityCreated(Bundle savedInstanceState) {
    super.onActivityCreated(savedInstanceState);

    map=new MapView(getActivity(), "00yHj0k7_7vxbuQ9zwyXI4bNMJrAjYrJ9KKHgbQ");
    map.setClickable(true);

    map.getController().setCenter(getPoint(40.76793169992044,
        -73.98180484771729));
    map.getController().setZoom(17);
    map.setBuiltInZoomControls(true);

    Drawable marker=getResources().getDrawable(R.drawable.marker);

    marker.setBounds(0, 0, marker.getIntrinsicWidth(),
        marker.getIntrinsicHeight());

    map.getOverlays().add(new SitesOverlay(marker));

    me=new MyLocationOverlay(getActivity(), map);
    map.getOverlays().add(me);

    ((ViewGroup)getView()).addView(map);
}
```

Note that we are creating a `MapView` in Java code, which means our Maps API key resides in the Java code (or something reachable from the Java code, such as a string resource). You could inflate a layout containing a `MapView` here if you wished—the change for `MapFragment` was simply to illustrate creating a `MapView` from Java code.

Host the Fragment in a MapActivity

You must make sure that whatever activity hosts the map-enabled fragment is a `MapActivity`. So, even though the `NooYawk` activity no longer has much to do with mapping, it must still be a `MapActivity`:

```
package com.commonsware.android.maps;

import android.os.Bundle;
import com.google.android.maps.MapActivity;

public class NooYawk extends MapActivity {
    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);
    }

    @Override
    protected boolean isRouteDisplayed() {
        return(false);
    }
}
```

The layout now points to a `<fragment>` instead of a `MapView`:

```
<?xml version="1.0" encoding="utf-8"?>
<fragment xmlns:android="http://schemas.android.com/apk/res/android"
    class="com.commonsware.android.maps.MapFragment"
    android:id="@+id/map_fragment"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
/>
```

The resulting application, shown in Figure 40–3, looks like the original `NooYawk` activity would on a large screen, because we are not doing anything much else with the fragment system (e.g., having other fragments alongside in a landscape layout).

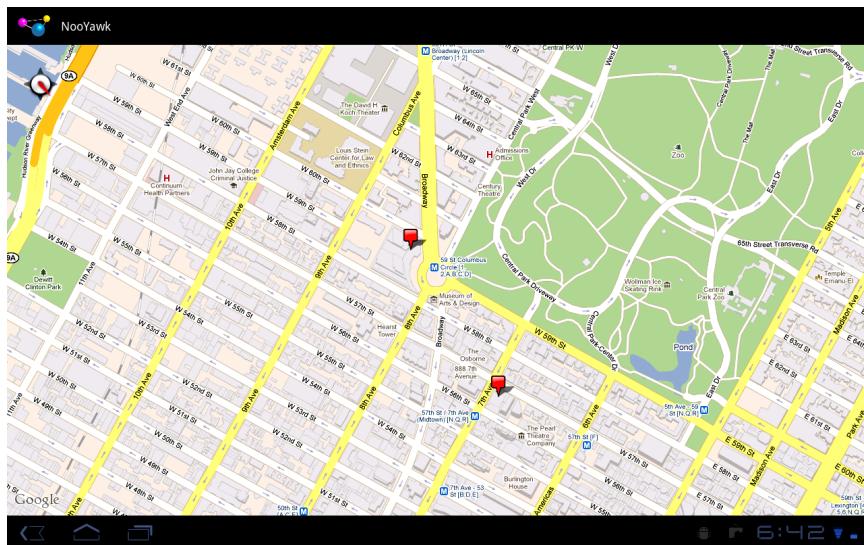


Figure 40–3. The NooYawkFragments map, rendered on a Motorola XOOM

Handling Telephone Calls

Many, if not most, Android devices will be phones. As such, not only will users be expecting to place and receive calls using Android, but you will have the opportunity to help them place calls, if you wish.

Why might you want to?

- Maybe you are writing an Android interface to a sales management application (*a la* Salesforce.com) and you want to offer users the ability to call prospects with a single button tap, and without them having to keep those contacts both in your application and in the phone's contacts application.
- Maybe you are writing a social networking application, and the roster of phone numbers that you can access shifts constantly, so rather than try to sync the social network contacts with the phone's contact database, you want to let people place calls directly from your application.
- Maybe you are creating an alternative interface to the existing contacts system, perhaps for users with reduced motor control (e.g., the elderly), sporting big buttons and the like to make it easier for them to place calls.

Whatever the reason, Android has the means to let you manipulate the phone just like any other piece of the Android system.

Report to the Manager

To get at much of the phone API, you use the `TelephonyManager`. That class lets you do things like the following:

- Determine if the phone is in use via `getCallState()`, with return values of `CALL_STATE_IDLE` (phone not in use), `CALL_STATE_RINGING` (call requested but still being connected), and `CALL_STATE_OFFHOOK` (call in progress)

- Find out the SIM ID (IMSI) via `getSubscriberId()`
- Find out the phone type (e.g., GSM) via `getPhoneType()` or find out the data connection type (e.g., GPRS or EDGE) via `getNetworkType()`

You Make the Call!

You can also initiate a call from your application, such as from a phone number you obtained through your own web service. To do this, simply craft an `ACTION_DIAL` Intent with a Uri of the form `tel:NNNNN` (where NNNNN is the phone number to dial) and use that Intent with `startActivity()`. This will not actually dial the phone; rather, it activates the dialer activity, from which the user can then press a button to place the call.

For example, let's look at the Phone/Dialer sample application. Here's the crude but effective layout:

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:orientation="vertical"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    >
    <LinearLayout
        android:orientation="horizontal"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        >
        <TextView
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:text="Number to dial:"
            />
        <EditText android:id="@+id/number"
            android:layout_width="fill_parent"
            android:layout_height="wrap_content"
            android:cursorVisible="true"
            android:editable="true"
            android:singleLine="true"
            />
    </LinearLayout>
    <Button android:id="@+id/dial"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:layout_weight="1"
        android:text="Dial It!"
        android:onClick="dial"
        />
</LinearLayout>
```

We have a labeled field for typing in a phone number, plus a button for dialing that number.

The Java code simply launches the dialer using the phone number from the field:

```
package com.commonsware.android.dialer;

import android.app.Activity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.view.View;
import android.widget.EditText;

public class DialerDemo extends Activity {
    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);
    }

    public void dial(View v) {
        EditText number=(EditText)findViewById(R.id.number);
        String toDial="tel:"+number.getText().toString();

        startActivity(new Intent(Intent.ACTION_DIAL, Uri.parse(toDial)));
    }
}
```

The activity's own UI is not that impressive, as shown in Figure 41–1.

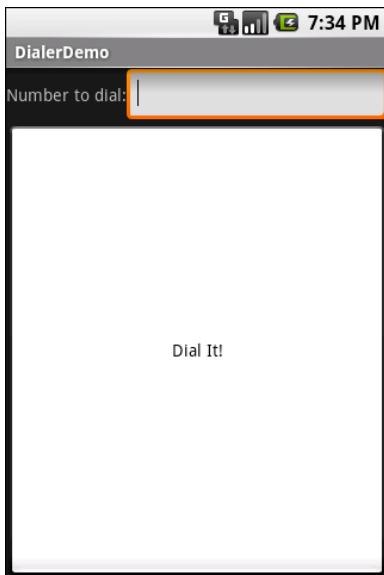


Figure 41–1. The *DialerDemo* sample application, as initially launched

However, the dialer you get from clicking the dial button is better, showing you the number you are about to dial, as shown in Figure 41–2.

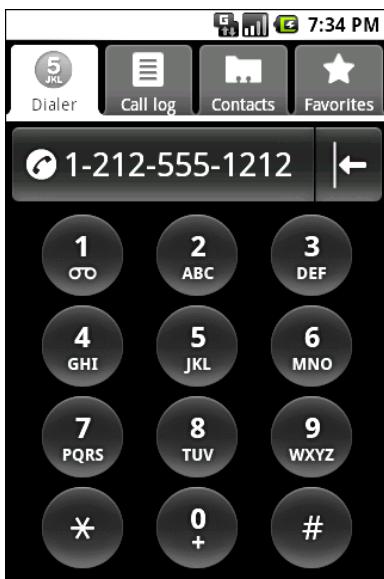


Figure 41–2. The Android Dialer activity, as launched from *DialerDemo*

No, Really, You Make the Call!

The good news is that ACTION_DIAL works without any special permissions. The bad news is that it takes the user only to the dialer. The user still has to take action (press the green call button) to actually place the phone call.

An alternative approach is to use ACTION_CALL instead of ACTION_DIAL. Calling `startActivity()` on an ACTION_CALL Intent will immediately place the phone call, without any other UI steps required. However, you need the CALL_PHONE permission to use ACTION_CALL (see Chapter 38).

Chapter 42

Fonts

The question you'll inevitably get when developing any type of application is, "Hey, can we change this font?" The answer depends on which fonts come with the platform, whether you can add other fonts, and how to apply them to the widget or whatever needs the font change. Android is no different. It comes with some fonts, plus a means for adding new fonts. However, as with any new environment, there are a few idiosyncrasies to deal with, as described in this chapter.

Love the One You're With

Android natively knows three fonts, by the shorthand names sans, serif, and monospace. These fonts are actually the Droid series of fonts, created for the Open Handset Alliance by Ascender (www.ascendercorp.com/). To use these three fonts, you can just reference them in your layout XML, such as the following layout from the Fonts/FontSampler sample project:

```
<?xml version="1.0" encoding="utf-8"?>
<TableLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:stretchColumns="1">
    <TableRow>
        <TextView
            android:text="sans:"
            android:layout_marginRight="4dip"
            android:textSize="20sp"
        />
        <TextView
            android:id="@+id/sans"
            android:text="Hello, world!"
            android:typeface="sans"
            android:textSize="20sp"
        />
    </TableRow>
    <TableRow>
        <TextView
```

```
        android:text="serif:"  
        android:layout_marginRight="4dip"  
        android:textSize="20sp"  
    />  
    <TextView  
        android:id="@+id/serif"  
        android:text="Hello, world!"  
        android:typeface="serif"  
        android:textSize="20sp"  
    />  
  </TableRow>  
  <TableRow>  
    <TextView  
        android:text="monospace:"  
        android:layout_marginRight="4dip"  
        android:textSize="20sp"  
    />  
    <TextView  
        android:id="@+id/monospace"  
        android:text="Hello, world!"  
        android:typeface="monospace"  
        android:textSize="20sp"  
    />  
  </TableRow>  
  <TableRow>  
    <TextView  
        android:text="Custom:"  
        android:layout_marginRight="4dip"  
        android:textSize="20sp"  
    />  
    <TextView  
        android:id="@+id/custom"  
        android:text="Hello, world!"  
        android:textSize="20sp"  
    />  
  </TableRow>  
  <TableRow android:id="@+id/filerow">  
    <TextView  
        android:text="Custom from File:"  
        android:layout_marginRight="4dip"  
        android:textSize="20sp"  
    />  
    <TextView  
        android:id="@+id/file"  
        android:text="Hello, world!"  
        android:textSize="20sp"  
    />  
  </TableRow>  
</TableLayout>
```

This layout builds a table showing short samples of five fonts. Notice that the first three have the `android:typeface` attribute, whose value is one of the three built-in font faces (e.g., "sans").

Additional Fonts

The three built-in fonts are very nice. However, a designer, a manager, or a customer may want a different font. Or perhaps you want to use a font for specialized purposes, such as a dingbats font instead of a series of PNG graphics. The easiest way to accomplish this is to package the desired font(s) with your application. To do this, simply create an assets/ folder in the project root, and put your TrueType (TTF) fonts in that folder. You might, for example, create assets/fonts/ and put your TTF files in there.

Then, you need to tell your widgets to use that font. Unfortunately, you can no longer use layout XML for this, since the XML does not know about any fonts you may have tucked away as an application asset. Instead, you need to make the change in Java code:

```
import android.widget.TextView;
import java.io.File;

public class FontSampler extends Activity {
    @Override
    public void onCreate(Bundle icicle) {
        super.onCreate(icicle);
        setContentView(R.layout.main);

        TextView tv=(TextView)findViewById(R.id.custom);
        Typeface face=Typeface.createFromAsset(getAssets(),
            "fonts/HandmadeTypewriter.ttf");

        tv.setTypeface(face);

        File font=new File(Environment.getExternalStorageDirectory(),
            "MgOpenCosmeticaBold.ttf");

        if (font.exists()) {
            tv=(TextView)findViewById(R.id.file);
            face=Typeface.createFromFile(font);

            tv.setTypeface(face);
        }
        else {
            findViewById(R.id.filerow).setVisibility(View.GONE);
        }
    }
}
```

Here, we grab the TextView for our custom sample, and then create a Typeface object via the static `createFromAsset()` builder method. This takes the application's AssetManager (from `getAssets()`) and a path within your assets/ directory to the font you want.

Then, it is just a matter of telling the TextView to `setTypeface()`, providing the Typeface we just created. In this case, we are using the Handmade Typewriter font. You can also load a font out of a local file and use it. The benefit is that you can customize your fonts

after your application has been distributed. On the other hand, you have to somehow arrange to get the font onto the device. But, just as you can get a Typeface via `createFromAsset()`, you can get a Typeface via `createFromFile()`. In our `FontSampler`, we look in the root of “external storage” (typically the SD card) for the `MgOpenCosmeticaBold` TrueType font file, and if it is found, we use it for the fifth row of the table. Otherwise, we hide that row.

Figure 42–1 shows the results.

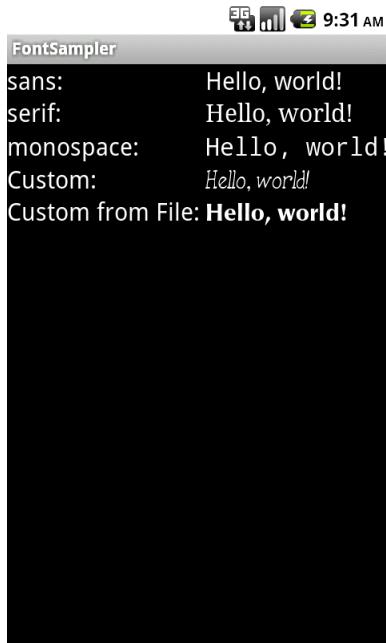


Figure 42–1. The `FontSampler` application

We will go into more details regarding assets and local files in an upcoming chapter.

Note that Android does not seem to like all TrueType fonts. When Android dislikes a custom font, rather than raise an Exception, it seems to substitute Droid Sans ("sans") quietly. So, if you try to use a different font and it does not appear to be working, it might be incompatible with Android, for whatever reason.

Here a Glyph, There a Glyph

TrueType fonts can be rather pudgy, particularly if they support an extensive subset of the available Unicode characters. The Handmade Typewriter font used in the previous section runs over 70KB; the DejaVu free fonts can run upwards of 500KB apiece. Even compressed, these add bulk to your application, so be careful not to go overboard with custom fonts, lest your application take up too much room on your users’ phones.

Conversely, bear in mind that fonts may not have all of the glyphs that you need. As an example, let's talk about the ellipsis.

Android's TextView class has the built-in ability to “ellipsize” text, truncating it and adding an ellipsis if the text is longer than the available space. You can use this via the `android:ellipsize` attribute, for example. This works fairly well, at least for single-line text.

The ellipsis that Android uses is not three periods. Rather, it uses an actual ellipsis character, where the three dots are contained in a single glyph. Hence, any font that you use that you also use the “ellipsizing” feature will need the ellipsis glyph.

Beyond that, though, Android pads out the string that gets rendered on the screen, such that the length (in characters) is the same before and after ellipsizing. To make this work, Android replaces one character with the ellipsis, and replaces all other removed characters with the Unicode character ‘ZERO WIDTH NO-BREAK SPACE’ (U+FEFF). As a result, the extra characters after the ellipsis do not take up any visible space onscreen, yet they can be part of the string. However, this means any custom fonts you use for TextView widgets that you use with `android:ellipsize` must also support this special Unicode character. Not all fonts do, and you will get artifacts in the onscreen representation of your shortened strings if your font lacks this character (e.g., rogue Xs appear at the end of the line).

And, of course, Android's international deployment means your font must handle any language your users might be looking to enter, perhaps through a language-specific input method editor.

Hence, while using custom fonts in Android is very possible, there are many potential problems, and so you must weigh carefully the benefits of the custom fonts versus their potential costs.

More Development Tools

The Android SDK is more than a library of Java classes and API calls. It also includes a number of tools to assist in application development. Eclipse, of course, tends to dominate the discussion. However, that is not the only tool at your disposal, so, let's take a quick tour of what else is available to you.

Hierarchy Viewer: How Deep Is Your Code?

Android comes with a Hierarchy Viewer tool, designed to help you visualize your layouts as they are seen in a running activity in a running emulator. So, for example, you can determine how much space a certain widget is taking up, or try to find where a widget that does not appear on the screen is hiding.

To use Hierarchy Viewer, you first need to fire up your emulator, install your application, launch your activity, and navigate to the spot you wish to examine. Note that you cannot use Hierarchy Viewer with a production Android device.

You can launch Hierarchy Viewer via the `hierarchyviewer` program, found in the `tools/` directory in your Android SDK installation, or from inside of Eclipse. The main window is shown in Figure 43–1.

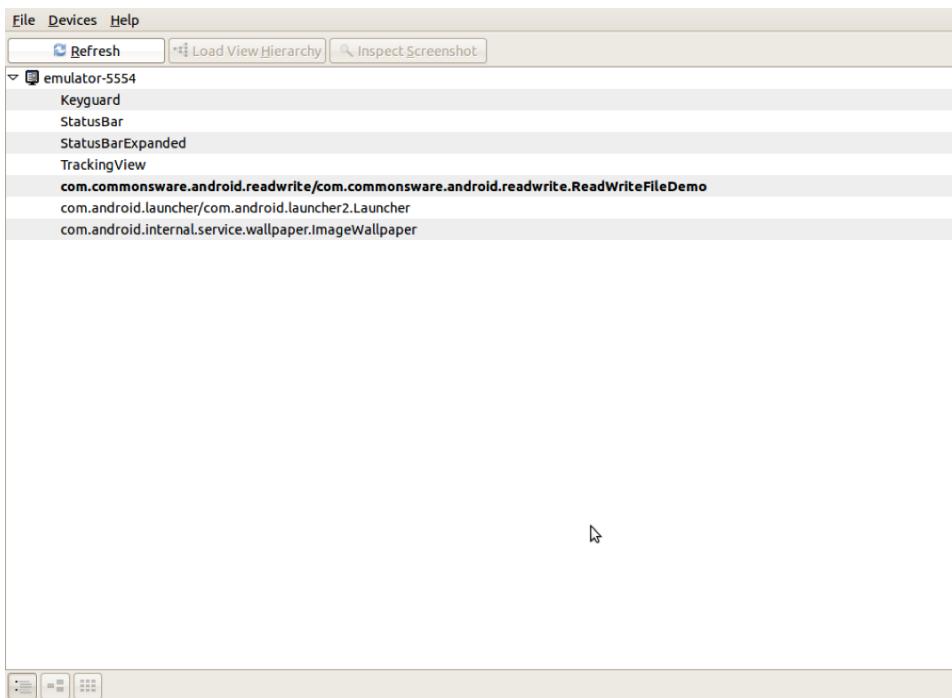


Figure 43–1. *Hierarchy Viewer main window*

The roots of the table show the emulator instances presently running on your development machine. The leaves represent applications running on that particular emulator. Your activity will be identified by application package and class (e.g., `com.commonware.android.files/...`).

Things get interesting when you choose a window and click Load View Hierarchy. After a few seconds, the details spring into view, as shown in Figure 43–2.

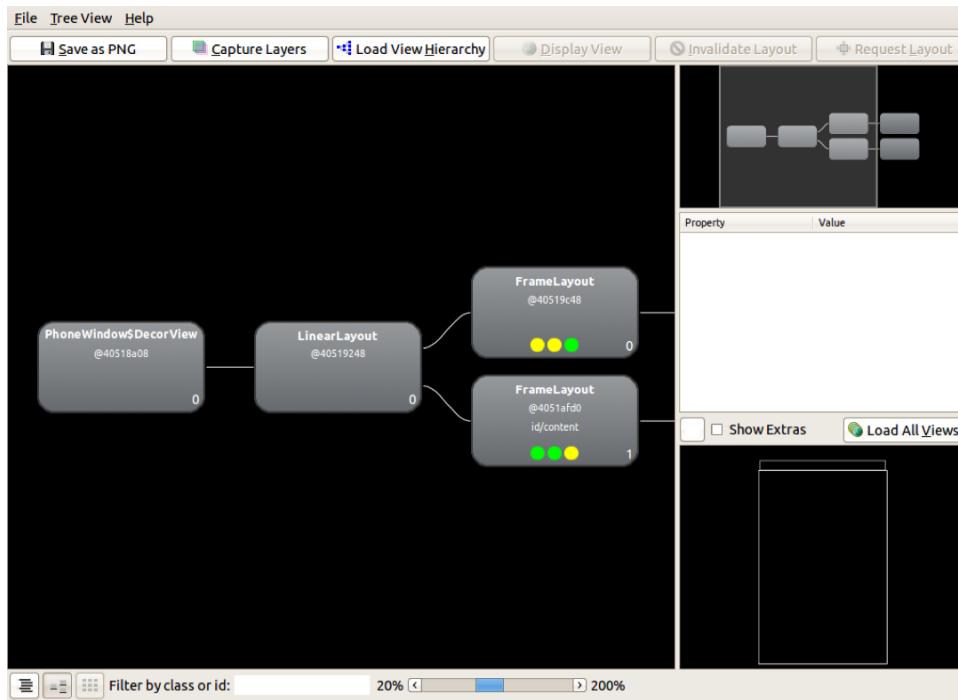


Figure 43–2. Hierarchy Viewer Layout View

The main area of the Layout View shows a tree of the various widgets and stuff that make up your activity, starting from the overall system window and driving down into the individual UI widgets that users will interact with. This includes both the widgets and containers defined by your application and others that are supplied by the system, including the title bar.

Clicking one of the views adds more information to this perspective, as shown in Figure 43–3.

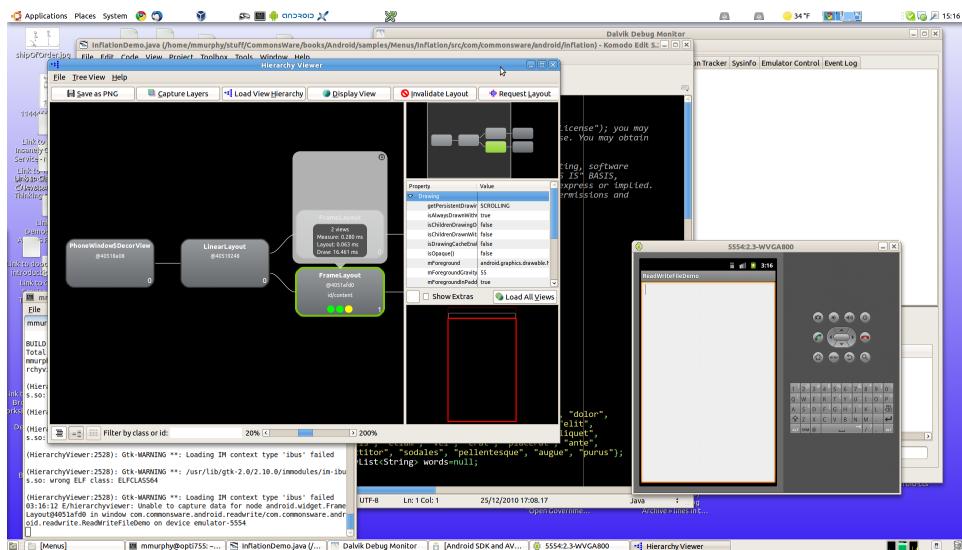


Figure 43–3. Hierarchy Viewer View properties

Now, in the middle-right region of Hierarchy Viewer, you see properties of the selected widget or container, plus timing details for how long it took to render that container and its children.

Also, the widget is highlighted in red in the wireframe of the activity, shown beneath the properties (by default, views are shown as white outlines on a black background). This can help you ensure you have selected the right widget, if, say, you have several buttons and cannot readily tell from the tree which button is which.

You can also do the following in the main Hierarchy Viewer window:

- Save the tree diagram as a PNG file
- Save the UI as a Photoshop PSD file, with different layers for the different widgets and containers
- Force the UI to repaint in the emulator or reload the hierarchy, in case you have made changes to a database or to the app's contents and need a fresh diagram

Instead of clicking Load View Hierarchy in the main window, you can click Inspect Screenshot. This puts Hierarchy Viewer in a whole new perspective, called the Pixel Perfect View, as shown in Figure 43–4.

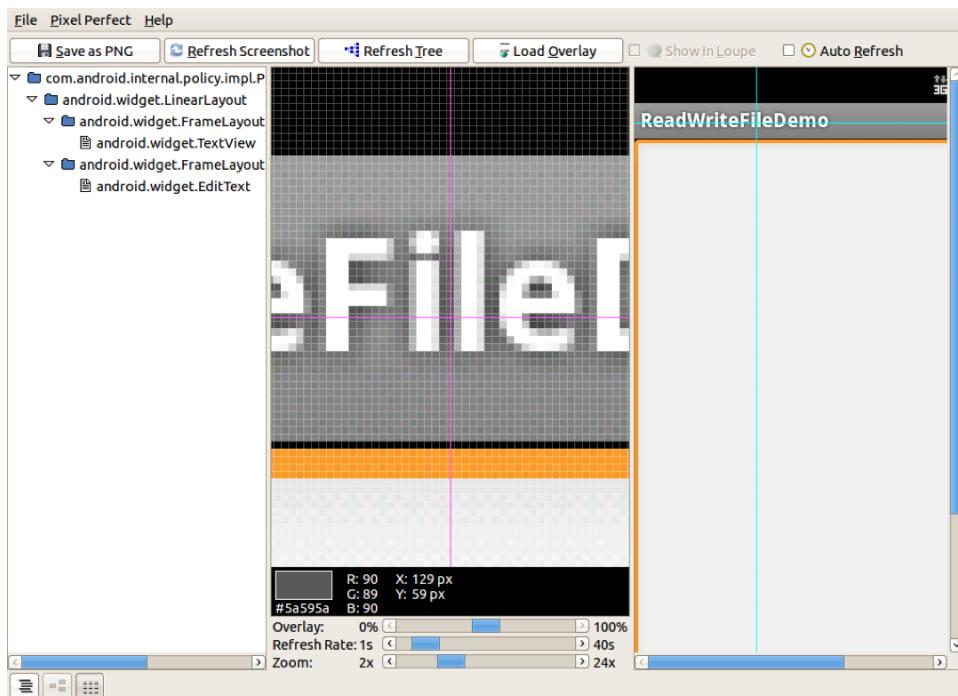


Figure 43–4. Hierarchy Viewer Pixel Perfect View

On the left, you see a tree representing the widgets and other Views in your activity. In the middle, you see a zoomed view of your activity, which is shown at normal size on the right.

The crosshairs overlaying the activity show the position being zoomed. Just click a new area to change what you are seeing. There is a slider to control the level of zoom. Clicking a pixel also indicates the position and color of that pixel.

If you check the Auto Refresh check box in the toolbar, Hierarchy Viewer will poll and reload the UI from your activity periodically, with the frequency controlled by another slider.

DDMS: Under Android's Hood

Another tool in the Android developer's arsenal is the Dalvik Debug Monitor Service (DDMS). This is like a Swiss army knife, allowing you to do everything from browse log files, update the GPS location provided by emulator, simulate incoming calls and messages, and browse the on-emulator storage to push and pull files.

To launch DDMS, run the `ddms` program inside the `tools/` directory in your Android SDK distribution or open the DDMS perspective in Eclipse. It will initially display just a tree of emulators and running programs on the left, as shown in Figure 43–5.

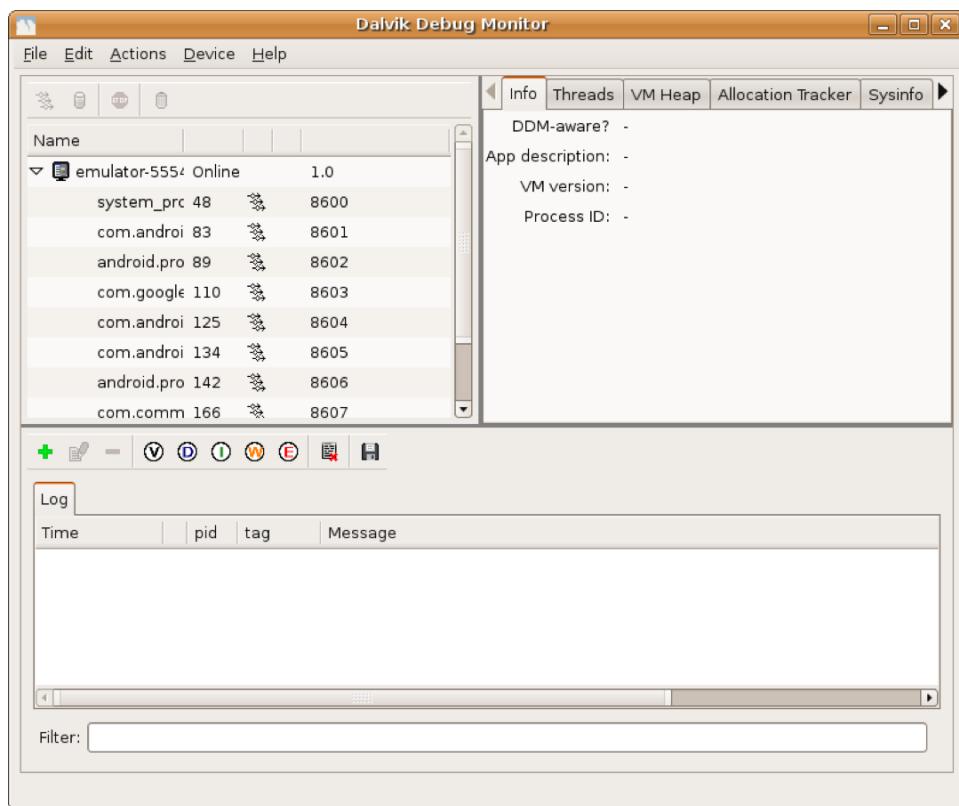


Figure 43–5. DDMS initial view

Clicking an emulator allows you to browse the event log on the bottom and manipulate the emulator via the tabs on the right, as shown in Figure 43–6.

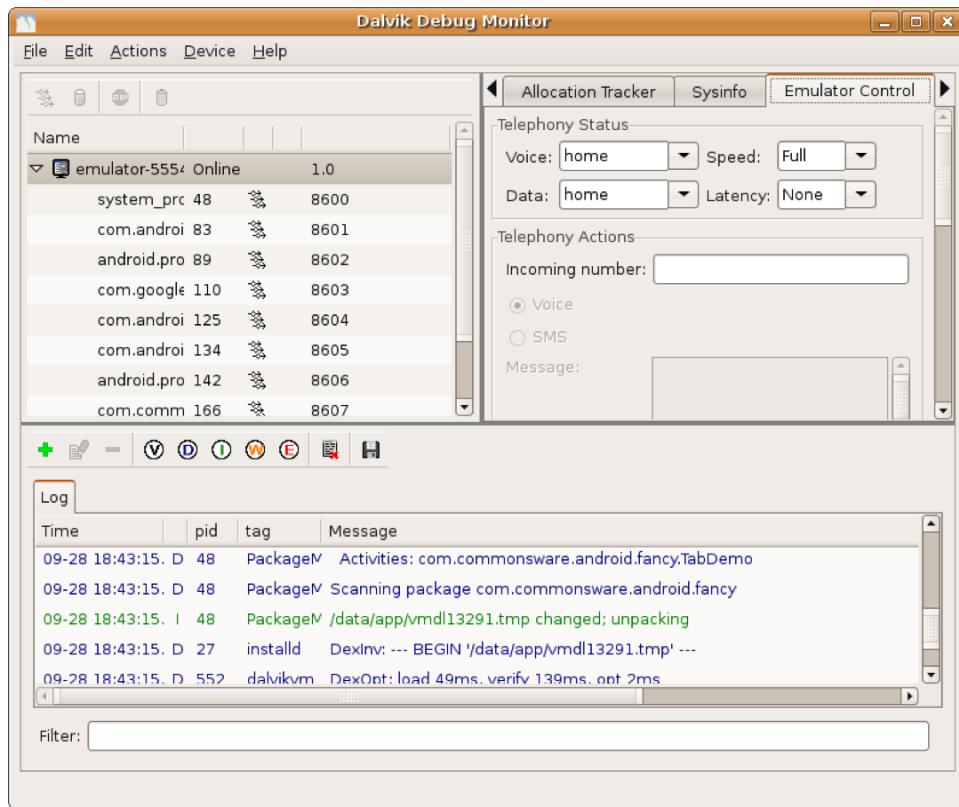


Figure 43–6. DDMS, with emulator selected

Logging

Rather than use `adb logcat`, DDMS lets you view your logging information in a scrollable table. Just highlight the emulator or device you want to monitor, and the bottom half of the screen shows the logs.

In addition, you can do the following:

- Filter the Log tab by any of the five logging levels, shown as the V through E toolbar buttons.
- Create a custom filter, so you can view only those entries tagged with your application's tag, by clicking the + toolbar button and completing the form (shown in Figure 43–7). The name you enter in the form will be used as the name of another logging output tab in the bottom portion of the DDMS main window.
- Save the log information to a text file for later perusal, or for searching.

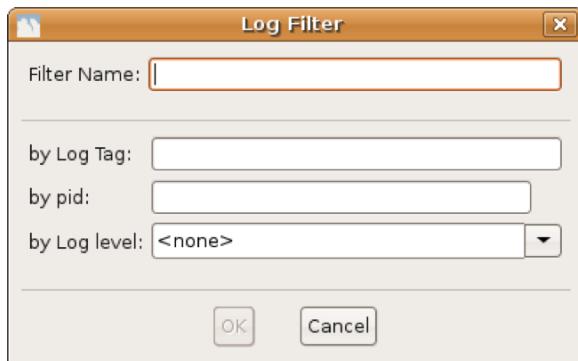


Figure 43–7. DDMS logging filter

File Push and Pull

While you can use adb pull and adb push to get files to and from an emulator or device, DDMS lets you do that visually. Just highlight the emulator or device you wish to work with, and then choose Device > File Explorer from the main menu. That will bring up your typical directory browser, as shown in Figure 43–8.

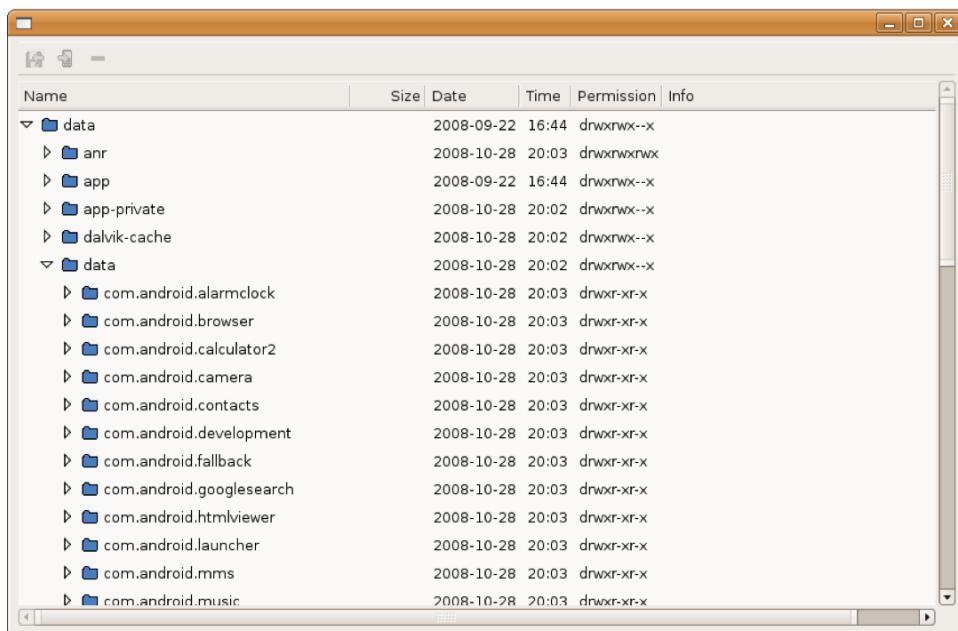


Figure 43–8. DDMS File Explorer

Just browse to the file you want and click either the pull (leftmost) or push (middle) toolbar button to transfer the file to or from your development machine. To delete a file, click the delete (rightmost) toolbar button.

Using File Explorer has a few caveats:

- You cannot create directories through this tool. You will need to either use adb shell or create them from within your application.
- While you can putter through most of the files on an emulator, you can access very little outside of /sdcard on an actual device, due to Android security restrictions.

Screenshots

To take a screenshot of the Android emulator or device, simply press Ctrl+S or choose Device > Screen capture from the main menu. This will bring up a dialog box containing an image of the current screen, as shown in Figure 43–9.

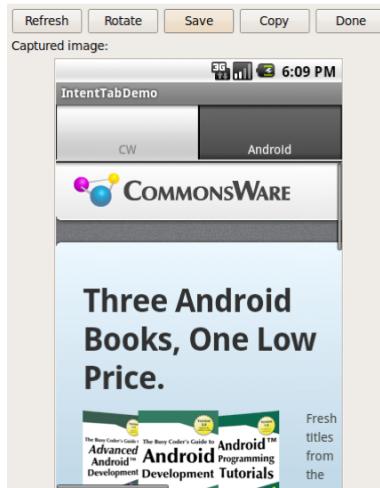


Figure 43–9. DDMS screen capture

From here, you can click Save to save the image as a PNG file somewhere on your development machine, click Refresh to update the image based on the current state of the emulator or device, or click Done to close the dialog box.

Location Updates

To use DDMS to supply location updates to your application, the first thing you must do is have your application use the gps LocationProvider, as that is the one that DDMS is set to update. Then, click the Emulator Control tab and scroll down to the Location Controls section. Here, you will find a smaller tabbed pane with three options for specifying locations: Manual, GPX, and KML, as shown in Figure 43–10.

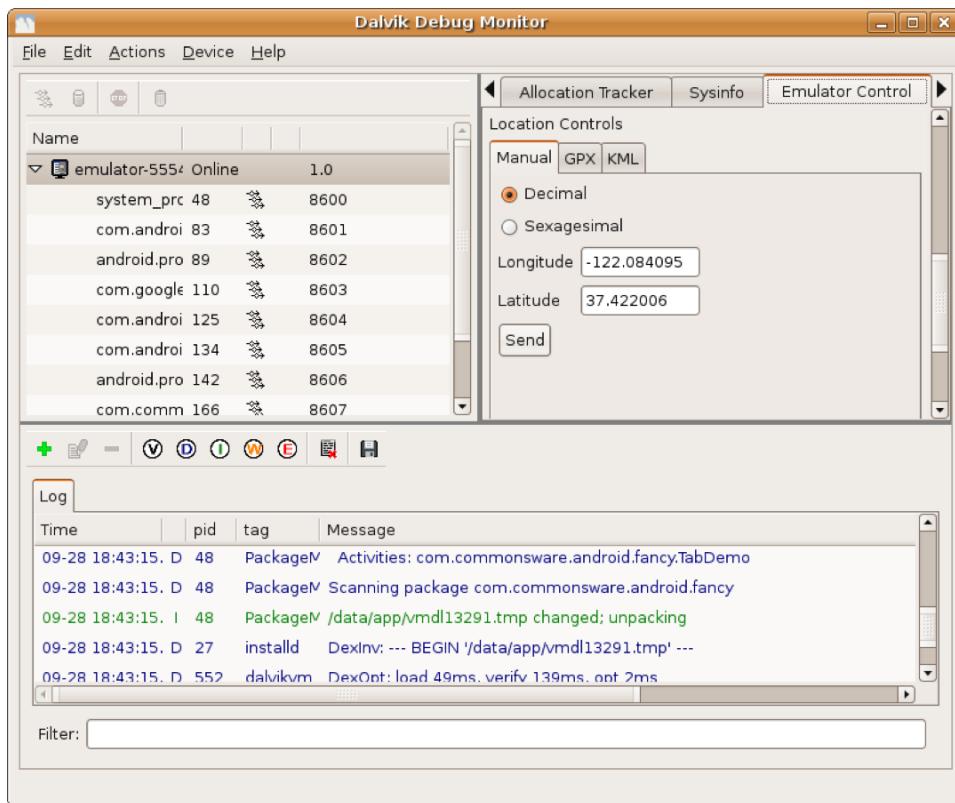


Figure 43–10. DDMS location controls

To use the Manual tab, provide a latitude and longitude and click the Send button to submit that location to the emulator. The emulator, in turn, will notify any location listeners of the new position.

Placing Calls and Messages

If you want to simulate incoming calls or SMS messages to the Android emulator, DDMS can handle that as well. On the Emulator Control tab, above the Location Controls group, is the Telephony Actions group, as shown in Figure 43–11.

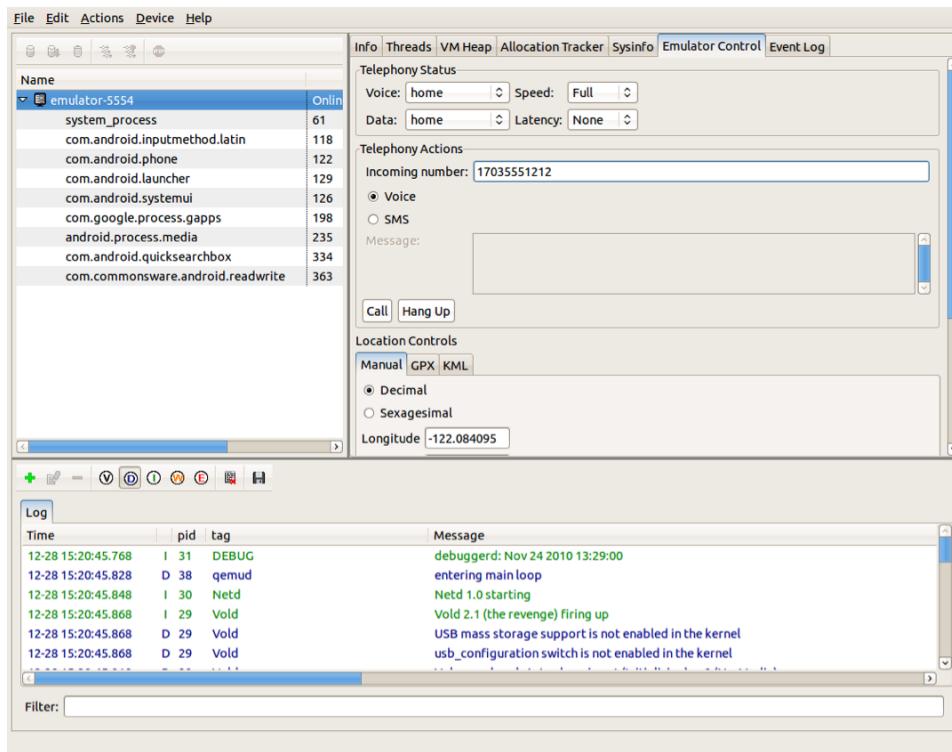


Figure 43–11. DDMS telephony controls

To simulate an incoming call, fill in a phone number, choose the Voice radio button, and click Call. At that point, the emulator will show the incoming call, allowing you to accept it (via the green phone button) or reject it (via the red phone button), as shown in Figure 43–12.

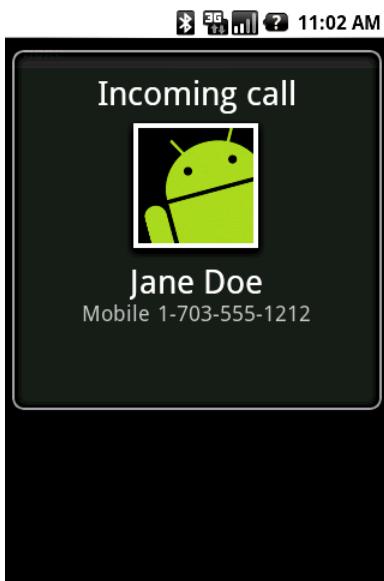


Figure 43–12. Simulated incoming call

To simulate an incoming text message, fill in a phone number, choose the SMS radio button, enter a message in the provided text area, and click Send. The text message will then appear as a notification, as shown in Figure 43–13.

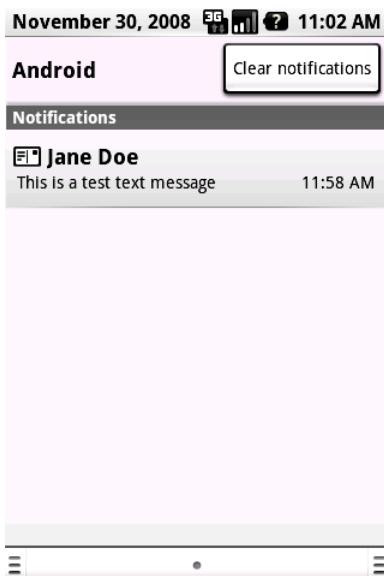


Figure 43–13. Simulated text message

And, of course, you can click on the notification to view the message in the full-fledged Messaging application, as shown in Figure 43–14.

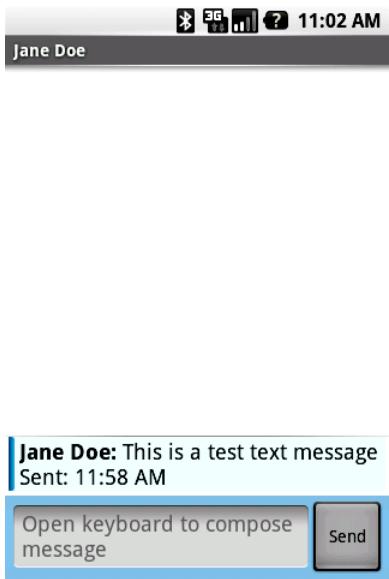


Figure 43–14. Simulated text message, in Messaging application

Memory Management

DDMS also helps you diagnose issues related to how your application uses memory, particularly heap space.

On the Sysinfo tab, you can see a pie chart of the overall memory allocation for the emulator, as shown in Figure 43–15.

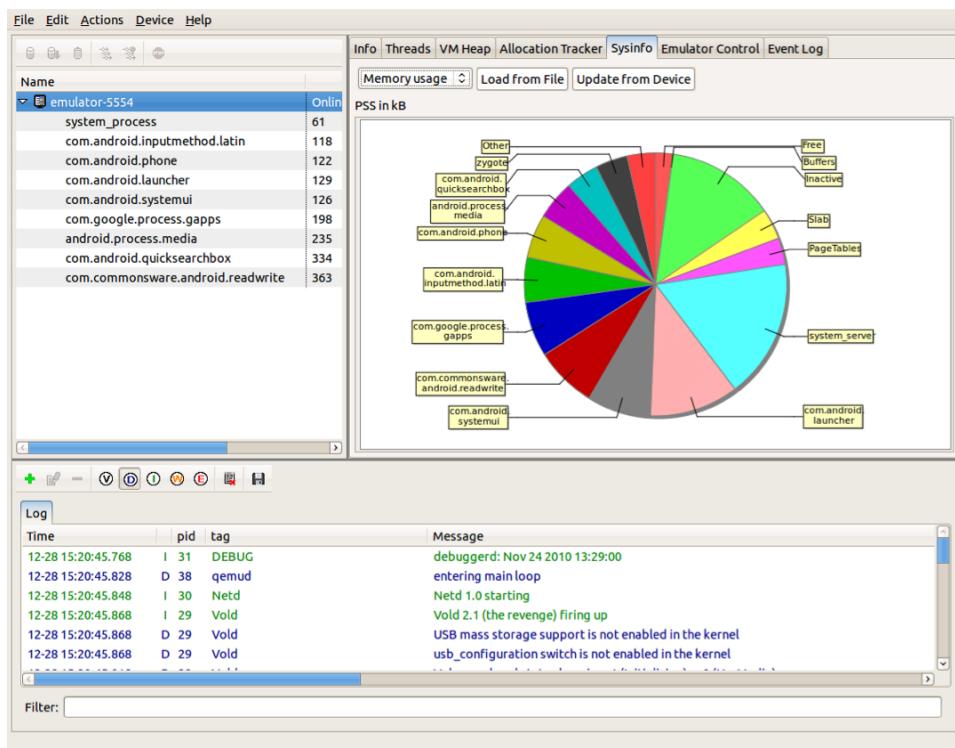


Figure 43–15. DDMS memory usage chart

On the Allocation Tracker tab, you can record every time your code (or code you call inside of Android) allocates memory. Simply highlight your application's process in the tree table, and then click the Start Tracking button. When you want to see what you have allocated since you clicked Start Tracking, click the Get Allocations button, which will fill in a table showing each allocation, how much memory was allocated, and where in the code the memory was allocated, as shown in Figure 43–16.

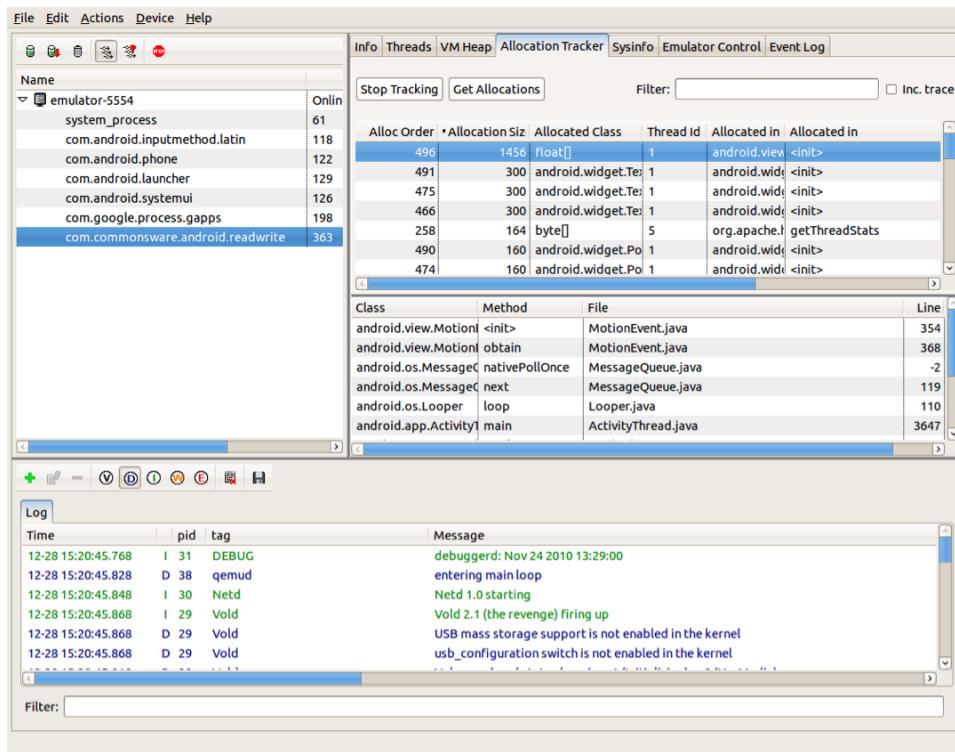


Figure 43–16. DDMS allocation tracker

And, you can even dump the entire heap for your application via the Dump HPROF option, which is the toolbar button that looks like a half-empty can with a red downward-pointing arrow to its right. The resulting HPROF file can be used with MAT, an add-in for Eclipse, to see what objects are still on the heap and who is causing them to stick around.

Before dumping the HPROF file, you may wish to force a garbage collection run on your process. You do so by clicking the toolbar button that looks like a classic metal garbage can.

adb: Like DDMS, with More Typing

The Android Debug Bridge, or adb utility, serves two roles:

- Behind the scenes, it serves as a bridge between your emulators/devices and the rest of the tools. For example, ADT, Hierarchy Viewer, and DDMS all communicate with your emulator via the adb bridge. This bridge comes in the form of a daemon process, spawned the first time you try using any of those tools since your last reboot.

- It offers command-line equivalents for many features of the other tools, notably DDMS.

Some of the things you can do with adb include the following:

- Start (adb start-server) or stop (adb kill-server) the aforementioned daemon process
- List all of the recognized Android devices and emulators presently visible (adb devices)
- Get access to a Linux shell inside your device or emulator (adb shell)
- Install or uninstall Android applications on your device or emulator (adb install)
- Copy files to (adb push) or from (adb pull) the emulator, much like DDMS's File Explorer
- Examine LogCat (adb logcat)

Part **VII**

Alternative Application Environments

The Role of Alternative Environments

You might think that Android is all about Java. The official Android Software Development Kit (SDK) is for Java development, the build tools are for Java development, the Android discussion groups and blog posts are all about Java, and, yes, most Android books are for Java development. Heck, most of this book is about Java.

However (and with apologies to William Goldman), it just so happens that Android is only mostly Java. There's a big difference between mostly Java and all Java. Mostly Java is slightly not Java.

So, while Android's "sweet spot" will remain Java-based applications for the near term, you can still create applications using other technologies. This chapter and the three that follow introduce some of those alternative technologies.

This chapter starts with an examination of the pros and cons of Android's Java-centric strategy. It then enumerates some reasons why you might want to use something else for your Android applications. The downsides of alternative Android application environments—lack of support and technical challenges—are also discussed.

In the Beginning, There Was Java...

The core Android team made a fairly reasonable choice of language when they chose Java. It is a very popular language, and in the mobile community it had a clear predecessor in Java 2 Platform, Micro Edition (J2ME). Lacking direct access to memory addresses (so-called pointers), a Java-based application will be less prone to developer errors that might lead to buffer overruns and expose the application to possible hacks. And there is a fairly robust ecosystem around Java, in terms of educational materials, existing code bases, integrated development environments (IDEs), and so on.

However, while you can program Android in the Java language, an Android device does not run a Java application. Instead, your Java code is converted into something that

runs on the Dalvik virtual machine. This is akin to the technology used for regular Java applications, but Dalvik is specifically tuned for Android's environment. Moreover, it limits the dependency of Android on Java itself to a handful of programming tools, which is important as Java's stewardship moves from Sun to Oracle to wherever.

The Dalvik virtual machine is also capable of running code from other programming languages, a feature that makes possible much of what this book covers.

...And It Was OK

No mobile development environment is perfect, and the combination of Java and Android is no exception.

In the beginning, Java, as implemented for the Dalvik virtual machine, was interpreted, without any of the just-in-time (JIT) compiler tricks regular Java uses to boost performance. This is a bigger problem in mobile, since the devices Android runs on tend to be less powerful than your average desktop, notebook, or web server. Android 2.3 added a JIT compiler, which helps a lot, but it is still slow compared to native compiled code. Hence, there will be some things you just can't do on Android with Java because it is too slow.

Java uses garbage collection to save people from having to keep track of all their memory allocations. That works for the most part, and is generally a boon to developer productivity. However, it is not a cure-all for every memory and resource allocation problem. You can still have what amounts to "memory leaks" in Java, even if the precise mechanics of those leaks differ from the classic leaks you get in C, C++, and other languages.

Most importantly, though, not everybody likes Java. It could be because they lack experience with it, or perhaps they have had experience with it and did not enjoy that experience. Certainly, Java is often seen as a language for big enterprise systems and, therefore, not necessarily "cool." Advocates of other languages will have their own pet peeves with Java as well (e.g., to a Ruby developer, Java is really verbose).

So, while Java was not a bad choice for Android, it was not perfect, either.

Bucking the Trend

Just because Java is the dominant way to build apps for Android, that does not mean it is the only way, and for you, it may not even be the best way.

Perhaps Java is not in your existing skill set. You might be a web developer, more comfortable with HTML, CSS, and JavaScript. There are frameworks to help you with that. Or, maybe you cut your teeth on server-side scripting languages like Perl or Python—there are ways to sling that code on Android as well. Or perhaps you already have a bunch of code in C/C++, such as game physics algorithms, that would be painful to rewrite in Java. You should be able to reuse that code, too.

Even if you would be willing to learn Java, it may be that your inexperience with Java and the Android APIs will just slow you down. You might be able to get something built much more quickly with another framework, even if you wind up replacing it with a Java-based implementation in the future. Rapid development and prototyping is frequently important, to get early feedback with minimal investment in time.

And, of course, you might just find Java programming to be irritating. You would not be the first, nor the last, to have that sentiment. If you are getting into Android as a hobby, rather than as part of your “day job,” having fun will be particularly important to you, and you might not find Java to be much fun.

Fortunately, Android is friendly toward alternative ways of building applications, unlike some mobile platforms.

Support, Structure

However, “friendly” and “fully supported” are two different things. Some alternatives to Java-based development are officially supported by the core Android team, such as C/C++ development via the Native Development Kit (NDK) and web-style development via HTML5. Some alternatives to Java-based development are supported by companies. Adobe supports the Adobe Integrated Runtime (AIR), Nitobi supports PhoneGap (described in detail in Chapter 46), Rhomobile supports Rhodes, and so on. Other alternatives are supported by standards bodies. For example, the World Wide Web Consortium (W3C) supports HTML5. Still others are just tiny projects with the backing of only a couple of developers.

You will need to make the decision for yourself which of these levels of support will meet your requirements. For many development activities, support is not much of an issue, but in some cases, support might be paramount (e.g., enterprise application development).

Caveat Developer

Of course, going outside the traditional Java environment for Android development has its issues, beyond just how much support might be available.

Some environments may be less efficient, in terms of processor time, memory, or battery life, than Java. C/C++, on the whole, is probably better than Java, but HTML5 may be worse, for example. Depending on what you are writing and how heavily it will be used will determine how critical that inefficiency will be.

Some environments may not be available on all devices. Right now, Flash is the best example of this; some devices offer some amount of Flash support, while other devices have no Flash support at all. Similarly, HTML5 support was added to Android only as of Android 2.0, so devices running older versions of Android do not have HTML5 as a built-in option.

Every layer between you and officially supported environments makes it that much more difficult for you to ensure compatibility with new versions of Android, when they arise. For example, if you create an application using PhoneGap, and a new Android version becomes available, there may be incompatibilities that only the PhoneGap team can address. While they will probably address those quickly—and they may provide to you some measure of insulation from those incompatibilities—the response time is outside of your control. In some cases, that is not a problem, but in other cases, that might be bad for your project.

Hence, just because you are developing outside of Java does not mean everything is perfect. You simply have to trade off between these problems and the ones Java-based development might cause you. Where the balance lies is up to each individual developer or firm.

HTML5

Prior to the current wave of interest in mobile applications, the technology *du jour* was web applications. A lot of attention was paid to AJAX, Ruby on Rails, and other techniques and technologies that made the experience of using web applications close to, and sometimes even superior to, the experience of using a desktop application.

The explosion of web applications eventually drove the next round of enhancements to web standards, collectively called HTML5. Android 2.0 was the first version to add support for these HTML5 enhancements. Notably, Android supports offline applications and Web storage, meaning that HTML5 becomes a relevant technique for creating Android applications, without dealing with Java.

Offline Applications

The linchpin for using HTML5 for offline applications—on Android or elsewhere—is that those applications can be used when there is no Internet connectivity, either on the client side (e.g., on an airplane sans Wi-Fi) or on the server side (e.g., due to web server maintenance).

What Does It Mean?

Historically, web applications have had this annoying tendency to require web servers. This led to all sorts of workarounds for offline use, up to and including shipping a web server and deploying it to the desktop.

HTML5 solves this problem by allowing web pages to specify their own caching rules. A web app can publish a *cache manifest*, describing which resources

- Can be safely cached, such that if the web server is unavailable, the browser can use the cached copy.
- Cannot be safely cached, such that if the web server is unavailable, the browser should fail as it normally would.

- Have a “fallback” resource, such that if the web server is unavailable, the cached fallback resource should be used instead.

For mobile devices, this means that a fully HTML5-capable browser should be able to load all its assets up front and keep them cached. If the user loses connectivity, the application will still run. In this respect, the web app behaves almost identically to a regular app.

How Do You Use It?

For this chapter, we will use the Checklist “mini app” created by Alex Gibson. While the most up-to-date version of this app can be found at the MiniApps web site (<http://miniapps.co.uk/>), this chapter will review the HTML5/Checklist copy found in the Source Code/Download area of the Apress web site (www.apress.com). This copy is also hosted online on the CommonsWare site, and you can easily locate it directly via the shortened URL <http://bit.ly/cw-html5>.

About the Sample App

Checklist is, as the name suggests, a simple checklist application. When you first launch it, the list will be empty, as shown in Figure 45–1.

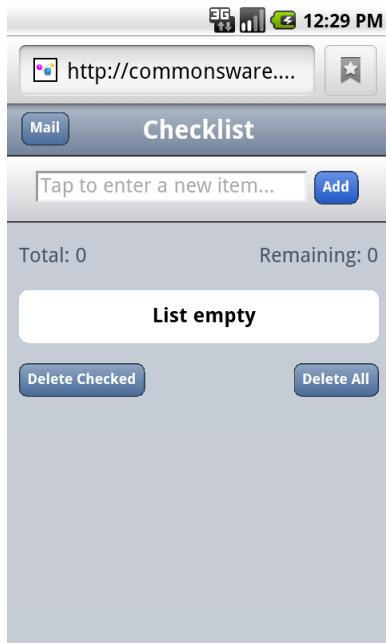


Figure 45–1. The Checklist app, as initially launched

You can enter some text in the top field and click the Add button to add it to the list, as shown in Figure 45–2.



Figure 45–2. The Checklist, with one item added

You can “check off” individual items, which are then displayed in strikethrough, as shown in Figure 45–3.

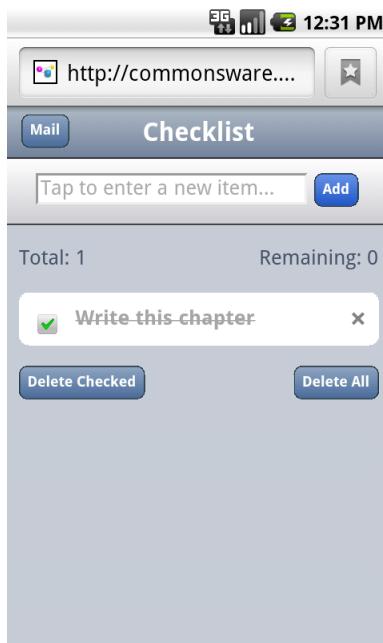


Figure 45–3. The Checklist, with one item marked as completed

You can also delete the checked entries (via the Delete Checked button) or all entries (via the Delete All button), which will pop up a confirmation dialog box before proceeding, as shown in Figure 45–4.

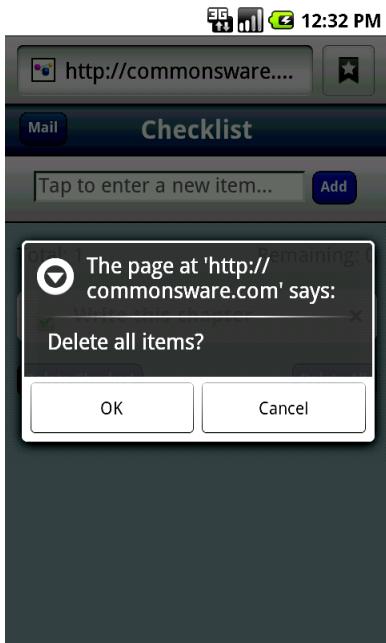


Figure 45–4. The Checklist's delete confirmation dialog box

“Installing” Checklist on Your Android Device

To access Checklist on your Android device, visit the hosted edition at <http://bit.ly/cw-html5>. You can then add a bookmark for it (choose More > Add bookmark in the browser’s options menu) to come back to it later.

You can even set up a shortcut for the bookmark on your home screen, if you so choose—just long-tap the background, choose Bookmark, and then choose the Checklist bookmark you set up before.

Examining the HTML

All the functionality in the Checklist app is accomplished using just a handful of lines of HTML:

```
<!DOCTYPE html>
<html lang="en" manifest="checklist.manifest">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<title>Checklist</title>
<meta name="viewport"
      content="width=device-width; initial-scale=1.0; maximum-scale=1.0;~
```

```
user-scalable=0;" />
<meta name="apple-mobile-web-app-capable" content="yes" />
<meta name="apple-mobile-web-app-status-bar-style" />
<link rel="apple-touch-startup-image" href="splashscreen.png" />
<link rel="stylesheet" href="styles.css" />
<link rel="apple-touch-icon-precomposed"
      href="apple-touch-icon-precomposed.png" />
</head>
<body>
<section>
  <header>
    <button type="button" id="sendmail">Mail</button>
    <h1>Checklist</h1>
  </header>
  <article>
    <form id="inputarea" onsubmit="addNewItem()">
      <input type="text" name="name" id="name" maxlength="75"
             autocorrect placeholder="Tap to enter a new item&hellip;" />
      <button type="button" id="add">Add</button>
    </form>
    <ul id="maillist">
      <li class="empty"><a href="" id="maillink">Mail remaining items</a></li>
    </ul>
    <p id="totals"><span id="tally1">Total: <span id="total">0</span></span>
       <span id="tally2">Remaining: <span id="remaining">0</span></span></p>
    <ul id="checklist">
      <li class="empty">Loading&hellip;</li>
    </ul>
  </article>
  <fieldset>
    <button type="button" id="deletechecked">Delete Checked</button>
    <button type="button" id="deleteall">Delete All</button>
  </fieldset>
</section>
<script src="main.js"></script>
</body>
</html>
```

For the purposes of offline applications, though, the key is the `manifest` attribute of our `html` element:

```
<html lang="en" manifest="checklist.manifest">
```

Here, we specify the relative path to a manifest file, indicating what the rules are for caching various portions of this application offline.

Examining the Manifest

Because the manifest is where all the fun is, let's look at Checklist's manifest:

```
CACHE MANIFEST
#version 54
styles.css
main.js
splashscreen.png
```

The HTML5 manifest format is extremely simple. It starts with a CACHE MANIFEST line, followed by a list of files (technically, relative URLs) that should be cached. It also supports comments, which are lines beginning with #.

The manifest can also have a NETWORK: line, followed by relative URLs that should never be cached. Similarly, the manifest can have a FALLBACK: line, followed by pairs of relative URLs: the URL to try to fetch off the network, followed by the URL of a cached resource to use if the network is not available.

In principle, the manifest should request caching for everything that the application needs to run, though the page that requested the caching (index.html in this case) is also cached.

Web Storage

Caching the HTML5 application's assets for offline use is all well and good, but that will be rather limiting on its own. In an offline situation, the application would not be able to use AJAX techniques to interact with a web service. So, if the application is going to be able to store information, it will need to do so on the browser itself.

Google Gears and related tools pioneered this concept and blazed the trail for what is now variously called Web Storage or DOM Storage for HTML5 applications. An HTML5 app can store data persistently on the client, within client-imposed limits. That, in conjunction with offline asset caching, means an HTML5 application can deliver far more value when it lacks an Internet connection, or for data that just does not make sense to store "in the cloud."

NOTE: Technically, Web Storage is not part of HTML5, but rather is a related specification. However, it tends to get lumped in with HTML5 in common conversation.

What Does It Mean?

On a Web Storage–enabled browser, your JavaScript code will have access to a `localStorage` object, representing your application's data. More accurately, each `origin` (i.e., domain) will have a distinct `localStorage` object on the browser.

The `localStorage` object is an *associative array*, meaning you can work with it via either numerical indexes or string-based keys. Values typically are strings. You can do the following with `localStorage`:

- Find out how many entries are in the array via `length()`
- Get and set items by key via `getItem()` and `setItem()`
- Get the key for a numerical index via `key()`
- Remove individual entries via `removeItem()` or remove all items via `clear()`

This means you do not have the full richness of a SQL database, like you might have with SQLite in a native Android application. But, for many applications, this should suffice.

How Do You Use It?

Checklist stores the list items as keys in the associative array, with a value of 0 for a regular item and 1 for a deleted item. Here, we see the code for putting a new item into the checklist:

```
try {
    localStorage.setItem(strippedString, data);
}
catch (e) {
    if (e == QUOTA_EXCEEDED_ERR) {
        alert('Quota exceeded!');
    }
}
```

Here is the code where those items are pulled back out of storage and put into an array for sorting and, later, display as DOM elements on the web page itself:

```
/*get all items from localStorage and push them one by one into an array.*/
for (i = 0; i <= listlength; i++) {

    var item = localStorage.key(i);
    myArray.push(item);
}

/*sort the array into alphabetical order.*/
myArray.sort();
```

When the user checks the check box next to an item, the storage is updated to toggle the checked setting persistently:

```
/*toggle the check flag.*/
if (target.previousSibling.checked) {
    data = 0;
}
else {
    data = 1;
}
/*save item in localStorage.*/
try {
    localStorage.setItem(name, data);
} catch (e) {

    if (e == QUOTA_EXCEEDED_ERR) {
        alert('Quota exceeded!');
    }
}
```

Checklist also has code to delete items from storage, either all items marked as checked or all items. Following is the code to delete all checked items:

```
/*remove every item from localStorage that has the data flag checked.*/
while (i <= localStorage.length-1) {

    var key = localStorage.key(i);
    if (localStorage.getItem(key) === '1') {
        localStorage.removeItem(key);
    }
    else { i++; }
}
```

And here is the code to delete all items:

```
/*deletes all items in the list.*/
deleteAll: function() {

    /*ask for user confirmation.*/
    var answer = confirm("Delete all items?");

    /*if yes.*/
    if (answer) {

        /*remove all items from localStorage.*/
        localStorage.clear();
        /*update view.*/
        checklistApp.getAllItems();
    }
    /*clear up.*/
    delete checklistApp.deleteAll;
},
```

Web SQL Database

Android's built-in browser also supports a Web SQL Database option, which enables you to use SQLite-style databases from JavaScript. This adds a lot more power than basic Web Storage, albeit at a complexity cost. It is also not part of an active standard—the Web Hypertext Application Technology Working Group (WHATWG) team working on this standard has set it aside for the time being.

You might consider evaluating Lawnchair, which is a JavaScript API that allows you to store arbitrary JavaScript Object Notation (JSON)-encoded objects. It will use whatever storage options are available, and therefore will help you deal with cross-platform variety. In particular, it supports the Google Gears facility found in some older versions of Android.

Going to Production

Creating a little test application requires nothing magical. Presumably, though, you are interested in having other people use your application—perhaps many others. Classic Java-based Android applications have to deal with testing, having the application digitally signed for production, distribution through various channels (such as the Android Market), and providing updates to the application by one means or another.

Those issues do not all magically vanish because HTML5 is used as the application environment. However, HTML5 does change things significantly from what Java developers have to do.

Testing

Since HTML5 works in other browsers, testing your business logic could easily take advantage of any number of HTML and JavaScript testing tools, from Selenium to QUnit to Jasmine.

For testing on Android proper—to ensure there are no issues related to Android’s browser implementation—you can use Selenium’s Android Driver or Remote Control modes.

Signing and Distribution

Unlike native Android applications, you do not need to worry about signing your HTML5 applications. The downside of this is that there is no support for distribution of HTML5 applications through the Android Market, which today supports only native Android apps. Users will have to find your application by one means or another, visit it in the browser, bookmark the page, and possibly create a home screen shortcut to that bookmark.

Updates

Unlike native Android applications, which by default must be updated manually, HTML5 applications will be transparently updated the next time the user runs the app while connected to the Internet. The offline caching protocol will check the web server for new editions of files before falling back to the cached copies. Hence, there is nothing more for you to do other than publish the latest web app assets.

Issues You May Encounter

Unfortunately, nothing is perfect. While HTML5 may make many things easier, it is not a panacea for all Android development problems.

This section covers some potential areas of concern you will want to consider as you move forward with HTML5 applications for Android.

Android Device Versions

Not all Android devices support HTML5—only those running Android 2.x or higher. Ideally, therefore, you should do a bit of user-agent sniffing on your web server and redirect older Android users to some other page explaining the limitations in their device.

Here is the user-agent string for a Google/HTC Nexus One device running Android 2.1:

Mozilla/5.0 (Linux; U; Android 2.1-update1; en-us; Nexus One Build/ERE27) AppleWebKit/530.17 (KHTML, like Gecko) Version/4.0 Mobile Safari/530.17

As you can see, it is formatted like a typical modern user-agent string, meaning it is quite a mess. It does indicate it is running Android 2.1-update1.

Eventually, somebody will create a database of user-agent strings for different device models, and from there we can derive appropriate regular expressions or similar algorithms to determine whether a given device can support HTML5 applications.

Screen Sizes and Densities

HTML5 applications can be run on a wide range of screen sizes, from QVGA Android devices to 1080p LCDs and beyond. Similarly, screen densities may vary quite a bit, so while a 48×48-pixel image on a smartphone may be an appropriate size, it may be too big for a 1080p television, let alone a 24-inch LCD desktop monitor.

Other than increasing the possible options on the low end of screen sizes, none of this is unique to Android. You will need to determine how best to design your HTML and CSS to work on a range of sizes and densities, even if Android were not part of the picture.

Limited Platform Integration

HTML5, while offering more platform integration than ever before, does not come close to covering everything an Android application might want to be able to do. For example, an ordinary HTML5 application cannot do the following:

- Launch another application
- Work with the contacts database
- Raise a notification
- Do work truly in the background (though web workers may alleviate this somewhat someday)
- Interact with Bluetooth devices
- Record audio or video
- Use the standard Android preference system
- Use speech recognition or text-to-speech

Many applications will not need these capabilities, of course. And other application environments, like PhoneGap, will likely evolve into “HTML5 Plus” for Android. That way, you could create a stock application that works across all devices and a separate enhanced Android application that leverages greater platform integration, at the cost of some additional amount of programming.

Performance and Battery

There has been a nagging concern for some time that HTML-based user interfaces are inefficient compared to native Android UIs, in terms of processor time, memory, and battery. For example, one of the stated reasons for avoiding BONDI-style web widgets for the Android home screen is the performance impact.

Certainly, it is possible to design HTML5 applications that will suck down the battery. For example, if you have a hunk of JavaScript code running every second indefinitely, that is going to consume a fair amount of processor time. However, outside of that, it seems unlikely that an ordinary application would be used so heavily as to materially impact battery life. Certainly, more testing will need to be done in this area.

Also, an HTML5 application may start up a bit slower than other applications, particularly if the browser has not been used in a while or if the network connection is there but has minimal bandwidth to your server.

Look and Feel

HTML5 applications can certainly look very slick and professional—after all, they are built with web technologies, and web apps can look very slick and professional.

However, HTML5 applications will not necessarily look like standard Android applications, at least not initially. Some enterprising developers will, no doubt, create some reusable CSS, JavaScript, and images that will, for example, mirror an Android native Spinner widget (a type of drop-down control). Similarly, HTML5 applications will tend to lack options menus, notifications, or other UI features that a native Android application may well use.

This is not necessarily bad. Considering the difficulty in creating a very slick-looking Android application, HTML5 applications may tend to look better than their Android counterparts. After all, there are many more people skilled in creating slick web apps than there are people skilled in creating slick Android apps.

However, some users may complain about the look-and-feel disparity, just because it is different.

Distribution

HTML5 applications can be trivially added to a user's device—browse, bookmark, and add a shortcut to the home screen. However, HTML5 applications will not show up in the Android Market, so users trained to look at the Market for available applications will not find HTML5 applications, even ones that may be better than their native counterparts.

It is conceivable that, someday, the Android Market will support HTML5 applications. It is also conceivable that, someday, Android users will tend to find their apps by means

other than searching the Android Market, and will be able to get their HTML5 apps that way. However, until one of those becomes true, HTML5 applications may be less “discoverable” than their native equivalents.

HTML5 and Alternative Android Browsers

While the built-in Android browser will be the choice of many Android users, there are other browsers available. Here is how some of the better-known alternatives stand in terms of HTML5 support:

- *Firefox Mobile*: Presently in beta form, supports offline caching and local storage. However, it is unable to run the Checklist sample correctly at this time, for reasons presently unknown.
- *Opera Mobile*: Also in beta, does not support local storage, rendering Checklist moot. It also does not support offline caching at this time.
- *Dolphin Browser HD 4.0*: Supports offline caching and local storage. While there are slight rendering problems—perhaps CSS-related—in Checklist, the application otherwise runs fine, even without an Internet connection.

HTML5: The Baseline

HTML5 is likely to become rather popular for conventional application development. It gives web developers a route to the desktop. It may be the only option for Google’s Chrome OS. And, with ever-improving support on popular mobile devices—Android among them—developers will certainly be enticed by another round of “write once, run anywhere” promises.

It is fairly likely that, over time, HTML5 will be the number two option for Android application development, after the conventional Java application written to the Android SDK. That will make HTML5 the baseline for comparing alternative Android development options—not only will those options be compared to using the SDK, they will be compared to using HTML5.

Chapter 46

PhoneGap

PhoneGap is perhaps the original alternative application framework for Android, arriving on the scene in early 2009. PhoneGap (www.phonegap.com/) is open source, backed by Nitobi, which offers a mix of open source and commercial products, along with consulting and training services.

What Is PhoneGap?

As the PhoneGap web site puts it:

The PhoneGap mission is to web-enable native device functionality with open standards like HTML, CSS and JavaScript so that developers can focus on the app they're building, not on authoring complex platform compatibility layers.¹ PhoneGap focuses on bridging the gap between web technologies and native mobile development, with access to more features than HTML5 applications have.

What Do You Write In?

A PhoneGap application is made up of HTML, CSS, and JavaScript, no different from a mobile web site or HTML5 application, except that in PhoneGap the web assets are packaged with the application rather than downloaded on-the-fly.

A preinstalled PhoneGap application, therefore, can contain comparatively large assets, such as complex JavaScript libraries, that might be too slow to download over slower EDGE connections. However, PhoneGap is still limited by the speed of mobile devices and how quickly the WebKit browser can load and process those assets.

Also, development for WebKit for mobile differs from development for WebKit for desktops, particularly with respect to touch versus mouse events. You may want to develop using mobile layers of JavaScript frameworks (e.g., jQTouch versus plain jQuery) where practical.

¹ http://www.phonegap.com/case_study/it's-a-goodday-for-a-phonegap-app/

What Features Do You Get?

As with an HTML5 application, PhoneGap gives you the basic capabilities of a web browser, including AJAX support. Beyond that, PhoneGap adds a number of JavaScript APIs to allow you to get at the underlying features of the Android platform. At the time of this writing, that includes the following:

- Accelerometer access, for detecting movement of the device
- Audio recording
- Camera access, for taking still pictures
- Database access, both to databases that you create (SQLite) and to others built into Android (e.g., contacts)
- File system access, such as to the SD card or other external storage
- Geolocation, for determining where the device is
- Vibration, for shaking the phone (e.g., force-feedback)

Since some of these are part of the HTML5 specification (e.g., geolocation), you have your choice of APIs. Also, this list will change over time, so by the time you are reading this, you may have access to more than what is described here.

What Do Apps Look Like?

PhoneGap apps look like web pages, more so than native Android apps, as shown in Figure 46–1, a screenshot of the example application that ships with PhoneGap. You can use CSS and images to mimic the Android look and feel to some extent, but only for those sorts of widgets that can be created in both Android and HTML. For example, the Android Spinner widget, which resembles a drop-down list, may be difficult to mimic in HTML.

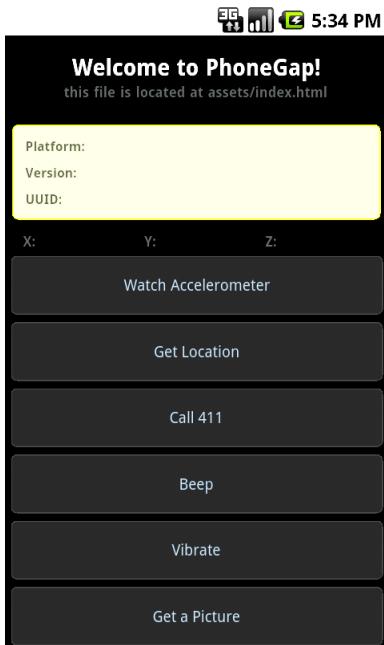


Figure 46–1. The example application that comes with PhoneGap

How Does Distribution Work?

Distributing a PhoneGap application is pretty much identical to distributing any other standard Android application. After testing, you create a standard APK file with the Android build tools, from an Android project generated for you by PhoneGap. This project will contain the Java, XML, and other necessary bits to wrap around your HTML, CSS, and JavaScript to make up your application. Then, you digitally sign the application and upload it to the Android Market or any other distribution mechanism you wish to use.

What About Other Platforms?

PhoneGap is not just for Android. You can create PhoneGap applications for iPhone, Blackberry, some flavors of Symbian, and Palm's WebOS. In theory, at least, you can create one application using HTML, CSS, JavaScript, and the PhoneGap JavaScript APIs, and have it run across many devices.

There are a couple of limitations that will hamper your progress to that goal:

- The web browsing component used by PhoneGap across all those platforms is not identical. Even multiple platforms using WebKit will have different WebKit releases, based on what was available when WebKit was integrated into a given device's firmware. Hence, you will want to test to ensure that your CSS, in particular, works as you expect on as many devices as possible.
- Not all PhoneGap JavaScript APIs are available on all devices yet, due to a variety of factors (e.g., not exposed in the platform's native APIs, lack of engineering time to hoist the capability into the PhoneGap APIs, etc.). The PhoneGap wiki can keep you apprised of what works and what does not across the devices. You will want to restrict your feature use to match your desired platforms, or restrict your platforms to match your desired features.

Using PhoneGap

Now, let's look at more of the mechanics for using PhoneGap. PhoneGap's installation and usage, as of the time of this writing, normally requires an expert in Java-based Android development. You need to install a whole bunch of tools, edit configuration files by hand, and so forth. If you want to do all of that, documentation is available on the PhoneGap web site and I'll cover it briefly below. If you are reading this chapter, there's a decent chance that you would rather skip all of that. Hence, for many, the best answer is the PhoneGap Build service (<http://build.phonegap.com/>), still in private beta at the time of this writing (which means you have to register to obtain the download).

Installation

You can download the latest PhoneGap tools as a ZIP archive from the PhoneGap web site. Unpack those tools wherever it makes sense for your development machine and platform. For Android development, that is all the PhoneGap-specific installation you will need. However, you will need the Android SDK and related tools (e.g., Eclipse, if you wish to use Eclipse) for setting up the project.

Creating and Installing Your Project

A PhoneGap Android project is, at its core, a regular Android project, which you can create following the instructions outlined earlier in this book. To convert the standard generated "Hello, World" application into a PhoneGap project, you need to do the following:

1. From the Android/ directory of wherever you unzipped the PhoneGap ZIP file, copy the PhoneGap JAR file to the libs/ directory of your project. If you are using Eclipse, you also need to add it to your build path.
2. Create an assets/www/ directory in your project. Then, copy over the PhoneGap JS file from the Android/ directory of wherever you unzipped the PhoneGap ZIP file.
3. Adjust the standard “Hello, World” activity to inherit from DroidGap instead of Activity. This requires you to import com.phonegap.DroidGap.
4. In your activity’s onCreate() method, replace setContentView() with super.loadUrl("file:///android_asset/www/index.html");
5. In your manifest, add all the permissions that PhoneGap requests, listed later in this chapter.
6. Also in your manifest, add a suitable <supports-screens> element based on what screen sizes you want to test and support.
7. Also in your manifest, add android:configChanges="orientation|keyboardHidden" to your <activity> element, as DroidGap handles orientation-related configuration changes.

At this point, you can create an assets/www/index.html file in your project and start creating your PhoneGap application using HTML, CSS, and JavaScript. You need to include a reference to the PhoneGap JavaScript file (e.g., <script type="text/javascript" charset="utf-8" src="phonegap.0.9.4.js" />). When you want to test the application, you can build and install it like any other Android application (e.g., ant clean install if you are using the command-line build process).

For somebody experienced in Android SDK development, setting this up is not a big challenge.

PhoneGap Build

PhoneGap Build is a tools-as-a-service (TaaS) hosted approach to creating PhoneGap projects. All of the Android build process is handled for you by PhoneGap-supplied servers. You just focus on creating your HTML, CSS, and JavaScript as you see fit.

As noted earlier, PhoneGap Build is still in private beta at the time of this writing, though hopefully it will be open to the public in the near future.

When you log into PhoneGap Build, you are first prompted to create your initial project, by supplying a name and the web assets to go into the app, as shown in Figure 46–2.

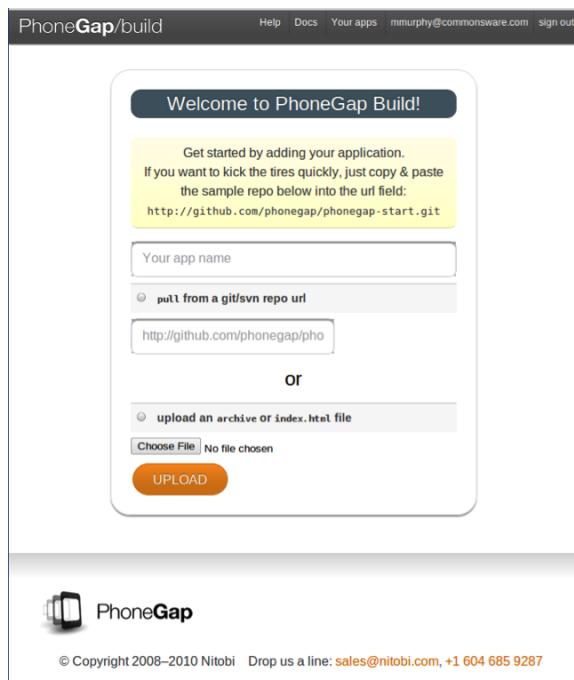


Figure 46–2. Creating your first project in PhoneGap Build

You will be able to add new projects later via a New App button, which gives you the same set of options.

Your choices for supplying the assets are to upload a ZIP file containing all of them or to specify the URL to a public GitHub repository that PhoneGap Build can pull from. The latter method tends to be more convenient, if you are used to using Git for version control and your project is open source (and therefore has a public repository).

Once you click the Upload button, the PhoneGap Build server immediately starts building your application for Android, plus Blackberry, Symbian, and webOS, as shown in Figure 46–3.

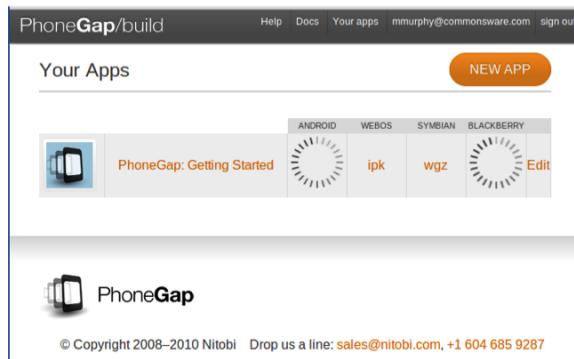


Figure 46–3. Building your first project in PhoneGap Build

Each of the targets has its own file extension (e.g., apk for Android). Clicking that link will let you download that file. Or, click the name of the project, and you get Quick Response (QR) codes to enable downloads straight to your test device, as shown in Figure 46–4.

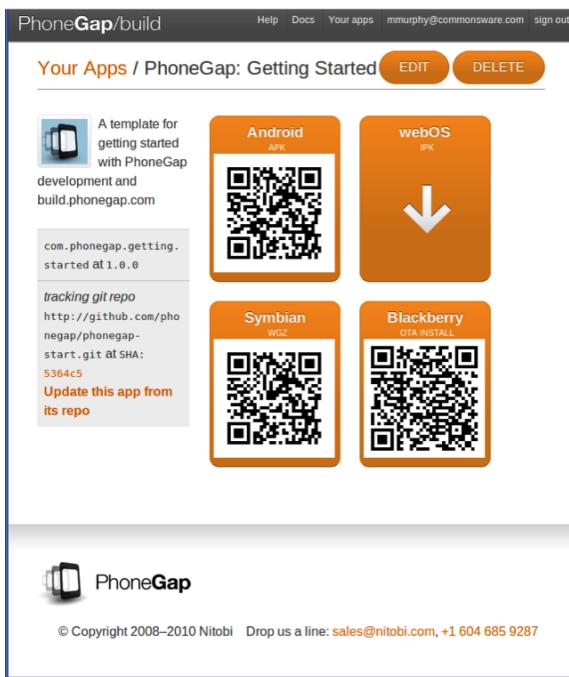


Figure 46–4. Your project's QR codes in PhoneGap Build

This page also gives you a link to update the app from its GitHub repository (if you chose that option). Or, you can click Edit to specify more options, such as the version of your application or its launcher icon, as shown in Figure 46–5.

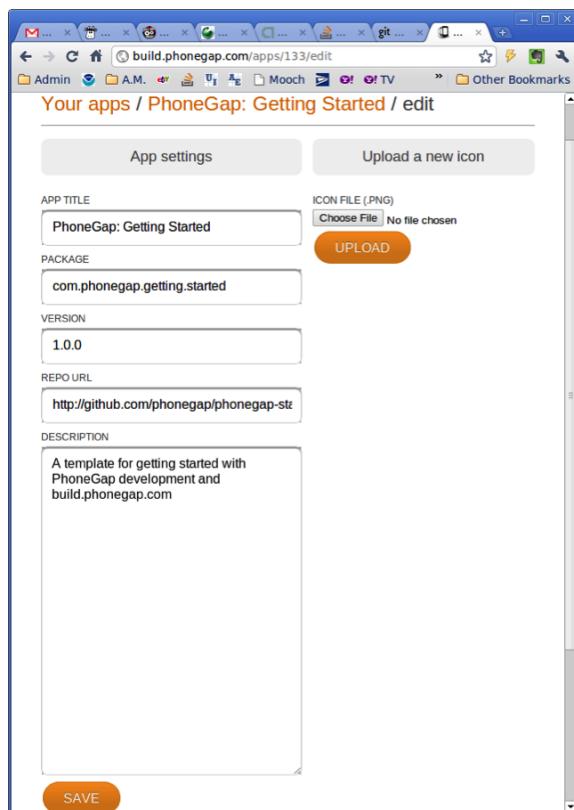


Figure 46–5. Your project's settings in PhoneGap Build

All in all, if you do not otherwise need the Android SDK and related tools on your development machine, PhoneGap Build certainly simplifies the PhoneGap building process.

Note, though, that at the time of writing, Nitobi (the firm behind PhoneGap and PhoneGap Build) is planning on making PhoneGap Build a commercial service for non-open-source applications, though it has not announced rates yet.

PhoneGap and the Checklist Sample

The beauty of PhoneGap is that it wraps around HTML, CSS, and JavaScript. In other words, you do not have to do much of anything PhoneGap-specific to be able to take advantage of PhoneGap delivering to you an APK suitable for installation on an Android device. That being said, PhoneGap does expose more stuff to you than you can get from the standards, if you need them and are willing to use proprietary PhoneGap APIs for them.

Sticking to the Standards

Given an existing HTML5 application, all you need to do to make it an installable APK is wrap it in PhoneGap. For example, to convert the HTML5 version of Checklist (from Chapter 45) into an APK file, you need to do the following:

1. Follow the steps to create an empty PhoneGap project, as outlined earlier in this chapter.
2. Copy the HTML, CSS, JavaScript, and images from the HTML5 project into the assets/www/ directory of the PhoneGap project (note that you do not need anything unique to HTML5, such as the cache manifest).
3. Make sure that your HTML entry point file name matches the path you used with the loadUrl() call in your activity (e.g., index.html).
4. Add a reference to the PhoneGap JavaScript file from your HTML.
5. Build and install the project.

Here is the DroidGap activity for our app, from the PhoneGap/Checklist project:

```
package com.commonsware.pg.checklist;

import android.app.Activity;
import android.os.Bundle;
import com.phonegap.DroidGap;

public class Checklist extends DroidGap {
    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        super.loadUrl("file:///android_asset/www/index.html");
    }
}
```

Here is the manifest, with all of the PhoneGap-requested settings added:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.commonsware.pg.checklist"
    android:versionCode="1"
    android:versionName="1.0">
    <application android:label="@string/app_name" android:icon="@drawable/cw">
        <activity android:name="Checklist"
            android:configChanges="orientation|keyboardHidden"
            android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />
                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>
        </activity>
    </application>
    <supports-screens
        android:largeScreens="true"
```

```
    android:normalScreens="true"
    android:smallScreens="true"
    android:resizeable="true"
    android:anyDensity="true"
/>
<uses-permission android:name="android.permission.CAMERA" />
<uses-permission android:name="android.permission.VIBRATE" />
<uses-permission android:name="android.permission.ACCESS_COARSE_LOCATION" />
<uses-permission android:name="android.permission.ACCESS_FINE_LOCATION" />
<uses-permission android:name="android.permission.ACCESS_LOCATION_EXTRA_COMMANDS" />
<uses-permission android:name="android.permission.READ_PHONE_STATE" />
<uses-permission android:name="android.permission.INTERNET" />
<uses-permission android:name="android.permission.RECEIVE_SMS" />
<uses-permission android:name="android.permission.RECORD_AUDIO" />
<uses-permission android:name="android.permission.MODIFY_AUDIO_SETTINGS" />
<uses-permission android:name="android.permission.READ_CONTACTS" />
<uses-permission android:name="android.permission.WRITE_CONTACTS" />
<uses-permission android:name="android.permission.WRITE_EXTERNAL_STORAGE" />
<uses-permission android:name="android.permission.ACCESS_NETWORK_STATE" />
</manifest>
```

And here is the HTML, which is almost identical to the HTML5 original, but with some HTML5 offline stuff removed (e.g., iPhone icons) and the reference to PhoneGap's JavaScript file added:

```
<!DOCTYPE html>
<html lang="en" manifest="checklist.manifest">
<head>
    <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
    <title>Checklist</title>
    <meta name="viewport"
        content="width=device-width; initial-scale=1.0; maximum-scale=1.0;←
        user-scalable=0;" />
    <link rel="stylesheet" href="styles.css" />
    <script type="text/javascript" charset="utf-8" src="phonegap.0.9.4.js"></script>
</head>
<body>
    <section>
        <header>
            <button type="button" id="sendmail">Mail</button>
            <h1>Checklist</h1>
        </header>
        <article>
            <form id="inputarea" onsubmit="addNewItem()">
                <input type="text" name="name" id="name" maxlength="75"
                    autocorrect placeholder="Tap to enter a new item&hellip;" />
                <button type="button" id="add">Add</button>
            </form>
            <ul id="maillist">
                <li class="empty"><a href="" id="maillink">Mail remaining items</a></li>
            </ul>
            <p id="totals"><span id="tally1">Total: <span id="total">0</span></span>
                <span id="tally2">Remaining: <span id="remaining">0</span></span></p>
            <ul id="checklist">
                <li class="empty">Loading&hellip;</li>
            </ul>
        </article>
```

```
<fieldset>
  <button type="button" id="deletechecked">Delete Checked</button>
  <button type="button" id="deleteall">Delete All</button>
</fieldset>
</section>
<script src="main.js"></script>
</body>
</html>
```

For many applications, this is all you will need. You are simply looking at PhoneGap to give you something you can distribute on the Android Market, on the iOS App Store, and so on.

Adding PhoneGap APIs

If you want to take advantage of more device capabilities, you can augment your HTML5 application to use PhoneGap-specific APIs. These run the gamut from telling you the device's model to letting you get compass readings. Hence, their complexity will vary. For the purposes of this chapter, we will look at some of the simpler ones.

Set Up Device-Ready Event Handler

For various reasons, PhoneGap will not be ready to respond to all of its APIs right away when your page is loaded. Instead, you need to look for a deviceready event to confirm that it is safe to use PhoneGap-specific JavaScript globals. The following is the typical recipe:

1. Add an `onload` attribute to your `<body>` tag, referencing a global JavaScript function (e.g., `onLoad()`).
2. In `onLoad()`, use `addEventListener()` to register another global JavaScript function (e.g., `onDeviceReady()`) for the `deviceready` event.
3. In `onDeviceReady()`, start using the PhoneGap APIs.

Use What PhoneGap Gives You

PhoneGap makes a number of methods available to you through a series of virtual JavaScript objects. Here, “virtual” means that you cannot check to see if the objects exist, but you can call methods and read properties on them. So, for example, there is a `device` object that has a handful of useful properties, such as `phonegap` to return the PhoneGap version and `version` to return the OS version. These virtual objects are ready for use in or after the `deviceready` event.

For example, here is a JavaScript file (`props.js` from the PhoneGap/ChecklistEx project) that implements an `onLoad()` function (to register for `deviceready`) and an `onDeviceReady()` function (to use the `device` object's properties):

```
// PhoneGap's APIs are not immediately ready, so set up an
// event handler to find out when they are ready
```

```
function onLoad() {
    document.addEventListener("deviceready", onDeviceReady, false);
}

// Now PhoneGap's APIs are ready

function onDeviceReady() {
    var element=document.getElementById('props');

    element.innerHTML='<li>Model: '+device.name+'</li>' +
                      '<li>OS and Version: '+device.platform+' '+device.version+'</li>' +
                      '<li>PhoneGap Version: '+device.phonegap+'</li>';
}
```

The `onDeviceReady()` function needs a list element with an id of `props`. That, plus loading this JavaScript in the first place, will require some minor modifications to our HTML:

```
<!DOCTYPE html>
<html lang="en" manifest="checklist.manifest">
<head>
    <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
    <title>Checklist</title>
    <meta name="viewport"
        content="width=device-width; initial-scale=1.0; maximum-scale=1.0;➥
        user-scalable=0;" />
    <link rel="stylesheet" href="styles.css" />
    <script type="text/javascript" charset="utf-8" src="phonegap.0.9.4.js"></script>
    <script type="text/javascript" charset="utf-8" src="props.js"></script>
</head>
<body onload="onLoad()">
    <section>
        <header>
            <button type="button" id="sendmail">Mail</button>
            <h1>Checklist</h1>
        </header>
        <article>
            <form id="inputarea" onsubmit="addNewItem()">
                <input type="text" name="name" id="name" maxlength="75"
                    autocorrect placeholder="Tap to enter a new item&hellip;" />
                <button type="button" id="add">Add</button>
            </form>
            <ul id="maillist">
                <li class="empty"><a href="" id="maillink">Mail remaining items</a></li>
            </ul>
            <p id="totals"><span id="tally1">Total: <span id="total">0</span></span>
                <span id="tally2">Remaining: <span id="remaining">0</span></span></p>
            <ul id="checklist">
                <li class="empty">Loading&hellip;</li>
            </ul>
        </article>
        <fieldset>
            <button type="button" id="deletechecked">Delete Checked</button>
            <button type="button" id="deleteall">Delete All</button>
        </fieldset>
    <footer>
```

```
<h2>Device Properties</h2>
<ul id="props"></ul>
</footer>
</section>
<script src="main.js"></script>
</body>
</html>
```

Figure 46–6 shows what the resulting app looks like.

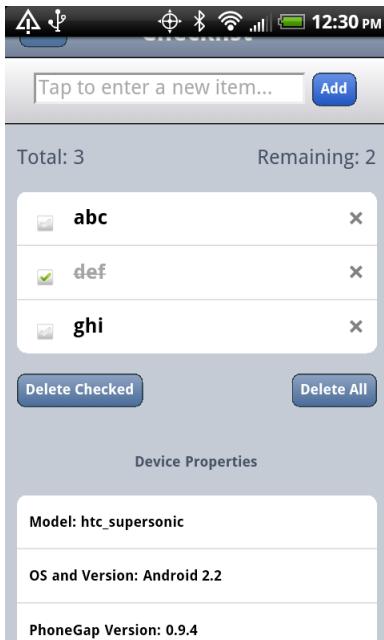


Figure 46–6. The PhoneGap Checklist application with device properties

Obviously, reading a handful of properties is far simpler than, say, taking a picture with the device’s camera. However, the difference in complexity is mostly in what PhoneGap’s virtual JavaScript objects give you and how you can use them, more so than anything peculiar to Android.

Issues You May Encounter

PhoneGap is a fine choice for creating cross-platform applications. However, it is not without its issues. Some of these issues may be resolved in time; some may be endemic to the nature of PhoneGap.

Security

Android applications use a permission system to request access to certain system features, such as making Internet requests or reading the user’s contacts. Applications

must request these permissions at install time, so the user can elect to abandon the installation if the requested permissions seem suspect.

A general rule of thumb is that you should request as few permissions as possible, and make sure that you can justify why you are requesting them.

PhoneGap, for a new project, requests quite a few permissions:

- CAMERA
- VIBRATE
- ACCESS_COARSE_LOCATION
- ACCESS_FINE_LOCATION
- ACCESS_LOCATION_EXTRA_COMMANDS
- READ_PHONE_STATE
- INTERNET
- RECEIVE_SMS
- RECORD_AUDIO
- MODIFY_AUDIO_SETTINGS
- READ_CONTACTS
- WRITE_CONTACTS
- WRITE_EXTERNAL_STORAGE
- ACCESS_NETWORK_STATE

Leaving this roster intact will give you an application that can use every API that PhoneGap makes available to your JavaScript...and an application that will scare away many users. After all, it is unlikely that your application will be able to use, let alone justify, all of these permissions.

It is certainly possible for you to trim down this list, by modifying the `AndroidManifest.xml` file in the root of your PhoneGap project. However, you will then need to thoroughly test your application to make sure you did not get rid of a permission that you actually need. Also, it may be unclear to you which permissions you can safely remove.

Eventually, the PhoneGap project may have tools to help guide you in the choice of permissions, perhaps by statically analyzing your JavaScript code to see which PhoneGap APIs you are using. In the meantime, though, getting the proper set of permissions will involve a lot of trial and error.

Screen Sizes and Densities

Normal web applications primarily focus on screen resolution and window sizes as their primary variables. Mobile web applications do not have to worry about window sizes, as browsers and apps typically run full-screen. Mobile web applications need to deal with physical size and density, though—issues that are off the radar for traditional web development.

Netbooks can have screens that are 10 inches or smaller, whereas desktops can have screens that are 24 inches or larger. So physical screen size would seem to be something web developers need to address. However, screen resolution (in pixels) generally tracks well with physical size in the netbook/notebook/desktop realm. That is because screen density is fairly consistent across their LCDs, and that density is fairly low.

Smartphones, on the other hand, have several different densities, causing the connection between resolution and size to be broken. Some low-end phones, particularly with small (e.g., 3 inch) LCDs, have densities on par with nice monitors. Midrange phones have twice the density (240 dpi versus 120 dpi). Apple's iPhone 4 has even higher density, and there likely will soon be some Android devices with so-called retina displays as well. Hence, an 800×480 resolution could be on a screen ranging anywhere from 4 inches to 7 inches, for example. Tablets add even more possible sizes to the mix.

This is compounded by the problems caused by touchscreens. A mouse can get pixel-level precision in its clicks. Fingers are much less precise. Hence, you may need to make your buttons and such bigger on a touchscreen, so that it is finger-friendly. This causes some problems with scaling of assets, particularly images. What might be finger-friendly on a low-density 3-inch device might be entirely too small for a high-density 4-inch device.

Native Android applications have built-in logic for dealing with this issue, in the form of multiple sets of resources (e.g., images) that can be swapped in based on device characteristics. Eventually, PhoneGap and similar tools will need to provide relevant advice to their users for how to create applications that can similarly adapt to circumstances.

Look and Feel

A web app never quite looks like a native one. This is not necessarily a bad thing. However, some users may find it disconcerting, particularly since they will not understand why their newly installed app (made with PhoneGap, for example) looks so different from any other similar app they may already have.

As HTML5 applications become more prominent on Android, this issue should decline in importance. However, it is something to keep in mind for the next year or two.

For More Information

At the time of this writing, there are no books available dedicated to PhoneGap development. Also, it is still a fast-moving target, particularly as it heads to version 1.0. Hence, at the moment, the best information on PhoneGap can be found on the PhoneGap site, including its API documentation.

Other Alternative Environments

The alternative application environments described in the preceding chapters represent but a few of the growing flood of such technologies. Here, we will take a brief look at a few other alternative application environments.

NOTE: This area is changing rapidly, so by the time you read this chapter, the material may be somewhat out of date relative to the progress each of these technologies has made. Check the web site of each of the application environments for the latest updates.

Rhodes

Rhodes (<http://rhomobile.com/>) is similar to PhoneGap insofar as you develop an Android application whose user interface is defined via HTML, CSS, and JavaScript. The difference is that Rhodes bakes in a full Ruby environment, with a Rails-esque framework. Your Ruby code generates HTML and such to be “served” to an activity via a WebView widget, much like a server-side Ruby web app would generate HTML to be served to a stand-alone web browser.

Similar to PhoneGap, you can either build the project on your development machine or use their hosted build process. The latter method is recommended, partly because the requirements for local builds are higher than those for PhoneGap—notably, Rhodes requires the Native Development Kit (NDK) for building and linking the Ruby interpreter to your application.

Rhodes winds up creating larger applications than does PhoneGap, due to the overhead of the Ruby interpreter (~1.5MB). However, if you are used to server-side web development, picking up Rhodes may be easier for you than picking up PhoneGap.

Flash, Flex, and AIR

Adobe has been hard at work extending its Flash, Flex, and AIR technologies to the mobile space. You can use Flex (the “Hero” edition) and Flash Builder (the “Burrito” edition) to create Android APK files that can be distributed on the Android Market and deployed to Android devices. Those devices will need to have the AIR runtime installed, which is free, but is a large download and works only on Android 2.2 devices. The same projects can be repackaged for iOS and the Blackberry Playbook tablet, and possibly for future devices down the road.

AIR (Adobe Integrated Runtime) is not as tightly integrated with the platform as PhoneGap is (e.g., AIR provides no access to the device’s contacts), though this is an area to which Adobe likely will devote more resources over time. Besides, Adobe is a big firm with a large ecosystem behind it and many existing Flash, Flex, and AIR developer resources to tap into.

JRuby and Ruboto

JRuby (www.jruby.org/) is one of the most popular languages designed to run on the JVM—besides Java itself. JRuby was quickly ported to run on Android, but with some optimizations disabled, since JRuby is actually running on the Dalvik virtual machine that underlies the Android environment, not on a classic JVM.

However, JRuby alone cannot create Android applications. As a scripting language, there is no way for it to define an activity or other component—those need to be registered in the application’s manifest as regular Java class files.

This is where Ruboto (<http://ruboto.org/>) comes in. Ruboto is a framework for a generic JRuby/Android application. It provides skeletal activities via a code generator and allows JRuby scripts to define handlers for all of the lifecycle methods (e.g., `onCreate()`), define user interfaces using JRuby code, and so forth. The result can be packaged as an APK file using supplied Rake script. The results can be uploaded to the Android Market or distributed however else you desire.

Mono for Android

Mono is an open source reimplementation of C# and .NET for non-Windows environments. Mono has had its fair share of controversies, mostly stemming from Microsoft, such as whether Microsoft will someday squash Mono over patent considerations.

Mono for Android has been in the works for some time. This would allow Mono developers to target Android for their apps. In principle, one could develop C# applications for Android this way.

While Mono itself is an open source project, Mono for Android “is a commercial product...licensed on a per-developer basis,” according to the Mono project. This may come as a bit of a shock to developers who are expecting Mono on Android to remain open source.

App Inventor

App Inventor (<http://appinventor.googlecode.com/>) is an Android application development tool made available by Google, but outside of the normal Android developer site. App Inventor was originally developed for use in education, but they have been inviting others into their closed beta.

App Inventor is theoretically a web-based development tool. Here, “theoretically” means that, in practice, users have to do a fair amount of work outside of the browser to get everything set up:

- Have Java installed and functioning in the browser, capable of running Java Web Start (.jnlp) applications
- Download and install a large (~55MB) client-side set of tools
- Have a phone and have it configured to work with App Inventor and the Android SDK

Once you set it up, App Inventor gives you a drag-and-drop GUI editor, as shown in Figure 47–1.

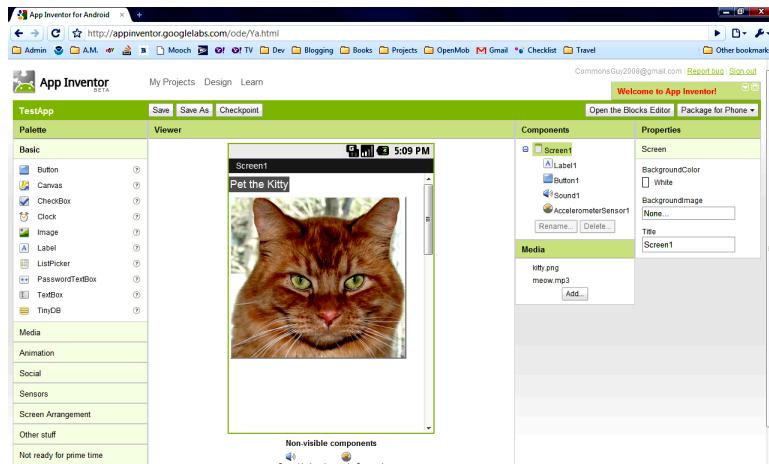


Figure 47–1. The App Inventor “Designer” view

App Inventor also gives you a Blocks Editor (see Figure 47–2), where you attach behaviors to events (e.g., button clicks) by snapping together various “blocks” representing events, methods, and properties.

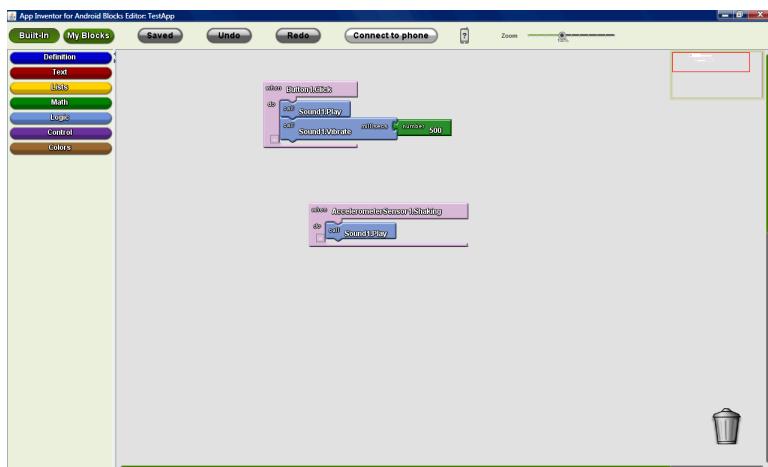


Figure 47–2. The App Inventor Blocks Editor

While working in the GUI editor, you see what you are building live on an attached phone and can test it in real time. Later, when you are ready, you can package the application into a standard APK file.

However, App Inventor is not really set up for production application use today:

- You cannot distribute App Inventor apps on the Android Market.
- It has more components aimed at “sizzle” (e.g., Twitter integration) and fewer components delivering capabilities that a typical modern app might need (e.g., relational databases and lists).
- Only one developer at a time can work on a project.

In the future, it is possible that App Inventor will become a solid option, or that App Inventor will trigger other firms to create similar sorts of programming-free development options for Android.

Titanium Mobile

Titanium Mobile’s claim to fame is that it uses JavaScript only to define the user interface, and eschews HTML entirely. Its JavaScript library, in addition to providing access to databases and platform capabilities, lets you declare user interface widgets. But its layout capabilities, for positioning said widgets, leave something to be desired.

As of the time of this writing, Appcelerator (www.appcelerator.com/), the creator of Titanium Mobile, does not offer a cloud-based set of tools. Its Titanium tool has a very slick-looking UI, but it still requires the Java SDK and Android SDK in order to be able to build Android applications, making the setup a bit daunting for some.

As of the time of this writing, Titanium Mobile supports development for Android and iOS, with Blackberry support in a private beta.

Other JVM Compiled Languages

If you are happy with regular Android development, but you just do not like Java, any language that can generate compatible JVM bytecode should work with Android. You would have to modify the build chain for that other language to do the rest of the Android build process (e.g., generate R.java from the resources and create the APK file in the end).

Scala (www.scala-lang.org/) and Clojure (<http://clojure.org/>) are two such languages, whose communities have put together instructions for using their languages for Android development.

Part **VII**

The Ever-Evolving Android

Dealing with Devices

Android is “free as in beer” for device manufacturers, as it is an open source project. Hence, device manufacturers have *carte blanche* to do what they want with Android as they put it on their devices. This means a breadth of choices for device users, who can choose among Android devices in a variety of shapes, sizes, and colors. This also means developers have some device differences and idiosyncrasies to take into account.

This chapter will give you some tips and advice for dealing with these device-specific issues, to go along with the screen size material in Chapter 25.

This App Contains Explicit Instructions

Originally, the only Android device was the T-Mobile G1. Hence, if you were writing an Android application, you could assume the existence of a hardware QWERTY keyboard, a trackball for navigation, and so on. Now, though, over 100 other devices exist, many with different hardware capabilities (e.g., no keyboard).

Ideally, your application can work regardless of the existence of various types of hardware. Some applications, though, will be unusable without certain hardware characteristics. For example, a full-screen game may rely on a hardware keyboard or trackball to indicate player actions—soft keyboards and touchscreens may be insufficient.

Fortunately, starting with Android 1.5, you can add explicit instructions that tell Android what you need, so that your application is not installed on devices lacking such hardware. We'll look at that now, then move onto implied feature requests.

Explicit Feature Requests

In addition to using the target ID system to indicate the level of device your project is targeting, you can use a new `AndroidManifest.xml` element to specify hardware that is required for your application to run properly. You can add one or more `<uses-configuration>` elements inside the `<manifest>` element. Each `<uses-configuration>`

element specifies one valid configuration of hardware that your application will work with. At the present time, there are five possible hardware requirements you can specify this way:

- android:reqFiveWayNav: Indicates you need a five-way navigation pointing device of some form (e.g., android:reqFiveWayNav = "true")
- android:reqNavigation: Restricts the five-way navigation pointing device to a specific type (e.g., android:reqNavigation = "trackball")
- android:reqHardKeyboard: Specifies whether a hardware (physical) keyboard is required (e.g., android:reqHardKeyboard = "true")
- android:reqKeyboardType: Used in conjunction with android:reqHardKeyboard, indicates a specific type of hardware keyboard is required (e.g., android:reqKeyboardType = "qwerty")
- android:reqTouchScreen: Indicates what type of touchscreen is required, if any (e.g., android:reqTouchScreen = "finger")

Starting in Android 1.6, there is a similar manifest element, <uses-feature>, that is designed to document requirements an application has for other optional features on Android devices. For example, the following attributes can be placed in a <uses-feature> element:

- android:glEsVersion: Indicates that your application requires OpenGL, where the value of the attribute indicates the level of OpenGL support (e.g., 0x00010002 for OpenGL 1.2 or higher)
- android:name = "android.hardware.camera": Indicates that your application needs a camera
- android:name = "android.hardware.camera.autofocus": Indicates that your application specifically needs an autofocus camera

Each Android release adds more features that you can require. These requests will cause the Android Market—and other, third-party markets, one hopes—to filter your application out from devices for which it is unsuitable.

The <uses-feature> element has an android:required attribute that you can specify. By default, it is set to true, meaning your application absolutely needs this feature. If you set it to false, you are advertising that your application can take advantage of the feature if it exists, but does not absolutely need it. To find out at runtime whether the feature exists on the device, you can use the hasSystemFeature() method on PackageManager to interrogate the device.

Implied Feature Requests

If you have requested permissions like CALL_PHONE or SEND_SMS, unless you take the proper steps, your application will not be available for the Motorola XOOM, nor presumably for other Android 3.0-based tablets.

Some permissions imply that you need certain hardware features. Scroll down to the “Permissions that Imply Feature Requirements” section on the `<uses-feature>` page to find the list.¹

The Android Market treats as though requesting a permission like `CALL_PHONE` also requests:

```
<uses-feature android:name="android.hardware.telephony" />
```

The XOOM does not have telephony; it is the first Android Market-compliant device with that limitation. While it can have a data plan, it has no voice or SMS capability, so it is treated as not having `android.hardware.telephony`. But, if you request permissions like `CALL_PHONE`, the Android Market by default will assume you *need* `android.hardware.telephony`. As a result, you will be filtered out of the Android Market for the XOOM.

The solution is simple: for any hardware features that might be implied by permissions but that your application does not absolutely need, manually add the appropriate `<uses-feature>` element to your manifest with `android:required="false"`:

```
<uses-feature  
    android:name="android.hardware.telephony"  
    android:required="false"  
/>
```

Then, before you try placing a phone call or sending an SMS or something, use `PackageManager` and `getSystemAvailableFeatures()` to find out if `android.hardware.telephony` is available on the device. For example, you might check for telephony early on and disable various menu choices, such as buttons that might lead the user to place a call or send an SMS.

If your application absolutely needs telephony, then the implied `<uses-feature>` will work, though you may wish to consider putting one in explicitly. However, just bear in mind that this means your app will not work on the XOOM or other tablets that lack telephony.

A Guaranteed Market

As mentioned in the introduction to the chapter, Android is open source. Specifically, it is mostly available under the Apache Software License 2.0. This license places few restrictions on device manufacturers. Therefore, it is very possible for a device manufacturer to create a device that, frankly, does not run Android very well. It might work fine for standard applications shipped on the device but do a poor job of handling third-party applications, like the ones you might write.

To help address this, Google has some applications, such as the Android Market, that it has not released as open source. While these applications are available to device

¹ <http://developer.android.com/guide/topics/manifest/uses-feature-element.html>

manufacturers, the devices that run the Android Market are tested first, to help ensure that a user's experience with the device will be reasonable.

A Google engineer cited one case where a device manufacturer was readying a phone that had a QVGA screen, before the release of Android 1.6, in which QVGA support was officially added to the platform. While that manufacturer had arranged for the built-in applications to work acceptably on the smaller-resolution screen, third-party applications were a mess. Google apparently declined to provide the Android Market to the manufacturer for this device.

Hence, the existence of the Android Market on a device, beyond providing a distribution means for your applications, also serves as a bit of a seal of approval that the device should support well-written third-party applications. Specifically, any device that has the Android Market

- Meets the criteria outlined in the Compatibility Definition Document (CDD)
- Has passed the Compatibility Test Suite (CTS)

Other Stuff That Varies

Other things that vary from device to device include the following:

- Which location technologies are available (e.g., GPS, cell tower proximity, Galileo)
- Which camera features are available (e.g., flash, autofocus, sepia tone)
- What sensors are available (e.g., accelerometer, gyroscope, barometer)

The strategy for these is to interrogate the system to find out what the possibilities are, then decide which to use, where the decision could be made solely by you or with user input. For example, you can use Criteria to determine which is the best location provider to use with LocationManager.

Bugs, Bugs, Bugs

Unfortunately, devices inevitably have bugs. Some bugs are truly accidental. Some are side effects from changes the device manufacturer made to achieve some business aims. Some are actually intentional, though the engineers who implemented them may not have fully understood their ramifications.

There is not much you can do tactically about these bugs, beyond try to work around them. The Build class, in the android.os package, can tell you the make and model of the device that is running your app. That, plus your own hard-won experience with certain problems, will help you identify where you need to route around firmware damage.

Strategically, if you find something that is clearly a device bug, you should file an issue to have this bug detected via the CTS. The CTS is supposed to filter out devices that cannot faithfully run Android applications. However, the CTS has many holes, and device bugs slip through. By collectively improving the CTS, we can help prevent problems from cropping up in the future. You can file an issue at the Public Issue Tracker for Android Bugs, <http://code.google.com/p/androidbugs/issues/list>.

Device Testing

Ideally, you should try to test your apps on a variety of hardware. However, this can get expensive. Here are some options for doing it more cheaply:

- Sign up for DeviceAnywhere's independent developer plan, which is a lower-cost way of being able to access their device farm for remote testing.
- Some device manufacturers hold device labs at various events, such as Motorola held at AnDevCon 2011.
- Some carriers have perpetual device labs, such as Orange's developer centres.
- You may be able to arrange short-term (e.g., 15-minute) device swaps as part of a Meetup or Google Technology User Group with fellow Android developers.

Where Do We Go from Here?

Obviously, this book does not cover everything. And while your primary resource (besides the book) is the Android SDK documentation, you are likely to need information from additional sources.

Searching online for “android” and a class name is a good way to locate tutorials that reference a given Android class. However, bear in mind that tutorials written before late August 2008 are probably written for the M5 SDK and, as such, will require considerable adjustment to work properly in current SDKs.

Instead of randomly hunting around for tutorials, you can use some of the resources outlined in this chapter to narrow your search.

Questions, Sometimes with Answers

The official places to get assistance with Android are the Android Google Groups. With respect to the SDK, there are three to consider:

- StackOverflow’s android tag
(<http://stackoverflow.com/questions/tagged/android>)
- Android Developers (<http://groups.google.com/group/android-developers>), for SDK questions and answers
- Android Discuss (<http://groups.google.com/group/android-discuss>), designed for free-form discussion of anything Android-related, not necessarily for programming questions and answers

You might also consider the following resources:

- The Android tutorials and programming forums at www.anddev.org
- The Open Mob for Android wiki (<http://andmob.wikidot.com/>)

- The #android-dev IRC channel on freenode (<http://irc.freenode.net>)
- The Android forum on JavaRanch

It is important, particularly for StackOverflow and the Google Groups, to write informative questions. Following are some tips for writing effective questions:

- Include relevant portions of the source code (e.g., the method in which you are getting an exception).
- Include the stack trace from LogCat, if the problem is an unhandled exception.
- On StackOverflow, make sure your source code and stack trace are formatted as source code; on Google Groups, consider posting long listings on <http://gist.github.com> or a similar code-paste site.
- Explain thoroughly what you are trying to do, how you are trying to do it, and why you are doing it this way (especially if you think your goal or approach may be a little offbeat).
- On StackOverflow, respond to answers and comments with your own comments, addressing the person using the @ syntax (e.g., @CommonsWare), to maximize the odds you will get a reply.
- On the Google Groups, do not “ping” or reply to your own message to try to elicit a response until a reasonable amount of time has gone by (e.g., 24 hours).

Heading to the Source

The source code to Android is now available. Mostly, this is for people who are looking to enhance, improve, or otherwise fiddle with the insides of the Android operating system. But it is possible that you will find the answers you seek in that code, particularly if you want to see how some built-in Android component does its thing.

The source code and related resources can be found at <http://source.android.com>, where you can do the following:

- Download or browse the source code
- File bug reports against the operating system itself
- Submit patches and learn about the process for how such patches are evaluated and approved
- Join a separate set of Google Groups for Android platform development

Rather than download the multigigabyte Android source code snapshot, you may wish to use Google Code Search (www.google.com/codesearch) instead. Just add the

package:android constraint to your search query, and it will search only in Android and related projects.

Getting Your News Fix

Ed Burnette, a nice guy who happened to write his own Android book, is also the manager of Planet Android (www.planetandroid.com), a feed aggregator for a number of Android-related blogs. Subscribing to Planet Android's feed enables you to monitor quite a few Android-related blog posts, though not exclusively related to programming.

To try to focus more on programming-related, Android-referencing blog posts, you can search DZone (www.dzone.com) for "android" and subscribe to a feed based on that search.

Index

Symbols and Numerics

- @ symbol
 - soft keyboard for e-mail address input, 97
 - XML-based layouts, 57
- @+id convention, 57, 58
- *.properties file, 32
- + (plus) sign
 - first occurrence of id value, 83

A

- aapt tool
 - XML-based layouts, 55
- AbsoluteLayout container, 156
 - handling multiple screen sizes, 259
- accelerometer
 - changing screen orientation, 187, 200, 201
- ACCESS_ALL_DOWNLOADS permission, 383
- ACCESS_COARSE_LOCATION permission, 438, 444, 444
- ACCESS_FINE_LOCATION permission, 438, 444, 452
- accessory button, 98, 99, 100, 101
- ACL (Android Compatibility Library), 299
 - Fragment implementation from, 300
 - inheritance from FragmentActivity, 306
- maps and fragments, 459
- preferences via fragments, 351
- action bar, Android 3.0 apps, 283
 - Find contacts search field, 285

- action bar, Honeycomb UI, 289–295
 - adding custom views to, 291–295
 - defining layout, 292–293
 - getting control of user input, 294–295
 - putting layout in menu, 293–294
- backward compatibility, 289, 295, 319
 - enabling, 289–290
 - fragments adding options to, 299
 - fragments adding tabs to, 299
 - handling multiple Android versions, 319–320
 - checking API level, 319
 - promoting menu items to, 290–291
 - responding to activity icon, 291
- ACTION_CALL intent, 466
- ACTION_DIAL intent, 464, 466
- ACTION_PICK intent, 189, 190
 - saving state, 192
 - startActivityForResult method, 229
- ACTION_VIEW intent, 190
- actionDone value, accessory button, 99
- actionLayout attribute
 - adding custom views to action bar, 293
 - getting control of user input, 294
- actions, intents, 221, 222
- actionSend value, accessory button, 99
- activated style
 - persistent row highlighting, 305
- active state, activities, 183
- activities, 5
 - active state, 183
 - adding fragments to, 306
- Android UI architecture, 227

background threads, 203
bigger keyboard obscuring activity, 100
blocking rotation of activity, 198–200
building, 53
consolidating, 266
cost of using background threads, 219
creating skeleton project in Eclipse, 25
creating/attaching widgets to activity, 55
CWBrowser activity, 233
dead state, 184
dealing with multiple screen sizes, 306
declaring intent filters, 223
DetailsActivity class, EU4You_6, 311
device configuration changes affecting, 187
eligibility for intents, 223
embedding images in, 63
enforcing permissions via manifest, 439
EU4You_6 project, 309–311
fragment-to-activity communication, 307
FragmentActivity class, 306
fragments, 297
hosting fragments, 306
imported classes, 52
inheritance from Activity class, 52
intents, 228
Java code for, 51–53
launching, 228–231
 calling startActivity(), 228, 230
 calling startActivityForResult(), 229
 creating intent, 228
 launching peer activity, 229–231
layout with IME, 100
life cycle, 183
ListActivity widget, 104–106
manifest file, 33
Now demonstration activity, 54
Now.java file, 51
onCreate method, 53
onRestoreInstanceState method, 188
onSaveInstanceState method, 188
package declaration, 52
panning activity, layout, 100
paused state, 183
peer (not subordinate) activities, 227
 launching peer activity, 229–231
 startActivity method, 228, 230
PreferenceActivity, 340–341
premature closing of, 183, 184
recreating instance state, 186
resizing activity, layout, 100
running, 53
saving application-instance state, 186
screen rotation, 188
sending button clicks to activity instance, 53
setting content view, 53
startActivity method, 228, 230
startActivityForResult method, 189, 190, 229
states, 183–184
stopped state, 184
styling with themes, 256
subordinate activities, 227
 startActivityForResult method, 229
TabActivity widget, 144
 tabbed browsing, 232
taking advantage of bigger screen, 266
target component, intents, 222
threads and screen rotation, 214–218
Activity class, 32
finish method, 184
getLastNonConfigurationInstance method, 218
inheritance from, 52
OnClickListener, 52
onCreate method, 184, 218
onDestroy method, 184
onPause method, 185

onRestart method, 185
onResume method, 185
onRetainNonConfigurationInstance method, 217, 218
onSaveInstanceState method, 186, 225
onStart method, 185
onStop method, 185
runOnUiThread method, 208
threads and screen rotation, 215, 217, 218
activity command-line switch
 android create project command, 27
activity element, 35
 intent-filter child element, 35
 label attribute, 35
 name attribute, 35
 theme attribute, 256
 windowSoftInputMode attribute, 100
activity icon, responding to
 action bar, Honeycomb UI, 291
adapters, 103–104
 ArrayAdapter, 104
 delegating loading to initAdapter(), 172
 getView method, 121–123, 125
 IconicAdapter class, 121–123
 Java, 103
 selection widgets, 103
 setAdapter method, 104, 108, 112, 115
 setListAdapter method, 105
adb (Android Debug Bridge) utility, 487
adb pull command, 367
adb push command, 368
addEventListerner function, JavaScript
 PhoneGap Checklist application, 517
addPreferencesFromResource method, 352, 353
 backward compatibility, 354
 users setting up preferences, 341
addProximityAlert method, 446
AddStringTask class, 211, 213
addSubMenu method, 169
addTab method, 145, 148
addWord method, 295
Adobe Integrated Runtime see AIR
ADT (Android Developer Tools)
 installing ADT for Eclipse, 12–14
 installing Android SDK, 8
ADT add-in, Eclipse, 37
afterTextChanged callback,
 TextWatcher, 116
AIR (Adobe Integrated Runtime), 524
 alternatives to Java-based development, 493
AlertDialog, 180, 181
 adding custom views to action bar, 292
alerting users, 179
 toasts, 179–180
alerts, 180, 181
 notifications, 423–433
Allocation Tracker tab, DDMS, 486
alphabeticShortcut attribute, 177
altitude
 hasAltitude method, 445
always value
 showAsAction attribute, 290
AnalogClock widget, 140
Android
 adding soft keyboards to, 64
 alternatives to Java-based development, 492–494
API levels, 315
application device hardware
 requirements, 531–533
buttons, 62–63
check boxes, 66–68
content providers, 5
creating skeleton project, 23–27
detecting build version, 316
downloading files, 383–391
fields, 64–65
fonts, 467–468
handling API changes, 314–318
handling changes to, 313
 resources, 314
 view hierarchy, 313
handling increasing variety of platforms, 313

- handling multiple screen sizes, 258–260
- handling multiple versions, 314
 - highest supported version, 316
 - Honeycomb UI, 318–320
 - lowest supported version, 315
 - targeted development version, 316
- intents, 5
- Java code with, 370
- Java-centric strategy, 491
- labels, 61–62
- notifications, 423–433
- Open Mob for Android wiki, 537
- parsers, 379
- Planet Android, 539
- preferences, 339–355
- radio buttons, 68–70
- smartphone programming, 4
- source code, 538
- SQLite, 357–368
- tutorials, 537
- using BeanShell on, 371–373, 374
- using scripting languages on, 371, 374
- versions, 48
- Android 2.x options icon
 - application UI, Android 3.0 screen, 283
- Android 3.0 see Honeycomb
- Android 3.0 screen see Honeycomb UI
- Android applications see applications
- Android attributes (`android:`)
 - see also* attributes
 - `actionLayout`, 293, 294
 - `alphanumericShortcut`, 177
 - `anyDensity`, 261
 - `apiKey`, 451
 - `background`, 71
 - `choiceMode`, 106, 107
 - `clickable`, 451
 - `collapseColumns`, 89
 - `columnWidth`, 111
 - `completionThreshold`, 115
 - `configChanges`, 195, 198
 - `contentDescription`, 71
- debuggable, 35
- `drawSelectorOnTop`, 118
- `ellipsize`, 471
- `enabled`, 176
- `glEsVersion`, 532
- `hardwareAccelerated`, 286
- `horizontalSpacing`, 111
- `icon`, 176
- `id`, 56, 57, 83
- `imeActionId`, 293
- `imeOptions`, 98, 293
- `inputType`, 64, 94, 293
- `label`, 35
- `largeScreens`, 261
- `layout_above`, 83
- `layout_alignXyz`, 82, 83
- `layout_below`, 83
- `layout_centerXyz`, 82
- `layout_column`, 88
- `layout_gravity`, 75
- `layout_height`, 57, 74, 81
- `layout_margin`, 76
- `layout_span`, 88
- `layout_toLeftOf`, 83
- `layout_toRightOf`, 83, 84
- `layout_weight`, 75, 81
- `layout_width`, 57
 - `LinearLayout` container, 74, 75, 77, 293
 - `RelativeLayout` container, 85
- `menuCategory`, 176
- `minSdkVersion`, 48
- `name`, 35
- `nextFocusXyz`, 71
- `normalScreens`, 261
- `numColumns`, 111
- `numericShortcut`, 177
- `orderInCategory`, 176
- `orientation`, 74
- `padding`, 70
- `password`, 94
- `reqFiveWayNav`, 532
- `reqHardKeyboard`, 532
- `reqKeyboardType`, 532
- `reqNavigation`, 532
- `reqTouchScreen`, 532

required, 532
screenOrientation, 198, 200
shortcut, 177
showAsAction, 290
shrinkColumns, 89
smallScreens, 261
spacing, 118
spacingWidth, 111
spinnerSelector, 118
src, 63
stretchColumns, 89
stretchMode, 111
targetSdkVersion, 48
text, 57
textAppearance, 293
theme, 256
title, 176
typeface, 468
versionCode, 34
versionName, 34
verticalSpacing, 111
visibility, 71
visible, 177
windowSoftInputMode, 100
xlargeScreens, 261
Android AVD Manager
 see also Android SDK and AVD
 Manager
 creating AVDs, 15
 emulator screen densities, 264
android batch file
 installing Android SDK, 9
Android Compatibility Library *see* ACL
android create project command, 26, 27, 31
Android Debug Bridge (adb) utility, 487
Android Developer Tools *see* ADT
Android Developers web site, 7, 537
 Android developer tools, 8
Android devices
 building/running applications, 27–30
 changing screen orientation, 200
 GPS (Global Positioning System), 6
 Honeycomb UI, 286–288
 Internet access, 6, 377
 keyboards, 93–94
multimedia capabilities, 6
networks, 6
phone services, 6
setting up, 21
 setting up development machine to
 talk to, 21
 Mac OS X and Linux, 22
 Windows, 21–22
storage, 5
Android devices *see* devices
Android Discuss web site, 537
Android emulators *see* emulators
Android Google Groups, 537
Android JAR
 importing non-Eclipse project into
 Eclipse, 42
android list targets command, 27
Android Market
 creating skeleton project at
 command line, 27
 filtering applications, 533
 handling multiple Android versions, 314
android package
 Java code for activities, 52
Android packaging tool
 building activity, 53
Android phones *see* phones
Android programs
 Java SE classes availability to, 52
Android Project option
 creating skeleton project in Eclipse, 23
Android projects *see* projects, Android
Android properties *see* Android
 attributes (android:)
Android Repository
 Android SDK and AVD Manager, 10
Android SDK and AVD Manager
 Android Repository, 10
 Android Virtual Devices list, 15
 Available packages option, 9
 creating Android emulator, 43
 Google add-ons, 11
 installing Android SDK, 9–12
 license confirmation dialog, 11

- running, 15
- Third party Add-ons, 10
- Android toolkit
 - Button widget, 62–63
 - CheckBox widget, 66–68
 - EditText widget, 64–65
 - ImageButton widget, 63
 - ImageView widget, 63
 - RadioButton widget, 68–70
 - TextView widget, 61–62
 - widgets, 61–70
- Android Virtual Device see AVD
- android.R.id.home
 - responding to activity icon, 291
- AndroidHttpClient class, 382
 - cookies, 382
 - threads, 382, 392
- AndroidManifest.xml file, 31, 33–35
 - see also* manifest file
 - activity element, 35
 - adding service to, 397
 - application element, 35
 - explicit hardware feature
 - requirements, 531
 - importing non-Eclipse project into Eclipse, 39
 - intent-filter element, 35, 223
 - launching activities, 228
 - manifest element, 34
 - namespace declaration, 34
 - putting maps into applications, 452
 - receiver element, 224
 - requesting permission to access Internet, 160
 - supports-screens element, 47
 - writing tablet-only apps, 321
 - users setting up preferences, 342
 - uses-permission element, 437, 438
 - uses-sdk element, 48
 - maximum SDK version, 316
 - minimum SDK version, 315
 - target SDK version, 316
 - version information, 48
 - versionCode attribute, 34
 - versionName attribute, 34
- Android-style smartphones
 - benefits/drawbacks of smartphone programming, 3–4
- ANR (application not responding) error, 209
- Ant
 - adding JARs to project, 369
 - installing Apache Ant, 14
 - ant clean install command, 28
 - building activity, 53
 - ant jarcore command
 - using BeanShell on Android, 371
 - ANT_HOME environment variable
 - installing Apache Ant, 14
- anyDensity attribute
 - screen densities, 261
- Apache Ant see Ant
- Apache HttpClient library see HttpClient interface
- API keys
 - generating, Google Maps, 450
- apiKey attribute
 - putting maps into applications, 451
- APIs
 - API levels, 315
 - action bar, Honeycomb UI, 319
 - examining API level of device, 318
 - HoneycombHelper class, 320
 - conditional class loading, 318
 - detecting classes, 317
 - documenting required permissions, 440
 - Java code with Android, 370
 - reflection, 317–318
 - wrapping, 317
- .apk file, 33
 - converting HTML5 Checklist app into, 515
 - handling multiple Android versions, 314
- App Inventor, 525–526
- application element, 35
 - debuggable attribute, 35
 - theme attribute, 256

- application launcher
 - activity element, manifest, 35
 - Android 3.0, 282
 - Android emulator, 30
- application name
 - creating skeleton project in Eclipse, 25
- application not responding (ANR) error
 - UI (main) thread, 203
- application resource (.ap) file
 - bin directory, 33
- application UI
 - Android 3.0 screen, 282
- applications
 - accessing files prepackaged with, 323–326
 - alternative environments, 523–527
 - Android 3.0-optimized apps, 283
 - Android Market filtering, 533
 - .apk file, bin directory, 33
 - avoiding unresponsive code, 331–334
 - building/running, 27–30
 - command line, 28–30
 - Eclipse, 27–28
 - device hardware requirements, 531–533
 - HTML5 for offline apps, 495–500
 - initiating phone call from, 464–466
 - manifest file, 33
 - menus, 167–178
 - onSaveInstanceState method, 186
 - premature closing of activities, 184
 - putting maps into, 451–452
 - reading/writing data files, 326–330
 - recreating instance state, 186
 - requesting permissions pre-installation, 441
 - running project in emulator, 45
 - saving application-instance state, 186
 - securing, 438–440
 - setting up to build, 7–22
 - threads, 203–219
 - writing tablet-only apps, 321
- apply method, SharedPreferences, 340
- applyFormat method
 - styled text and strings, 239
- apps see applications
- ArrayAdapter class, 104
 - changing list icon based on row data, 121
 - enhancing lists, 120
 - getView method, 121, 366
 - ListActivity widget, 105, 106
 - ListView widget, 107
 - RatingBar widget, 129, 131
 - res/layout/cell.xml file, 113
 - TextView widget, 104
 - using convertView parameter, 127
 - getView(), 127
 - using holder pattern, 128
- arrays, 245–246
 - getStringArray method, 246
 - res/values directory, 243
- assets directory, 32
- assets folder
 - packaging fonts, 469
- AsyncDemo class
 - implementing ListActivity using AsyncTask, 210–213
- AsyncTask class, 208–213
 - database write operations, 367
 - dolnBackground method, 209, 210
 - implementing ListActivity, 212
 - threads and screen rotation, 217, 218
 - generics, 209
 - implementing ListActivity using, 210–213
 - AddStringTask class, 211
 - onPostExecute method, 210
 - implementing ListActivity, 213
 - threads and screen rotation, 218
 - onPreExecute method, 210
 - onProgressUpdate method, 210
 - implementing ListActivity, 212
 - overridable methods, 209
 - threads and screen rotation, 214–218
 - varargs, 209

attach method, `RotationAwareTask`, 217, 218
attributes
 see also android attributes (`android:`)
 `android:` prefix, 252
getAttributeCount method, 243
getAttributeName method, 243
inheriting style attributes, 254
`AutoCompleteTextView` widget, 65, 115–118
 completionThreshold property, 115
`MultiAutoCompleteTextView` widget, 157
 `setAdapter` method, 115
 `TextWatcher`, 115, 116
`autoText` property, `EditText` widget, 64
Available packages option
 Android SDK and AVD Manager, 9
`AVD` (Android Virtual Device)
 adding, 15–17
 Android SDK and AVD Manager, 15
 creating Android emulator, 44
 setting up Android emulator, 15
 starting emulator, 17
 targets, 315
`AVD Manager` see `Android AVD Manager`

B

Back button
 Android 3.0 screen, 282
 managing dynamic fragments, 299
background attribute, widgets, 71
background threads, 203
 `AsyncTask` class, 208–213
 cost of using, 218–219
 current execution on UI or, 208
Downloader service, 403
Handler class, 204–208
 communicating via messages, 205–208
 communicating via runnables, 208
Internet access, 391
modifying UI, 204

ProgressBar widget, 204
threads and screen rotation, 214–218
backward compatibility
 Android Compatibility Library (ACL), 299
action bar, Honeycomb UI, 319
persistent row highlighting, 305
PreferenceActivity class, 354
preferences via fragments, 351
reflection, 318
battery life
 cost of using background threads, 219
 HTML5 application concerns, 505
battery strength indicator
 Android 3.0 screen, 282
BeanShell
 using scripting languages, 371–373, 374
bearings
 `has Bearing` method, 445
beforeTextChanged callback, 116
bin directory, 31, 33
`BIND_AUTO_CREATE` flag, 399
Binder class, 399
 `WeatherBinder` class, 413
bindService method, 398–399
bindView method, `CursorAdapter`, 366
bin/classes directory, 33
box model
 `LinearLayout` container, 73, 80–81
boxes
 `CheckBox` widget, 66–68
broadcast intents, 400
BroadcastReceiver interface, 224
 implementing on longer-lived component, 225
 `onReceive` method, 224
browser navigation
 `WebView` widget, 162
browsing
 HTML5 and alternative Android browsers, 506
 tabbed browsing, 232–234

bugs
 see also debugging
 devices, 534–535

Build class
 bugs on devices, 534

Build Path menu option
 importing non-Eclipse project into
 Eclipse, 41

build system, Android
 directory tree structure, 31

build target
 creating skeleton project at
 command line, 27
 creating skeleton project in Eclipse,
 25

build tools, Android, 31
 PhoneGap Build service, 511–514

build version, Android
 detecting, 316

Build.VERSION.SDK
 detecting build version, 316
 examining API level of device, 318

build.xml file, 32

Builder class
 constructing AlertDialog, 180
 methods, 180

buildfile
 ant clean install command, 28

buildForecasts method, 379

building activities, 53

building/running applications, 27–30
 command line, 28–30
 Eclipse, 27–28
 setting up to build application, 7–22

Bundle
 fragments, 312
 intents, 222
 recreating instance state, 186
 saving state in, 186, 190–193
 screen rotation, 188, 190–193
 startActivityForResult method, 229

Bundle icicle
 Java code for activities, 53

Button class/widget, 62–63
 padding property, 70
 XML-based layouts, 56, 57

buttons
 ImageButton widget, 63
 RadioButton widget, 68–70
 sending button clicks to activity
 instance, 53
 setNegativeButton method, Builder,
 180
 setPositiveButton method, Builder,
 180
 setting activity's content view to, 53
 taking advantage of bigger screen,
 265
 ToggleButton widget, 157

C

CACHE MANIFEST line
 manifest file, Checklist app, 500

caching
 HTML5 rules for, 495, 499

calculations
 background threads, 204

Calendar object
 time/date widgets/dialogs, 138

CALL_PHONE permission, 438
 implicit hardware feature
 requirements, 532
 initiating call from application, 466

CALL_STATE_XYZ values
 getCallState() returning, 463

callbacks
 communicating from services, 400
 threads and screen rotation, 218
 UI (main) thread, 203

calls
 simulating with DDMS, 482–484

camera
 explicit hardware feature
 requirements, 532
 variations between devices, 534

cancel/cancelAll methods, notifications,
 423

canGoBack/canGoForward methods,
 WebView, 163

capitalize property, EditText, 64

category, intents, 222

category, preferences
 PreferenceCategory element, 345
cell.xml file, res/layout directory, 113
check method, RadioGroup, 69, 70
CheckBox widget, 66–68
checkCallingPermission method, 440
CheckedTextView widget, 156
Checklist app, HTML5, 496–500
 checking off individual items, 497
 deleting checked entries, 498
 deleting items from storage, 501
 examining HTML, 498–499
 examining manifest, 499
 installing Checklist on Android
 device, 498
 setting up shortcut for, 498
 Web Storage, 501–502
Checklist app, PhoneGap, 514–519
CHOICE_MODE_SINGLE/MULTIPLE
 values
 ListView widget, 106
choiceMode attribute
 layout XML, 106, 107
Chronometer widget, 141, 156
class attribute, fragment
 EU4You_6 layout, 307
classes
 see also widgets
 AsyncTask class, 208–213
 conditional class loading, 318
 creating fragment classes, 300–306
 detecting, 317
 imported classes, activities, 52
 LinearLayout container, 73–81
 ListFragment class, 301–306
 reflection, 317–318
 RelativeLayout container, 81–87
 ScrollView container, 90–92
 TableLayout container, 87–90
classes directory, bin, 33
classes.dex file, bin, 33
clean install command, ant, 28
clear method, SharedPreferences, 340
clearCache method, WebView, 163
clearCheck method, RadioGroup, 69
clearHistory method, WebView, 163
clickable attribute
 putting maps into applications, 451
clocks
 AnalogClock widget, 140
 Android 3.0 screen, 282
 DigitalClock widget, 140
Clojure, 527
close method
 Cursor class, 365
 SQLiteOpenHelper class, 361
closing activity
 onDestroy method, 184
collapseColumns property,
 TableLayout, 89
color attributes, widgets, 71–72
colors, 244–245
 res/values directory, 243
ColorStateList object
 color attributes, widgets, 71
 valueOf method, 72
column properties, TableLayout, 89
columnWidth property, GridView, 111,
 112
command line
 building/running applications, 28–30
 creating skeleton Android project,
 26–27
command-line switches
 android create project command, 27
commands
 android create project command, 26
 android list targets command, 27
 ant clean install command, 28
commit method, SharedPreferences,
 340
compatibility mode
 screen sizes, 258, 261
completionThreshold property,
 AutoCompleteTextView, 115
complex views
 XML-based layouts, 57
components, intents, 222
configChanges attribute
 blocking rotation of activity, 200
 handling rotations without Android's
 help, 195

- Google non-recommendation of, 198
- configuration changes
 - devices, 187
 - fragments, 312
 - onConfigurationChanged method, 195, 198
 - Google non-recommendation of, 198
- Configuration object
 - determining screen size, 263
- configuration options, resources
 - order of precedence, 247
- console interface
 - Java code with Android, 370
- contact filter spinner, Android 3.0, 285
- contacts
 - available contacts, 284
 - Find contacts search field, 285
 - picking/viewing, 189–190
 - saving state, 190–193
 - QuickContactBadge widget, 157
- containers, 73–92
 - AbsoluteLayout container, 156
 - applying styles to, 253
 - available style attributes, 254
 - complex views, 57
 - ExpandableListView container, 156
 - fill_parent value, 74
 - FrameLayout container, 143
 - HorizontalScrollView container, 92
 - Java code, 57
 - LinearLayout container, 73–81
 - match_parent value, 74
 - overlapping widgets, 86
 - RelativeLayout container, 81–87
 - ScrollView container, 90–92
 - SlidingDrawer container, 154–156
 - TabHost container, 142, 143
 - TableLayout container, 87–90
 - view hierarchies, 313–314
 - ViewFlipper container, 149–153
 - wrap_content value, 74
 - XML-based layouts, 55
- content overlays
 - styling activity with themes, 256
- content providers, Android, 5
- content Uri templates
 - intents, 222
- content view
 - setting activity's content view, 53
- contentDescription property, widgets, 71
- ContentValues class, 363
- context menus, 167, 169–170
 - calling getMenuInflater(), 170, 175
 - ListView widget, 265
 - registering ListView having, 172
 - taking advantage of bigger screen, 265
- context, intents, 221
- ContextMenu class
 - onContextItemSelected method, 169, 175
 - onCreateContextMenu method, 169, 174
 - registerForContextMenu method, 169
- convertView parameter, getView(), 125–127
- cookies
 - AndroidHttpClient class, 382
- CountriesFragment class
 - EU4You_6 project, 301, 307, 308, 310
- CountryAdapter class
 - EU4You_6 project, 302
 - persistent row highlighting, 304
- CountryListener interface
 - EU4You_6 project, 308, 310
- CountryWrapper class
 - EU4You_6 project, 302
- CPU speed
 - smartphone programming, 4
- CPU time
 - cost of using background threads, 219
- createFromAsset method
 - packaging fonts, 469
- Typeface class, 470
- createTabContent method, 146

- creating activity
 - onCreate method, 184
- CTS (Compatibility Test Suite)
 - bugs, 535
- current working directory
 - storing project files, 27
- Cursor class, 364, 365
- CursorAdapter class, 365, 366
- cursors
 - creating custom cursors, 366
 - custom cursor adapters, 366
 - using, 365
 - wrapping in CursorAdapter, 365
- custom views
 - adding to action bar, 291–295
 - getting control of user input, 294–295
 - defining layout, 292–293
 - putting layout in menu, 293–294
- CWBrowser activity
 - tabbed browsing, 233
- D**
 - Dalvik Debug Monitor Server see DDMS
 - Dalvik virtual machine (VM), 369
 - Java-centric strategy, Android, 491
 - string formats, 236
 - using scripting languages on Android, 371, 374
 - data
 - retrieving data, SQLite, 364
 - data adapters see adapters
 - data typing, SQLite, 359
 - data Uri, intents, 222
 - DatabaseHelper class, 360
 - databases
 - creating, 359
 - inspecting/manipulating contents, 367
 - write operations, 367
 - date input
 - setting date, 135
 - soft keyboard for, 96, 97, 98
 - DatePicker widget, 135
 - DatePickerDialog, 135, 138
- DDMS (Dalvik Debug Monitor Server), 477–487
 - Allocation Tracker tab, 486
 - browsing event log, 478
 - Dump HPROF option, 487
 - Emulator Control tab, 482
 - File Explorer, 480
 - file push and pull, 480–481
 - getting, 42–43
 - launching, 477
 - location updates, 481–482
 - LogCat tab, 42
 - logging, 479
 - memory management, 485–487
 - screen capture, 481
 - setting location, 381
 - simulating incoming calls or SMS messages, 482–484
 - simulating moving device, 447
 - Sysinfo tab, 485
 - Telephony Actions group, 482
- dead state, activities, 184
- debuggable attribute, 35
- debugging
 - adb (Android Debug Bridge) utility, 487
 - bugs, 534–535
 - getting DDMS, 42–43
 - MOTODEV Studio for Android, 46
 - StrictMode, 332
 - USB debugging, 21
- DefaultHttpClient class, 382
 - Downloader service, 405
 - WeatherAPI project, 415
- delete method, SQLiteDatabase, 363
- densities, screens see screen densities
 - dependencies
 - Java code with Android, 370
- design approach
 - fragments, 312
- destroying activity
 - onDestroy method, 184
- detach method, RotationAwareTask, 217
- DetailsActivity class
 - EU4You_6 project, 307, 311

- DetailsFragment class
 - EU4You_6 project, 300, 308, 310, 311
 - loadUrl method, 301
- developer tools
 - installing ADT for Eclipse, 13
- development environment
 - Java-centric strategy, Android, 492
 - using StrictMode, 333
- Development options
 - alternatives to Java, 492–494
 - baseline for comparing, 506
 - setting up Android devices, 21
- DeviceAnywhere
 - testing devices, 535
- deviceready event
 - PhoneGap Checklist application, 517
- devices
 - see also* phones
 - Android Market filtering applications, 533
 - application hardware requirements, 531–533
 - explicit feature requests, 531–532
 - implicit feature requests, 532–533
 - bugs, 534
 - configuration changes, 187
 - CTS (Compatibility Test Suite), 535
 - dealing with device-specific issues, 531–535
 - resource sets, 263
 - testing, 535
 - variations between, 534
- .dex file, 33
- DialogFragment class, 306
- dialogs
 - AlertDialog, 180
 - DatePickerDialog, 135, 138
 - New Project dialog, Eclipse, 23, 24
 - pop-up dialogs, preferences, 347–350
 - ProgressDialog, 204
 - Run As dialog, Eclipse, 27, 44
 - TimePickerDialog, 135, 138
- digital signatures
 - generating API key, Google Maps, 451
- DigitalClock widget, 140
- digits property, EditText, 64
- dimen element
 - name attribute, 244
- dimensions, 244
 - handling multiple screen sizes, 260
 - pixels, 260
 - res/values directory, 243
 - scaled pixels, 260
- dip dimension, 244
- directory names
 - suffixes, 33
- directory tree structure
 - build system, Android, 31
- discovery
 - permissions, 440
- disk size
 - Java code with Android, 370
- DisplayMetrics class
 - determining screen density, 263
- distribution
 - HTML5 application concerns, 505
- docking devices
 - device configuration changes, 187
- documentation for Android SDK
 - installing Android SDK, 10
- doInBackground method, 209, 210
 - implementing ListActivity, 212
 - threads and screen rotation, 217, 218
- Dolphin Browser HD 4.0
 - HTML5 and alternative Android browsers, 506
- DOM Storage, HTML5 apps *see* Web Storage
- domain names
 - uniquely identifying project, 27
- Done action
 - accessory button, 98, 99, 100
 - actionDone value, 99
- Downloader service, 403–407
 - background threads, 403
- IntentService class, 404

- Messenger object, 406
downloading files, 383–391
 DownloadManager class, 383
 permissions, 383
 requesting download, 384–386
 tracking download status, 386–387
DownloadManager class, 383
 enqueue method, 385, 386
 HTTPS limitation, 391
 permissions, 383
 query method, 386, 387
Request object, 385
 requesting download, 384–386
 tracking download status, 386–387
DownloadManager.Request class
 methods, 386
 setVisibleInDownloadsUi method, 391
drag-and-drop GUI editing
 ADT add-in, Eclipse, 37
drawable directory see res/drawable directory
drawables
 handling multiple screen sizes, 260
 notification icons, 424
 scalable drawables, 260
 version-based resource sets, 263
drawSelectorOnTop property
 Spinner widget, 109
 XML-based layouts, 118
drivers
 setting up development machine to talk to devices, 21
Droid series of fonts, 467
DROID, Motorola, 264
DroidGap class, 511, 515
drop-down selector
 Spinner widget, 108–111
Dump HPROF option, DDMS, 487
- E**
- Eclipse, 37–46
 ADT add-in, 37
 building/running applications, 27–28
 creating Android emulator, 43
- creating skeleton Android project, 23–26
extensibility of, 37
getting DDMS, 42–43
importing non-Eclipse project into, 38–42
installing ADT for Eclipse, 12–14
New Project dialog, 24
New Project wizard, 39
opening perspectives, 42
Perspective menu, 42
Project Properties window, 41
running activity, 53
running project in emulator, 44–45
edit method, SharedPreferences, 340
EditPreferences activity
 users setting up preferences, 341
EditPreferencesHC class, 355
EditText widget, 64–65
 flavors of soft keyboard, 95–98
 getting control of user input, Honeycomb UI, 294
 hiding IME, 101
 IME (input method editor), 93
 imeActionId attribute, 293
 imeOptions attribute, 98, 293
 inputType attribute, 94
 adding custom views to action bar, 293
 multiline input, 98
 opening IME, 101
 password attribute, 94
 properties, 64
 right-to-left (RTL) languages, 250
 setOnEditorActionListener method, 100
 getting control of user input, Honeycomb UI, 294
 TextWatcher, 115
EditTextPreference element
 preferences via pop-up dialogs, 348
elements, AndroidManifest.xml file
 activity element, 35
 application element, 35
 intent-filter element, 35
 manifest element, 34

- supports-screens** element, 47
- uses-sdk** element, 48
- ellipsis character, 471
- ellipsize attribute, 471
- e-mail addresses
 - soft keyboard for, 96, 97
- Emulator Control tab, DDMS, 482
- emulators, Android
 - adding AVD, 16
 - Android emulator application
 - launcher, 30
 - building/running applications, 27–30
 - creating, 43
 - database read/write operations, 367
 - emulating DROID screen, 264
 - resource sets, 263
 - running project in, 44–45
 - screen densities, 263–265
 - screen sizes, 263
 - setting location, 381
 - setting up, 15–20
 - simulating moving device, 447
 - sqlite3 console program, 367
 - starting, 17
 - startup phases, 17–20
 - home screen, 19
 - keyguard, 20
 - touchscreen input, 263
- enabled attribute, menu items/groups
 - describing menus via XML files, 176
- enableDefaults method, StrictMode, 332
- enqueue method, DownloadManager, 385, 386
- entity escaping
 - styled string formats, 237
- errors
 - AlertDialog, 180
 - application not responding (ANR)
 - error, 203
 - cost of using background threads, 219
 - VerifyError, 317
- escape characters, strings, 236
- escaping entities
 - styled string formats, 237
- EU4You project, 266–277
 - activity, 268
 - activity in HVGA/WVGA/QVGA, 271, 273
 - density-independent size, 272
 - font size, 268, 272–274
 - fragments handling multiple screen sizes, 298
 - icons, 274
 - landscape mode, WVGA, 274, 276
 - ListView widget, 266, 267
 - main.xml file, 275
 - screen sizes, 266
 - supports-screens element, 267, 274
 - WebView widget, 275
 - WVGA emulator, 274, 276
- EU4You_6 project, 307–311
 - activities, 307, 309–311
 - CountriesFragment class, 301
 - CountryAdapter class, 302
 - CountryWrapper class, 302
 - creating fragment classes, 300
 - DetailsActivity class, 307, 311
 - DetailsFragment class, 300
- EU4You activity, 307
 - layout XML file, 307–308
 - listener interface, 308–309
 - persistent row highlighting, 304
- events
 - XML pull parser, 242
- execSQL method, 362
- execute method, AddStringTask, 213
- ExpandableListView container, 156
- ext4 file system, Linux, 335
- external storage, 330–331
 - getExternalFilesDir method, 330
 - getExternalStorageXyz methods, 330, 331
- security, 330
- writing to, 330–331
- extras, intents, 222

F

- FakePlayer activity, 407, 409
- notifications, 430

FALLBACK line
manifest file, Checklist app, 500

fields
 EditText widget, 64–65

File Explorer
 DDMS (Dalvik Debug Monitor Server), 480

file operations
 background threads, 204

file push and pull
 DDMS (Dalvik Debug Monitor Server), 480–481

files
 accessing, 323–330
 files prepackaged with application, 323–326
 Linux ext4 file system, 335
 SharedPreferences, 335
 SQLite, 335
 StrictMode, 331–334
 YAFFS (Yet Another Flash File System), 335
 downloading, 383–391
 external storage, 330–331
 getExternalFilesDir method, 330
 reading/writing, 326–330
 getFilesDir method, 330
 openFileInput method, 326, 328, 330
 openFileOutput method, 326, 328, 330
 writing to external storage, 330–331

fill model
 LinearLayout container, 74

fill_parent value, containers, 74
 handling multiple screen sizes, 259

Find contacts search field
 action bar, Android 3.0 apps, 285

findFragmentById method, 310

findViewById method
 accessing identified widgets, 57
 finding MapView widget, 453
 getting control of user input,
 Honeycomb UI, 294
 getting TabHost, 144, 145
 navigating widgets, 71

NowRedux demo, 58
using convertView parameter,
 getView(), 125

using holder pattern, 127–129

finish method, Activity class, 184

Firefox
 SQLite Manager extension, 368

Firefox Mobile, 506

FLAG_AUTO_CANCEL value,
 notifications, 427, 429

Flash, 524
 alternatives to Java-based development, 493

flash memory, 367

Flex, 524
 XML data-binding framework, 103

flipping between views
 ViewFlipper container, 149–153

fly-out submenus, creating, 169

focus, widgets
 requestFocus method, 71

font size
 EU4You project, 268, 272–274
 setDefaultFontSize method, 165

fonts, 467–471
 additional fonts, 469–470
 built-in, Android, 467–468
 Droid series of, 467
 glyphs, 470
 packaging, 469
 substituting, 470

Forecast class, WeatherAPI project, 412

foreground
 declaring services as part of, 429–430

format method, strings, 236
 styled text, 237

forums, 537, 538

Fragment class
 creating fragment classes, 300
 implementation from ACL, 300
 lifecycle methods, 301
 map-based fragment, 460
 onPause method, 301
 onStop method, 301

-
- fragment classes
 - creating, 300–306
 - DetailsFragment class, 300
 - DialogFragment class, 306
 - Fragment class, 300
 - FragmentActivity class, 306
 - FragmentManager class, 306
 - FragmentTransaction class, 306
 - ListFragment class, 301–306
 - PreferenceFragment class, 306
 - WebViewFragment class, 306
 - fragment elements
 - adding fragments to activities, 306
 - layout, DetailsActivity, 311
 - FragmentActivity class, 306
 - maps and fragments, 459
 - FragmentManager class
 - adding fragments to activities, 306
 - EU4You_6, 308, 310
 - fragments, 285, 297–312
 - ACL (Android Compatibility Library), 299
 - activities, 297
 - activities hosting, 306
 - adding options to options
 - menu/action bar, 299
 - adding tabs to action bar, 299
 - adding to activities, 306
 - Bundle, 312
 - class attribute, EU4You_6, 307
 - configuration changes, 312
 - creating fragment classes, 300–306
 - dealing with multiple screen sizes, 306
 - design approach, 312
 - dynamic fragments
 - adding based on user interaction, 298
 - animating as move on/off screen, 299
 - automatic Back button management for, 299
 - fragment-to-activity communication, 307
 - handling multiple screen sizes, 297–299
 - inheriting from FragmentActivity, 306
 - lack of
 - onRetainNonConfigurationInstance(), 312
 - maps and, 459–461
 - onSaveInstanceState method, 312
 - overriding onCreateView(), 300
 - persistent row highlighting, 304–306
 - PreferenceFragment class, 351, 352, 353
 - preferences via, 350–355
 - StockPreferenceFragment class, 352, 353
 - supporting on pre-Android 3.0 devices, 299
 - when to use, 298
 - FragmentTransaction class
 - adding fragments to activities, 306
 - automatic Back button management for dynamic fragments, 299
 - EU4You_6 layout, 308
 - FrameLayout container, 143
 - SlidingDrawer container, 154
 - TabHost container, 143
 - fromHtml method, 237, 239
 - fsync function, Linux, 335
 - fullSensor value
 - screenOrientation attribute, 201

G

- Galileo, 443
- Gallery widget, 118, 157
- garbage collection
 - Java-centric strategy, Android, 492
- gen directory, 32
- generatePage method, 380
- generics
 - AsyncTask class, 209
- geo: intent
 - launching activities, 232
- GeoPoint, 454
- get methods, ContentValues class, 363
- getActionView method
 - API levels for action bar, 319

MenuItem, 294
older versions of Android, 296
getActivity method, notifications, 424
getAddActionView method,
 HoneycombHelper, 320
getApplicationContext method
 Web service interface, 411
getArguments method,
 PreferenceFragment, 353
getAttributeCount method, 243
getAttributeName method, 243
getBestProvider method, 444
getBroadcast method, notifications, 424
getCallState method, 463
getCheckedItemPositions method,
 ListView, 108
getCheckedRadioButtonId method, 69
getColumnIndex method, Cursor, 365
getColumnNames method, Cursor, 365
getController method, widgets, 453
getCount method, Cursor, 365
getDefaultSharedPreferences method,
 339, 340
getExternalFilesDir method, 330
getExternalStorageDirectory method,
 331
getExternalStoragePublicDirectory
 method, 330, 385
getExternalStorageState method, 331
getFilesDir method, 330
getForecast method, 413
getFragmentManager method, 310
getIdentifier method, 353
getInt method, Cursor, 365
getItemId method, MenuItem, 169, 173
getLastKnownPosition method, 444
getLastNonConfigurationInstance
 method
 Activity class, 218
 screen rotation, 193, 195, 218
 Web service interface, 420
getLayoutInflater method, 124
getListview method, 106
getMeMyCurrentLocationNow method,
 445
getMenuInfo method, 170, 175
getOverlays method, MapView, 454
getPackageName method, 353
getParent method, widgets, 71
getPhoneType method, 464
getPreferences method, Activity, 339
getProgress method
 ProgressBar widget, 204
 SeekBar widget, 142
getProviders method, 444
getReadableDatabase method, 361
getResources method, 323
getRootView method, 71
getSettings method, WebView, 161, 165
getSharedPreferences method, Activity,
 339
getString method, 236
 Cursor class, 365
 strings, 236, 237, 239
getStringArray method, 246
getSubscriberId method, 464
getSupportFragmentManager method,
 310
getSystemAvailableFeatures method,
 533
getSystemService method
 identifying location, 444
 requesting download, 384
 retrieving NotificationManager via,
 423
getTag method, View objects
 using holder pattern, 127, 128, 129
getText method, 237
getView method, adapters, 121–123,
 125
 ArrayAdapter, 121, 366
 convertView parameter, 125–127
 CursorAdapter, 366
 IconicAdapter, 121, 122
 RatingBar widget, 131
 using holder pattern, 128
getWritableDatabase method, 361
getXml method, 241
GIF format, images, 240
gIesVersion attribute, 532
glyphs, fonts, 470

goBack/goForward methods, *WebView*, 163
Google add-ons
 Android SDK and AVD Manager, 11
Google Groups, 537, 538
Google Maps, 449, 450
 see also maps
 creating *MyLocationOverlay*, 457
 displaying satellite imagery, 458
 generating API keys, 450
 integrating into third-party
 applications, 449
 legal terms when integrating, 449,
 450
 licensing issues, 450
 maps and fragments, 459–461
 optional or essential to application,
 452
 overlays, 454–456
 showing your direction on map, 456
 showing your position on map, 456
 testing integration of, 450
google-usb_driver directory, 22
GPS (Global Positioning System), 443
 Android devices, 6
 LocationProvider, 481
 simulating moving device, 447
gravity
 LinearLayout container, 75
grid model
 TableLayout container, 87–90
GridView widget, 111–114
 columnWidth property, 111, 112
 horizontalSpacing property, 111, 112
 numColumns property, 111, 112
 properties, 111
 res/layout/cell.xml file, 113
 setAdapter method, 112
 setItemSelectedListener method,
 112
 spacingWidth property, 111
 stretchMode property, 111, 112
 verticalSpacing property, 111, 113
group element, menus
 describing menus via XML files, 176

GUI builders
 reasons for using XML layouts, 56
GUI editing
 ADT add-in, *Eclipse*, 37

H

handleMessage method, 205, 207
Handler class
 background threads, 204–208
 communicating with Handler, 205
 Message objects, 208
 messages, 205
 Runnable objects, 208
 cost of using background threads,
 218
handleMessage method, 205, 207
obtainMessage method, 205
post methods, 208
registering Handler objects, 204
sendEmptyMessage method, 205
sendMessageXyz methods, 205
UI (main) thread, 205
hardware requirements, application,
 531–533
 explicit feature requests, 531–532
 implicit feature requests, 532–533
hardwareAccelerated attribute
 running phone-centric app on tablet,
 286
hasAltitude method, 445
hasBearing method, 445
hasSpeed method, 445
hasSystemFeature method,
 PackageManager, 532
hdpi suffix
 res/drawable-hdpi directory, 33
header element
 intents for headers or preferences,
 354
 preferences via Honeycomb
 fragments, 351
help
 Android Google Groups, 537
HIDE_IMPLICIT_ONLY flag,
 InputMethodManager, 102

- hideSoftInputFromWindow method, 102
Hierarchy Viewer tool, 473–477
 Layout View, 474, 475
 main window, 473, 474
 Pixel Perfect View, 476, 477
 View properties, 476
hierarchyviewer program, 313
holder pattern, using, 127–129
Holographic themes, Honeycomb,
 285–286
 Theme.Holo, 286
 Theme.Holo.Light, 286
Home button, Android 3.0 screen, 282
home screen
 emulator startup phases, 19
Honeycomb (Android 3.0), 281–288
 Android 3.0-optimized applications,
 283
 Android devices, 286–288
 avoiding nested PreferenceScreen
 elements, 353
 fragments, 285
 Holographic themes, 285–286
 intents for headers or preferences,
 353
 maps and fragments, 459
 notifications, 431–433
 options menus, 178
 preference headers, 351–352
 PreferenceFragment class, 352
 preferences via fragments, 351–354
 reasons for, 281
 running phone-centric app on tablet,
 286
 StockPreferenceFragment class, 352
tablets, 281
user’s view, 282, 285
v11 resource set suffix, 288
Honeycomb UI, 282–285
 action bar, 283, 289–295
 adding custom views to, 290–295
 enabling, 289–290
 Find contacts search field, 285
 options menu, 283
 responding to activity icon, 291
app launcher, 282
application UI, 282
 Android 2.x options icon, 283
Back button, 282
battery strength indicator, 282
clock, 282
contact filter spinner, 285
fragments, 297–312
Home button, 282
notification icons, 282
recent tasks, 282
signal strength indicator, 282
status bar, 282
supporting multiple Android
 versions, 318–320
system bar, 282
HoneycombHelper class
 handling multiple versions, 320
horizontal orientation
 LinearLayout container, 74
 RelativeLayout container, 82
HorizontalScrollView container, 92
horizontalSpacing property, GridView,
 111, 112
HPROF file
 Dump HPROF option, DDMS, 487
Html class
 fromHtml method, 237, 239
HTML5, 495–506
 alternative Android browsers, 506
 alternatives to Java-based
 development, 493
 caching rules, 495, 499
 Checklist app, 496–500
 comparing alternative development
 options, 506
 offline applications, 495–500
 Web Storage, 500–502
HTML5 applications for Android
 adding PhoneGap APIs, 517–519
PhoneGap Checklist application
 converting into APK file, 515
 JavaScript file, 516
 setting up device-ready event
 handler, 517
potential areas of concern, 503–506
 Android device versions, 503

- battery, 505
- distribution, 505
- look-and-feel of apps, 505
- performance, 505
- platform integration, 504
- screen sizes and densities, 504
- production applications, 502
- signing and distribution, 503
- testing tools, 503
- updates, 503
- htmlEncode method, `TextUtils`, 239
- HttpClient interface, 377
 - AndroidHttpClient class, 382
 - creating HttpClient objects, 378
 - DefaultHttpClient class, 378, 382
 - HTTP operations via, 378–379
 - parsing responses, 379–381
 - single/multiple threading, 382
 - SSL support, 381
- HttpGet/HttpPost/HttpRequest
 - HTTP operations via HttpClient, 378
- HVGA emulator
- EU4You project, 271, 273
- I**
- icon attribute, menus, 176
- icon.png file
 - res/drawable directory, 33
- IconicAdapter class, 121–123
 - constructor, 122
 - getView method, 121, 122
- icons
 - changing based on row data, 121–123
 - enhancing lists, 120
 - EU4You project, 274
 - notifications, 423, 424–425
 - resource sets for, 425
 - setIcon method, Builder, 180
 - size of, 425
- id attribute, XML layouts, 56, 57, 83
- IDEA, IntelliJ, 46
- IDEs (integrated development environments)
 - Eclipse, 37–46
- IDEA, 46
- MOTODEV Studio for Android, 45
- ifRoom value, `showAsAction` attribute, 290
- ImageButton widget, 63
 - taking advantage of bigger screen, 265
- images, 240–241
 - formats, 240
 - Gallery widget, 118
 - layout files, 240
 - res/drawable directory, 235, 240
- ImageSwitcher widget, 157
- ImageView widget, 63
- IME (input method editor), 93
 - accessory button, 98
 - Done action, 100
 - hiding, 101, 102
 - layout of activities, 100
 - opening, 101
 - soft keyboard input flavors, 94–98
- imeActionId attribute, `EditText`
 - adding custom views to action bar, 293
- imeOptions attribute, `EditText`, 98
 - adding custom views to action bar, 293
- IMF (input method framework), 93–102
 - controlling input method editor, 93
 - keyboards, 93
 - soft keyboard input flavors, 94–98
- imported classes
 - Java code for activities, 52
- importing non-Eclipse project into Eclipse, 38–42
- in dimension, 244
- incoming calls
 - simulating with DDMS, 482–484
- incrementProgressBy method, 204
- indexes, SQLite, 362
- inflation, XML layouts
 - getLayoutInflater method, 124
 - inflating XML files into menus, 175, 177–178
 - inflating XML files into View objects, 123–124

- LayoutInflater class, 123, 125
 - using convertView parameter, getView(), 127
- inheritance
 - multiple inheritance, 459
- inheriting style attributes, 254
- inheriting styles, 255
- initAdapter method, MenuDemo, 172, 174
- input method editor see IME
- input method framework see IMF
- InputMethodManager
 - getting control of user input, 295
 - HIDE_IMPLICIT_ONLY flag, 102
 - hiding IME, 101
- inputs, resources, 246
- InputStream class, Java
 - accessing files, 323
- inputType attribute, 64
 - EditText widget, 94
 - adding custom views to action bar, 293
 - soft keyboards, 94, 98
- insert method, SQLiteDatabase, 363
- install command, ant, 28
- installations
 - ADT for Eclipse, 12–14
 - Android SDK, 8–12
 - Apache Ant, 14
 - JDK, 7
 - PhoneGap, 510
- intent element
 - intents for headers or preferences, 354
- Intent object
 - notification icons, 424
 - tabbed browsing, 232
 - using Activity as content of tab, 232
- intent-filter elements
 - activity element, manifest, 35
 - AndroidManifest.xml file, 223
- intents, 5, 221–225, 228
 - actions, 221, 222
 - activity eligibility for, 223
 - broadcast intents, 400
 - Bundle, 222
- category, 222
- components, 222
- content Uri templates, 222
- context, 221
- creating to launch activity, 228
- data Uri, 222
- declaring intent filters, 223–224
- enforcing permissions via manifest, 440
- extras, 222
- MIME type, 222, 224
- pause caveat, 225
- PendingIntent object, 400
- routing, 222
 - implicit routing, 223
- target component, 222
- IntentService class, 396
 - Downloader service, 403, 404, 405
 - music player service, 407
 - onHandleIntent method, 405, 406
 - threads, 403
- interactive widgets
 - RatingBar widget, 129–133
- interfaces
 - fragment-to-activity communication, 307
- internationalization
 - string resources, 246
- Internet access
 - Android components, 382
 - Android devices, 6, 377
 - background threads, 203, 391
 - downloading files, 383–391
 - main application thread, 391
 - MapView widget, 382
 - StrictMode, 392
 - WebView widget, 382
- INTERNET permission, 383, 438
 - putting maps into applications, 452
 - requesting permissions pre installation, 441
- Internet-enabled phones
 - smartphone programming, 3
- Interpreter class, BeanShell, 371
- isAfterLast method, Cursor, 365

isChecked method
 CheckBox widget, 66
 RadioButton widget, 69
isEnabled method, widgets, 71
isFinishing method
 unbinding from service, 421
isRouteDisplayed method, 452
item element, menus
 actionLayout attribute, 293
 describing menus via XML files, 176
 detecting when item chosen, 176
 showAsAction attribute, 290
 submenus, 176
item element, style, 252
ItemizedOverlay class, 454
 drawing ItemizedOverlay, 454
onTap method, 456

J

JAR files (JARs)
 adding third-party code to project, 369
 importing non-Eclipse project into Eclipse, 42
 using BeanShell on Android, 371
 using scripting languages on Android, 374
jarcore command, ant, 371
jarsigner utility, Java
 generating API key, Google Maps, 451
Java
 adapters, 103
 alternative compilers, 7
 creating client-side API for Web service, 410
 installing JDK, 7
 Java-centric strategy, Android, 491
 learning, 8
 Now.java file, 51
 setting up, 7–8
 third-party libraries, 369
 Thread class, 204
 using BeanShell on Android, 371–373, 374

using scripting languages on Android, 371, 374
Java 2 Platform, Micro Edition (J2ME)
 Java-centric strategy, Android, 491
Java Build Path
 importing non-Eclipse project into Eclipse, 41
Java class name
 first activity for project, 27
Java code
 activities, 51–53
 android:id attribute, 57
 attaching widgets to, 57
 creating/attaching widgets to activity, 55
 working with Android, 370
Java package name
 creating skeleton project
 at command line, 27
 in Eclipse, 25
Java SE classes
 availability to Android programs, 52
JAVA_HOME environment variable
 installing Apache Ant, 14
Java/Swing
 setCellRenderer method, 103
JavaScript
 enabling, WebView widget, 161, 165
 PhoneGap Checklist application, 516
 setJavaScriptEnabled method, 165
 Titanium Mobile, 526
Jbutton click, Swing, 53
JDK (Java Development Kit), 7
JIT (just-in-time) compilation
 Java-centric strategy, Android, 492
 using scripting languages on Android, 374
JPEG format, images, 240
JRuby, 524
JSON parser, 379
just-in-time see JIT compilation
JVM (Java Virtual Machine)
 Java code with Android, 370
JVM compiled languages, 527

K

keyboards, 93–94
 see also soft keyboards
device configuration changes, 187
explicit hardware feature
 requirements, 532
handling keyboardHidden
 configuration changes, 196
IMF (input method framework), 93
reqHardKeyboard attribute, 532
reqKeyboardType attribute, 532
resources, 246
 smartphone programming, 3
keyguard
 emulator startup phases, 20
keys
 generating API key, Google Maps,
 450
keytool utility, Java
 generating API key, Google Maps,
 451

L

label attribute, activity element, 35
labels
 TextView widget, 61–62
landscape orientation
 EU4You project, 274, 276
 screenOrientation attribute values,
 201
landscape value, screenOrientation, 198
languages
 default language, 246
 right-to-left (RTL) languages, 250
 strings, 246
 strings in multiple languages, 246
largeScreens attribute, 261
launcher *see* application launcher
Lawnchair, 502
layers, maps *see* overlays, Google
 Maps
layout containers
 FrameLayout container, 143
IME and activities, 100

LinearLayout container, 73–81
RelativeLayout container, 81–87
TabHost container, 142, 143
TableLayout container, 87–90
layout directory *see* res/layout directory
layout files
 images, 240
 referencing layouts, 120
 referencing string from, 236
Layout View
 Hierarchy Viewer tool, 474, 475
layout XML *see* XML layouts
layout_above property, 83
layout_alignParentXyz properties, 82
layout_alignXyz properties, 83
layout_below property, 83
layout_centerXyz properties, 82
layout_column property, 88
layout_gravity property, 75
layout_height property, 57, 74, 81
layout_margin property, 76
layout_span property, 88
layout_toLeftOf property, 83
layout_toRightOf property, 83, 84
layout_weight property, 75, 81
layout_width property
 adding custom views to action bar,
 293
LinearLayout container, 74, 75, 77
RelativeLayout container, 85
XML-based layouts, 57
LayoutInflater class, 123, 125
ldpi suffix
 res/drawable-ldpi directory, 33
libraries
 third-party libraries, Java, 369
libs directory, 31
 using BeanShell on Android, 371
license confirmation dialog
 Android SDK and AVD Manager, 11
lights, notifications, 424
LinearLayout container, 73–81
 enhancing lists, 120
 EU4You_6 layout, 308
fill model, 74
fill_parent value, 74

-
- gravity, 75
 - layout_gravity property, 75
 - layout_height property, 74, 81
 - layout_margin property, 76
 - layout_weight property, 75, 81
 - layout_width property, 74, 75, 77
 - margins, 75
 - match_parent value, 74
 - non-row children of TableLayout, 88
 - orientation, 74
 - setGravity method, 75
 - setOrientation method, 74
 - weight, 75
 - wrap_content value, 74
 - wrapping two RadioGroups, 77
 - links
 - handling, WebView, 163
 - Linux
 - setting up development machine to talk to devices, 22
 - Linux ext4 file system, 335
 - list box
 - ListActivity widget, 104–106
 - ListView widget, 104, 106–108
 - ListActivity widget, 104–106
 - consolidating multiple activities, 266
 - implementing using AsyncTask, 210–213
 - AddStringTask class, 211
 - doInBackground method, 212
 - onPostExecute method, 213
 - onProgressUpdate method, 212
 - onListItemClick method, 105, 365
 - setListAdapter method, 105
 - listener interface
 - EU4You_6 project, 308–309
 - listeners
 - CheckBox widget, 66
 - communicating from services, 400
 - OnClickListener, 52, 53
 - setOnItemSelectedListener, 104, 108, 112
 - setOnSeekBarChangeListener, 142
 - SlidingDrawer container, 156
 - TextWatcher, 115
 - ListFragment class, 301–306
 - adding fragments dynamically, 298
 - animating dynamic fragments, 299
 - onActivityCreated method, 301
 - onListItemClick method, 301
 - persistent row highlighting, 304–306
 - setListAdapter method, 301
 - ListPreference element, 348
 - lists
 - enhancing, 119–133
 - changing icon based on row data, 121–123
 - ListView widget, 119–120
 - ExpandableListView container, 156
 - rows, 119
 - ListView class/widget, 104, 106–108
 - ArrayAdapter, 107
 - context menus, 265
 - enhancing lists, 119–120
 - EU4You project, 266, 267
 - getCheckedItemPositions method, 108
 - getListView method, 106
 - getView method, 121
 - convertView parameter, 125–127
 - interactive widgets, 129–133
 - registering as having context menu, 172
 - row highlighting, 304
 - setSelectionMode method, 106
 - setItemChecked method, 108
 - taking advantage of bigger screen, 265
 - using holder pattern, 127–129
 - loadData method, WebView, 161
 - loadHeadersFromResource method, 351, 352
 - loadUrl method
 - DetailsFragment class, 301
 - WebView widget, 160, 161
 - localization
 - device configuration changes, 187
 - right-to-left (RTL) languages, 250
 - string resources, 246

localStorage object, Web Storage, 500
location
 addProximityAlert method, 446
 arrival in proximity of, 446
 getBestProvider method, 444
 getLastKnownPosition method, 444
 getMeMyCurrentLocationNow
 method, 445
 getProviders method, 444
 GPS service, 443
 identifying, 443–445
 onLocationChanged method, 446
 registering for updates, 445
 removeProximityAlert method, 447
 requestLocationUpdates method,
 445, 446
 setting, 381
 simulating moving device, 447
 technology variations between
 devices, 534
 updates, DDMS, 481–482
LocationListener class
 identifying location, 445
 removeUpdates method, 446
LocationManager class
 addProximityAlert method, 446
 identifying location, 444
 removeProximityAlert method, 447
LocationProvider class
 hard-wiring, 444
 identifying location, 444, 445
 location updates, 481
LogCat
 downloading files, 390
 StrictMode, 332
LogCat tab, DDMS, 42
logging, DDMS, 479

M

Mac OS X
 setting up development machine to
 talk to devices, 22
main application thread see UI (main)
 thread
main.xml file

EU4You project, 275
res/layout directory, 33, 252
 attaching widgets to Java code,
 57
 screen rotation, 188
makeText method, toasts, 180
manifest attribute, html element
 Checklist app, HTML5, 499
manifest element, 34
 child elements in initial project
 manifest, 35
 package attribute, 34
 uses-sdk child element, 48
manifest file
 see also AndroidManifest.xml file
 Checklist app, HTML5, 499
 creating and installing PhoneGap
 projects, 511
 elements in initial project manifest,
 35
 enforcing permissions, 439–440
 PhoneGap settings, 515
 root of, 34
manifest typing, 359
MapActivity class/widget, 449
 maps and fragments, 459, 461
 putting maps into applications, 451,
 452
MapController class
 setCenter method, 454
 setZoom method, 453
MapFragment class, 460
maps
 see also Google Maps
 fragments and, 459–461
 Google Maps, 449
 mapping options, 449
 putting into applications, 451–452
MapView widget, 449
 finding, 453
 getOverlays method, 454
 Internet access, 382
 maps and fragments, 459, 460, 461
 putting maps into applications, 451
 setBuiltInZoomControls method, 453
 toggleSatellite method, 458

- margins
 - LinearLayout container, 75
- match_parent value, containers, 74
- maxSdkVersion attribute, uses-sdk element, 316
- MD5 signature
 - generating API key, Google Maps, 451
- mdpi suffix
 - res/drawable-mdpi directory, 33
- measurements see dimensions
- memory
 - flash memory, 367
 - managing with DDMS, 485–487
 - saving state due to low memory, 193
 - smartphone programming, 4
- Menu button
 - opening IME, 101
- menu directory, res, 32
- menu element, 176
- menu items
 - promoting to action bar, Honeycomb UI, 290–291
- Menu object
 - addSubMenu method, 169
 - onCreateOptionsMenu method, 168, 169
 - onCreatePanelMenu method, 169
 - onOptionsItemSelected method, 168, 169, 173
 - onPrepareOptionsMenu method, 168
 - setAlphabeticShortcut method, 168
 - setGroupCheckable method, 168, 169
 - setGroupEnabled method, 177
 - setGroupVisible method, 177
 - setNumericShortcut method, 168
 - setQwertyMode method, 168
- menuCategory attribute, groups
 - describing menus via XML files, 176
- MenuDemo class
 - initAdapter method, 172, 174
 - overriding onContextItemSelected(), 175
- overriding onCreateContextMenu(), 174
- overriding onCreateOptionsMenu(), 172
- overriding onOptionsItemSelected(), 173
- MenuItem class
 - getActionView method, 294
 - getItemId method, 169, 173
 - getMenuInfo method, 170, 175
 - setCheckable method, 168
 - setEnabled method, 177
 - setVisible method, 177
- menus, 167–178
 - context menus, 167, 169–170
 - creating fly-out submenus, 169
 - describing menus via XML files, 175–177
 - detecting when item chosen, 176
 - inflating XML files into, 175, 177–178
- More option, 167
- options menus, 167, 168–169
 - Honeycomb (Android 3.0), 178
- taking advantage of bigger screen, 265
- messages
 - advisory messages, 179
 - communicating with Handler, 205–208
 - handleMessage method, 205, 207
 - obtainMessage method, 205
 - pop-up messages, 179–180
 - sendMessage method, 205
 - setMessage method, 180
 - validation messages, 180
- Messenger object
 - communicating from services, 401
 - Downloader service, 406, 407
- MIME type, intents, 222, 224
- minSdkVersion attribute, uses-sdk element, 48, 315
- maps and fragments, 459
- new permissions in old applications, 440
- mm dimension, 244

mobile phones
resources, 246
smartphone programming, 4
Mono for Android, 524
More option, menus, 167
MOTODEV Studio for Android, 45
Motorola Charm
resources for, 247
Motorola DROID, 264
moveToFirst method, Cursor, 365
moveToNext method, Cursor, 365
MultiAutoCompleteTextView widget,
157
multiline input
 EditText widget, 98
 soft keyboard for, 96
multimedia capabilities
 Android devices, 6
multiple inheritance, 459
music player service, 407–410
 keeping services in foreground, 429
MyLocationOverlay class, creating, 457

N

name attribute
 activity element, 35
 dimen element, 244
 string element, 236
 string-array element, 245
namespace declaration
 AndroidManifest.xml file, 34
namespace directory tree
 Android projects, 32
Native Development Kit (NDK), 493
navigation
 explicit hardware feature
 requirements, 532
 reqFiveWayNav attribute, 532
 reqNavigation attribute, 532
 tree of widgets, 71
 WebView widget, 162
NETWORK line
 manifest file, Checklist app, 500
networks, Android devices, 6

New Android Project wizard
 creating skeleton project in Eclipse,
 24–26
 importing non-Eclipse project into
 Eclipse, 39–40
New Project dialog, Eclipse
 selecting wizard, 23, 24, 39
newTabSpec method, TabHost, 144,
145
newView method, CursorAdapter, 366
Next action, accessory button, 98, 100
nextFocusXyz properties, widgets, 71
normalScreens attribute, 261
NotAllThatStrict class
 conditional use of StrictMode, 334
notification icons
 Android 3.0 screen, 282
Notification object, 427
NotificationManager class, 423, 427
 keeping services in foreground, 430
notifications, 423–433
 canceling, 423
 communicating from services, 401
 configuration of, 423–425
 creating, 427
 declaring services as part of
 foreground, 429–430
 defaults field, 424
 hardware options, 424
 Honeycomb (Android 3.0), 431–433
 icons, 423, 424–425
 lights, 424
 raising, 423
 setForeground method, 430
 sounds, 424
 startForeground method, 430
 stopForeground method, 430, 431
 vibrations, 424
notify method, NotificationManager, 424
 keeping services in foreground, 430
NotifyDemo class, 425
notifyMe method, 427
Now demonstration activity, 54, 58
Now.java file, 51
NowRedux demo, 58
null column hack, 363

numColumns property, GridView, 111, 112
numeric input
 soft keyboard for, 96, 97, 98
numericShortcut attribute, 177

0

obtainMessage method, Handler, 205
offline applications, HTML5, 495–500
onActivityCreated method
 ListFragment class, 301
 maps and fragments, 460
onActivityResult callback
 picking/viewing contact, 190
 startActivityForResult method, 229
onBind method, Service class, 396, 399
 music player service, 409
onCheckedChangeListener callback
 CheckBox widget, 67
 LinearLayout wrapping
 RadioGroups, 78
OnCheckedChangeListener interface
 CheckBox widget, 67
 LinearLayout wrapping
 RadioGroups, 78
onClick method, invoking, 53
OnClickListener
 implementing, 52
 invoking onClick method, 53
onConfigurationChanged method
 handling rotations without Android's help, 195, 198
onContextItemSelected method, 169
 inflating XML files into menus, 177
 MenuDemo overriding, 175
onCountrySelected method
 EU4You_6 activity, 310
onCreate method
 Activity class, 184
 EU4You_6 activity, 310
 threads and screen rotation, 218
getting control of user input,
 Honeycomb UI, 294
LinearLayout wrapping
 RadioGroups, 78

NowRedux demo, 58
recreating instance state, 186
Service class, 396
 Downloader service, 405
 Web service interface, 413, 416, 420
SQLiteOpenHelper class, 359, 361
starting activities, 53
WebView widget, 160
onCreateContextMenu method, 169
 inflating XML files into menus, 177
 MenuDemo overriding, 174
onCreateOptionsMenu method, 168, 169
API levels for action bar, 319
getting control of user input,
 Honeycomb UI, 294
inflating XML files into menus, 177
MenuDemo overriding, 172
promoting menu items to action bar, 291
onCreatePanelMenu method, 169
onCreateView method
 fragments overriding, 300
 inflating layout, 301
 maps and fragments, 460
OnDateChangedListener callback
 DatePickerDialog, 135
OnDateSetListener callback
 DatePickerDialog, 135, 138
onDestroy method
 Activity class, 184
Service class, 396
 Downloader service, 405
 music player service, 409
 Web service interface, 413, 416
onDeviceReady function, JavaScript
 PhoneGap Checklist application, 517, 518
onDowngrade method,
 SQLiteOpenHelper, 362
OnEditorActionListener interface
 getting control of user input, 295
onHandleIntent method, IntentService
 Downloader service, 405, 406

onListItemClick method
 fragment design, 312
 ListActivity widget, 105, 365
ListFragment class, 301
 persistent row highlighting, 305
RatingBar widget, 131
onload function, JavaScript
 PhoneGap Checklist application, 517
onLocationChanged method, 446
onOpen method, SQLiteOpenHelper, 362
onOptionsItemSelected method, Menu, 168, 169
 inflating XML files into menus, 177
 MenuDemo overriding, 173
 promoting menu items to action bar, 291
 responding to activity icon, 291
onPause method
 Activity class, 185
 reading/writing data files, 328
 unregistering receivers, 225
 Fragment class, 301
onPostExecute method, AsyncTask, 210
 implementing ListActivity, 213
 threads and screen rotation, 218
 WeatherAPI project, 415
onPreExecute method, AsyncTask, 210
onPrepareOptionsMenu method, 168
onProgressUpdate method, AsyncTask, 210
 implementing ListActivity, 212
onRatingChanged listener, RatingBar, 131
onReceive method, 224
onRestart method, Activity, 185
onRestoreInstanceState method, 186
 screen rotation, 188
onResume method, Activity, 185
 location updates, 378
reading/writing data files, 328
registering receivers, 225
onRetainNonConfigurationInstance method
 blocking rotation of activity, 200
fragments lack of, 312
screen rotation, 193–195
threads and screen rotation, 217, 218
Web service interface, 411, 420, 421
onSaveInstanceState method, activities, 186
 blocking rotation of activity, 200
 screen rotation, 188, 190–192, 193
 unregistering receivers, 225
onSaveInstanceState method, fragments, 312
onServiceConnected method
 binding services, 399
onStart method, Activity class, 185
 communicating with Handler via messages, 207
onStartCommand method, Service class, 396
 music player service, 409
 sending commands with startService(), 398
 values returned by, 398
onStop method
 Activity class, 185
 communicating with Handler via messages, 207
 Fragment class, 301
onTap method, Overlay class, 456
onTextChanged callback, 116
OnTimeChangedListener callback, 136
OnTimeSetListener callback, 136, 138
onUpgrade method, SQLiteOpenHelper, 359, 362
Open Mob for Android wiki, 537
openFileInput/openFileOutput methods
 reading/writing data files, 326, 328, 330
OpenGL
 glEsVersion attribute, 532
OpenJDK, 7
openRawResource method, 323

Opera Mobile
HTML5 and alternative Android browsers, 506
options menus, 167, 168–169
adding menu choices, 168
addSubMenu method, 169
Android 3.0 action bar, 283
choice identifier, 168
creating fly-out submenus, 169
displaying action bar, 290
fragments adding options to, 299
getItemId method, 169
group identifier, 168, 169
onCreateOptionsMenu method, 168, 169
onCreatePanelMenu method, 169
onOptionsItemSelected method, 168, 169
onPrepareOptionsMenu method, 168
order identifier, 168
promoting menu items to action bar, 290
setAlphabeticShortcut method, 168
setCheckable method, 168
setGroupCheckable method, 168, 169
setNumericShortcut method, 168
setQwertyMode method, 168
taking advantage of bigger screen, 265
orderInCategory attribute, menu items
describing menus via XML files, 176
orientation
see also screen rotation
blocking rotation of activity, 198–200
handling configuration changes, 196
LinearLayout container, 74
screen orientation, 246
threads and screen rotation, 214–218
Web service interface, 411
.out file
running project in emulator, 45
overlapping widgets, 86

Overlay class, 454
onTap method, 456
OverlayItem class
drawing ItemizedOverlay, 454
overlays, Google Maps, 454–456
classes, 454
drawing ItemizedOverlay, 454–455
handling screen taps, 456
ItemizedOverlay class, 454
MyLocationOverlay class, 457

P

package attribute, manifest element, 34
package command-line switch
android create project command, 27
package declaration
Java code for activities, 52
package name
creating skeleton project in Eclipse, 25
PackageManager class
getSystemAvailableFeatures method, 533
hasSystemFeature method, 532
packages
Available packages option, Android SDK and AVD Manager, 9
packaging tool, Android
building activity, 53
padding
setPadding method, Java, 70
padding property, widgets, 70
panning activity, layout, 100
parent attribute, style element
inheriting style attributes, 254
parsing
Android parsers, 379
parsing responses, 379–381
XmlPullParser class, 241, 243
password attribute, EditText widget, 94
path command-line switch
android create project command, 27
pause caveat, intents, 225
paused state, activities, 183

- pausing activity
 - onPause method, 185
- PDAs
 - smartphone programming, 3
- peer (not subordinate) activities, 227
 - launching peer activity, 229–231
 - startActivity method, 228, 230
- PendingIntent object, 400
 - creating notifications, 427
 - notification icons, 424
- performance
 - HTML5 application concerns, 505
 - Java code with Android, 370
- permissions, 437–441
 - ACCESS_ALL_DOWNLOADS, 383
 - ACCESS_COARSE_LOCATION, 438
 - ACCESS_FINE_LOCATION, 438
 - CALL_PHONE, 438
 - declaring, 439
 - discovery of, 440
 - documenting for public APIs, 440
 - DownloadManager class, 383
 - enforcing, 439–440
 - identifying location, 444
 - implicit hardware feature
 - requirements, 532, 533
 - INTERNET, 383, 438
 - new permissions in old applications, 440
 - PhoneGap application concerns, 519–520
 - READ_PHONE_STATE, 441
 - requesting before installation, 441
 - requesting to access Internet, 160
 - securing applications, 438–440
 - SecurityException, 438
 - services, 397
 - uses-permission element, 437
 - using data/services of apps, 437
 - WRITE_EXTERNAL_STORAGE, 383, 438, 440
- persistent row highlighting
 - backward compatibility, 305
 - fragments, 304–306
- perspectives, Eclipse, 42
- phone API, accessing, 463
- phone calls
 - simulating with DDMS, 482–484
- phone services
 - Android devices, 6
- phone-centric app
 - running on tablet, 286
- PhoneGap, 507–522
 - alternatives to Java-based development, 493, 494
 - creating and installing projects, 510–511
 - features, 508
 - installation, 510
 - mission, 507
 - more information on, 522
- PhoneGap application concerns, 519–521
 - look-and-feel of apps, 521
 - permissions, 519–520
 - screen sizes and densities, 521
 - security, 519–520
- PhoneGap applications, 507, 508
 - Checklist app, 514–519
 - distributing, 509
 - other platforms (non-Android), 509
- PhoneGap Build service, 510, 511–514
- PhoneGap Checklist application, 514–519
 - adding PhoneGap APIs, 517–519
 - converting HTML5 app into apk file, 515
 - JavaScript file, 516
 - manifest file, 515
 - setting up device-ready event handler, 517
 - using available methods, 517–519
- phones
 - see also devices
 - backward compatibility, action bar, 295
 - determining if phone is in use, 463
 - finding phone type, 464
 - Honeycomb UI, 286–288
 - initiating call from application, 464–466
 - immediately placing call, 466

- smartphone programming, 3, 4
- ways to help users place calls, 463
- physical dimensions see dimensions
- Pick button
 - picking/viewing contact, 189
- Pixel Perfect View
 - Hierarchy Viewer tool, 476, 477
- pixels, scaled
 - handling multiple screen sizes, 260
- placeholders, strings, 237
- Planet Android, 539
- platform APIs
 - Java code with Android, 370
- platform integration
 - HTML5 application concerns, 504
- PlayerService, 408–410
 - notifications, 430
- plus(+) sign
 - first occurrence of id value, 83
- PNG format, images, 240
- pointing devices
 - smartphone programming, 4
- pop-up dialogs, preferences, 347–350
- pop-up messages, 179–180
- portrait orientation, screenOrientation attribute
 - portrait value, 198
 - reversePortrait value, 201
 - sensorPortrait value, 201
- post methods, Handler class
 - communicating via runnables, 208
- preference headers
 - preferences via Honeycomb fragments, 351–352
- PreferenceActivity class, 340–341
 - backward compatibility, 354
 - loadHeadersFromResource method, 351, 352
 - preferences via fragments, 350
 - preferences via Honeycomb fragments, 351
- SharedPreferences object, 340
- structuring preferences, 346
- users setting up preferences, 343
- PreferenceCategory element, 345
- PreferenceFragment class, 306
 - addPreferencesFromResource method, 341, 352, 353
- backward compatibility, 354
- getArguments method, 353
- preferences via Honeycomb fragments, 351, 352, 353
- preferences, 339–355
 - accessing, 339
 - avoiding nested PreferenceScreen elements, 353
- getDefaultSharedPreferences method, 339
- getPreferences method, 339
- getSharedPreferences method, 339
- intents for headers or preferences, 353
- pop-up dialogs, 347–350
- structuring preferences, 345–346
- users setting up preferences, 341–344
 - via fragments, 350–355
- PreferenceScreen element
 - avoiding nesting of, 353
 - preferences via fragments, 350, 351
- structuring preferences, 345
- XML files, 341
- production environment
 - using StrictMode, 333
- ProgressBar widget, 204
 - communicating with Handler via messages, 205–208
 - downloading files, 388
 - getProgress method, 204
 - incrementProgressBy method, 204
 - setIndeterminate method, 204
 - setMax method, 204, 207
 - setProgress method, 204
 - style attribute, 206, 251
- ProgressDialog, 204
- proguard.cfg file, 32
- project name
 - creating skeleton project in Eclipse, 25
- Project Properties window, Eclipse, 41

project wizards
 ADT add-in, Eclipse, 37
projects, Android
 *.properties file, 32
 Activity subclass, 32
 ADT add-in, Eclipse, 37
 AndroidManifest.xml file, 31
 assets directory, 32
 bin directory, 31, 33
 build.xml file, 32
 building activity, 53
 building/running applications, 27–30
 creating and installing PhoneGap projects, 510–511
 creating Android emulator, 43
 creating skeleton project, 23–27
 command line, 26–27
 Eclipse, 23–26
 enhancing, 47–48
EU4You project, 266–277
gen directory, 32
importing non-Eclipse project into Eclipse, 38–42
Java code for activities, 51–53
libs directory, 31
manifest file, 33
namespace directory tree, 32
proguard.cfg file, 32
R.java file, 32
res directory, 31, 32
res/xyz directories, 32
root directory, 31
running activity, 53
running in emulator, 44–45
screen sizes, supporting multiple, 47
src directory, 31, 32, 51
structure of, 31–33
 uniquely identifying, 27
proximity
 addProximityAlert method, 446
 removeProximityAlert method, 447
pt dimension, 244
publishProgress method
 UI (main) thread, 210
pull command, adb, 367
pulling files, DDMS, 480–481

push command, adb, 368
pushing files, DDMS, 480–481

Q

query method
 DownloadManager class, 386, 387
 SQLiteDatabase class, 364
queryWithFactory method
 SQLiteDatabase class, 366
QuickContactBadge widget, 157
QVGA screen
 compatibility mode, 258
 EU4You project, 271, 273
qwerty mode
 setQwertyMode method, Menu, 168

R

R.array file, 246
R.color file, 245
R.dimens file, 244
R.drawable file, 240
R.id.home file, 291
R.java file, 32
 aapt tool generating, 55
 NowRedux demo, 58
R.layout file, 120, 124
R.layout.main file, 57
R.menu file, 177
R.string file, 236
R.xml file, 241
RadioButton widget, 68–70
 isChecked method, 69
 RadioGroup wrapping, 69
 setChecked method, 70
 toggle method, 69
RadioGroup class
 check method, 69, 70
 clearCheck method, 69
 getCheckedRadioButtonId method, 69
 LinearLayout container wrapping, 77
 RadioButton widgets, 69
RAM
 Java code with Android, 370

- RatingBar widget, 129–133
raw directory see res/raw directory
rawQuery method, SQLiteDatabase, 364
rawQueryWithFactory method, 366
READ_CONTACTS permission, 374, 441
READ_PHONE_STATE permission, 441
receiver element
 AndroidManifest.xml file, 224
receivers, 224–225
 BroadcastReceiver interface, 224
 declaring, 224
 onReceive method, 224
 registerReceiver method, 225
 unregisterReceiver method, 225
recent tasks
 Android 3.0 screen, 282
reflection, 317–318
registerForContextMenu method, 169
registerReceiver method, 225, 400
RelativeLayout container, 81–87
 handling multiple screen sizes, 259
 layout_above property, 83
 layout_alignParentXyz properties, 82
 layout_alignXyz properties, 83
 layout_below property, 83
 layout_centerXyz properties, 82
 layout_toLeftOf property, 83
 layout_toRightOf property, 83, 84
 layout_width property, 85
 order of evaluation, 84
 overlapping widgets, 86
 positions relative to container, 82
 positions relative to other widgets, 83
 relative notation in properties, 82
SlidingDrawer container, 154
reload method, WebView, 162
remove method, SharedPreferences, 340
removeProximityAlert method, 447
removeUpdates method,
 LocationListener, 446
reqFiveWayNav attribute
explicit hardware feature
 requirements, 532
reqHardKeyboard attribute, 532
reqKeyboardType attribute, 532
reqNavigation attribute, 532
reqTouchScreen attribute, 532
requery method, Cursor, 365
Request object, DownloadManager, 385
requestFocus method, widgets, 71
requestLocationUpdates method, 445, 446
requests, HttpClient interface, 378
required attribute
 explicit hardware feature
 requirements, 532
 implicit hardware feature
 requirements, 533
res directory, 31, 32
 resource files, 235
res/drawable directory, 32, 235
 icon.png file, 33
 images, 240
res/drawable-hdpi directory, 33
res/drawable-ldpi directory, 33
res/drawable-mdpi directory, 33
res/layout directory, 32, 55, 235
 cell.xml file, 113
 main.xml file, 33, 252
 EU4You_6, 307
 screen rotation, 188
res/menu directory, 32
res/raw directory, 32, 235
 files prepackaged with applications, 323
res/values directory, 32, 235
 arrays, 243, 245–246
 colors, 243, 244–245
 dimensions, 243, 244
 strings in multiple languages, 246
 strings.xml file, 33, 236
 styles, 252
res/xml directory, 32, 235, 241
resizing activity, layout, 100
resolution
 adding AVD, 17

- resolution see screen resolution
resource sets, 262–263
resources, 235–249
 application resource (.ap) file, bin directory, 33
 configuration options order of precedence, 247
 cutting number of directories, 248
 device configuration changes affecting, 187
 handling change to, 314
 images, 235, 240–241
 inputs, 246
 keyboards, 246
 mobile devices, 246
 res directory, 32, 235
 right-to-left (RTL) languages, 250
 screen orientation, 246
 screen size, 246
 strings, 235–239
 switching resources based on environment, 261
 touchscreen, 246
 values, 235
 XML files, 235, 241–243
 XML layouts, 235
Resources class
 accessing files, 323
 getIdentifier method, 353
responses, parsing, 379–381
restarting activity
 onRestart method, 185
restoreMe method
 saving state, 192, 195
REST-style web services
 Apache HttpClient library, 377
RESULT_OK/RESULT_CANCELED
 statuses, 190
 startActivityForResult method, 229
resuming activity
 onResume method, 185
retrieving data, SQLite, 364
reverseLandscape/reversePortrait values
 screenOrientation attribute, 201
Rhino JavaScript, 375
Rhodes, 523
 alternatives to Java-based development, 493
right-to-left (RTL) languages, 250
RingtonePreference element
 XML files, 341
root directory, Android projects, 31
root element, menus, 176
rotation see screen rotation
RotationAsync class, 215–218
RotationAwareTask class, 215–218
 attach method, 217, 218
 detach method, 217
routing, intents, 222
 implicit routing, 223
RowModel objects
 RatingBar widget, 131
rows
 persistent row highlighting, 304–306
 putting cells in rows, TableLayout, 88
rows, lists, 119
 changing icon based on row data, 121–123
 inflating rows, 123–125
 interactive widgets, 129–133
 LinearLayout container, 120
 R.layout file, 120
RSS/Atom parser, 379
Ruboto, 524
Ruby environment
 Rhodes, 523
rule-based model
 handling multiple screen sizes, 259
 RelativeLayout container, 81–87
Run As dialog, Eclipse
 building/running applications, 27
 running project in emulator, 44
Runnable objects
 communicating with Handler, 208
runOnUiThread method, Activity, 208

S

- samples for SDK
 installing Android SDK, 10

- Samsung Galaxy Tab
resources for, 247
satellite imagery
 displaying, Google Maps, 458
SAX parser, 379
Scala, 527
scalable drawables
 default scaling, 262
 handling multiple screen sizes, 260
scaled pixels, 260
screen capture
 DDMS (Dalvik Debug Monitor
 Server), 481
screen densities
 creating resource sets, 262–263
 density-based resource sets, 262
 determining, 263
 emulators, 263–265
 EU4You project, 272
 HTML5 application concerns, 504
 PhoneGap application concerns,
 521
 supporting, 261
 switching resources based on
 environment, 261
screen orientation
 resources, 246
screen resolution
 adding AVD, 17
 Android devices, 257
 default, 257
screen rotation, 187–201
 see also orientation
 affect on activities, 188
 blocking rotation of activity, 198–200
 device configuration changes, 187
 `getLastNonConfigurationInstance`
 method, 193, 195
 handling configuration changes,
 195–198
 handling rotations without Android's
 help, 195–198
 `onRestoreInstanceState` method,
 188
 `onRetainNonConfigurationInstance`
 method, 193–195
 `onSaveInstanceState` method, 188,
 190–192, 193
 picking/viewing contact, 190
 `restoreMe` method, 192, 195
 saving state, 190–193
 shortcut in emulator, 189
 state, 189
 threads and, 214–218
 widgets, 189
screen size
 Android devices, 257
 compatibility mode, 258, 261
 consolidating multiple activities, 266
 creating resource sets, 262–263
 dealing with multiple sizes, 306
 default, 257
 default scaling, 262
 determining, 263
 emulators, 263
 EU4You project, 266
 EU4You_6 layouts, 307–308
 fragments handling multiple sizes,
 297–299
 handling multiple sizes, 258–260
 physical dimensions, 260
 pixels, 260
 rules (not positions), 259
 scalable drawables, 260
 HTML5 application concerns, 504
 PhoneGap application concerns,
 521
resources, 246
size-based resource sets, 262
supporting different sizes, 261
supporting multiple sizes, 47
supports-screens element, 47
switching resources based on
 environment, 261
taking advantage of bigger screen,
 265–266
version-based resource sets, 262
writing tablet-only apps, 321
screenLayout field, Configuration object
 determining screen size, 263
screenOrientation attribute
 blocking rotation of activity, 198–200

- fullSensor value, 201
- landscape value, 198
- portrait value, 198
- reverseLandscape value, 201
- reversePortrait value, 201
- sensor value, 200
- sensorLandscape value, 201
- sensorPortrait value, 201
- screens
 - emulating DROID screen, 264
 - smartphone programming, 3
- scripting languages
 - using on Android, 371, 374
- Scripting Layer for Android (SL4A), 374
- scrolling
 - bidirectional scrolling, 92
 - HorizontalScrollView container, 92
 - ScrollView container, 90–92
- ScrollView container, 90–92
 - wrapping TableLayout, 100
- SD card
 - adding AVD, 16
- SDK and AVD Manager see *Android*
 - SDK and AVD Manager
- SDKs (software development kits)
 - installing Android SDK, 8–12
 - installing JDK, 7
 - maximum SDK version, 316
 - minimum SDK version, 315
 - target SDK version, 316
- Search button
 - hiding IME, 101
- security
 - enforcing permissions, 439–440
 - external storage, 330
 - permissions, 437–441
- PhoneGap application concerns, 519–520
- securing applications, 438–440
- SecurityException
 - missing permissions, 438
- SeekBar widget, 141–142
 - getProgress method, 142
 - setMax method, 142
 - setOnSeekBarChangeListener, 142
- SELECT statement, SQLite, 364
- selection widgets
 - adapters, 103–104
 - ArrayAdapter adapter, 104
 - AutoCompleteTextView widget, 115–118
 - drawSelectorOnTop property, 118
 - Gallery widget, 118
 - GridView widget, 111–114
 - ListActivity widget, 104–106
 - ListView widget, 104, 106–108
 - enhancing lists, 119–120
 - setAdapter method, 104, 108
 - setOnItemSelectedListener method, 104, 108
 - spacing property, 118
 - Spinner widget, 108–111
 - spinnerSelector property, 118
- Send action
 - actionSend value, accessory button, 99
- sendBroadcast method
 - broadcast intents, 400
 - enforcing permissions, 440
- sendEmptyMessage method, Handler, 205
- sendMessage method, Handler, 205
- sendMessageAtFrontOfQueue method, 205
- sendMessageAtTime method, 205
- sendMessageDelayed method, 205
- sensor value, screenOrientation
 - attribute, 200
- sensorLandscape value, screenOrientation, 201
- sensorPortrait value, screenOrientation, 201
- sensors
 - variations between devices, 534
- Service class
 - creating services, 396
 - Downloader service, 405
 - lifecycle methods, 396
 - music player service, 407
 - onBind method, 396, 399
 - onCreate method, 396, 405
 - onDestroy method, 396, 405

onStartCommand method, 396, 398
stopSelf method, 398
ServiceConnection interface, 419
services, 5, 395–401
 broadcast intents, 400
 callback/listener objects, 400
 communicating from, 399–401
 pending results, 400
 communicating to, 397–399
 binding with bindService(),
 398–399
 sending commands with
 startService(), 397–398
 creating, 395, 396–397
 creating client-side Java API for Web
 service, 410–421
 declaring as part of foreground,
 429–430
 Downloader service, 403–407
 enforcing permissions via manifest,
 439
 Messenger object, 401
 notifications, 401
 PlayerService, 407–410
 reasons for, 395
 stopping, 398
 stopService method, 399
 unbindService method, 399
setAccuracy method
 identifying location, 444
setAdapter method, 104
 AutoCompleteTextView widget, 115
 GridView widget, 112
 Spinner widget, 108
setAllowedNetworkTypes method, 386
setAllowedOverRoaming method, 386
setAlphabeticShortcut method, 168
setAltitudeRequired method, 444
setBuiltInZoomControls method, 453
setCellRenderer method, Java/Swing,
 103
setCenter method, MapController, 454
setChecked method
 CheckBox widget, 66
 RadioButton widget, 70
setChoiceMode method, ListView, 106
setColumnXyz methods
 TableLayout container, 89
setContent method, TabSpec, 144, 145
setContentView method
 EU4You_6 activity, 310
 NowRedux demo, 58
 setting activity's content view, 53
setCostAllowed method, 444
setCurrentTab method, 145
setDefaultFontSize method, 165
setDescription method
 DownloadManager.Request class,
 386
setDestinationInExternalPublicDir
 method, 386
setDropDownViewResource method,
 Spinner, 108, 110
setDuration method, toasts, 180
setEnabled method
 MenuItem, 177
 widgets, 71
setFlipInterval method, 153
setForeground method, notifications,
 430
setGravity method, LinearLayout, 75
setGroupCheckable method, Menu,
 168, 169
setGroupEnabled method, Menu, 177
setGroupVisible method, Menu, 177
setIcon method, Builder, 180
setIndeterminate method, ProgressBar,
 204
setIndicator method, TabSpec, 144,
 145
setItemChecked method, ListView, 108
setJavaScriptEnabled method,
 WebSettings, 165
setLatestEventInfo method,
 notifications, 425, 427
setListAdapter method
 ListActivity widget, 105
 ListFragment class, 301
setMax method
 ProgressBar widget, 204, 207
SeekBar widget, 142

setMessage method, Builder, 180
setNegativeButton method, Builder, 180
setNumericShortcut method, Menu, 168
setOnClickListener method, 53
setOnEditorActionListener method,
 EditText, 100, 294
setItemSelectedListener method,
 104
 GridView widget, 112
 Spinner widget, 108, 110
setOnSeekBarChangeListener, 142
setOrientation method, LinearLayout, 74
setPadding method, Java, 70
setPositiveButton method, Builder, 180
setProgress method, ProgressBar, 204
setQwertyMode method, Menu, 168
setTag method, View objects
 RatingBar widget, 132
 using holder pattern, 127, 128, 129
setText method
 updating button label, 53
setTitle method
 Builder class, 180
 DownloadManager.Request class,
 386
setTypeface method, TextView, 469
setup method, TabHost, 144
setUserAgent method, WebSettings,
 165
setView method, toasts, 180
setVisible method, MenuItem, 177
setVisibleInDownloadsUi method, 391
setWebViewClient method, 163
setZoom method, MapController, 453
shared preferences
 getDefaultSharedPreferences
 method, 339
 getSharedPreferences method, 339
SharedPreferences object
 accessing files, 335
 apply method, 340
 clear method, 340
 commit method, 340
 edit method, 340
 getDefaultSharedPreferences()
 returning, 340
preferences via pop-up dialogs, 348
remove method, 340
shortcut attribute, menu items
 describing menus via XML files, 177
shortcuts
 screen rotation in emulator, 189
setAlphabeticShortcut method,
 Menu, 168
setNumericShortcut method, Menu,
 168
shouldOverrideUrlLoading method,
 WebView, 163, 164
show method, toasts, 180
showAsAction attribute, 290
showMe callback method
 launching peer activity, 230
showNext method, ViewFlipper, 151
shrinkColumns property, TableLayout,
 89
signal strength indicator
 Android 3.0 screen, 282
SIM ID (IMSI)
 finding, 464
singleLine property, EditText, 64, 65
SitesOverlay class
 drawing ItemizedOverlay, 455
 onTap method, 456
size, screens see screen size
sizzle
 App Inventor, 526
skin options
 adding AVD, 17
sliding keyboard
 changing screen orientation, 200
 device configuration changes, 187
 handling keyboardHidden
 configuration, 196
SlidingDrawer container, 154–156
callbacks, 156
listeners, 156
locking/unlocking drawer, 156
opening/closing/toggling drawer,
 156
smallScreens attribute, 261

smartphones
 benefits/drawbacks of smartphone programming, 3–4

SMS messages
 simulating with DDMS, 482–484

SOAP/XML-RPC layer
 Apache HttpClient library, 377

sockets, storing, 193

soft keyboards
 accessory button, 98
 adding to Android, 64
 date input, 96, 97, 98
 e-mail addresses, 96, 97
 inputType attribute, 98
 inputType attribute classes, 94
 multiline input, 96
 numeric input, 96, 97, 98
 plain text-entry field, 96

sounds
 notifications, 424

source code, Android, 538

sp dimension, 244

spacing property
 XML-based layouts, 118

spacingWidth property, GridView, 111

Spanned objects, 237

speed
 hasSpeed method, 445

Spinner widget, 108–111
 drawSelectorOnTop property, 109
 getView method, 121
 Holographic themes, Honeycomb, 285
 populating/using, 109
 setAdapter method, 108
 setDropDownViewResource method, 108, 110
 setOnItemSelectedListener method, 108, 110

spinnerSelector property
 XML-based layouts, 118

SQLite, 357–368
 accessing files, 335
 creating databases, 359
 creating tables and indexes, 362
 data typing, 359

flash memory, 367

inspecting/manipulating database contents, 367

populating tables, 362

retrieving data, 364

SELECT statement, 364

using cursors, 365–366

Web SQL Database option, 502

wrapping cursor in CursorAdapter, 365

SQLite browsing
 MOTODEV Studio for Android, 45

SQLite Manager
 Firefox extension, 368

sqlite3 console program, 367

SQLiteDatabase class
 creating object, 359, 361
 delete method, 363
 execSQL method, 362
 insert method, 363
 query method, 364
 queryWithFactory method, 366
 rawQuery method, 364
 rawQueryWithFactory method, 366
 update method, 363

SQLiteOpenHelper class
 close method, 361
 creating databases, 359
 getReadableDatabase method, 361
 getWritableDatabase method, 361
 onCreate method, 359, 361
 onDowngrade method, 362
 onOpen method, 362
 onUpgrade method, 359, 362
 using, 361

SQLiteDatabase class, 364

src attribute, widgets, 63

src directory, 31, 32, 51
 adding third-party code to project, 369

SSL support
 HttpClient interface, 381

StackOverflow, 537, 538

StackOverflowException
 view hierarchy depth, 313, 314

START_NOT_STICKY value
communicating to services, 398, 409
START_REDELIVER_INTENT value, 398
START_STICKY value, 398
startActivity method
 ACTION_CALL intent, 466
 ACTION_DIAL intent, 464
 launching peer activity, 228,
 229–231
startActivityForResult method, 229
 picking/viewing contact, 189, 190
startForeground method, notifications,
 430
starting activity
 onStart method, 185
startPlayer method, FakePlayer activity,
 410
startService method
 communicating to services, 397–398
 Downloader service, 403, 405
 FakePlayer activity, 410
 music player service, 407
state
 getExternalStorageState method,
 331
 getLastNonConfigurationInstance
 method, 193, 195
 onCreate method, 186
 onRestoreInstanceState method,
 186
 onRetainNonConfigurationInstance
 method, 193–195
 onSaveInstanceState method, 186,
 190–192, 193
 recreating instance state, 186
 restoreMe method, 192, 195
 saving application-instance state,
 186
 saving state in Bundle, 186, 190–193
 screen rotation, 189
 Web service interface, 419
states, activities, 183–184
 active state, 183
 dead state, 184
 paused state, 183
 stopped state, 184
status bar, Android 3.0 screen, 282
Stay awake option
 setting up Android devices, 21
StockPreferenceFragment class, 352,
 353
stopForeground method, notifications,
 430, 431
stopped state, activities, 184
stopping activity
 onStop method, 185
stopSelf method, Service class, 398
stopService method, 399
 stopping services, 398
 FakePlayer activity, 410
stopwatch
 Chronometer widget, 156
storage
 accessing files in
 files prepackaged with
 application, 323–326
 Android devices, 5
 external storage, 330–331
 Lawnchair, 502
 project files, 27
 Web Storage, 500–502
stretchColumns property, TableLayout,
 89
stretchMode property, GridView, 111,
 112
StrictForRealz class
 conditional use of StrictMode, 334
StrictMode class, 331–334
 avoiding unresponsive code, 331
 conditional use of, 333–334
 debugging, 332
 development/production
 environments, 333
 enableDefaults method, 332
 Internet access, 392
 setting up, 332
 thread policies, 332
 using StrictWrapper, 333–334
 VM policies, 332
StrictWrapper class
 conditional use of StrictMode,
 333–334

- string element
 - name attribute, 236
- string formats, 236
 - styled text and, 237–239
- String objects
 - styled text and strings, 237
- string-array element
 - name attribute, 245
- strings, 235–239
 - escape characters, 236
 - format method, 236
 - getString method, 236
 - handling multiple languages, 246
 - internationalization, 246
 - languages, 246
 - localization, 246
 - placeholders, 237
 - referencing from layout file, 236
 - res/values directory, 236
 - styled text, 237–239
- strings.xml file
 - res/values directory, 33, 236
- style attribute
 - applying styles, 253
 - inheriting, 254
 - LinearLayout container, 305
 - ProgressBar widget, 206, 251
 - res/layout/main.xml file, 252
 - values, 255
- style element, 252
 - inheriting style attributes, 254
 - item child elements of, 252
- style resources
 - res/values directory, 252
- styled text
 - strings, 237–239
 - styled string formats, 237–239
- styles, 251–256
 - available attributes, 254
 - inheriting, 255
 - inheriting style attributes, 254
 - invalid styles, 254
 - res/values directory, 252
 - themes, 256
 - using single definition, 251
- v11 resource set suffix, 288
 - values, 255
- stylus
 - smartphone programming, 4
- submenus
 - menu element, menus, 176
- subordinate activities, 227
 - startActivityForResult method, 229
- suffixes, directory names, 33
- supports-screens element, 47
 - creating/installing PhoneGap projects, 511
- EU4You project, 267, 274
 - supporting different screen sizes, 261
 - writing tablet-only apps, 321
- Swing
 - Jbutton click, 53
 - switcher widgets, 157
- Sysinfo tab, DDMS, 485
- system bar, Android 3.0 screen, 282, 283

T

- TabActivity widget, 144
 - tabbed browsing, 232
 - tabbed browsing, 232–234
- TabHost container, 142, 143
 - adding tabs dynamically at runtime, 146, 148
 - addTab method, 145
 - FrameLayout container, 143
 - getting via findViewById(), 144, 145
 - newTabSpec method, 144, 145
 - registering tab, 145
 - setCurrentTab method, 145
 - setup method, 144
 - TabWidget widget, 143
 - taking advantage of bigger screen, 266
 - views representing tab contents, 144
- TableLayout container, 87–90
 - collapseColumns property, 89
 - fragments handling multiple screen sizes, 298
- layout_column property, 88

layout_span property, 88
non-row children of, 88
putting cells in rows, 88
ScrollView container wrapping, 100
setColumnXyz methods, 89
shrinkColumns property, 89
stretchColumns property, 89
users setting up preferences, 344

TableRow class
 putting cells in rows, 88

tables, SQLite, 362

tablets
 fragments handling multiple screen sizes, 297
 Honeycomb, 281
 running phone-centric app, 286
 writing tablet-only apps, 321

tabs, 232
 adding dynamically at runtime, 146–149
 fragments adding tabs to action bar, 299
 tabbed browsing, 232–234
 using Activity as content of, 232

TabSpec objects, 144, 145

TabWidget widget, 143, 146
 Holographic themes, Honeycomb, 286

target command-line switch
 android create project command, 27

target component, intents, 222

targets
 AVD (Android Virtual Device), 315
 finding available targets, 27

targetSdkVersion attribute, uses-sdk element, 48, 316
 displaying action bar, 289
 maps and fragments, 459
 running phone-centric app on tablet, 286

tasks
 AsyncTask class, 208–213

telephony
 implicit hardware feature requirements, 533

Telephony Actions group, DDMS, 482

TelephonyManager class, 463, 464
testing devices, 535
text
 styled text, 237–239

text attribute
 XML-based layouts, 57

textAppearance attribute, TextView, 293

text-entry field, soft keyboards, 96

TextSwitcher widget, 157

TextUtils class
 htmlEncode method, 239

TextView class/widget, 61–62
 ArrayAdapter creating, 104
 CheckedTextView widget, 156
 ellipsis character, 471
 enhancing lists, 120
 packaging fonts, 469
 right-to-left (RTL) languages, 250
 setTypeface method, 469
 textAppearance attribute, 293

TextWatcher interface, 115, 116

theme attribute, 256

Theme.Holo theme, Honeycomb, 286

Theme.Holo.Light theme, Honeycomb, 286

themes, 256

Third party Add-ons
 Android SDK and AVD Manager, 10
third-party libraries, Java, 369

Thread class, Java, 204

thread policies
 StrictMode, 332

threads, 203–219
 AndroidHttpClient class, 382, 392
 background threads, 203

Handler class, 204–208
 communicating via messages, 205–208
 communicating via runnables, 208

HttpClient interface, 382

IntentService class, 403

modifying UI, 204

ProgressBar widget, 204

registering Handler objects, 204

runOnUiThread method, 208

screen rotation and, 214–218
UI (main) thread, 203–204, 205
time
 AnalogClock widget, 140
 DigitalClock widget, 140
 displaying, 140
 setting time, 135
TimePicker widget, 135
TimePickerDialog, 135, 138
Titanium Mobile, 526
title attribute, menu items, 176
titles
 setTitle method, Builder, 180
T-Mobile G1
 resources for, 247
toasts, 179–180
 downloading files, 389
 example, 181
 methods, 180
 using BeanShell on Android, 373
toggle method
 CheckBox widget, 66
 RadioButton widget, 69
ToggleButton widget, 157
toggleSatellite method, MapView, 458
tools
 Android Debug Bridge (adb), 487
 Dalvik Debug Monitor Service (DDMS), 477–487
 Eclipse, 37–46
 Hierarchy Viewer tool, 473–477
tools directory
 installing Android SDK, 9
tooltip support
 ADT add-in, Eclipse, 37
touchscreen
 emulators, 263
 explicit hardware feature requirements, 532
 reqTouchScreen attribute, 532
 resources, 246
Traceview, 331
tutorials, 537
Twitter
 App Inventor, 526
typeface attribute, 468

Typeface class
 createFromAsset method, 470
 creating Typeface object, 469

U

Ubuntu
 setting up development machine to talk to devices, 22
UI (main) thread, 203–204
 application not responding error, 203
 AsyncTask class, 208–213
 callbacks, 203
 causes of slow response, 331
 current execution on, 208
 Handler objects, 205
 Internet access, 391
 modifying UI, 204
 publishProgress method, 210
 runOnUiThread method, 208
 screen rotation, 218
unbindService method, 399
units of measurement see dimensions
unregisterReceiver method, 225
update method, SQLiteDatabase, 363
updateForecast method, 378, 379
updateTime method, 53
USB debugging option
 setting up Android devices, 21
user agent
 setUserAgent method, 165
user input
 cost of using background threads, 219
 getting control of, 294–295
user interface
 Android 3.0 screen, 282
 avoiding unresponsive code, 331–334
 fragments handling multiple screen sizes, 298
users
 notifications, 423–433
 setting up preferences, 341–344
uses-configuration element, 531

uses-feature element
 explicit hardware requirements, 532
 implicit hardware requirements, 533
uses-permission element
 AndroidManifest.xml file, 437
 declaring permissions, 439
 securing applications, 438
uses-sdk element, 48
 maxSdkVersion attribute, 316
 minSdkVersion attribute, 48, 315
 targetSdkVersion attribute, 48, 316
 displaying action bar, 289
 running phone-centric app on tablet, 286

V

v11 resource set suffix, styles, 288
 persistent row highlighting, 305
validation messages
 AlertDialog, 180
valueOf method, ColorStateList, 72
values
 res/values directory, 235
 style attributes, 255
values directory see res/values directory
varargs, AsyncTask, 209
VerifyError, 317
version-based resource sets, 262
versionCode/versionName attributes, manifest element, 34
versions, 48
 API levels, 315
 conditional use of StrictMode, 333–334
 detecting build version, 316
 handling multiple Android versions, 314
 highest supported version, 316
 Honeycomb UI, 318–320
 lowest supported version, 315
 targeted development version, 316
 HTML5 applications concerns, 503
 Java code with Android, 370
 maxSdkVersion attribute, 316

minSdkVersion attribute, 48
targetSdkVersion attribute, 48
uses-sdk element, 48
vertical orientation
 LinearLayout container, 74
 RelativeLayout container, 82
vertical scrolling see ScrollView container
verticalSpacing property, GridView, 111, 113
vibrations
 notifications, 424, 427
View button
 picking/viewing contact, 189
View class
 inflating XML files into View objects, 123–124
 methods, 71
 properties, 70–71
 widgets extending, 70
view hierarchies, 313–314
View properties
 Hierarchy Viewer tool, 476
ViewAnimator class
 showNext method, 151
ViewFlipper container, 149–153
 setFlipInterval method, 153
 showNext method, 151
ViewHolder class
 RatingBar widget, 131, 132
 using holder pattern, 127–129
views
 adding to action bar, Honeycomb UI, 291–295
 convertView parameter, getView(), 125–127
 ExpandableListView container, 156
 getView method, 121–123
 ImageView widget, 63
 inflating XML files into View objects, 123–124
 ListView widget, 104, 106–108
 enhancing lists, 119–120
 ScrollView container, 90–92
 setting activity's content view, 53
 TextView widget, 61–62

using holder pattern, 127–129
WebView widget, 159–166
ViewSwitcher widget, 157
visibility property, widgets, 71
visible attribute, menu items/groups, 177
VM see Dalvik virtual machine
VM policies
 StrictMode, 332

W

W3C DOM parser, 379
watchers
 TextWatcher, 115
WeatherAPI project, 410
WeatherBinder class, 413–415
WeatherDemo activity, 416–419
WeatherListener object, 412
WeatherService class, 415–416
web browsing
 tabbed browsing, 232–234
Web service interface
 creating client-side Java API, 410–421
 Forecast class, 412
 orientation changes, 411
 state, 419
 unbinding from service, 421
 WeatherBinder class, 413–415
 WeatherDemo activity, 416–419
 WeatherListener object, 412
 WeatherService class, 415–416
Web SQL Database option, 502
Web Storage, 500–502
 Checklist app, HTML5, 501–502
 deleting items from storage, 501
 localStorage object, 500
WebKit browser component
 HTTP operations via HttpClient, 378
 Internet access, Android, 377
 PhoneGap development for, 507
 PhoneGap limitations, 510
WebKit object, 165

WebView widget, 159–166
 adjusting settings via WebSettings, 165
 browser navigation, 162
 canGoBack/canGoForward methods, 163
 clearCache/clearHistory methods, 163
 enabling JavaScript, 161, 165
EU4You project, 275
getSettings method, 161, 165
getting content into, 161
goBack/goForward methods, 163
handling links, 163
Internet access, 382
loadData method, 161
loadUrl method, 160, 161
onCreate method, 160
reload method, 162
requesting permission to access Internet, 160
settings/preferences/options, 165
setWebViewClient method, 163
shouldOverrideUrlLoading method, 163, 164
using as local UI, 163–165
WebViewFragment class, 306
weight
 LinearLayout container, 75
widgets
 see also classes
accessing identified widgets, 57
adapters, 103–104
AnalogClock widget, 140
Android toolkit, 61–70
applying styles to, 253
ArrayAdapter class, 104
attaching to Java code, 57
AutoCompleteTextView widget, 65, 115–118
available style attributes, 254
Button widget, 62–63
CheckBox widget, 66–68
CheckedTextView widget, 156
Chronometer widget, 141, 156
color attributes, 71–72

- complex views, 57
containers, 73–92
contentDescription property, 71
creating/attaching to activity, 55
DatePicker widget, 135
DigitalClock widget, 140
drawSelectorOnTop property, 118
EditText widget, 64–65
findViewById method, 71
Gallery widget, 118, 157
getParent method, 71
getRootElement method, 71
GridView widget, 111–114
Holographic themes, Honeycomb, 285
ImageButton widget, 63
ImageSwitcher widget, 157
ImageView widget, 63
interactive widgets, 129–133
isEnabled method, 71
Java code, 57
LinearLayout container, 73–81
ListActivity widget, 104–106
ListFragment class, 301–306
ListView widget, 104, 106–108
enhancing lists, 119–120
MultiAutoCompleteTextView widget, 157
navigating tree of, 71
nextFocusXyz properties, 71
onSaveInstanceState method, 186
overlapping, 86
padding property, 70
ProgressBar widget, 204
properties/methods from View class, 70
QuickContactBadge widget, 157
RadioButton widget, 68–70
RatingBar widget, 129–133
RelativeLayout container, 81–87
requestFocus method, 71
screen rotation, 189
ScrollView container, 90–92
SeekBar widget, 141–142
setEnabled method, 71
spacing property, 118
specifying relationships between, 55
Spinner widget, 108–111
spinnerSelector property, 118
src attribute, 63
TabActivity widget, 144, 232
TableLayout container, 87–90
TabWidget widget, 143, 146
TextSwitcher widget, 157
TextView widget, 61–62, 104
TimePicker widget, 135
ToggleButton widget, 157
ViewSwitcher widget, 157
visibility property, 71
WebView widget, 159–166
wikis, 537
Windows
setting up development machine to talk to devices, 21–22
windowSoftInputMode attribute, 100
withText value, showAsAction attribute, 290
wrap_content value, containers, 74
handling multiple screen sizes, 259
write operations, database, 367
WRITE_EXTERNAL_STORAGE permission, 383, 438, 440
WVGA emulator
EU4You project, 271, 273, 274, 276

X

- xlargeScreens attribute, 261
XML data-binding framework, Flex, 103
xml directory see res/xml directory
XML files, 241–243
accessing, 324
describing menus via, 175–177
getXml method, 241
inflating into menus, 175, 177–178
inflating into View objects, 123–124
Java code reading, 324
PreferenceScreen element, 341
res/xml directory, 235
RingtonePreference element, 341
running project in emulator, 45

XML layouts, 55, 56
 @ signs, 57
 @+id convention, 57
adding custom views to action bar,
 Honeycomb UI
 defining layout, 292–293
 putting layout in menu, 293–294
attaching widgets to Java code, 57
Button class, 56, 57
choiceMode attribute, 106, 107
complex views, 57
containers, 73–92
creating/attaching widgets to
 activity, 55
DetailsActivity class, EU4You_6, 311
drawSelectorOnTop property, 118
EU4You_6 project, 307–308
id attribute, 56, 57
layout_height attribute, 57
layout_width attribute, 57
LinearLayout container, 73–81
NowRedux demo, 58
properties, 118
reasons for using, 55
RelativeLayout container, 81–87
res/layout directory, 235

root element, 56
screen rotation, 188
ScrollView container, 90–92
spacing property, 118
specification of widget relationships,
 55
spinnerSelector property, 118
TableLayout container, 87–90
text attribute, 57
WebView widget, 159
XML pull parser, 242
XmlPullParser class, 241, 243
XML-RPC layer, SOAP
 Apache HttpClient library, 377

Y

YAFFS (Yet Another Flash File System),
 335

Z

zooming
 setZoom method, MapController,
 453