

Lecture 2: Processes

Operating Systems – EDA093/DIT401

Vincenzo Gulisano
vincenzo.gulisano@chalmers.se



UNIVERSITY OF
GOTHENBURG


What to read (Main textbook)

- Chapter 2.1

(extra facultative reading: 3.1-3.4, 3.5.3, 3.6.3 from Silberschatz
Operating System Concepts)

Objectives

- To introduce the notion of a process: a program in execution, which forms the basis of all computation
- To describe the various features of processes, including scheduling, creation and termination, and communication
- To explore inter-process communication using shared memory and message passing

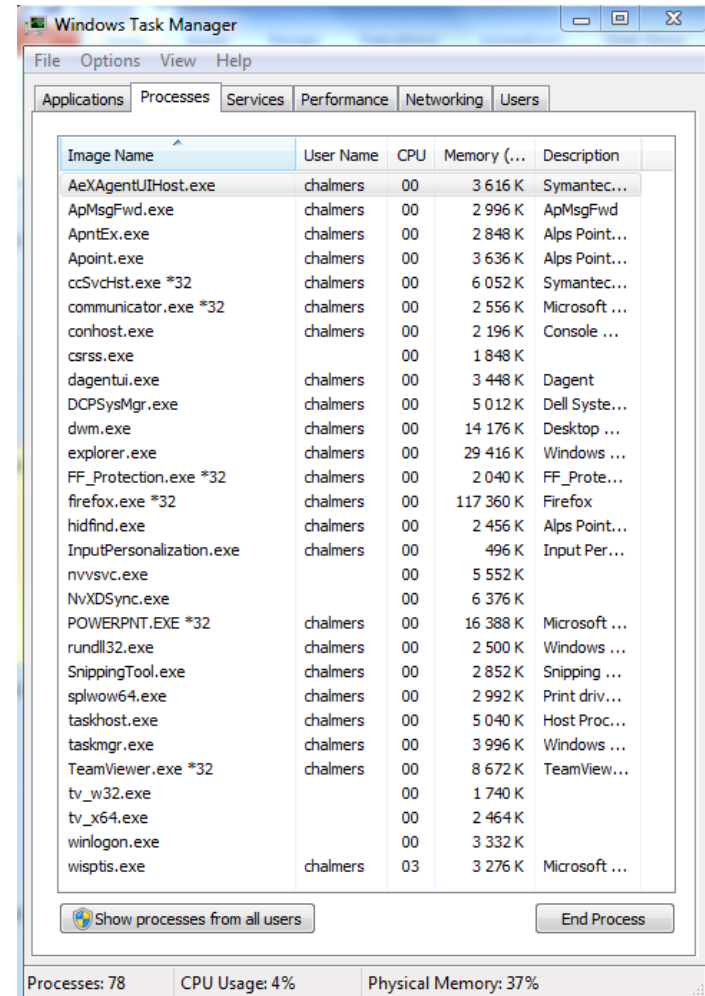

AGENDA

- Processes (Introduction)
- Process Scheduling
- Operations on Processes
- Interprocess Communication (contains self-reading part)


AGENDA

- Processes (Introduction)
- Process Scheduling
- Operations on Processes
- Interprocess Communication (contains self-reading part)

1. We run several programs at the same time




2. One CPU can only run one program at the time

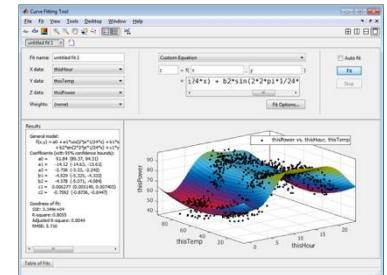

Concurrent vs Parallel execution

~~1. We run several programs at the same time~~



1. We feel several programs run at the same time


~~2. One CPU can only run one program at the time~~



2. Each CPU core can only run one program at the time

(Next lecture)


Process, not program

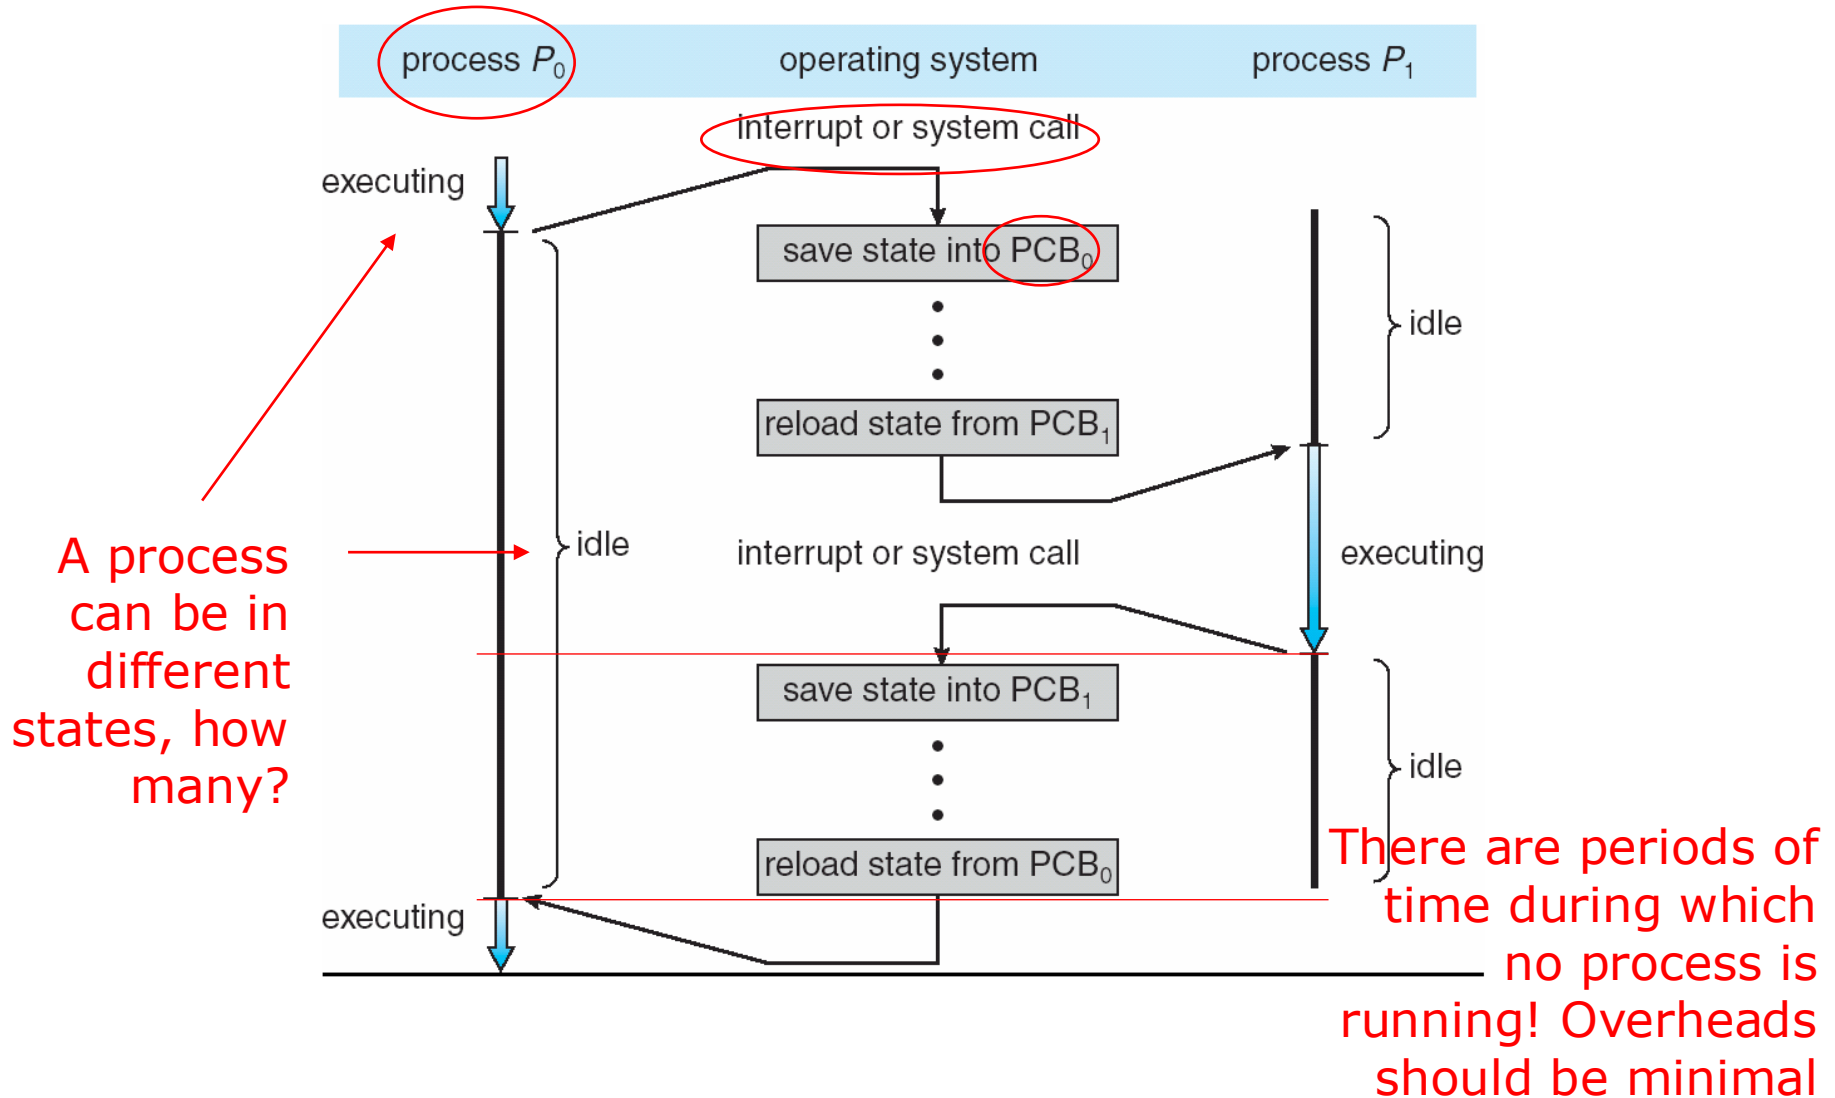

Process Concept


- Process (or job, task) – a program in execution; process execution must progress in sequential fashion
- Program is passive entity stored on disk (executable file), process is active
- Program becomes process when executable file loaded into memory
- Execution of program started via GUI mouse clicks, command line entry of its name, ...
- One program can be several processes (consider multiple users executing the same program)
- A process can be the execution environment for other code (e.g., Java Virtual Machine)

Process in Memory

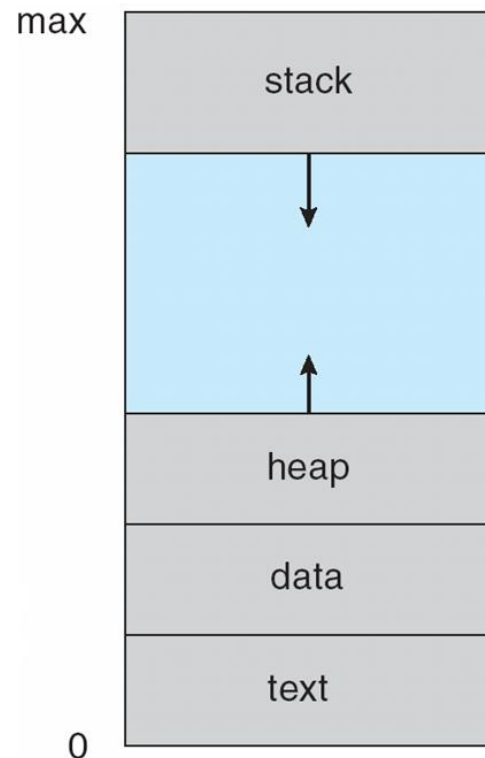

- Multiple parts:
 - The program code, also called text section
 - Data section containing global variables
 - Heap containing memory dynamically allocated during run time
 - Stack containing temporary data
 - Function parameters, return addresses, local variables

Diagram of Process State

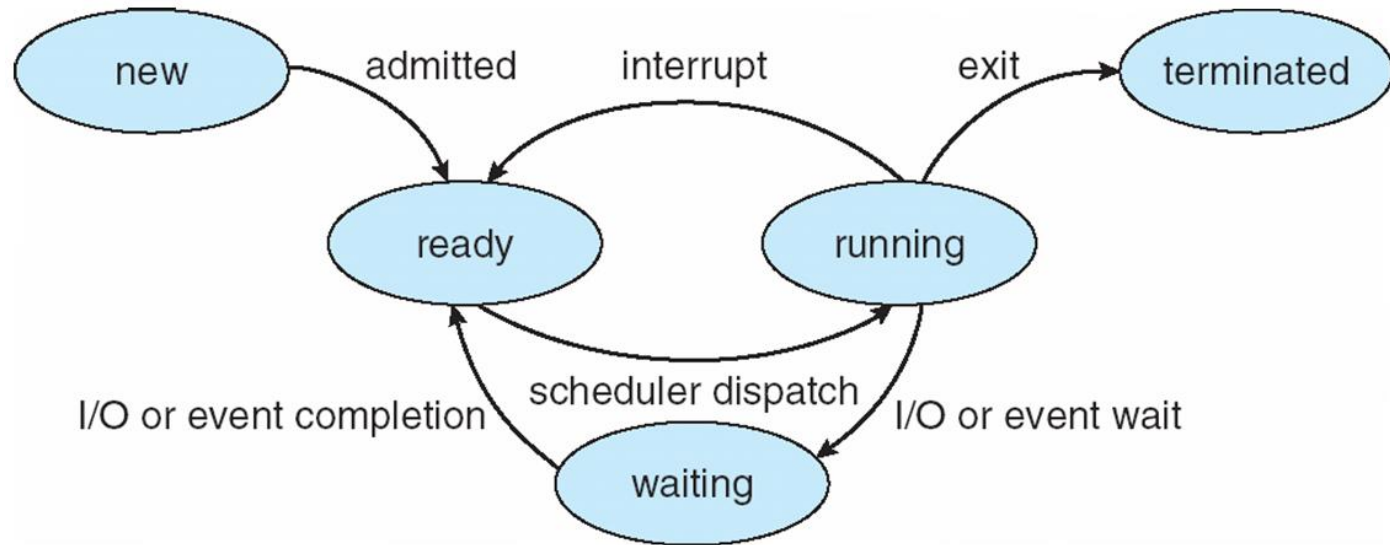

- As a process executes, it changes state
 - **new**: The process is being created
 - **ready**: The process is waiting to be assigned to a processor
 - **running**: Instructions are being executed
 - **waiting**: The process is waiting for some event to occur
 - **terminated**: The process has finished execution


Important: only 1 process can be **running** on any processor at any instant.

Context Switch

- When CPU switches to another process, the system must save the state of the old process and load the saved state for the new process via a context switch
- Context of a process represented in the PCB
- Context-switch time is overhead; the system does no useful work while switching
 - The more complex the OS and the PCB → the longer the context switch
- Time dependent on hardware support
 - Some hardware provides multiple sets of registers per CPU → multiple contexts loaded at once

Process Control Block (PCB)

- Information associated with each process in the OS
- Process state: running, waiting, etc.
- Program counter: location of next instruction to execute
- CPU registers: contents of all process-centric registers
- CPU scheduling information: priorities, scheduling queue pointers
- Memory-management information: memory allocated to the process
- Accounting information: CPU used, clock time elapsed since start, time limits
- I/O status information: I/O devices allocated to process, list of open files

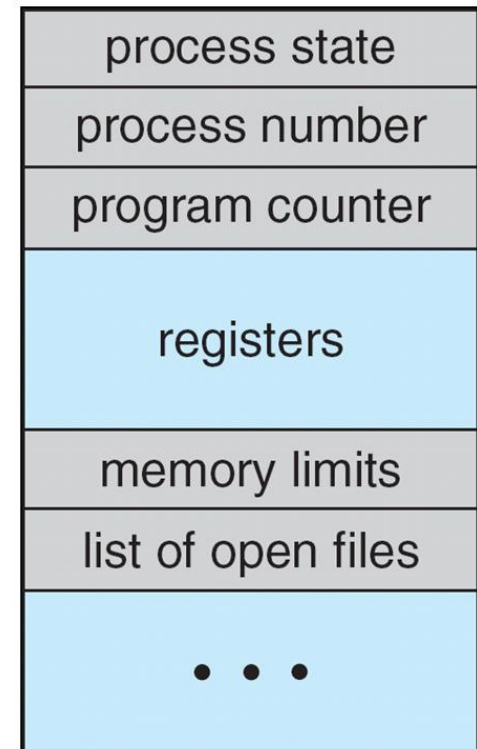


AGENDA

- Processes (Introduction)
- Process Scheduling
- Operations on Processes
- Interprocess Communication (contains self-reading part)

Process Scheduling


- Maximize CPU use, quickly switch processes onto CPU for time sharing
- Process scheduler selects among available processes for next execution on CPU
- Maintains scheduling queues of processes
 - Job queue – set of all processes in the system
 - Ready queue – set of all processes residing in main memory, ready and waiting to execute
 - Device queues – set of processes waiting for an I/O device
 - Processes migrate among the various queues

Ready Queue And Various I/O Device Queues

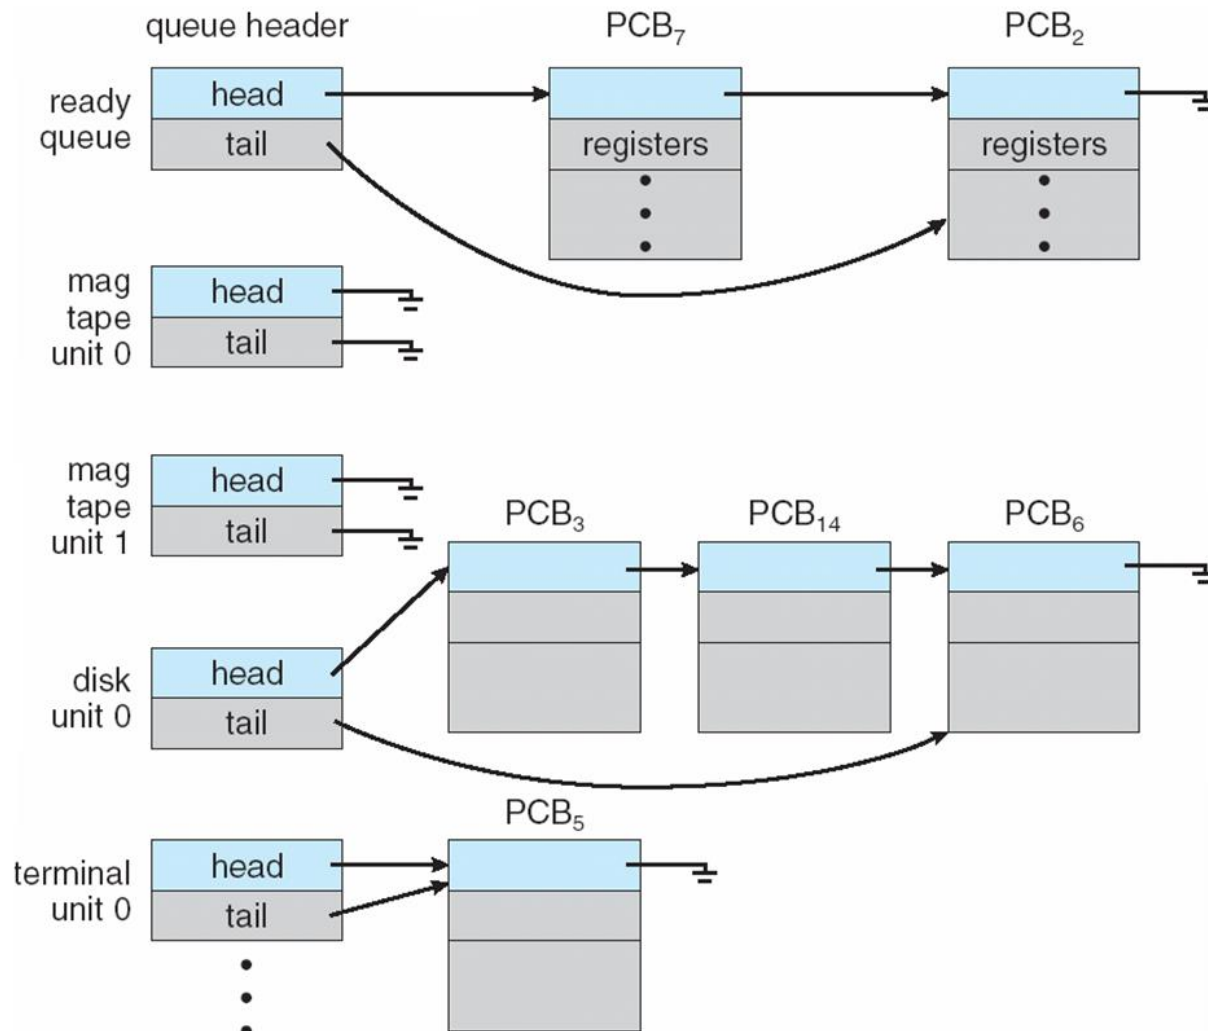

Representation of Process Scheduling

Queueing diagram represents queues, resources, flows

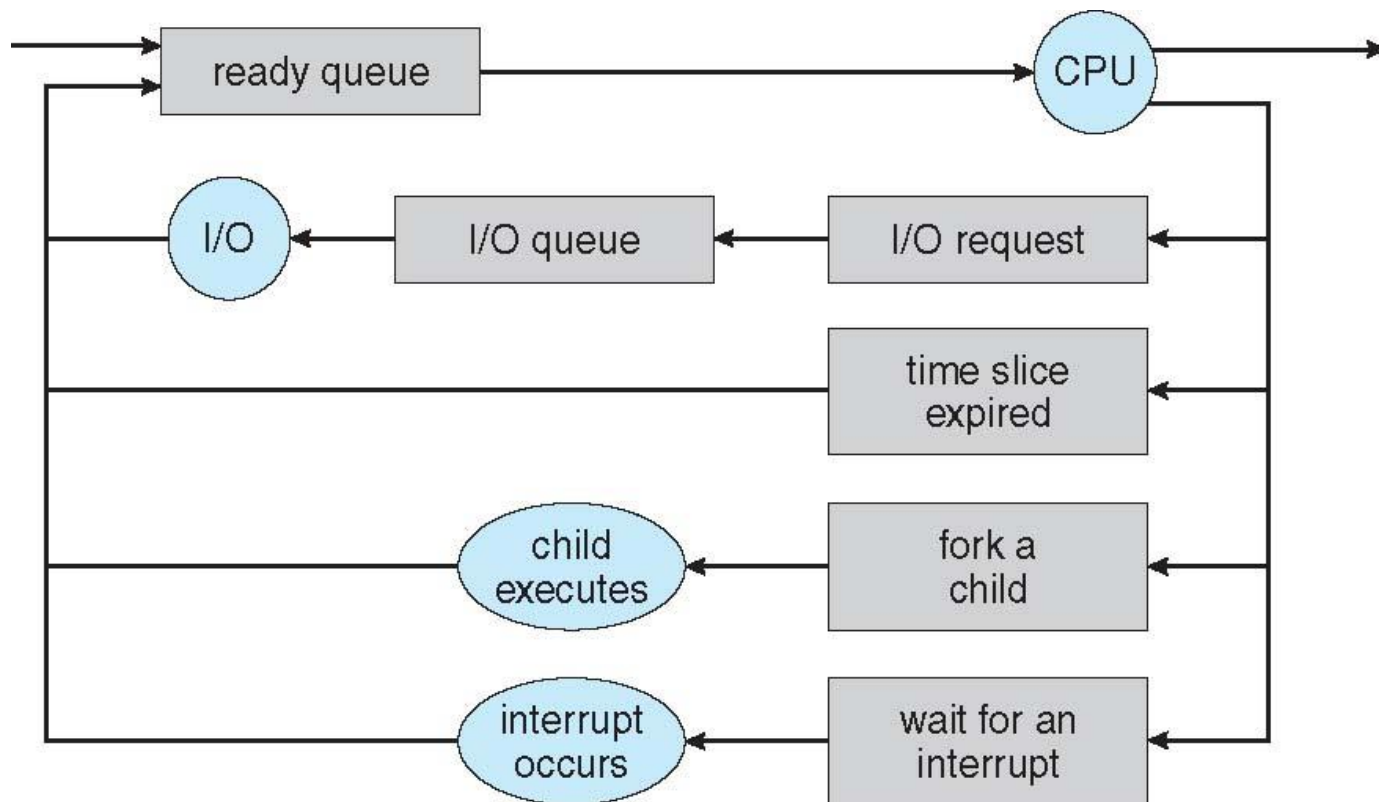

Schedulers

- Short-term scheduler (or CPU scheduler) – selects which process should be executed next and allocates CPU
 - Sometimes the only scheduler in a system
 - Short-term scheduler is invoked frequently (milliseconds) $\Rightarrow$ (must be fast)
- Long-term scheduler (or job scheduler) – selects which processes should be brought into the ready queue
 - Long-term scheduler is invoked infrequently (seconds, minutes) $\Rightarrow$ (may be slow)
 - The long-term scheduler controls the degree of multiprogramming

Questions - Part 1

The instruction to be run next when process X is scheduled is maintained in ...

1. its text section
2. its data section
3. its process control block

Which of the following state switch is not valid?

1. ready --> running
2. running --> ready
3. running --> waiting
4. ready --> waiting

During a context switch, what is saved by the OS (to be later re-loaded) is ...

1. the PCB of the process
2. the PCB and the memory of the process
3. the memory of the process

AGENDA

- Processes (Introduction)
- Process Scheduling
- Operations on Processes
- Interprocess Communication (contains self-reading part)


Operations on Processes

- System must provide mechanisms for:
 - process creation,
 - process termination,
 - and so on as detailed next

Process Creation

- Parent process create children processes, which, in turn create other processes, forming a tree of processes
- Generally, process identified and managed via a process identifier (pid)
- Resource sharing options
 - Parent and children share all resources
 - Children share subset of parent's resources
 - Parent and child share no resources
- Execution options
 - Parent and children execute concurrently
 - Parent waits until children terminate

A Tree of Processes in Linux

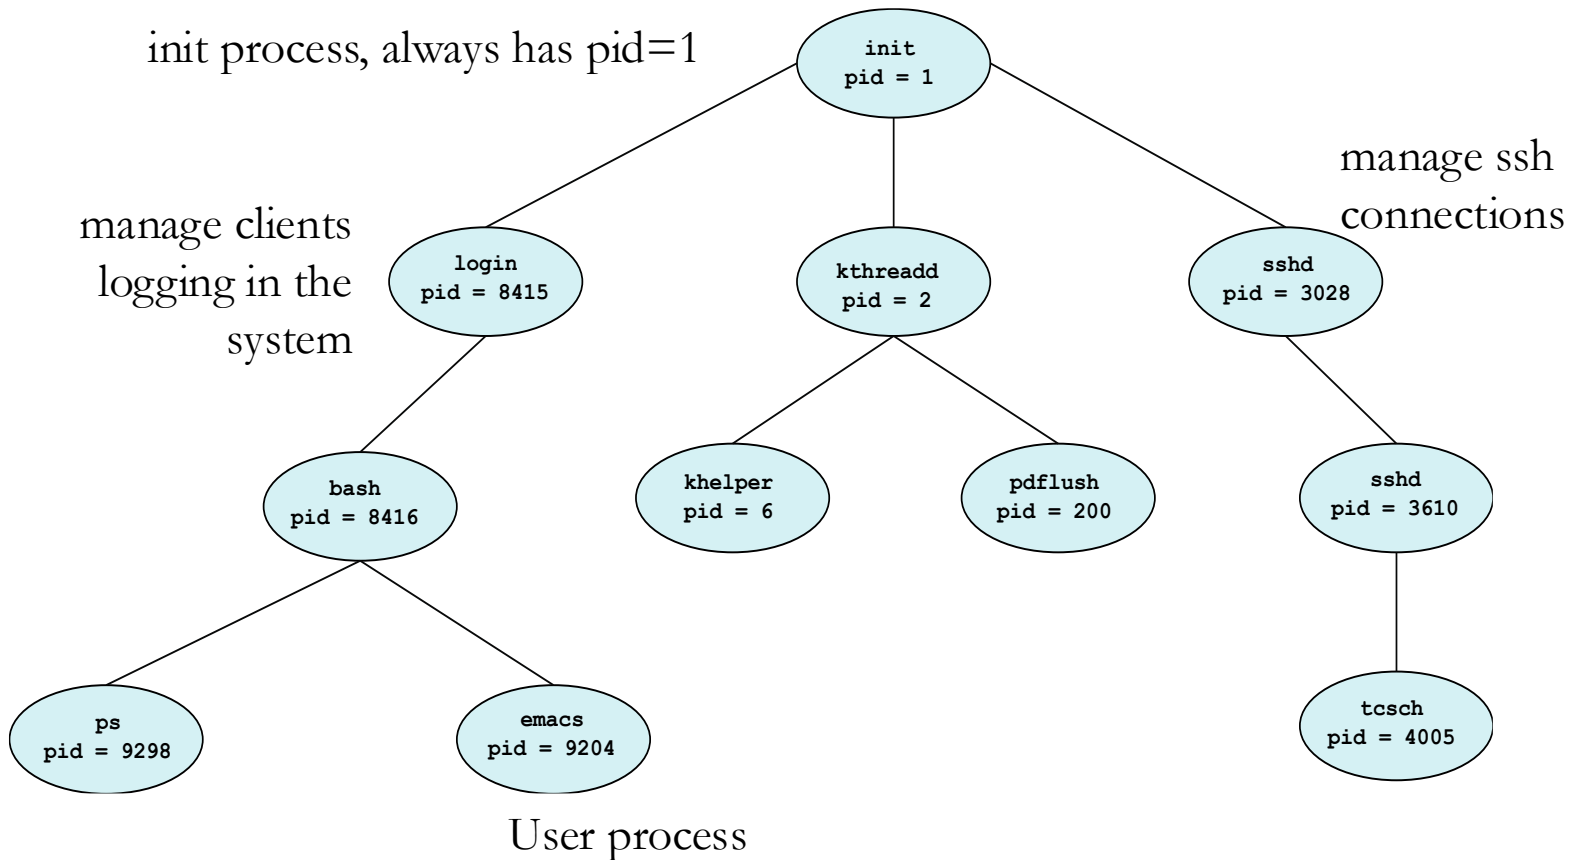


ps -el (UNIX)

```
XXXXXXXXXX:~$ pstree -pl
init(1)-+-NetworkManager(1215)-+-dhclient(3386)
|
|   |-dnsmasq(3390)
|   |
|   |   |-{NetworkManager}(1224)
|   |   `-{NetworkManager}(2164)
|   |-accounts-daemon(1527)---{accounts-daemon}(1530)
|   |-acpid(1360)
|   |-apache2(16861)-+-apache2(2458)
|   |
|   |   |-apache2(2460)
|   |   |-apache2(2461)
|   |   |-apache2(2462)
|   |   |-apache2(2463)
|   |   |-apache2(2464)
|   |   |-apache2(4079)
|   |   |-apache2(4082)
|   |   |-apache2(5464)
|   |   |-apache2(5465)
|   |   `--apache2(5466)
|   |-at-spi-bus-laun(3570)-+-dbus-daemon(3576)
|
|   ...
```

Process Creation (Cont.)

- Address space
 - Child duplicate of parent
 - Child has a program loaded into it
- UNIX examples
 - `fork()` system call creates new process
 - `exec()` system call used after a `fork()` to replace the process' memory space with a new program

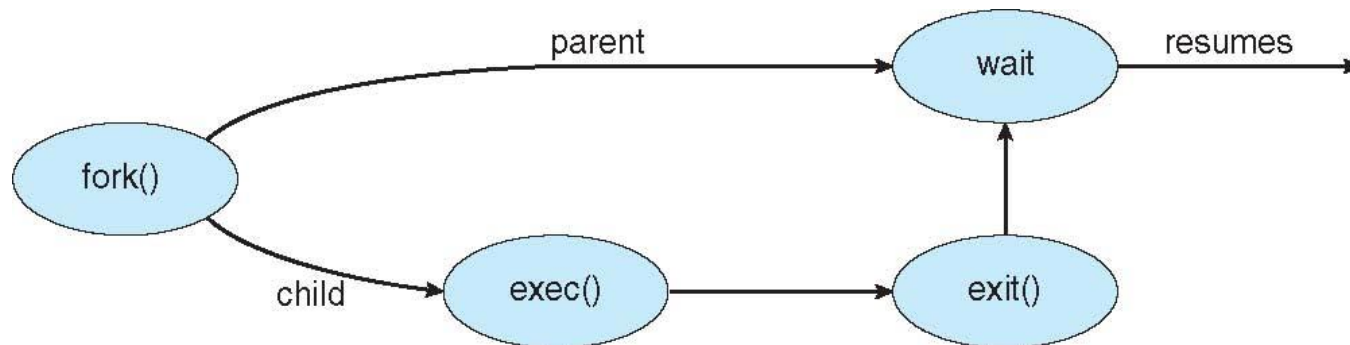

C Program Forking Separate Process

```
#include <sys/types.h>
#include <stdio.h>
#include <unistd.h>
```

```
int main()
{
    pid_t pid;
```

```
    /* fork a child process */
    pid = fork();
```


```
    if (pid < 0) { /* error occurred */
        fprintf(stderr, "Fork Failed");
        return 1;
    }
```

```
    else if (pid == 0) { /* child process */
        execlp("/bin/ls", "ls", NULL);
    }
```

```
    else { /* parent process */
        /* parent will wait for the child to complete */
        wait(NULL);
        printf("Child Complete");
    }
```

```
    return 0;
```

```
}
```

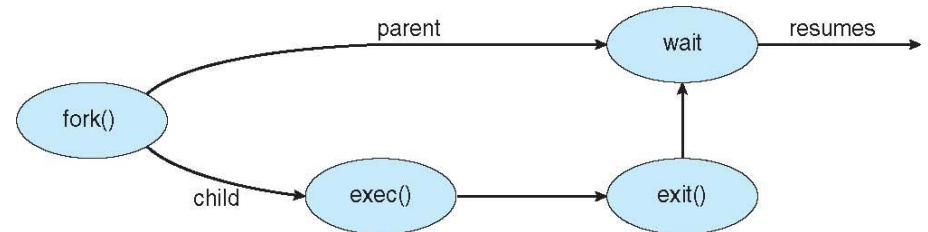

Process Termination


- Process executes last statement and then asks the operating system to delete it using the `exit()` system call.
 - Returns status data from child to parent (via `wait()`)
 - Process' resources are deallocated by operating system
- Parent may terminate the execution of children processes using the `abort()` system call. Some reasons for doing so:
 - Child has exceeded allocated resources
 - Task assigned to child is no longer required
 - The parent is exiting and the operating systems does not allow a child to continue if its parent terminates

Process Termination

- Some operating systems do not allow child to exist if its parent has terminated. If a process terminates, then all its children must also be terminated.
 - cascading termination. All children, grandchildren, etc. are terminated.
 - The termination is initiated by the operating system.
- The parent process may wait for termination of a child process by using the `wait()` system call. The call returns status information and the pid of the terminated process
- `pid = wait(&status);`
- If no parent waiting (did not invoke `wait()`) process is a zombie
- If parent terminated without invoking `wait`, process is an orphan

Multiprocess Architecture – Chrome Browser

- Many web browsers ran as single process (some still do)
 - If one web site causes trouble, entire browser can hang or crash
- Google Chrome Browser is multi process with 3 different types of processes:
 - Browser process manages user interface, disk and network I/O
 - Renderer process renders web pages, deals with HTML, Javascript. A new renderer created for each website opened
 - Runs in sandbox restricting disk and network I/O, minimizing effect of security exploits
 - Plug-in process for each type of plug-in

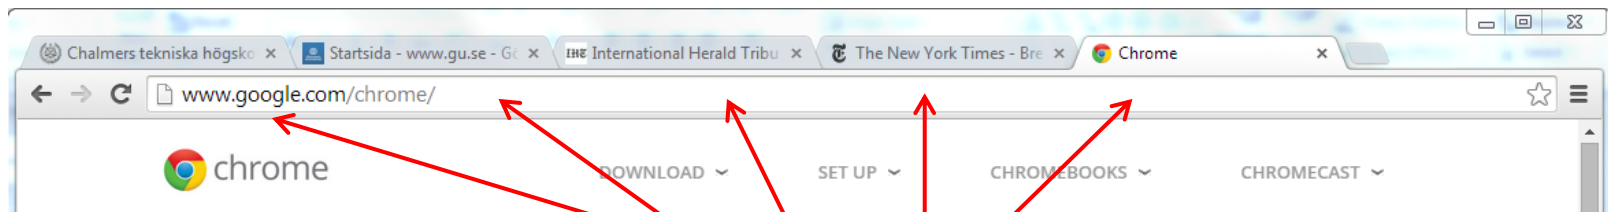

Each tab represents a process

AGENDA


- Processes (Introduction)
- Process Scheduling
- Operations on Processes
- Interprocess Communication (contains self-reading part)

Interprocess Communication

- Processes within a system may be independent or cooperating
- Cooperating process can affect or be affected by other processes, including sharing data
- Reasons for cooperating processes:
 - Information sharing
 - Computation speedup
 - Modularity
- Cooperating processes need interprocess communication (IPC)
- Two models of IPC
 - Shared memory
 - Message passing

Communications Models

(a) Message passing. (b) shared memory.

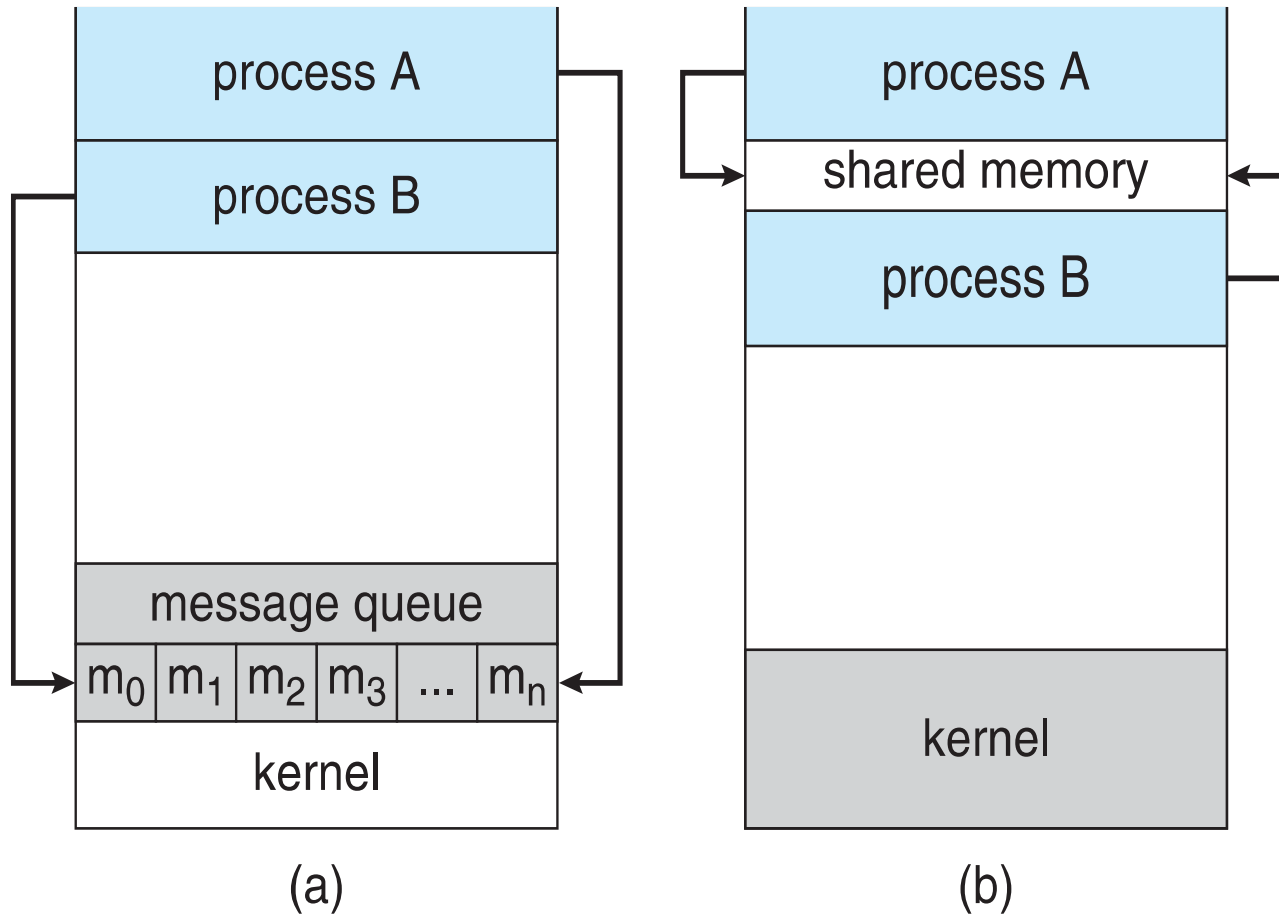


Cooperating processes

Producer-Consumer Problem


- Paradigm for cooperating processes, producer process produces information that is consumed by a consumer process
- **unbounded-buffer:** places no practical limit on the size of the buffer
- **bounded-buffer:** assumes that there is a fixed buffer size

Interprocess Communication – Shared Memory

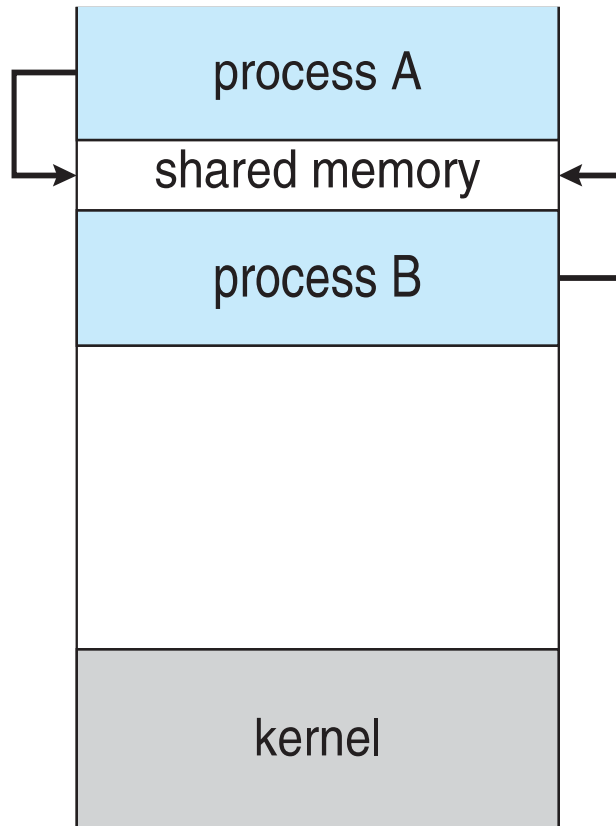

- Major issues is to provide mechanism that will allow the user processes to synchronize their actions when they access shared memory.
- Synchronization is discussed in detail in following lessons

Interprocess Communication – Message Passing

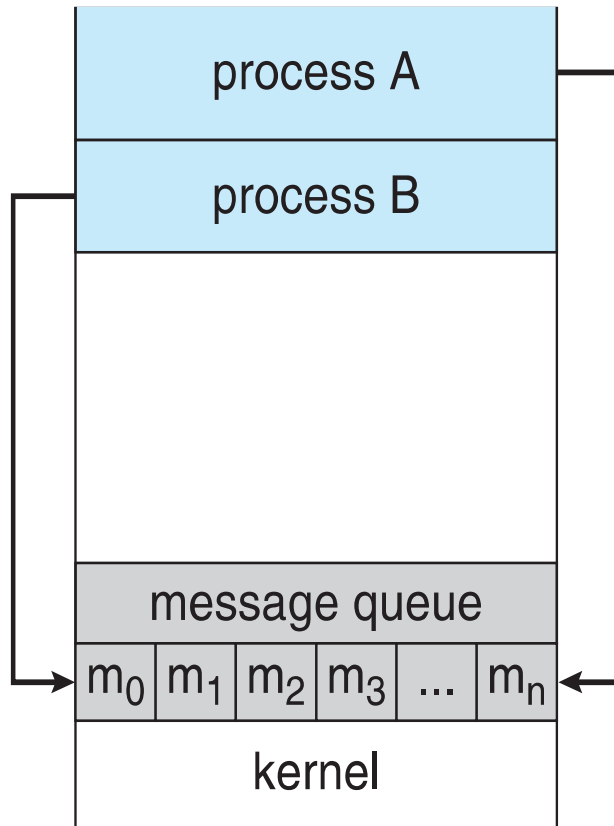

- If processes P and Q wish to communicate, they need to:
 - Establish a communication link between them
 - Exchange messages via send/receive
- Implementation issues:
 - How are links established?
 - Can a link be associated with more than two processes?
 - How many links can there be between every pair of communicating processes?
 - What is the capacity of a link?
 - Is the size of a message that the link can accommodate fixed or variable?
 - Is a link unidirectional or bi-directional?

Logical implementation – Issues [Self-reading section]

- Naming, Direct or indirect communication
- Synchronous or asynchronous communication
- Automatic or explicit buffering

Logical implementation - Issues

- Naming, Direct or indirect communication
- Synchronous or asynchronous communication
- Automatic or explicit buffering

Direct Communication

- Processes must name each other explicitly:
 - `send (P, message)` – send a message to process P
 - `receive(Q, message)` – receive a message from process Q
- Properties of communication link
 - Links are established automatically
 - A link is associated with exactly one pair of communicating processes
 - Between each pair there exists exactly one link
 - The link may be unidirectional, but is usually bi-directional

Indirect Communication

- Messages are directed and received from mailboxes (also referred to as ports)
 - Each mailbox has a unique id
 - Processes can communicate only if they share a mailbox
- Properties of communication link
 - Link established only if processes share a common mailbox
 - A link may be associated with many processes
 - Each pair of processes may share several communication links
 - Link may be unidirectional or bi-directional

Indirect Communication

- Operations
 - create a new mailbox (port)
 - send and receive messages through mailbox
 - destroy a mailbox
- Primitives are defined as:
 - `send(A, message)` – send a message to mailbox A
 - `receive(A, message)` – receive a message from mailbox A

Logical implementation - Issues

- Naming, Direct or indirect communication
- Synchronous or asynchronous communication
- Automatic or explicit buffering

Synchronization

- Message passing may be either blocking or non-blocking
- Blocking is considered synchronous
 - Blocking send -- the sender is blocked until the message is received
 - Blocking receive -- the receiver is blocked until a message is available
- Non-blocking is considered asynchronous
 - Non-blocking send -- the sender sends the message and continues
 - Non-blocking receive -- the receiver receives:
 - A valid message, or
 - Null message
- Different combinations possible
 - If both send and receive are blocking, we have a rendezvous

Synchronization (Cont.)

- Producer-consumer becomes trivial for blocking send/receive:

```
message next_produced;
while (true) {
    /* produce an item in next produced */
    send(next_produced);
}
```

```
message next_consumed;
while (true) {
    receive(next_consumed);

    /* consume the item in next consumed */
}
```

Logical implementation - Issues

- Naming, Direct or indirect communication
- Synchronous or asynchronous communication
- Automatic or explicit buffering


Buffering

- Queue of messages attached to the link.
- implemented in one of three ways
 - 1.Zero capacity – no messages are queued on a link.
Sender must wait for receiver (rendezvous)
 - 2.Bounded capacity – finite length of n messages
Sender must wait if link full
 - 3.Unbounded capacity – infinite length
Sender never waits

Examples of IPC Systems – Windows

- Message-passing centric via advanced local procedure call (LPC) facility
- Only works between processes on the same system
- Uses ports (like mailboxes) to establish and maintain communication channels

Local Procedure Calls in Windows

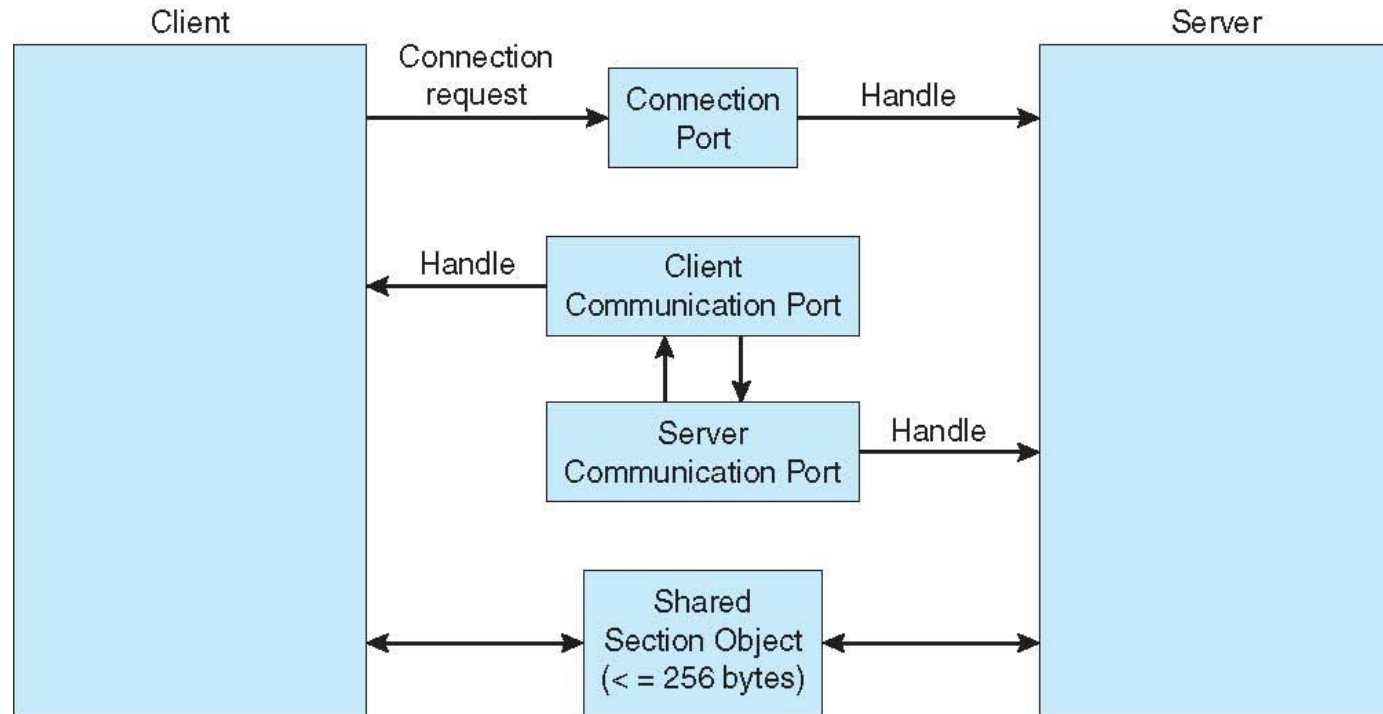


Pipes

- Acts as a conduit allowing two processes to communicate
- Ordinary pipes – cannot be accessed from outside the process that created it. Typically, a parent process creates a pipe and uses it to communicate with a child process that it created.
- Named pipes – can be accessed without a parent-child relationship.

Ordinary Pipes

- Ordinary Pipes allow communication in standard producer-consumer style
- Producer writes to one end (the **write-end** of the pipe)
- Consumer reads from the other end (the **read-end** of the pipe)
- Ordinary pipes are therefore unidirectional
- Require parent-child relationship between communicating processes

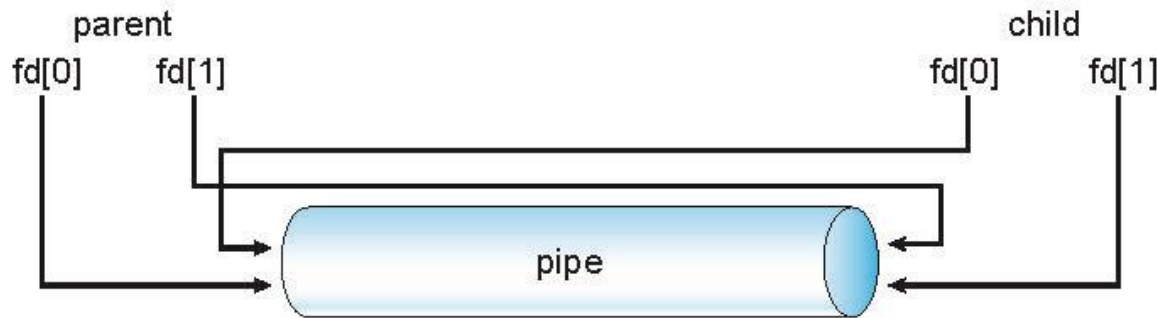


- Windows calls these **anonymous pipes**
- See Unix and Windows code samples in textbook

Named Pipes

- Named Pipes are more powerful than ordinary pipes
- Communication is bidirectional
- No parent-child relationship is necessary between the communicating processes
- Several processes can use the named pipe for communication
- Provided on both UNIX and Windows systems

Pipes in UNIX

- Serve output of one command → input of another command

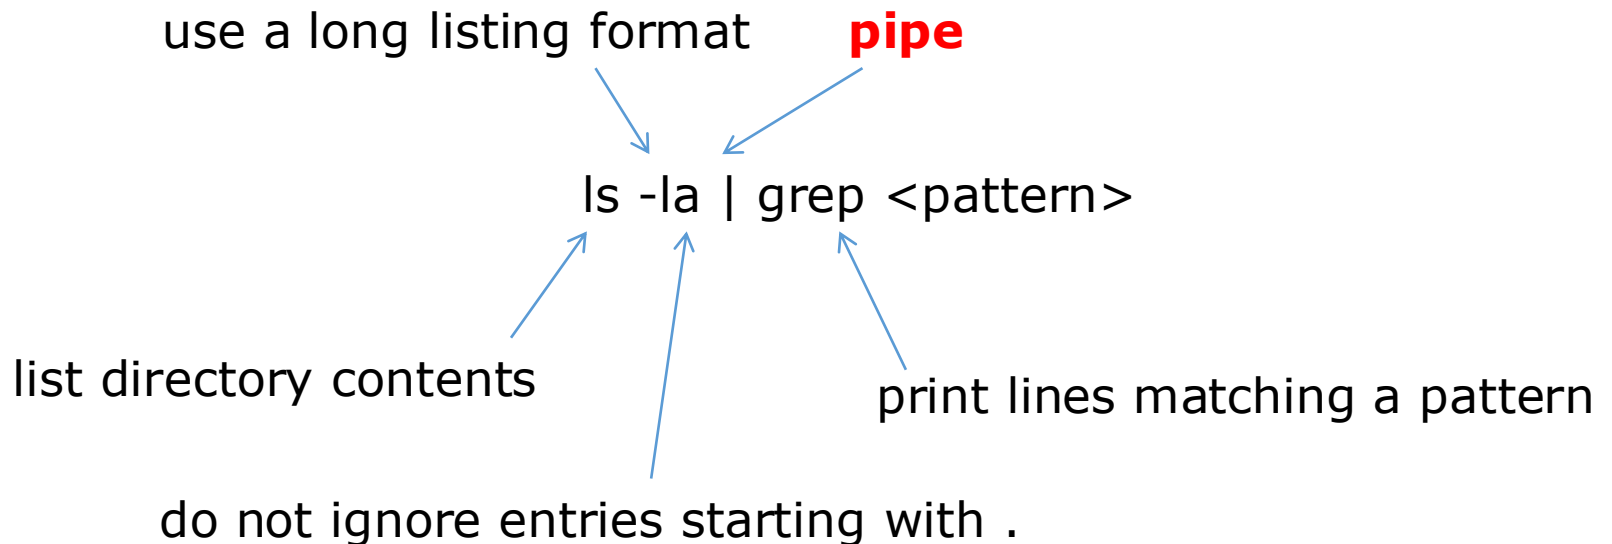

Pipes in UNIX

ls -la

```
vincenzo[REDACTED]:~$ ls -la
total 132
drwxr-xr-x 13 vincenzo vincenzo 4096 Nov  1 15:04
drwxr-xr-x 14 root      root      4096 Oct 28 2013
-rw----- 1 vincenzo vincenzo 52882 Oct 31 22:27
-rw-r--r-- 1 vincenzo vincenzo 220 Aug  7 2013
-rw-r--r-- 1 vincenzo vincenzo 3785 Jun 23 10:10
drwx----- 2 vincenzo vincenzo 4096 Feb 18 2014
drwx----- 3 vincenzo vincenzo 4096 Jul 18 13:10
drwxrwxr-x 5 vincenzo vincenzo 4096 Jul 16 08:51
drwxrwxr-x 6 vincenzo vincenzo 4096 Sep  7 19:12
drwxrwxr-x 3 vincenzo vincenzo 4096 Feb 20 2014
drwxrwxr-x 12 vincenzo vincenzo 4096 Oct 24 15:11
-rw----- 1 vincenzo vincenzo 35 Nov  1 15:04
drwxrwxr-x 17 vincenzo vincenzo 4096 Jul 21 10:30
drwxrwxr-x 3 vincenzo vincenzo 4096 Mar 26 2014
drwxrwxr-x 14 vincenzo vincenzo 4096 Apr 27 2014
-rw-r--r-- 1 vincenzo vincenzo 675 Aug  7 2013
drwx----- 2 vincenzo vincenzo 4096 Feb 20 2014
drwxrwxr-x 3 vincenzo vincenzo 4096 Jul 15 09:02
-rw----- 1 root      root      737 Apr  8 2014
-rw----- 1 vincenzo vincenzo 51 Jun 25 08:58
```

ls -la | grep Apr

```
vincenzo[REDACTED]:~$ ls -la | grep Apr
drwxrwxr-x 14 vincenzo vincenzo 4096 Apr 27 2014
-rw----- 1 root      root      737 Apr  8 2014
```

Ordinary Pipes - example

```
#include <stdio.h>
#include <unistd.h>
#include <sys/types.h>
#include <string.h>

#define BUFFER_SIZE 25
#define READ_END    0
#define WRITE_END   1
```


Ordinary Pipes - example

```
1. int main(void)
2. {
3.     char write_msg[BUFFER_SIZE] = "Greetings";
4.     char read_msg[BUFFER_SIZE];
5.     pid_t pid;
6.     int fd[2];

7.     /* create the pipe */
8.     if (pipe(fd) == -1) {
9.         fprintf(stderr, "Pipe failed");
10.        return 1;
11.    }

12.    /* now fork a child process */
13.    pid = fork();
```

```

14.if (pid < 0) {
15.    fprintf(stderr, "Fork failed");
16.    return 1;
17.}

18.    if (pid > 0) { /* parent process */
19.        /* close the unused end of the pipe */
20.        close(fd[READ_END]);
21.        /* write to the pipe */
22.        write(fd[WRITE_END], write_msg,
    strlen(write_msg)+1);
23.        /* close the write end of the pipe */
24.        close(fd[WRITE_END]);
25.    }
26.    else { /* child process */
27.        /* close the unused end of the pipe */
28.        close(fd[WRITE_END]);
29.        /* read from the pipe */
30.        read(fd[READ_END], read_msg, BUFFER_SIZE);
31.        printf("child read %s\n", read_msg);
32.        /* close the write end of the pipe */
33.        close(fd[READ_END]);
34.    }
35.    return 0;
36.}

```

Questions - Part 2

Which of the following affirmation is false?

1. Line 4 can be executed by the parent AND the child process
2. Line 7 is executed by the parent process
3. Line 7 is executed by the child process

```
1 pid = fork();  
2  
3 if (pid < 0) {  
4     [instruction 1]  
5 }  
6 else if (pid == 0) {  
7     [instruction 2]  
8 }  
9 else {  
10    [instruction 3]  
11 }
```

Which type of pipes requires a parent-child relation between two processes?

1. Ordinary
2. Named

Including the initial parent process, how many processes are created by this code?

1. 4
2. 5
3. 16
4. 31

```
1 #include <stdio.h>
2 #include <unistd.h>
3
4 int main()
5 {
6     int i;
7     for (i=0; i<4; i++)
8         fork();
9
10    return 0;
11 }
```