



SET 2

1. R: Generate 20 random values with `set.seed(25)`; find min, max, mean, median and summary; draw a histogram.

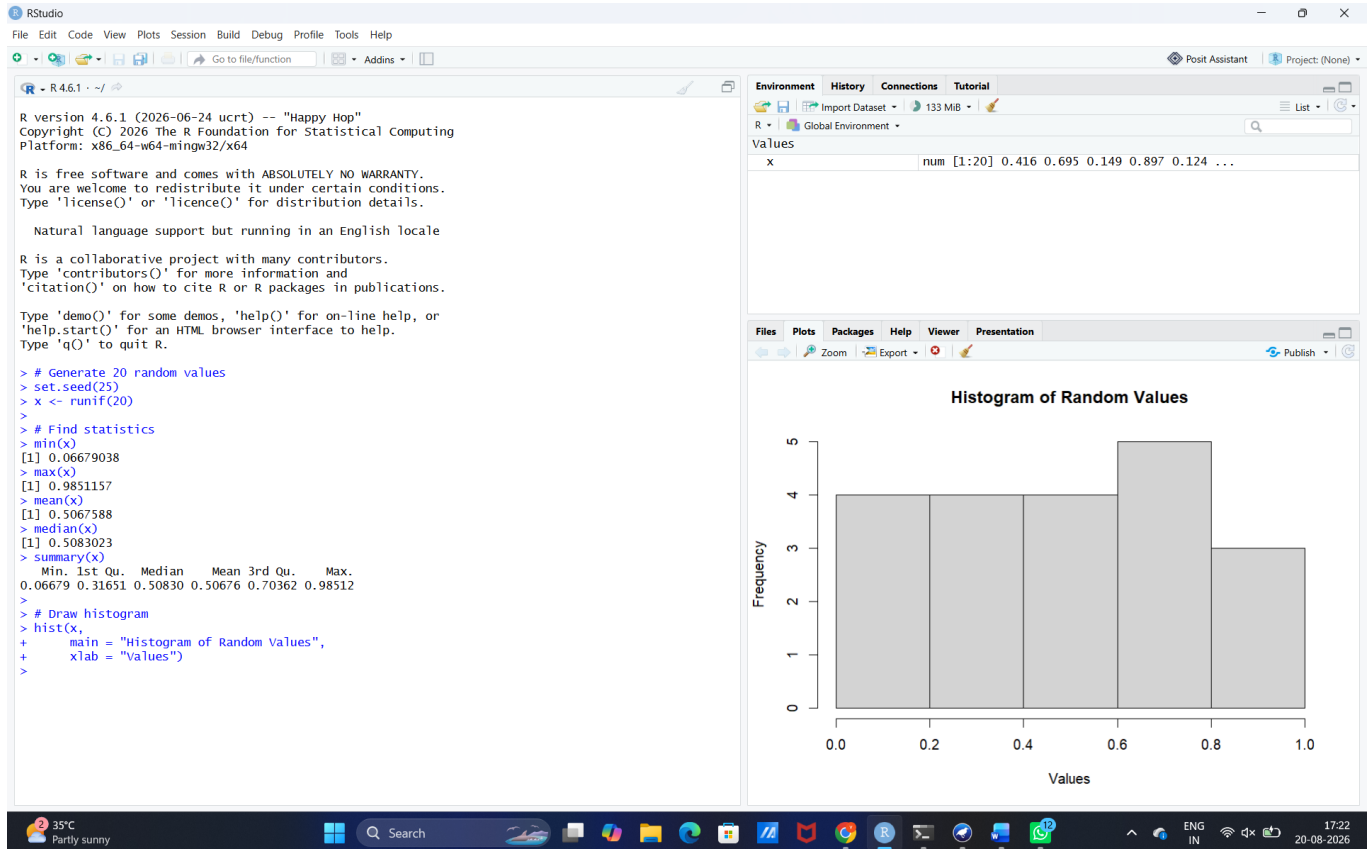


2. R: Create StudyHours and Marks for 10 students; calculate Pearson correlation and draw a scatter plot.

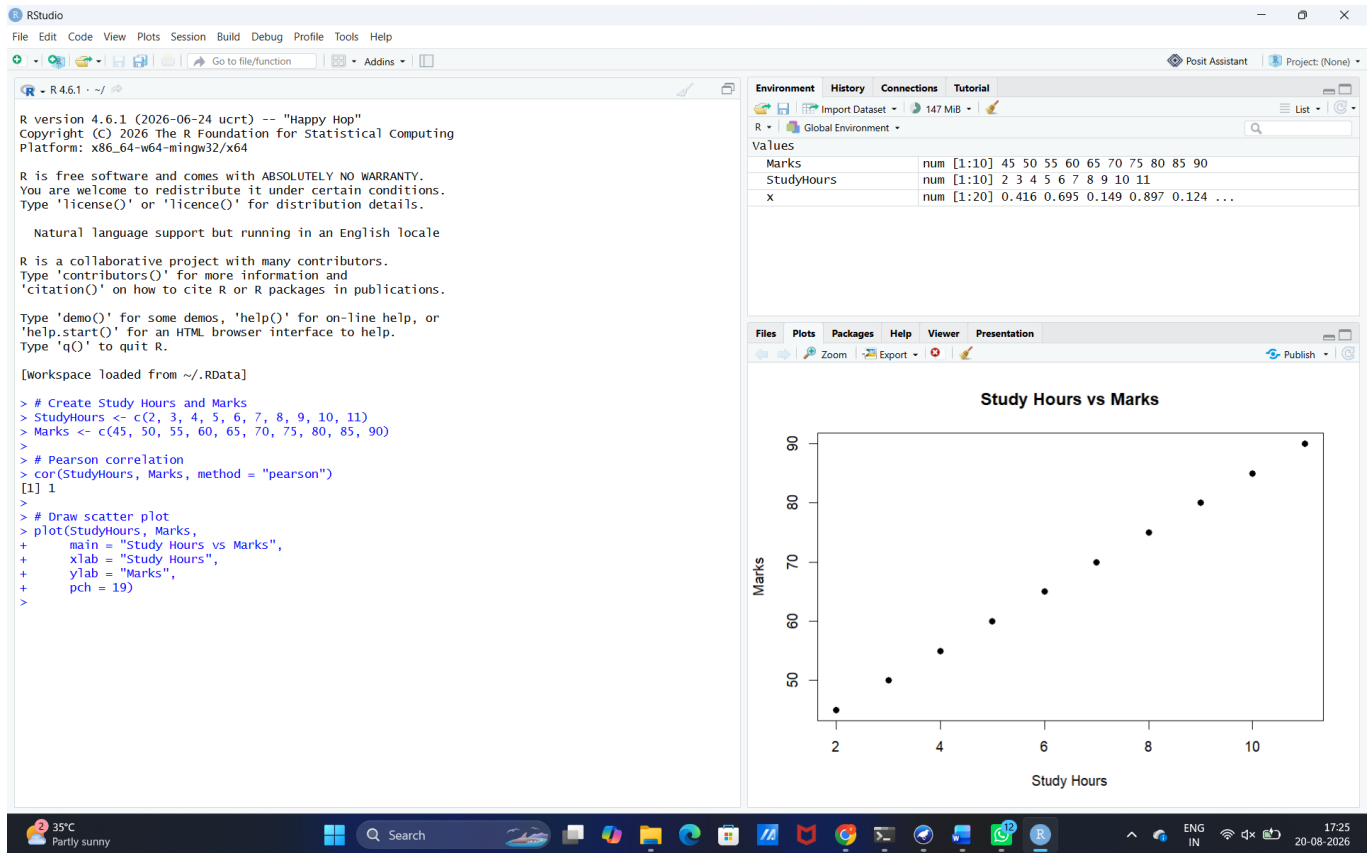

3. WEKA: Create an ARFF weather dataset and apply Apriori with minimum support 25% and confidence 60%; list rules.

Dataset: Weather

```
@relation weather
@attribute Outlook {Sunny,Overcast,Rainy}
@attribute Temperature {Hot,Mild,Cool}
@attribute Humidity {High,Normal}
@attribute Windy {True,False}
@attribute Play {Yes,No}
@data
Sunny,Hot,High,False,No
Sunny,Hot,High,True,No
Overcast,Hot,High,False,Yes
Rainy,Mild,High,False,Yes
Rainy,Cool,Normal,False,Yes
Rainy,Cool,Normal,True,No
Overcast,Cool,Normal,True,Yes
Sunny,Mild,High,False,No
Sunny,Cool,Normal,False,Yes
Rainy,Mild,Normal,False,Yes
```

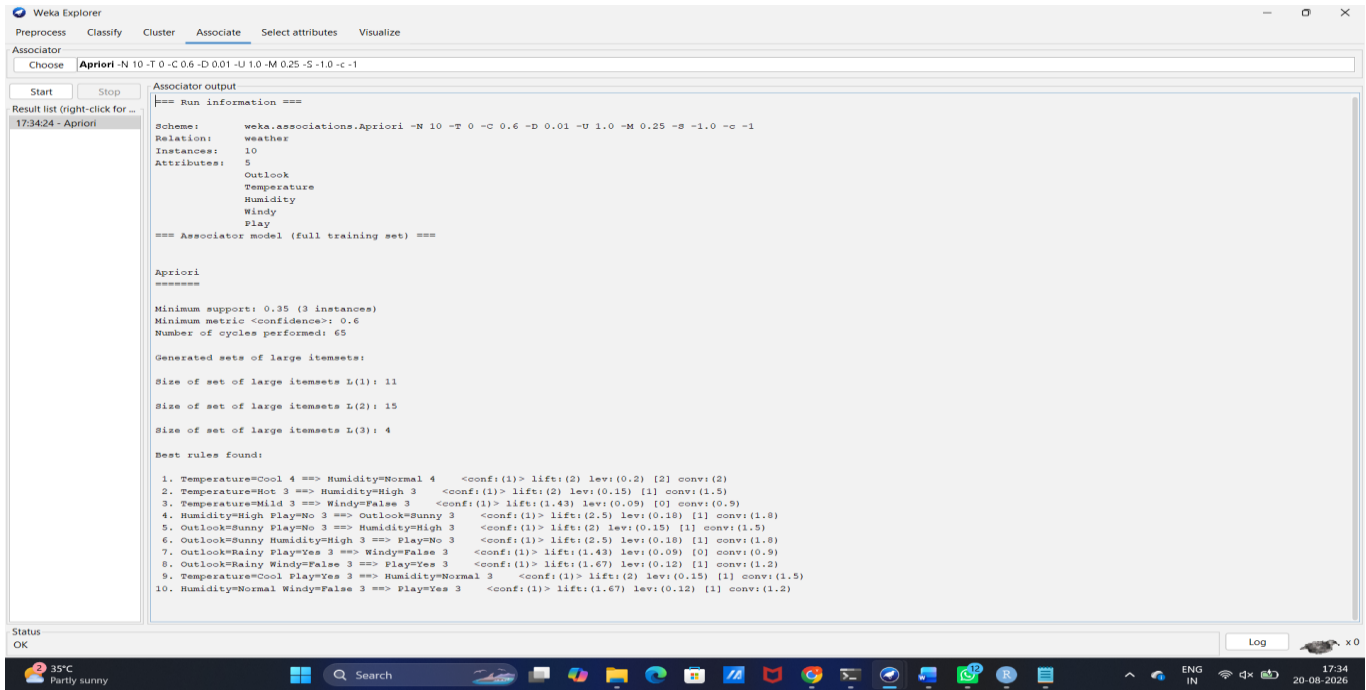

4. WEKA: Apply FP-Growth to the weather transactions and compare frequent patterns with Apriori.

Use the same Weather transaction-style data from Set 2 Q3 after converting attributes into nominal item indicators as required by the WEKA association workflow.

