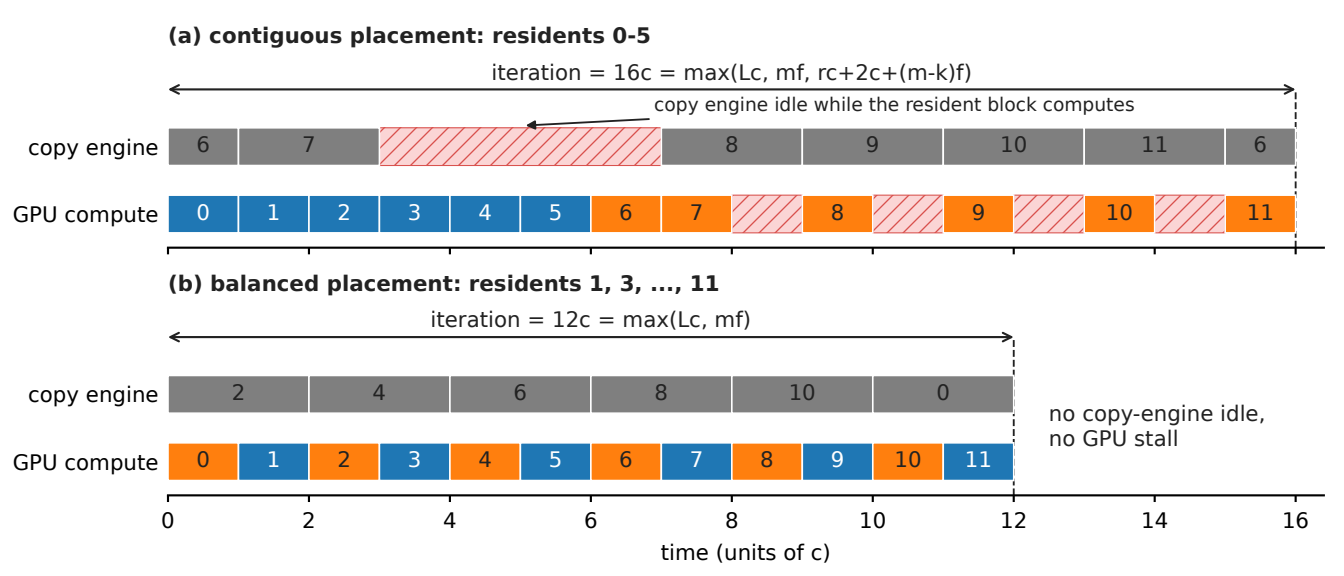
(a) contiguous placement: residents 0-5
iteration = 16c = max(Lc, mf, rc+2c+(m-k)f)
copy engine idle while the resident block computes
copy engine
6
7
8
9
10
11
6
GPU compute
0
1
2
3
4
5
6
7
8
9
10
11
(b) balanced placement: residents 1, 3, ..., 11
iteration = 12c = max(Lc, mf)
copy engine
2
4
6
8
10
0
GPU compute
0
1
2
3
4
5
6
7
8
9
10
11
no copy-engine idle,
no GPU stall
0
2
4
6
8
10
12
14
16
time (units of c)