

CS193X: Web Programming Fundamentals

Spring 2017

Victoria Kirst
(vrk@stanford.edu)

CSS Selectors: Classes and Ids

Classes and ids

There are 3 basic types of CSS selectors:

Element selector (this is the one we've been using)	p	All <p> elements
✨ ID selector ✨	#abc	element with id="abc"
✨ Class selector ✨	.abc	elements with class="abc"

```
<h1 id="title">Homework</h1>
<em class="hw">HW0</em> is due Friday.<br/>
<em class="hw">HW1</em> goes out Monday.<br/>
<em>All homework due at 11:59pm.</em>
```

Other selectors

element.className

Syntax	Example	Example described
<i>element.className</i>	p.abc	<p> elements with abc class

HTML

```
<h1 class="hw">Homework 0</h1>
<p class="hw">Due Fri</p>
<p class="hw">Late cutoff Sun</p>
<h1>Lectures</h1>
<p>Apr 3: Syllabus</p>
<p>Apr 5: HTML+CSS</p>
```

CSS

```
p.hw {
  color: green;
}
```

Homework 0

Due Fri

Late cutoff Sun

Lectures

Apr 3: Syllabus

Apr 5: HTML+CSS

Descendent selector

Syntax	Example	Example described
<i>selector selector</i>	div strong	 elements that are descendants of a <div>

HTML

```
<div class="hw">
  <h1>Homework 0</h1>
  <p>Due Fri</p>
  <p>Late cutoff Sun</p>
</div>
```

CSS

```
.hw p {
  color: green;
}
```

Homework 0

Due Fri

Late cutoff Sun

Lectures

Apr 3: Syllabus

Apr 5: HTML+CSS

Descendent selector

Syntax	Example	Example described
<i>selector selector</i>	div strong	 elements that are descendants of a <div>

Note: The element does not have to be a direct child. The descendent may be nested many layers in.

The screenshot shows a web browser interface with two panels: HTML and CSS. The HTML panel contains the following code:

```
<div class="hw">
  <div>
    <p>
      HW0: <strong>Due Friday</strong>
    </p>
  </div>
  HW1 out <strong>Monday</strong>
</div>
```

The CSS panel contains the following code:

```
.hw strong {
  color: red;
}
```

The rendered output on the right shows:

HW0: **Due Friday**

HW1 out **Monday**

Descendent selector

Syntax	Example	Example described
<i>selector selector</i>	div strong	 elements that are descendants of a <div>

Discouraged:

```
<h1 class="hw">Homework 0</h1>  
<p class="hw">Due Fri</p>  
<p class="hw">Late cutoff Sun</p>
```

vs



Preferred:

```
<div class="hw">  
  <h1>Homework 0</h1>  
  <p>Due Fri</p>  
  <p>Late cutoff Sun</p>  
</div>
```



Instead of applying a class to several adjacent elements, wrap the group in a `<div>` container and style the contents via descendent selectors.

selector, selector (comma)

Syntax	Example	Example described
<i>selector, selector</i>	h2, div	<h2> elements and <div>s

 **HTML** 

```
<h1>Course Info</h1>
<h2>Lectures</h2>
<p>Mon-Wed-Fri 1:30-2:20</p>
<h2>Honor code</h2>
<p>Do the right thing</p>
```

 **CSS** 

```
h1, h2 {
  font-family: Arial;
}
```

Course Info

Lectures

Mon-Wed-Fri 1:30-2:20

Honor code

Do the right thing

Selector summary

Example	Description
p	All <p> elements
.abc	All elements with the abc class , i.e. class="abc"
#abc	Element with the abc id , i.e. id="abc"
p.abc	<p> elements with abc class
p#abc	<p> element with abc id (p is redundant)
div strong	 elements that are descendants of a <div>
h2, div	<h2> elements and <div> s

Grouping selectors

2 Common bugs:

p.abc **vs** p .abc

p .abc **vs** p, .abc

- A <p> element with the **abc** class **vs**
An element with the **abc** class that descends from <p>
- An element with the **abc** class that descends from <p> **vs**
All <p> elements *and* all elements with the **abc** class

Combining selectors

You can combine selectors:

```
#main li.important strong {  
  color: red;  
}
```

Q: What does this select?

Grouping selectors

Q: What does this select?

```
#main li.important strong {  
  color: red;  
}
```

A: Read from right to left:

- `` tags that are children of `` tags that have an "important" class that are children of the element with the "main" id.

Colliding styles

When styles collide, the most specific rule wins ([specificity](#))

```
div strong { color: red; }  
strong { color: blue; }
```

```
<div>  
  <strong>What color am I?</strong>  
</div>
```

Colliding styles

When styles collide, the most specific rule wins ([specificity](#))

```
div strong { color: red; }  
strong { color: blue; }
```

```
<div>  
  <strong>What color am I?</strong>  
</div>
```

Colliding styles

Specificity precedence rules ([details](#)):

- `ids` are more specific than `classes`
- `classes` are more specific than element names
- Style rules that directly target elements are more specific than style rules that are inherited

Colliding styles

- If elements have the same specificity, the later rule wins.

```
strong { color: red; }  
strong { color: blue; }
```

```
<div>  
  <strong>What color am I?</strong>  
</div>
```

Aside: The process of figuring out what rule applies to a given element is called the [cascade](#). This is where the "C" in *Cascading* Style Sheets comes from.

Inheritance

We saw earlier that CSS styles are inherited from parent to child.

Instead of selecting all elements individually:

```
a, h1, p, strong {  
    font-family: Helvetica;  
}
```

You can style the parent and the children will inherit the styles.

```
body {  
    font-family: Helvetica;  
}
```

You can override this style via specificity:

```
h1, h2 {  
    font-family: Consolas;  
}
```

Inheritance

While many CSS styles are inherited from parent to child,
not all CSS properties are inherited.

```
a {  
  display: block;  
  font-family: Arial;  
}
```

 inherits the
font-family property,
but not display:

```
<a href="/home">  
  Back to <em>Home</em>  
</a>
```

[Back to Home](#)

Inheritance

While many CSS styles are inherited from parent to child, **not all CSS properties are inherited.**

- There's no rule for what properties are inherited or not; the inheritance behavior defined in the CSS spec.
- You can look it up via MDN, e.g.

font-family: Inherited yes

display: Inherited no

- Generally text-related properties are inherited and layout-related properties are not.
- (You can also change this via the inherit CSS property, which is somewhat esoteric and not often use)

<a> colors?

Hmm, MDN says [color is inherited](#)... but if I set the body color to deeppink, links don't change color:

⚙ CSS

```
body {  
  color: deeppink;  
  font-family: Helvetica;  
}
```

⚙ HTML

▼

```
<h1>Chocolate</h1>  
<p>  
  <a href="https://www.ghirardelli.com/">Ghiradelli</a>  
  is not overrated  
</p>
```

<a> inherits font-family...
Why doesn't <a> inherit color?
([Codepen](#))

Chocolate

[Ghiradelli](#) is not overrated

User agent styles

This is because the browser has its own default styles:

- Browser loads its own default stylesheet on every webpage
- Not governed by spec, but there are [recommendations](#)

```
<!DOCTYPE html>
```

```
<html>
```

```
  <head>
```

```
    <title>CS 193X</title>
```

```
    <!--
```

NOT TOTALLY ACCURATE: This isn't actually injected in the HTML, but it is loaded silently!

```
    -->
```

```
    <link rel="stylesheet" href="user-agent-style.css" />
```

```
  </head>
```

<a> colors?

So to style <a> links, we have to override the browser default link style by explicitly setting a color:

CSS

```
body {  
  color: deeppink;  
  font-family: Helvetica;  
}  
  
a {  
  color: deeppink;  
}
```

HTML

```
<h1>Chocolate</h1>  
<p>  
  <a href="https://www.ghirardelli.com/">Ghiradelli</a>  
  is not overrated  
</p>
```

Chocolate

Ghiradelli is not overrated

Link-related CSS

Since we're on the topic of links:

- How do we style **visited** links differently from **unvisited**?

CSS pseudo-classes

[pseudo-classes](#): special keywords you can append to selectors, specifying a *state* or *property* of the selector

Syntax	Explanation
a	All anchor tags (links) in all states
a:visited	A visited link
a:link	An unvisited link
a:hover	The style when you hover over a link
a:active	The style when you have "activated" a link (downclick)

There are more [pseudo-classes](#) than this; have a look!

Before we move on:
A few style notes

Why not `<div>` everywhere?

Technically, you can define your entire web page using `<div>` and the `class` attribute.


- Is this a good idea?
- Why does HTML have `ids` when you have `classes`?
- Why does HTML have `<p>`, `<h1>`, ``, etc. when you have `<div>`, ``, `class`, and `id`?

CSS Box Model


The CSS Box Model

Every element is composed of 4 layers:

- the element's content
- the **border** around the element's content
- **padding** space between the content and border (inside)
- a **margin** clears the area around border (outside)

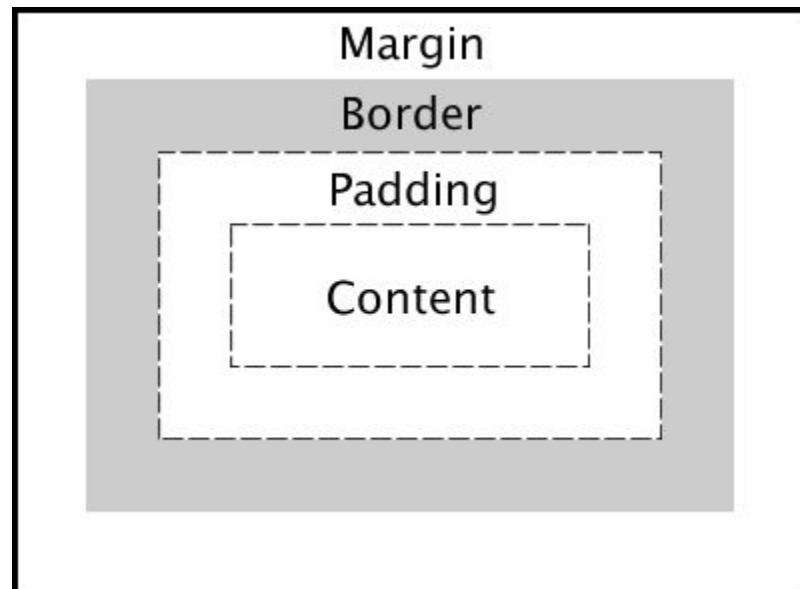

border

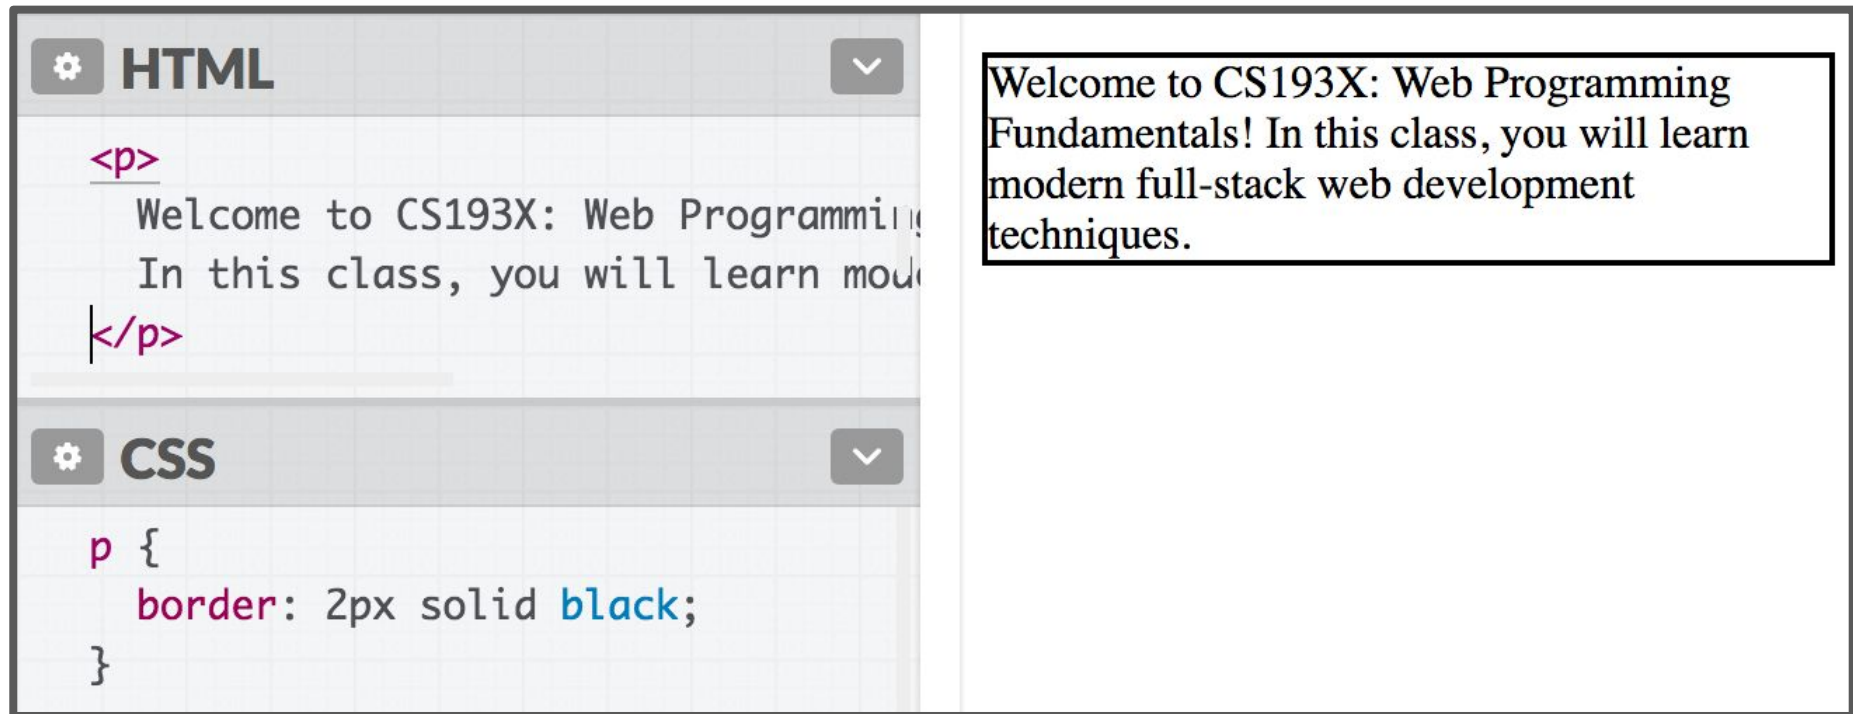

We've used the [shorthand](#):
`border: width style color;`

border

Can also specify each border individually:

`border-top`

`border-bottom`

`border-left`

`border-right`

And can set each property individually:

`border-style: dotted; (all styles)`

`border-width: 3px;`

`border-color: purple;`

border

Can also specify each border individually:

`border-top`

`border-bottom`

`border-left`

`border-right`

And can set each property individually:

`border-style: dotted;` ([all styles](#))

`border-width: 3px;`

`border-color: purple;`

There are other units besides pixels (px) but we will address them in the next couple lectures.

Rounded border

Can specify the `border-radius` to make rounded corners:
`border-radius: 10px;`

You don't actually need to set a border to use `border-radius`.


```
p {  
  background-color: purple;  
  border-radius: 10px;  
  color: white;  
}
```

Welcome to CS193X: Web Programming Fundamentals! In this class, you will learn modern full-stack web development techniques.

Borders look a little squished

When we add a border to an element, it sits flush against the text:

Q: How do we add space between the border and the content of the element?

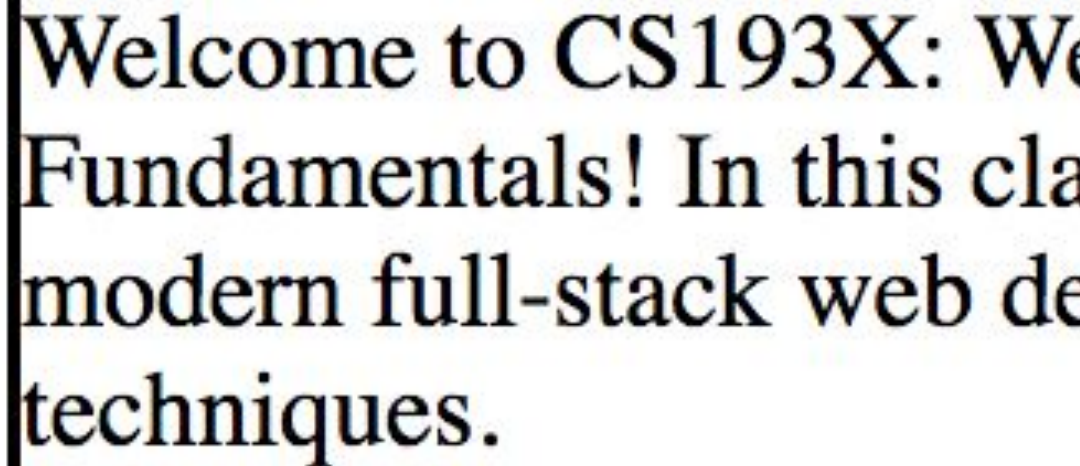

Welcome to CS193X: Web Fundamentals! In this class, we'll learn modern full-stack web development techniques.

padding

```
p {  
  border: 2px solid black;  
  padding: 10px;  
}
```

Welcome to CS193X: Web Programming Fundamentals! In this class, you will learn modern full-stack web development techniques.

padding is the space between the border and the content.

- Can specify padding-top, padding-bottom, padding-left, padding-right
- There's also a shorthand:

padding: 2px 4px 3px 1px; <- top|right|bottom|left

padding: 10px 2px; <- top+bottom|left+right

<div>s look a little squished

When we add a border to multiple divs, they sit flush against each other:




The screenshot shows a code editor with two panels. The left panel, titled 'HTML', contains the following code:

```
<div>
  Lectures
</div>
<div>
  Homework
</div>
```

The right panel, titled 'CSS', contains the following code:

```
div {
  border: 2px solid black;
  padding: 10px;
}
```

Q: How do we add space between multiple elements?

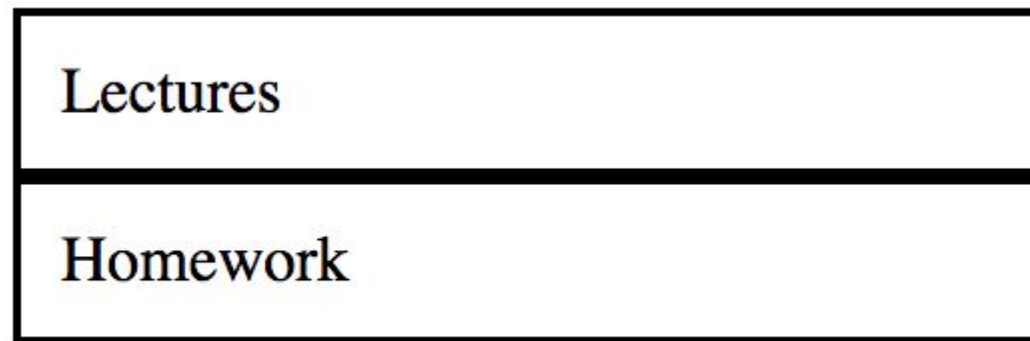

margin

```
div {  
  margin: 20px;  
  padding: 10px;  
  border: 2px solid black;  
}
```

Lectures

Homework

margin is the space between the border and other elements.

- Can specify margin-top, margin-bottom, margin-left, margin-right
- There's also a shorthand:

margin: 2px 4px 3px 1px; <- top | right | bottom | left

margin: 10px 2px; <- top+bottom | left+right

More box model:
Next time!