

DEVELOPER HANDBOOK

Account-Closure System Guide

Everything a future builder needs to continue this project: the Power Apps screens and their variable model, how those variables link to SharePoint through Power Automate, the entity-relationship design, and the flow overview — with the exact Power Fx patterns, the build checklist, and the pa.yaml authoring rules.

17 Power Apps screens

11 SharePoint lists

137 columns

7 Power Automate flows

8 workflow stages

7 product task-chains


Contents

- 1** System overview — the three layers
- 1b** The tech stack, layer by layer
- 2** The business workflow — 8 stages & routing
- 2b** The settlement task engine (stage 6)
- 3** Power Apps — screens & anatomy
- 4** The variable model — gbl / var / col, how each is set
- 5** The five core Power Fx patterns (with code)
- 6** Data binding — every box → variable → column
- 7** SharePoint — the 11 lists
- 8** Entity-relationship diagram
- 9** Power Automate — flow overview & step detail
- 10** Efficiency — why it won't lag
- 11** Build & wire checklist (do this in order)
- 12** pa.yaml authoring rules (if you regenerate screens)
- A** Appendix — full variable reference
- B** Appendix — glossary (Thai ↔ English)
- C** Appendix — file manifest

How to use this document. Read §1–§2 for the big picture, §3–§6 to understand the app, §7–§9 for the backend. When you sit down to build, work straight through §11. §12 matters only if you edit the YAML generator rather than the app in Studio.

1 · System overview — the three layers

Account-Closure is a role-based workflow app that walks a securities account-closure request from the first customer contact to a fully closed account, across seven teams. It is built on three layers, each with one job:

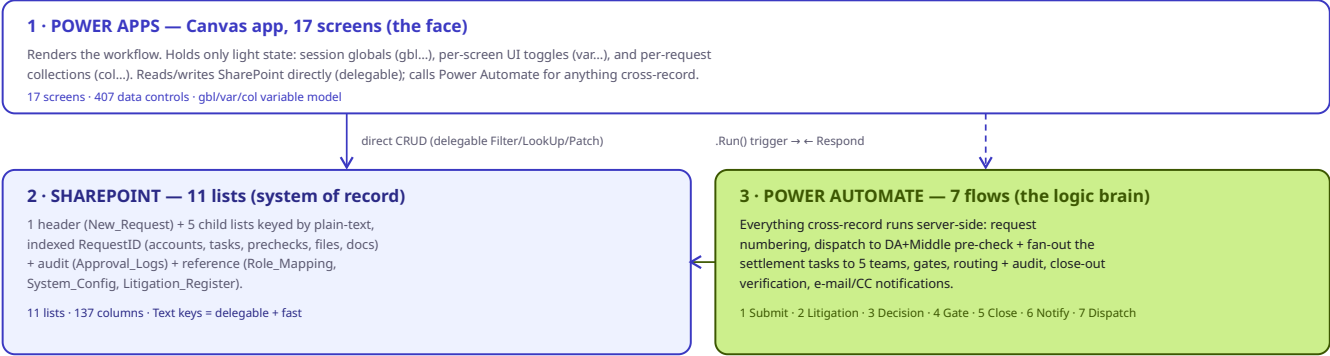

The golden rule: Power Apps is a *thin* face over the data. It never holds more than the current request in memory, and it never does cross-record work (numbering, fan-out, "are all three done?", email) — that all lives in Power Automate. This is what keeps it fast (\$10) and what makes the logic auditable and changeable without touching the UI.

Demo-ready today. The delivered screens already run the whole 8-stage workflow using session variables (gblStageIndex + colLog), so you can click through end-to-end before any SharePoint list exists. Each of those variables maps 1:1 onto a column you'll create in \$7, so wiring the backend is a swap, not a rewrite.

1b · The tech stack, layer by layer

Two deliverables share one design: an **HTML prototype** (the spec / clickable mock, deployed to Vercel for review) and the **Power Apps app** (the real SCB build). Both are produced deterministically by Node generators from the same design, so they never drift.

Layer	Technology	Where / how	Notes
Prototype UI	Static HTML + Tailwind CSS (Play CDN, no build step)	repo root + /pages	Material Symbols icons · Hanken Grotesk · tokens in assets/tailwind-config.js
Prototype generator	Node.js (.cjs)	tools/page-generator/	node gen.cjs && node verify.cjs → writes index.html + pages/*.html
Prototype hosting	Vercel	auto-deploys from main; every branch/PR gets a preview URL	repo root = web root · no build step · generator excluded from deploy
App UI	Microsoft Power Apps (Canvas)	pasted from Source-Code YAML (pa.yaml)	auto-layout containers · classic + modern controls · Thai + English
App generator	Node.js (pa-final.cjs) + validate_pa_yaml.py	deterministic pa.yaml + PA2108 legality checks	17 screens · 0 validator errors · paste-safe
Automation	Microsoft Power Automate	7 flows (see \$9)	.Run() from the app · SharePoint triggers · child e-mail flow
Data	SharePoint Online lists + 1 document library	11 lists (see \$7)	plain-text INDEXED RequestID keys → delegable + fast (\$10)
Docs / fonts	Noto Sans Thai (handbook) · Hanken Grotesk (prototype)	bilingual UI throughout	this PDF rendered via headless Chromium print-to-pdf

Why two generators, one design: the HTML prototype is the reviewable spec (fast to change, shareable via a Vercel link); the Power Apps YAML is the production artifact SCB policy requires. Keeping both deterministic means a workflow change is authored once in each generator and regenerated — never hand-edited across 17 screens twice.

Deploy note. Vercel serves the repo root as web root and auto-deploys main; pages in /pages reference ../assets/..., the root index.html references

assets/.... The generator (tools/) is dev-only and not part of the deployed site.

2 · The business workflow — 8 stages & routing

Every request travels this rail. Stage 2 **fans out to two teams in parallel** (Digital Assets + Middle) and both must finish before Head of Sales. Stage 6 (Settlement) fans out again to **five departments** working a per-product task engine in parallel (\$2b).



Routing rules (round-17)

- **Sales-1 submit** → dispatches to the 2 parallel pre-check teams, DA + Middle (stage 2).
- **Parallel gate** → when both prechecks are decided: both *Clear* → Head of Sales; any *Reject* → back to Sales.
- **Head of Sales** → Approve → C&AM Gate; Reject → Sales.
- **C&AM Gate** → check iTrade (moved here from pre-check) + account Lock (Lock → terminal reject); then **Dispatch** (Flow 7) fans the settlement tasks out to all five departments.
- **Settlement** → each department clears its *Ready* tasks; finishing a task unlocks the next step of that product; when the non-optional tasks are done → C&AM Close-out → **Completed**.
- **Terminal reject** — any reject *after* Head of Sales stops every task and returns the request to Sales (account not closable). Pre-Head rejects go back to Sales for documents.
- **Litigation gate** (Sales-1): 13-digit Citizen ID → Flow 2 screens it; litigation found → cannot close.
- Every reject/return requires a remark and writes an **Approval_Logs** row.

Status vocabulary (New_Request.RequestStatus): Draft → PrecheckInProgress → PendingDocuments / PendingApproval → Approved → InSettlement → Closing → Completed / Rejected. The rail position (1–8) is CurrentStage; in the app it is gbIStageIndex.

2b · The settlement task engine (stage 6)

After the C&AM Gate, the work is not linear — it is a **per-product dependency engine** run in parallel across five departments. This is the round-17 heart of the system and the part the old linear screens hid.

How it works

- **Dispatch** (Flow 7) reads, for each product the customer actually holds, that product's ordered chain from Task_Templates and writes the rows into Request_Tasks — step 1 = **Ready**, every later step = **Locked**.
- Each department's screen is just its live queue: Filter(Request_Tasks, ResponsibleTeam = me And Status = "Ready"). A department only ever sees the tasks it can act on *right now*.
- Ticking a task **Done** unlocks the next StepNo of the *same* product — which may belong to a different department, so it appears in *their* queue automatically. No team enters the system more than it must.
- **Optional** steps (Offshore FCD transfer, DA transfer-if-alive, post-interest) can be **Passed / Skipped**. **Any reject is terminal** → all tasks stop, request → Sales.
- When every non-optional task is Done, C&AM Close-out records the net balance and closes → Completed.

The seven product chains (Task_Templates)

Read each row as StepNo · OwningDept · task. A step is Ready only when the previous step is Done.

Product	Ordered chain (step · dept · task)
TFEX	1 Cash เช็ค Position · 2 CAM Post ดอกเบี้ย (opt) · 3 Cash ถอน+โอน THB · 4 CAM ปิด BSB · 5 CAM ปิด CIS
Offshore	1 Offshore Position+Dividend · 2 Offshore Accrued Interest USD · 3 Offshore ถอน+โอน FCD (opt→Pass) · 4 Cash ถอน+โอน THB+ปิด SBA · 5 CAM ปิด CIS>SAXO/GTN
Equity + Bond + SN	1 EQ Position Bond+SN · 2 Cash ถอน+โอน THB+ปิด SBA · 3 CAM ปิด CIS
บัญชีซื้อขายหน่วยลงทุน (Fund)	1 CAM ปิด FundConnex · 2 CAM ปิด CIS (ไม่มี outstanding → ปิดได้เลย)
DA · Digital Assets	1 DA โอน (กรณีตายเท่านั้น, opt) · 2 DA Suspend · 3 DA ลง GL · 4 Cash โอนเป็น THB
LiVEx	1 EQ Position · 2 Cash ถอน+โอน THB · 3 CAM ปิด LiveX · 4 CAM ปิด CIS
Algo	1 CAM Stop model ที่ Jaeger · 2 EQ Position ที่ SBA (เจอ→reject) · 3 Cash แจ้ง IT post→SBA · 4 Cash ถอน+โอน THB+ปิด SBA · 5 CAM ปิด CIS

In the app this engine runs on a session collection colTasks (see §4) so the whole parallel flow is clickable before SharePoint exists; wiring it is swapping colTasks for Filter(Request_Tasks, RequestID = gblRequestID) and the Patch/unlock formulas for Flow 7 + a SharePoint Patch.

3 · Power Apps — screens & anatomy

17 screens. Paste order = this order (Dashboard first so its sidebar Navigate() targets resolve).

#	Screen (Navigate name)	What it does
01	Dashboard	My Tasks (red/urgent) + All Requests split; 'q' → Tracking; New Request
02	Sales - Initial Contact	create request: customer, litigation (next to Card-ID), call record, inventory, assets/money, docs; submit to DA + Middle
03	Sales - Documents	prechecks (DA+Middle), files (deletable), close-scope, relinquish; submit to Middle
04	Digital Assets - Precheck	DA wallet precheck + early suspend (parallel; no view-other buttons)
05	Digital Assets - Recheck	re-check after customer clears wallet
06	Middle - Precheck Wallet	Total Balance from Wallet App; 4-option fund decision (+acct inputs); can view DA + Sales
07	Middle - Verify Docs	full verify + portfolio → Head of Sales
08	Head of Sales - Approval	approve → C&AM Gate / reject → Sales
09	CAM - Gate	iTrade + account Lock, then Dispatch → parallel settlement (no Algo, no matrix)
10	CAM - Close Account	C&AM ready-task queue + fund box + net balance + Complete
11	Cash Management	Cash ready-task queue + 'post interest?' decision
12	Product Op EQ - Settlement	EQ ready-task queue, done-checkbox per task (page 1 of 2)
13	Product Op EQ - Summary	EQ settlement summary + confirm (page 2 of 2)
14	Product Op Offshore	Offshore ready-task queue + Pass optional FCD → Passed
15	DA Team - Settlement	DA ready-task queue: transfer / suspend / GL
16	Settlement - Overview	read-only board of every product × step × team × status; opens each queue
17	Tracking	live 8-stage rail (gblStageIndex) + audit log (colLog); reached via Dashboard 'q'

Every screen has the same skeleton

- **Sidebar** (fixed 208px) — the 11 nav buttons; the active one is tinted; each is `Navigate('Screen Name')`.
- **Header** — eyebrow + title + subtitle on the left; a small status **pill** pinned top-right; a numbered **stepper** for multi-step roles; a 4-cell **meta strip** (Request ID / customer / etc.).
- **Content** — a vertical scroll column of white **cards** (each a titled section: customer info, inventory, precheck, tasks...).
- **Footer** — Back / Reject / Submit buttons; each carries the real workflow action (§5).
- **Bottom gap** — a spacer so the last buttons aren't flush to the screen edge.

Layout is **auto-layout containers** (responsive to a 16:9 canvas), not absolute X/Y. The one rule that governs it all is in §12: a fixed-size child must set `FillPortions = 0` or it stretches.

4 · The variable model — gbl / var / col

Three prefixes, three lifetimes. This convention tells you at a glance where a value lives and who owns it.

gbl... — **global (session)**, set with `Set()`; lives until the app closes

Variable	Set in	Set from	Drives
gblUser	App.OnStart	User() – current user record	identity for role lookup
gblRole / gblScope	App.OnStart	Lookup(Role_Mapping, EmployeeAccount = gblUser.Email)	which sidebar items & buttons show
gblConfig	App.OnStart	ClearCollect(gblConfig, System_Config)	SLA / CC / number seed (cached once)
gblRequestID	Dashboard / open-request	the open request's Title	every child query filters by it
gblRequest	screen OnVisible	Lookup(New_Request, Title = gblRequestID)	all header value boxes bind to gblRequest.*
gblStageIndex	every submit/reject	Set(gblStageIndex, N)	the Tracking rail (1–8) renders from it
gblStatus	every submit/reject	Set(gblStatus, targetScreen)	New_Request.RequestStatus
gblDAWalletStatus / gblCheckedBy... / gblIdentityCIS	OnVisible	← Request_Prechecks / New_Request	auto read-only status labels

var... — **screen-scoped UI state**, set with `UpdateContext()`; lives on one screen

Variable	Set by	Formula	Drives
varReasonOther	reason DropDown OnChange	UpdateContext({varReasonOther: Self.Selected.Value="อื่นๆ โปรดระบุ"})	reveals the specify input + grows its box
varCloseSome	close-scope Radio OnChange	UpdateContext({varCloseSome...: Self.Selected.Value="ปิดบางประเภทบัญชี"})	reveals the account-list input
varVF	View Files bar OnSelect	UpdateContext({varVF...: !varVF...})	toggles the files gallery + card height
varCardValid	card-id TextInput OnChange	UpdateContext({varCardValid: IsMatch(Self.Text, "^[0-9]{13}\$")})	switches litigation waiting↔clean; gates submit
varColAssets / Money / Unknown	Check-All buttons	UpdateContext({varColAssets: true})	ticks a whole matrix column at once

col... — **collections (tables in memory)**, built with `ClearCollect()` in `OnVisible`

Collection	Built in	From	Feeds
colTasks	OnVisible (settlement screens)	Filter(Request_Tasks, RequestID = gblRequestID)	THE SETTLEMENT ENGINE: every dept queue = Filter(colTasks, Status=Ready, Dept=me); ticking Done unlocks the next step
colMatrix	OnVisible	Filter(Request_Accounts, RequestID = gblRequestID)	assets/money single-select matrix (ThisItem.Pick)
colFiles	OnVisible	Filter(Request_Files, RequestID = gblRequestID)	View Files gallery (deletable on Sales-2)
colPCMiddle / colPCDA	OnVisible	Filter(Request_Files, Department = ...)	per-team file list inside the 2 precheck cards (DA + Middle)
colMyTasks / colRequests	Dashboard OnVisible	Filter(New_Request, CurrentAssignee=me) / (RequestStatus<>"Completed")	Dashboard My-Tasks (red) vs All-Requests split
colLog	seeded once; appended by every submit/reject	Collect(colLog, {At, Who, Stage, Action})	Tracking audit-log gallery → Approval_Logs

Golden efficiency rule (see §10): a collection is **always** filtered by `RequestID = gblRequestID` — never load a whole list into memory.

5 · The five core Power Fx patterns

Learn these five and you can read and extend every screen.

① App start — identity & cached reference data

```
// App.OnStart
Set(gblUser, User());
Set(gblRole, LookUp(Role_Mapping, EmployeeAccount.Email = gblUser.Email).SystemRole);
Set(gblScope, LookUp(Role_Mapping, EmployeeAccount.Email = gblUser.Email).DataVisibilityScope);
ClearCollect(gblConfig, System_Config); // small, rarely changes → cache once
```

② Screen open — load only THIS request

```
// <Screen>.OnVisible
Set(gblRequest, LookUp(New_Request, Title = gblRequestID));
ClearCollect(colAccounts, Filter(Request_Accounts, RequestID = gblRequestID));
ClearCollect(colTasks, Filter(Request_Tasks, RequestID = gblRequestID));
ClearCollect(colPrechecks, Filter(Request_Prechecks, RequestID = gblRequestID));
ClearCollect(colFiles, Filter(Request_Files, RequestID = gblRequestID));
```

③ Conditional reveal — show a box only when a choice is made

```
// on the DropDown/Radio that decides:
OnChange = UpdateContext({ varReasonOther: Self.Selected.Value = "อื่นๆ โปรดระบุ" });
// on the input that appears:
Visible = varReasonOther
// on its container (so it grows/shrinks with no dead space):
FillPortions = 0 // "flexible height OFF" — makes Height authoritative
Height = If(varReasonOther, 97, 56)
```

Why an event var, not a direct binding. Binding `Visible = DropDown.Selected.Value = "..."` did not re-evaluate reliably on paste. Driving a context variable from `OnChange` always does. Use this pattern for every reveal.

④ Cross-page workflow — one button moves the whole state machine

```
// a Submit/Reject button's OnSelect
Set(gblStageIndex, 4); // rail position (1..8)
Set(gblStatus, "Head of Sales - Approval");
Collect(colLog, { At: Text(Now(), "dd/mm hh:mm"), Who: User().FullName,
Stage: "Middle verify", Action: "Approved" });
// when wired: 'StageDecision'.Run(gblRequestID, "Approved", txtRemark.Text);
Navigate('Head of Sales - Approval')
```

⑤ Read-only value box + auto status

```
// upstream data shown non-editable = a Label styled as a box (NOT a TextInput):
// Fill = surfaceLow, BorderColor set, Text = gblRequest.CustomerName
// auto-collected status label bound to a variable:
Text = gblDAWalletStatus // set in OnVisible from Request_Prechecks[DA].WalletStatus
```

6 · Data binding — every box → variable → column

A programmatic sweep of the app source classified **381 data-bearing controls** and mapped every one to a database column (7 unmapped). Breakdown:

Control type	count	→ where it goes
Read-only value labels	160	display of gblRequest.* / status vars / read-mode fields
Checkboxes	110	Request_Accounts booleans · Request_DocChecklist · precheck confirmations
Text inputs	59	New_Request.* · Request_Accounts.AccountNumber · Approval_Logs.ActionComments
Galleries	36	colFiles / colTasks / colMatrix / colLog / per-team file lists
Radios	15	ClosureReason · CloseScope · UnitHolderDecision · RelinquishDA · decisions
Dropdowns	1	reason · task-filter

The full row-by-row map (screen → control → column) is the **App_Field_Coverage** sheet in the Excel, and **BINDINGS.md** lists all 500+ control-level references extracted from the YAML. These are generated from the app, so they cannot drift from what you paste.

How to wire a control to the backend (the swap)

- **Display box:** change its Text / Default from the sample literal to gblRequest.<Column> (or LookUp(col..., ...).<Column>).
- **Input box:** on Submit, Patch(New_Request, gblRequest, { <Column>: txt.Text }) (or Patch the child list).
- **Gallery:** point Items at the Filter(...) collection instead of the seeded sample.

7 · SharePoint — the 11 lists

One header + five child lists (the repeating data) + one audit list + three reference lists.  yellow = new vs. your original 4-list template.

1. New_Request EXTEND

Header — one row per closure request. The single-value boxes on every screen live here. · คำขอปิดบัญชี (หัวเรื่อง 1 คำขอ = 1 แถว)

#	Column	Type	ชื่อไทย	Notes
1	Title	Single line of text	เลขที่คำขอ (RequestID)	Primary key; run number via Flow 1 + System_Config seed
2	CustomerName	Single line of text	ชื่อลูกค้า	Customer's full name.
3	CustomerType	Choice	ประเภทลูกค้า	บุคคลธรรมดา (Individual), นิติบุคคล (Juristic)
4	CitizenID	Single line of text	เลขบัตร/พาสปอร์ต	Validated in-app: IsMatch ^\d{13}\$ → varCardValid
5	UID	Single line of text	รหัสลูกค้า (UID)	Key for Core Banking lookups
6	SourcePhone	Single line of text	เบอร์โทร (ต้นทาง)	Source phone of the confirmation call.
7	DestinationPhone	Single line of text	เบอร์โทร (ปลายทาง)	Destination phone of the confirmation call.
8	CallDate	Date and Time	วันที่โทรยืนยัน	Sales-1 · Call recording box
9	CallTime	Single line of text	เวลาโทรยืนยัน	Sales-1 · Call recording box
10	CustomerEmail	Single line of text	อีเมลลูกค้า	Customer e-mail.
11	IsAlive	Yes/No (Boolean)	สถานะมีชีวิต	Default = Yes
12	AccountNumberToClose	Single line of text	เลขบัญชีที่ต้องการปิด	Main account number to close.
13	CloseEquityAccount	Yes/No (Boolean)	ปิดบัญชีหุ้น	Close the equity account?
14	CashAccountNumber	Single line of text	เลขบัญชี Cash	Cash account number.
15	CashBalanceAccountNumber	Single line of text	เลขบัญชี Cash Balance	Cash Balance / Prepaid account number.
16	CreditBalanceAccountNumber	Single line of text	เลขบัญชี Credit Balance	Credit Balance account number.
17	CloseTFEXAccount	Yes/No (Boolean)	ปิดบัญชี TFEX	Close the TFEX account?
18	TFEXAccountNumber	Single line of text	เลขบัญชี TFEX	TFEX account number.
19	CloseSBLAccount	Yes/No (Boolean)	ปิดบัญชี SBL	Close the SBL account?
20	SBLAccountNumber	Single line of text	เลขบัญชี SBL	SBL account number.
21	CloseEBizService	Yes/No (Boolean)	ปิดบริการ eBiz	Close the eBiz service?
22	CloseDigitalAssetAccount	Yes/No (Boolean)	ปิดบัญชี DA	Close the Digital Asset account?
23	DigitalAssetAccountNumber	Single line of text	เลขบัญชี DA	Digital Asset account number.
24	ClosePrivateFundAccount	Yes/No (Boolean)	ปิดบัญชี Private Fund	Close the private fund account?
25	PrivateFundAccountNumber	Single line of text	เลขบัญชี Private Fund	Private fund account number.
26	CloseATSService	Yes/No (Boolean)	ปิดบริการ ATS	Close the ATS service?
27	ClosureReason	Choice	สาเหตุการปิดบัญชี	เจ้าของบัญชีเสียชีวิต, ลูกค้าแจ้งความประสงค์, อื่นๆ โปรดระบุ

#	Column	Type	ชื่อไทย	Notes
28	ClosureReasonOther	Single line of text	สาเหตุอื่น (ระบุ)	Shown by varReasonOther (dropdown OnChange)
29	CloseScope	Choice	ขอบเขตการปิด	ปิดทุกประเภทบัญชี, ปิดบางประเภทบัญชี
30	CloseScopeAccounts	Single line of text	บัญชีที่เลือกปิด	Shown by varCloseSome...
31	UnitHolderDecision	Choice	การปิดบัญชีกองทุน (unit holder)	4 ตัวเลือก (ปิดได้/ปิดได้+Suspend/ปิดได้+Suspend หลายบัญชี/ปิดไม่ได้)
32	MFSuspendAccounts	Single line of text	บัญชี Suspend (กองทุน)	Middle-1 mutual-fund decision · round-17
33	RelinquishDA	Choice	ประสงค์สละสิทธิทรัพย์สิน DA	ยินยอม (Consent), ไม่ยินยอม (Decline)
34	LitigationStatus	Choice	ผลตรวจการฟ้องร้อง	Pending, Clean, Found
35	LitigationReason	Multiple lines of text	สาเหตุการฟ้องร้อง	Reason behind the litigation (when Found).
36	AOOpinion	Multiple lines of text	ความเห็นเจ้าหน้าที่/บริษัท	Sales-1 AO OPINION box
37	AORemark	Multiple lines of text	AO Remark	Sales-1 AO REMARK box
38	RefundMethod	Choice	วิธีคืนเงิน	โอนเข้าบัญชีธนาคาร, เช็ค, อื่นๆ
39	ReceivingBankName	Choice	ธนาคารผู้รับ	รายชื่อธนาคาร
40	ReceivingBankBranch	Single line of text	สาขา	Receiving bank branch.
41	ReceivingBankAccountNumber	Single line of text	เลขบัญชีผู้รับ	Receiving bank account number.
42	ReceivingBankAccountName	Single line of text	ชื่อบัญชีผู้รับ	Receiving account name.
43	TransferSecuritiesToAccount	Single line of text	โอนหลักทรัพย์ไปบัญชี	Target account for securities transfer.
44	TransferSecuritiesToBroker	Single line of text	โอนไปโบรกเกอร์	B2B: broker fees deducted from FCY first
45	TotalBalance	Currency	ยอดเงินรวม (Wallet App)	Middle-1 → shown on the Wallet precheck card
46	IdentityCISVerified	Single line of text	ยืนยันตัวตน CIS (auto)	CAM-2 · read-only label
47	AccruedInterestPosted	Currency	ดอกเบี้ยค้างรับที่ Post	CAM-2
48	NetBalanceFinal	Currency	ยอดเงินสุทธิสุดท้าย	CAM-3
49	SalesRepresentative	Person or Group	เจ้าหน้าที่ Sales	Sales owner of the request.
50	InvestmentConsultantCode	Single line of text	รหัส IC	Investment consultant code.
51	Channel	Choice	ช่องทาง	Branch, eBiz
52	RequestStatus	Choice	สถานะคำขอ	Draft, PrecheckInProgress, PendingDocuments, PendingApproval, Approved, InSettlement, InCashMgmt, Closing, Completed, Rejected
53	CurrentStage	Choice	ขั้นตอนปัจจุบัน	Sales, Precheck, MiddleVerify, HeadOfSales, CAM, Settlement, Cash, Completed
54	CurrentAssignee	Person or Group	ผู้รับผิดชอบปัจจุบัน	Who must act next.
55	IsLocked	Yes/No (Boolean)	บัญชีติด Lock	ติด Lock → Reject กลับ Middle
56	LockType	Choice	ประเภท Lock	Lock Offshore, Others Lock, No Lock
57	iTradeFlag	Yes/No (Boolean)	iTrade Flag	มี = ต้องปิดก่อนบบ SBA · CAM Gate · round-17

#	Column	Type	ชื่อไทย	Notes
58	ApproverRemarks	Multiple lines of text	ความเห็นผู้อนุมัติ	Remarks from approval stages.
59	CCRecipients	Single line of text	ผู้รับสำเนา (CC)	อีเมลอัตโนมัติ box (Sales-1/2, Middle-2) → Flow 6
60	PostInterest	Yes/No (Boolean)	Post ดอกเบี้ย?	Cash Management queue · round-17
61	SettlementDispatchedAt	Date and Time	เวลา Dispatch งาน	round-17
62	TFEXOffshoreApplicable	Yes/No (Boolean)	มี TFEX / Offshore	Settlement screen
63	RejectCount	Number	จำนวนครั้งที่ถูก Reject	Flow 3 increments on Reject — avoids counting Approval_Logs per row (fast, delegable)

2. Request_Accounts NEW LIST

Child — one row per account the customer holds. Feeds the Account Inventory and the per-account assets/money matrix. · บัญชีของลูกค้า (1 บัญชี = 1 แถว)

#	Column	Type	ชื่อไทย	Notes
1	Title	Single line of text	AccountID	Primary key
2	RequestID	Single line of text	เลขที่คำขอ (อ้างอิง)	Text, not Lookup → delegable + fast; INDEX this column
3	GroupName	Choice	กลุ่มบัญชี	Equity+Bond+SN, SBL, บัญชีซื้อขายหน่วยลงทุน, Offshore, TFEX, DA, LiVEx, Algo
4	AccountLabel	Single line of text	ชื่อบัญชี	e.g. Cash Account, Mutual Fund ACC.
5	AccountNumber	Single line of text	เลขที่บัญชี	Account number (Sales keys; Middle can correct).
6	Balance	Currency	ยอดเงินคงเหลือ	Balance per account (Middle fills).
7	AssetMoneyState	Choice	สถานะทรัพย์สิน/เงิน	NoAssets (ไม่มีทรัพย์สินคงเหลือ), NoMoney (ไม่มีเงินคงเหลือ), MoneyUnknown (มีเงินแต่ไม่ทราบยอด)
8	ToggleValue	Single line of text	ค่า มี/ไม่มี	มี, ไม่มี
9	EditedBy	Person or Group	แก้ไขโดย	Last editor (the ↻ attribution line).
10	EditedAt	Date and Time	แก้ไขเมื่อ	Last edit timestamp.

3. Request_Tasks NEW LIST

Child — one row per closing task; the SETTLEMENT TASK ENGINE spine (round-17). Rows are expanded from Task_Templates for each product the customer holds; each department's queue = Filter(RequestID, Status=Ready, ResponsibleTeam=self). Completing a task unlocks the next StepNo of the same product. · งานปิดบัญชี (1 งาน = 1 แถว) · Settlement engine

#	Column	Type	ชื่อไทย	Notes
1	Title	Single line of text	TaskID	Primary key
2	RequestID	Single line of text	เลขที่คำขอ (อ้างอิง)	Text; INDEX this column
3	Product	Choice	Product	TFEX, Offshore, Equity + Bond + SN, บัญชีซื้อขายหน่วยลงทุน, DA Digital Assets, LiVEx, Algo
4	StepNo	Number	ลำดับขั้น	round-17 engine
5	AccountGroup	Single line of text	กลุ่มบัญชี	Group header rows
6	ResponsibleTeam	Choice	ทีมที่รับผิดชอบ	CAM, Cash, EQ, Offshore, DA
7	TaskName	Single line of text	งานที่ต้องทำ	e.g. เช็ก Position, ถอน+โอนเงิน THB.
8	Status	Choice	สถานะ	Locked, Ready, Done, Skipped, Rejected
9	IsExempt	Yes/No (Boolean)	ไม่บังคับ	Default = No
10	DoneBy	Person or Group	ทำโดย	Who completed it (ทำโดย column).
11	DoneAt	Date and Time	ทำเมื่อ	Completion timestamp.

4. Request_Prechecks NEW LIST

Child — exactly 2 rows per request (DA / Middle) in round-17. Feeds the parallel pre-check cards and the routing gate (Flow 4). Product Op EQ removed from pre-check (its iTrade check moved to the C&AM Gate). · wa pre-check 2 ทีม (1 ทีม = 1 แยก)

#	Column	Type	ชื่อไทย	Notes
1	Title	Single line of text	PrecheckID	Primary key
2	RequestID	Single line of text	เลขที่คำขอ (อ้างอิง)	Text; INDEX this column
3	Team	Choice	ทีม	DigitalAssets, Middle
4	WalletStatus	Single line of text	สถานะ wallet (auto)	DA row · read-only label in Power Apps
5	TotalBalance	Currency	ยอดเงินรวม	Middle's Wallet App balance (Middle row only).
6	AttachedFileRef	Single line of text	ไฟล์แนบ (อ้างอิง)	Link/name of the attached statement in Request_Files.
7	Remark	Multiple lines of text	หมายเหตุ	Card remark to the next team.
8	TransferredOutConfirmed	Yes/No (Boolean)	ลูกค้าโอนทรัพย์สินออกหมดแล้ว	The confirmation checkbox on each card.
9	WalletCleared	Choice	DA wallet เคลียร์แล้ว?	Cleared, NotCleared
10	DASuspendConfirmed	Yes/No (Boolean)	ยืนยัน Suspend DA แล้ว	non-deceased · no assets · no money case
11	Result	Choice	ผลตรวจ	Pending, Clear, Reject
12	CheckedBy	Person or Group	ตรวจโดย	The by-line on the card.
13	CheckedAt	Date and Time	ตรวจเมื่อ	Timestamp on the card.

5. Request_Files NEW LIST

All attachments — feeds the View Files gallery and every upload zone. · ไฟล์แนบทุกฝ่าย (Document Library)

#	Column	Type	ชื่อไทย	Notes
1	Name (file)	File	ไฟล์	Library, not a list
2	RequestID	Single line of text	เลขที่คำขอ (อ้างอิง)	Text; INDEX this column
3	Department	Choice	ฝ่ายที่แนบ	Sales, Digital Assets, Middle, Product Op (EQ), Product Op (Offshore), C&AM, Cash, Settlement
4	FileKind	Choice	ประเภทไฟล์	CustomerDoc, eService, DAstatement, WalletPrecheck, AlgoLiveX, SuspendEvidence, Summary
5	UploadedBy	Person or Group	แนบโดย	Modified By works too
6	UploadedAt	Date and Time	แนบเมื่อ	Modified works too

6. Request_DocChecklist NEW LIST

Child — one row per required document tick in the Check Document section (audit of who ticked what, when). · รายการตรวจเอกสาร (1 เอกสาร = 1 แยก)

#	Column	Type	ชื่อไทย	Notes
1	Title	Single line of text	DocItemID	Primary key
2	RequestID	Single line of text	เลขที่คำขอ (อ้างอิง)	Text; INDEX this column
3	DocName	Single line of text	ชื่อเอกสาร	12 deceased + 4 not-deceased + custom
4	Category	Choice	กรณี	Deceased, NotDeceased, Custom
5	Checked	Yes/No (Boolean)	ติดแล้ว	Received / verified.
6	CheckedBy	Person or Group	ติดโดย	Who ticked.
7	CheckedAt	Date and Time	ติดเมื่อ	When ticked.

10. Litigation_Register

NEW LIST

Litigation screening source — Flow 2 looks up CitizenID here (or caches an external API result) and writes New_Request.LitigationStatus. · กระบวนการฟ้องร้อง (แหล่งตรวจอัตโนมัติ)

#	Column	Type	ชื่อไทย	Notes
1	Title (=CitizenID)	Single line of text	เลขบัตรประชาชน	Primary key; INDEX
2	Status	Choice	ผล	Clean, Found
3	Reason	Multiple lines of text	สาเหตุ	Reason behind the litigation.
4	Source	Single line of text	แหล่งข้อมูล	Manual, API cache
5	UpdatedAt	Date and Time	อัปเดตเมื่อ	Last refresh.

7. Approval_Logs KEEP

Audit trail — one row per stage transition (written by the flows). Mirrors the in-app colLog. · ประวัติการอนุมัติ/ส่งต่อ

#	Column	Type	ชื่อไทย	Notes
1	Title	Single line of text	รหัสรายการ Log	Primary key
2	RequestID	Single line of text	เลขที่คำขอ (อ้างอิง)	Text (ไม่ใช่ Lookup) เพื่อความเร็ว; INDEX
3	ActionTakenBy	Person or Group	ผู้ดำเนินการ	Who performed the action.
4	ActionUserRole	Choice	บทบาทผู้ดำเนินการ	Sales, Head_Of_Sales, Middle_Team, Risk_Team, DA_Team, Operation_Team
5	ActionType	Choice	ประเภทการดำเนินการ	Submitted, Approved, Rejected, Returned, Completed
6	ActionComments	Multiple lines of text	ความคิดเห็น/เหตุผล	Reason / remark (required on Reject).
7	ActionDate	Date and Time	วันที่ดำเนินการ	When.

8. Role_Mapping KEEP

Who plays which workflow role — drives gblRole / gblScope and which buttons a user sees. · สิทธิ์และบทบาทผู้ใช้

#	Column	Type	ชื่อไทย	Notes
1	Title	Single line of text	คำอธิบาย	Rename Title → 'คำอธิบาย'
2	EmployeeAccount	Person or Group	บัญชีพนักงาน	Single selection only
3	SystemRole	Choice	บทบาทในระบบ	Sales, Head_Of_Sales, Middle_Team, Risk_Team, DA_Team, Operation_Team, System_Admin
4	DataVisibilityScope	Choice	ขอบเขตเข้าถึงข้อมูล	All_Data, Department_Only, My_Clients_Only
5	IsActiveUser	Yes/No (Boolean)	สถานะใช้งาน	Default = Yes

9. System_Config KEEP


Key/value settings — SLA per team, CC lists, request-number seed, routing overrides. · ค่าตั้งระบบ (Key/Value)

#	Column	Type	ชื่อไทย	Notes
1	Title (→ ConfigKey)	Single line of text	ConfigKey	Rename Title → ConfigKey
2	ConfigValue	Multiple lines of text	ค่าที่ตั้ง	Value, e.g. '3' or 'a@b.com;c@d.com'.
3	ConfigDescription	Single line of text	คำอธิบายการตั้งค่า	What this setting controls.
4	IsActiveConfig	Yes/No (Boolean)	สถานะใช้งาน	Default = Yes

Why the child lists. The inventory, the assets/money matrix, the task tables, the pre-check cards, the files and the doc checklist are all **repeating** (many rows per request). A flat header cannot hold them, so each becomes a child list carrying a plain-text RequestID that references New_Request.Title. Keep it Text (not Lookup) and index it — that is the single most important performance decision (§10).


8 · Entity-relationship diagram

Solid line = parent/child on RequestID (1 — ∞, plain-text indexed key). Dashed = reference relationship.

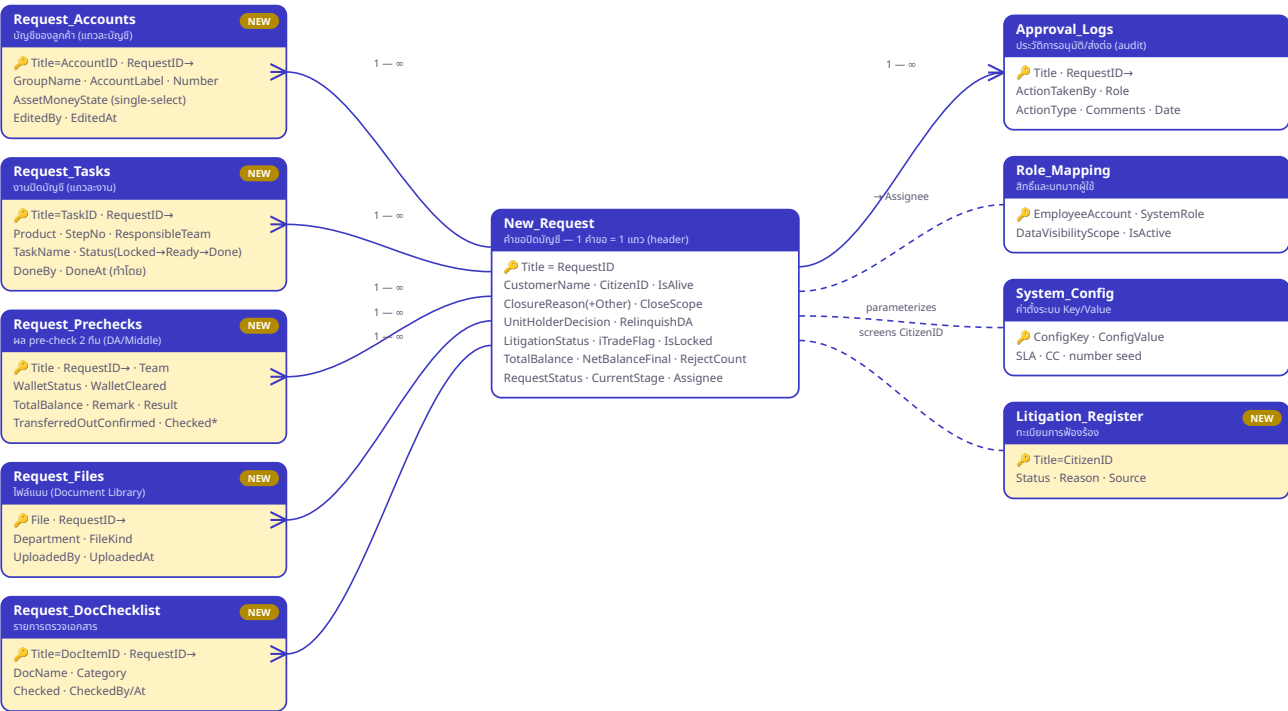

9 · Power Automate — flow overview

Seven flows. Five are called from the app with .Run(); one is triggered by a SharePoint change; one is a child flow for e-mail. This split is deliberate: the app stays thin, and the business rules live in one place you can change without republishing the app.

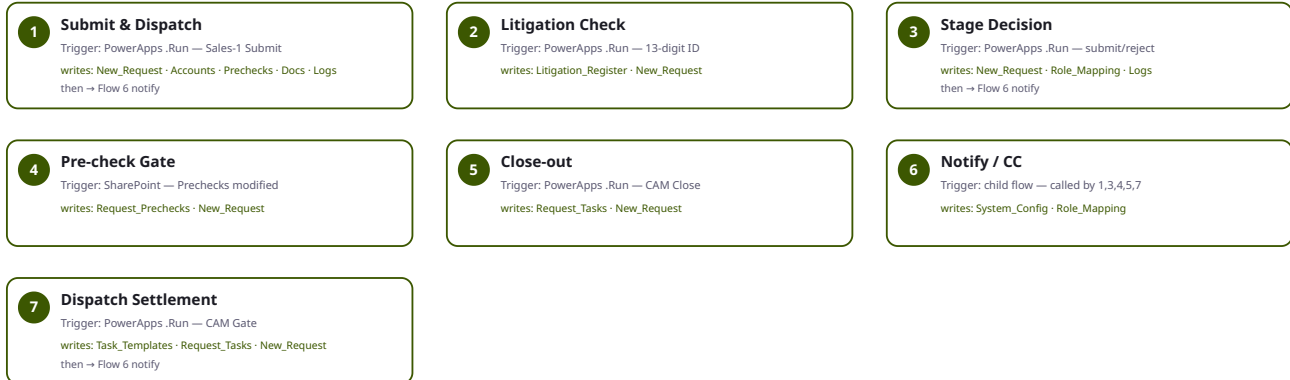

How the app calls a flow

```
// Sales-1 Submit
Set(gblSubmitResult, 'SubmitAndDispatch'.Run( JSON(payload) ));
Set(gblRequestID, gblSubmitResult.requestid); // flow returns the new RequestID
// Stage decision (any submit/reject)
'StageDecision'.Run(gblRequestID, "Approved", txtRemark.Text);
```

9 · Power Automate — step-by-step

Flow 1 — Submit & Dispatch

Trigger: Power Apps trigger (V2) — Sales-1 Submit button .Run(payload)

#	Action	Connector / type	Lists	Notes
1	Receive inputs from Power Apps	PowerApps trigger	—	customer fields, accounts JSON, reason, channel
2	Get number seed	Get item	System_Config	ConfigKey = RequestNumberSeed
3	Compose RequestID	Compose	—	e.g. INVX888- & (seed+1)
4	Update seed	Update item	System_Config	seed+1 (single writer = no collisions)
5	Create request header	Create item	New_Request	RequestStatus=PrecheckInProgress, CurrentStage=Precheck
6	Create account rows	Apply to each → Create item	Request_Accounts	one row per inventory account from the app payload
7	Create 3 precheck rows	Create item ×3	Request_Prechecks	Team=DigitalAssets/Middle/ProductOpEQ, Result=Pending
8	Create doc-checklist rows	Apply to each → Create item	Request_DocChecklist	per IsAlive case (12 deceased / 4 not)
9	Write audit log	Create item	Approval_Logs	ActionType=Submitted
10	Notify the 3 teams	Child flow → Flow 6	—	assignees from Role_Mapping
11	Respond to Power Apps	Respond	—	returns RequestID → Set(gblRequestID, result)

Flow 2 — Litigation Check

Trigger: Power Apps trigger — fires when varCardValid becomes true (13 digits)

#	Action	Connector / type	Lists	Notes
1	Receive CitizenID	PowerApps trigger	—	from the card-id input OnChange
2	Look up register	Get items (top 1)	Litigation_Register	Title eq CitizenID (indexed)
3	If not found → external check	HTTP / connector (optional)	—	cache result back into Litigation_Register
4	Patch header	Update item	New_Request	LitigationStatus=Clean/Found, LitigationReason
5	Respond to Power Apps	Respond	—	app shows clean (green) or found (red) box

Flow 3 — Stage Decision

Trigger: Power Apps trigger — every submit/reject button .Run(RequestID, action, remark)

#	Action	Connector / type	Lists	Notes
1	Receive action	PowerApps trigger	—	action = Submitted/Approved/Rejected/Returned/Completed
2	Guard: remark on reject	Condition	—	Rejected/Returned requires non-empty remark → else respond error
3	Resolve next stage	Switch(action, current stage)	—	the state machine table (SYSTEM_DESIGN §6)
4	Resolve next assignee	Get items	Role_Mapping	SystemRole for the next team, IsActiveUser=Yes
5	Update header	Update item	New_Request	RequestStatus, CurrentStage, CurrentAssignee
6	Write audit log	Create item	Approval_Logs	who/role/action/comments/date
7	Notify next owner	Child flow → Flow 6	—	—

Flow 4 — Parallel Pre-check Gate

Trigger: SharePoint — When an item is modified (Request_Prechecks)

#	Action	Connector / type	Lists	Notes
1	Trigger on precheck row change	SharePoint trigger	Request_Prechecks	—
2	Get all 3 rows for the request	Get items	Request_Prechecks	RequestID eq triggerBody RequestID
3	All decided?	Condition	—	count(Result ≠ Pending) = 3, else terminate
4	All Clear → route to Head	Update item	New_Request	RequestStatus=PendingApproval, CurrentStage=HeadOfSales
5	Any Reject → back to Sales	Update item	New_Request	RequestStatus=PendingDocuments, CurrentStage=Sales
6	Write gate log + notify	Create item / Flow 6	Approval_Logs	records which branch fired

Flow 5 — Close-out

Trigger: Power Apps trigger — CAM-3 'ปิดคำขอเรียบร้อยแล้ว' button

#	Action	Connector / type	Lists	Notes
1	Receive RequestID	PowerApps trigger	—	—
2	Any open tasks?	Get items	Request_Tasks	RequestID eq X AND Status eq 'รอทำ' AND IsExempt eq false
3	Guard	Condition	—	open tasks > 0 → respond error (app shows Notify)
4	Complete header	Update item	New_Request	RequestStatus=Completed, CurrentStage=Completed
5	Final log + notify Sales	Create item / Flow 6	Approval_Logs	Sales contacts the customer

Flow 6 — Notify / CC

Trigger: Child flow — called by Flows 1, 3, 4, 5

#	Action	Connector / type	Lists	Notes
1	Receive team/action/RequestID	Manual (child) trigger	—	—
2	Recipients	Get items	System_Config + Role_Mapping	CC_<team> keys + active members of the role
3	Send templated mail	Send an email (V2)	—	subject: [Account-Closure] <RequestID> <action>

Flow 7 — Dispatch Settlement

Trigger: Power Apps trigger — C&AM Gate 'Dispatch' button .Run(RequestID)

#	Action	Connector / type	Lists	Notes
1	Receive RequestID	PowerApps trigger	—	after iTrade + Lock pass
2	Get products held	Get items	Request_Accounts	distinct GroupName / product for the request
3	Get matching templates	Get items	Task_Templates	Product in (products held), ordered by StepNo
4	Create task rows	Apply to each → Create item	Request_Tasks	Status = If(StepNo=1,'Ready','Locked'); copy OwnerDept, TaskName, IsOptional
5	Stamp header	Update item	New_Request	SettlementDispatchedAt = utcNow(); CurrentStage = Settlement
6	Notify step-1 owners	Child flow → Flow 6	Role_Mapping	teams owning the Ready tasks

10 · Efficiency — why it won't lag

- **1 · Never load a whole list.** Every OnVisible filters by RequestID = gblRequestID → the app holds tens of rows, never thousands.
- **2 · RequestID is Text and indexed** on every child list → Filter stays **delegable** (SharePoint does the work, not the client) and never hits the 2 000-item / Lookup-threshold walls.
- **3 · One header read per screen.** Set(gblRequest, LookUp(New_Request, Title = gblRequestID)) once; every box binds to gblRequest.* instead of repeating the lookup.
- **4 · Cache reference data** (Role_Mapping, System_Config) in App.OnStart — small, rarely changes, zero per-screen reads.
- **5 · Write on Submit, not on keystroke.** Collect edits in the controls; Patch once per stage. Use varSubmitting to disable the button while a flow runs.
- **6 · Cross-record logic lives in flows** — numbering, dispatch, "all 3 done?", e-mail. Server-side, one shot, no client loops.
- **7 · Denormalized counters** — RejectCount is stored on the header (Flow 3 increments it). The Dashboard list never counts Approval_Logs per row (the classic gallery-lag trap).
- **8 · Delegable operators only** in filters (=, StartsWith, < >) on **indexed** columns. Add indexes: RequestID on every child list, RequestStatus on New_Request, Title(CitizenID) on Litigation_Register.

11 · Build & wire checklist (do this in order)

1. **Create the SharePoint lists** exactly as the Excel specifies. Add the yellow columns to your existing New_Request; create the 6 new lists + Request_Files document library. Set every choice column's options from the "Choices / Notes" column.
2. **Index** RequestID on all child lists, RequestStatus on New_Request, Title on Litigation_Register.
3. **Seed reference data:** Role_Mapping (who is Sales / Middle / DA / EQ / C&AM / Head of Sales) and System_Config (SLA hours, CC distribution lists, RequestNumberSeed).
4. **Build the 6 flows** (§9). Test each in isolation with a sample request before wiring the app.
5. **Paste the 17 screens** into a blank Canvas app (Tree view → Screens), Dashboard first.
6. **Wire App.OnStart and each OnVisible** per §5 patterns ① and ② (identity + per-request Filter loads).
7. **Swap the seeds & sample literals** for real bindings (§6): gallery Items → Filter(...); value-box Text → gblRequest.*. Use the App_Field_Coverage sheet as the checklist — one row per control.
8. **Connect buttons to flows:** Submit → SubmitAndDispatch; every submit/reject → StageDecision; card-id OnChange → LitigationCheck; CAM-3 → CloseOut.
9. **Test the full rail:** create a request, run it Sales → Completed, and confirm the Tracking rail + Approval_Logs match at each step.

Because the app already runs the workflow on session variables, you can wire the backend **incrementally** (one list / one flow at a time) and the app keeps working the whole way.

12 · pa.yaml authoring rules (only if you regenerate screens)

The screens are produced by a deterministic generator that emits Power Apps "Source Code" YAML. These are the rules that decide whether a paste compiles — each learned from a real Studio error, and now enforced by the bundled validator.

- **FillPortions = 0 on every fixed child** of an auto-layout container ("Flexible height/width OFF") — otherwise it stretches and ignores its Height/Width. This is the #1 layout rule. FillPortions is valid *only* on Label and GroupContainer.
- **No Radius* on Label or Gallery** (PA2108) — only GroupContainer / Button / Rectangle / TextInput support rounded corners. Read-only value boxes are Labels → no rounding.
- **No HoverBorderColor on Radio** (PA2108). Classic inputs support FocusedBorderColor / FocusedBorderThickness / HoverBorderColor selectively — TextInput & DropDown yes, Radio no.
- **Control type prefixes are exact**: Label & Gallery are *bare*; TextInput / DropDown / Radio / CheckBox / Button / Icon are *Classic*/... at a pinned version.
- **Every property value is a formula** → starts with =. Values containing : or # need a block scalar.
- **Every GroupContainer/Gallery** needs Height + LayoutMinHeight; container heights are computed = sum(children)+gaps+padding so nothing clips or leaves dead space.
- **Names are unique app-wide**; the toggling reveals collapse hidden children in auto-layout, so container Height uses If(var, open, closed).

Run `validate_pa_yaml.py <file>` before pasting — it gates all of the above (0 errors = safe to paste) and enforces the PA2108 denylist so those errors can't recur.

Appendix A · Full variable reference

Variable / collection	Kind	Set by	Drives (in the app)
gblRequestID	Global (Set)	Dashboard OnVisible (seed) / open-request action	Which request every screen filters by.
gblStageIndex	Global (Set)	Every submit/reject button (actionGo)	1–8 position on the Tracking rail — the rail renders from this.
gblStatus	Global (Set)	Every submit/reject button	Latest workflow status text (target screen key).
gblRole / gblScope	Global (Set)	App start (from Role_Mapping)	Role-based visibility (wire when SharePoint is connected).
colLog	Collection (Collect)	Seeded on every screen; appended by every submit/reject	In-app audit trail; Tracking's ประวัติการดำเนินงาน gallery renders it live. Mirrors Approval_Logs.
colFiles	Collection (ClearCollect)	Screen OnVisible (seed → later Filter(Request_Files, RequestID=gblRequestID))	View Files gallery items.
colPCMiddie / colPCDA / colPCEQ	Collection (ClearCollect)	Screen OnVisible (seed → later Filter(Request_Files, Department=...))	Per-department file lists inside each parallel pre-check card (multiple files, scrollable).
gblDAWalletStatus	Global (Set)	OnVisible (← Request_Prechecks.WalletStatus)	Read-only 'สถานะ wallet' label on DA screens (auto, non-editable).
gblCheckedByDA / gblCheckedByMiddle / gblCheckedByEQ	Global (Set)	OnVisible (← Request_Prechecks.CheckedBy)	Read-only 'ตรวจโดย' labels (auto, non-editable).
gblIdentityCIS	Global (Set)	OnVisible (← New_Request.IdentityCISVerified)	Read-only 'ยืนยันตัวตน CIS' label on CAM-2 (auto).
colMatrix	Collection (ClearCollect)	Screen OnVisible (seed → later Request_Accounts)	The 8 matrix accounts.
varReasonOther	Context (UpdateContext)	Reason DropDown OnChange (Sales-1)	Reveals the 'ไม่ว่าอะไร' input + grows its box.
varCloseSome	Context (UpdateContext)	Close-scope DropDown OnChange (Sales-2, Middle-2)	Reveals the 'ระบุถึงสิ่งที่ต้องปิด' input.
varVF	Context (UpdateContext)	View Files bar OnSelect (toggle)	Shows/hides the files gallery + grows the card.
varCardValid	Context (UpdateContext)	Card-ID input OnChange — IsMatch ^\d{13}\$ (Sales-1)	Switches the litigation box: waiting ↔ clean.
varColAssets / varColMoney / varColUnknown	Context (UpdateContext)	'Check All' buttons	Tick a whole matrix column at once.

Appendix B · Glossary (Thai ↔ English)

Term	Meaning
ปิดบัญชี	Account closure
เจ้าของบัญชีเสียชีวิต	Account owner deceased
ผู้จัดการมรดก	Estate administrator
การฟ้องร้อง	Litigation
ตรวจสอบ	Verify / check
pre-check / precheck	Parallel readiness check by DA, Middle, Product Op EQ before Head of Sales
unit holder	Mutual-fund unit-holder account that may block fund closure
Suspend	Freeze an account instead of closing (DA / fund cases)
Wallet App	Middle's balance-checking app (source of TotalBalance)
iTrade Flag	Equity flag that must be closed on SBA first
SBA	Securities Borrowing Account
C&AM	Client & Account Management team
TFEX	Thailand Futures Exchange account
FCD / FCY	Foreign-currency deposit / foreign currency
ทำโดย	Done by
หมายเหตุ	Remark

Appendix C · File manifest

File	What it is
Account-Closure_PowerApps_final.zip	the 17 screen .pa.yaml files — paste into Power Apps Studio (Dashboard first)
Account-Closure_SharePoint_Database.xlsx	15-sheet workbook: the 11 lists to create + Power Automate design + variables + screen-data matrix + 407-control coverage proof
Account-Closure_Database_Design.pdf	boss-facing architecture & schema summary
Account-Closure_Developer_Handbook.pdf	this document — the full build guide
BINDINGS.md	500+ control↔variable↔column bindings extracted from the app source
SYSTEM_DESIGN.md	the written spec (variables, read-only rules, state machine, flows)
validate_pa_yaml.py	the linter that gates every screen before pasting