

[Home](#)[News](#)[R Package for Data Mining](#)[Documents](#)[Examples](#)[Data Exploration](#)[Decision Trees](#)[k-means Clustering](#)[Hierarchical Clustering](#)[Outlier Detection](#)[Time Series Analysis](#)[Time Series Clustering](#)[and Classification](#)[Association Rules](#)[Text Mining](#)[Social Media Analysis](#)[Social Network Analysis](#)[Parallel Computing](#)[Other Examples](#)[Tutorials](#)[Building an R Hadoop](#)[System](#)[Hadoop: from Single-](#)[Node Mode to Cluster](#)[Mode](#)[Resources](#)[Online Documents](#)[Free Online Courses](#)[Free Datasets](#)[Free Data Mining Tools](#)[Data](#)[Books](#)[R and Data Mining:](#)[Examples and Case](#)[Studies](#)[Data Mining](#)[Applications with R](#)[Post-Mining of](#)[Association Rules](#)[What is R](#)[Donation & Supporters](#)[About RDataMining](#)[Sitemap](#)[Examples](#) >

## Social Media Analysis


Below is a simple example for plotting Twitter followers on a world map. Simply replace "RDataMining" with your Twitter account to produce your own follower map.

Note that Twitter API requires authentication. Please follow instructions in "Section 3 - Authentication with OAuth" in [the twitterR vignettes on CRAN](#) or [this link](#) to complete authentication before running the code below.

```
> source("http://biostat.jhsph.edu/~jleek/code/twitterMap.R")
> twitterMap("RDataMining", fileName="twitterMap.pdf", nMax=1500)
```

See a detailed post on the above function at the link below:

[An R function to map your Twitter Followers](#)

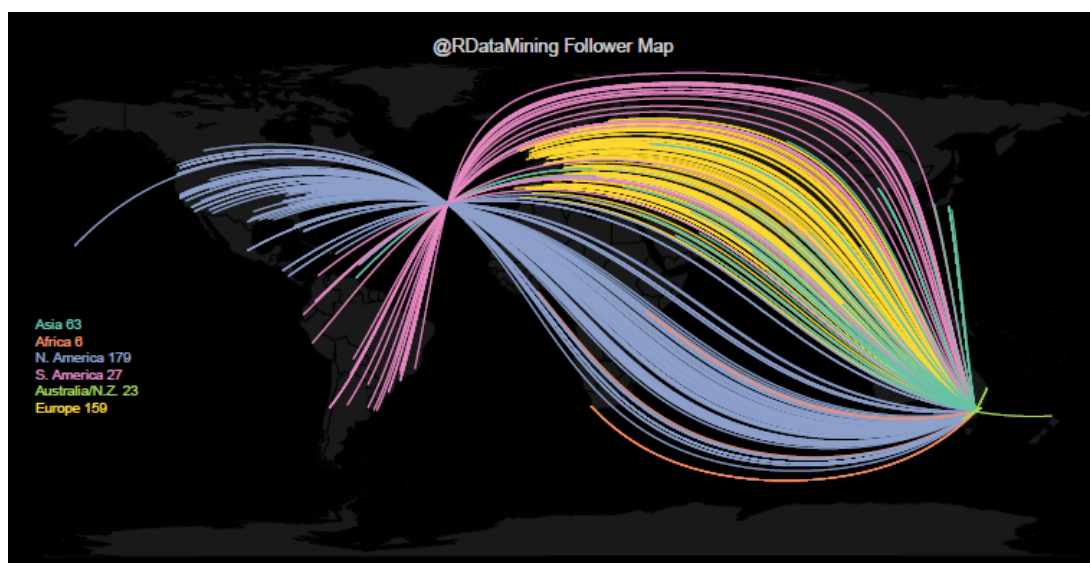

©2014 Yanchang Zhao. Contact: [yanchang\(at\)rdatamining.com](mailto:yanchang(at)rdatamining.com)

[Sign in](#) | [Report Abuse](#) | [Print Page](#) | [Remove Access](#) | Powered By [Google Sites](#)