Interface Agreement

3rd Party API

MyAds

Mobile Advertising System Management

Confidential & Proprietary

Revision History

Version	Date	Editor	Comment/Changes	Remark
1.0	September 2025	Luna Sweeta	Initial Version	-
2.0	Maret 2026	Musa		-
2.1	April 2026	Musa	Add section credential	-
2.2	April 2026	Musa	Add Curl API	-

Confidential & Proprietary

Document Approval

Version	Name	Area/Company/Role	Date	Signature
2.0				
2.0				
2.0				
2.0				
2.0				

Confidential & Proprietary

Contents

1. Introduction.....5
2. Background.....5
3. Purpose.....5
4. Flow.....6
5. Authentication Guide.....7
1. Peruser Key.....7
2. API Key.....7
3. Secret.....7
4. Request Header Summary.....8
6. API.....9
6.1. Get Token API.....9
6.2. Balance.....10
6.3. Create Campaign (SMS and MMS).....11
Broadcast.....11
Targeted.....13
LBA.....16
6.4. Upload File Content.....21
6.5. Pricebook.....22
6.6. List Profile.....23
Gender.....37
Operating System (OS).....37
Lifestyle Segment.....37
Card Type.....39
Marital Status.....39
Religion.....39
6.7. Campaign List.....40
6.8. Stop/Rejected Campaign.....42
6.9. Create WABA Campaign.....43
WABA Broadcast.....43
WABA Targeted.....46
WABA LBA.....48
6.10. Create WABA Template.....51
6.11. List WABA Template.....54
6.12. List WABA Display Name.....56
6.13. Report Campaign.....57

Confidential & Proprietary

1. Introduction

This document describes the 3rd Party MyAds API that enables some third-party applications for Merchants to connect MyAds systems.

2. Background

In today's digital advertising landscape, merchants often need to switch between different platforms just to manage their advertisement campaign. This can disrupt efficiency, reduce user convenience, and complicate the integration with existing business systems.


To overcome these challenges, My Ads API was introduced as a seamless integration solution that allows third party applications to connect directly with the My Ads platform. With this API, merchants can manage their campaigns from within their own websites or internet systems, without the need to access My Ads separately.

3. Purpose

The purpose of this document is to define the technical and operational framework for the integration between third party applications and the My Ads system through the use of My Ads API.

Confidential & Proprietary

4. Flow

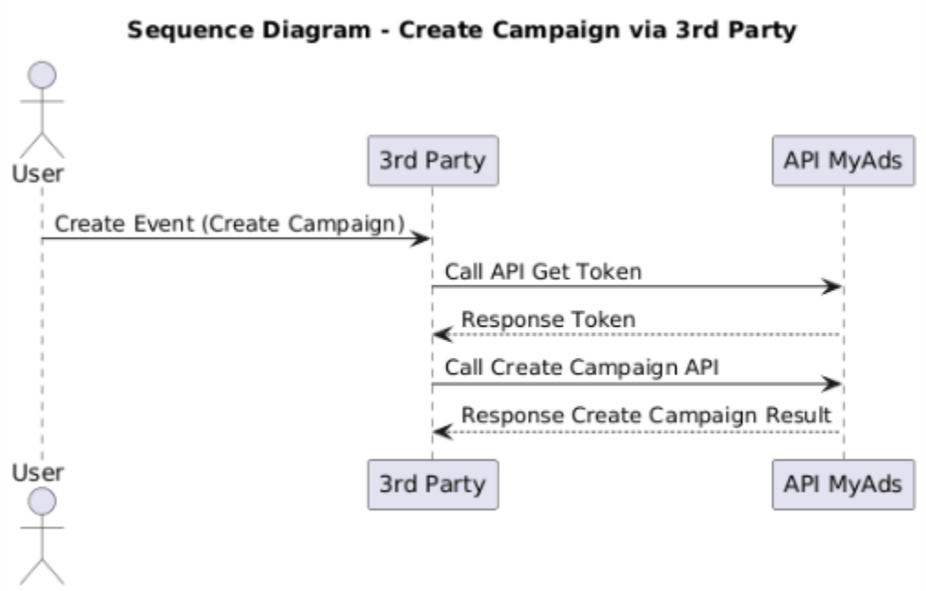

This sequence diagram illustrates the process of creating a campaign through a third-party platform that integrates with the MyAds API. With flow:

1. The user initiates the process by creating an event (e.g., “Create Campaign”) through the third-party interface.
2. The third-party system requests an authentication token from the MyAds API to gain authorized access to campaign management functions.
3. The MyAds API validates the request and responds with an access token, which will be used in subsequent API calls.
4. The third-party system uses the obtained token to call the “Create Campaign” API on MyAds, passing campaign details such as name, budget, and target audience.
5. The MyAds API processes the campaign creation request and returns a response indicating success or failure, along with the campaign ID or status.

At the end of the interaction, the campaign is successfully created in the MyAds system, and the 3rd Party platform can display confirmation or further campaign details to the User.

Confidential & Proprietary

5. Authentication Guide

There are three types of keys used in this authentication system. All three keys must be included in every request through the request header as defined in the API specification.

1. Peruser Key.

A unique key assigned to each user. This key is combined with the current date in YYYYMMDD format, then encoded using Base64. The encoded result is sent as the x-api-secret header value in every request.

Logic:

```
let key_user = "<<Key PerUser>>";

// Get today's date
let today = new Date();

// Format: YYYYMMdd
let year = today.getFullYear();
let month = String(today.getMonth() + 1).padStart(2, '0');
let day = String(today.getDate()).padStart(2, '0');
let formattedDate = `${year}${month}${day}`;

// Combine with key_user
let rawSecret = `${key_user}:${formattedDate}`;

// Encode to Base64
let base64Secret = CryptoJS.enc.Base64.stringify(
  CryptoJS.enc.Utf8.parse(rawSecret)
);

// Set to environment variable
pm.environment.set("x-api-secret", base64Secret);
```

Format before encoding:

```
<<PeruserKey>>:20250417
```

Real encoding example:

```
Input  :  USR-ABC123:20250417
Output :  VVNSLUFCQzEyMzoyMDI1MDQxNw==
```

Combine PeruserKey + ':' + YYYYMMDD, then encode with Base64.

2. API Key

The application identity key used to identify the request sender. This key is sent directly as the api_key header value and is also used as part of the signature generation process.

3. Secret

A confidential key that is combined together with the API Key and a timestamp (current time in seconds), then processed using the MD5 algorithm to generate a signature. This signature is sent as the signature header to verify the authenticity and integrity of every request.

Logic:

```
// Get api_key and secret from environment
let api_keys = "<<Api Keys>>";
let secret = "<<Secret>>";

// Get current time in seconds (like PHP time())
let timestamp = Math.floor(Date.now() / 1000);

// Combine: api_keys + secret + timestamp
let rawString = `${api_keys}${secret}${timestamp}`;

// Generate MD5 hash
let signature = CryptoJS.MD5(rawString).toString();

// Save to environment variables
pm.environment.set("signature", signature);
pm.environment.set("api_key", api_keys);
```

Format before hashing:

```
<<ApiKey>><<Secret>><<Timestamp>>
```

Real hashing example:

```
api_key   :  APIKEY-XYZ789
secret :  SCRT-DEF456
timestamp :  1744934400

Input  :  APIKEY-XYZ789SCRT-DEF4561744934400
Output :  35fc5481ea48ad0e52a7defd0e1adf99
```

Concatenate api_key + secret + timestamp (no spaces/delimiter), then MD5-hash.

4. Request Header Summary

Header	Value Source	Description
x-api-secret	Base64(PeruserKey:YYYYMMDD)	Encoded user key with current date
api_key	<<Api Keys>>	Application identity key
signature	MD5(ApiKey+Secret+Timestamp)	Request integrity verification hash

6. API

6.1. Get Token API

This API uses for process flow on 4.1

a. Info

Description	API to give the token for used call the API
Prep URL	https://<<domain>>preprod-web/scrt/myads/api/v1/auth/get-token
Prod URL	https://<<domain>>/scrt/myads/api/v1/auth/get-token
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
Authorization: Basic Auth (Base64 encoded from username, password)

c. Request body

Request body example:

```
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location 'https://<<domain>>/scrt/myads/api/v1/auth/get-token' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Basic {{basic_auth}}' \
--data '{}'
```

Response body

Name	Data Type	Length	Mandatory	Description
accessType	String	-	-	-
token	String	-	-	-

Response body example:

HTTP Status: 200

```
{
```

```
  "code": 0,
  "desc": "Success",
  "data": {
     "accessType": "Bearer",
     "token":
"eyJhbGciOiJIUzI1NiJ9.eyJpc1VzZXIiOnRydWUsImlzcyI6Ik15QURTLVdlYi1B
UEkiLCJhdWQiOiJNeUFEUy1XZWItQVBJLUNsaWVudCIsImlhdCI6MTc0NTgx
NDI0NCwiZXhwIjoxNzQ1ODQzMDQ0LCJzdWIiOiJ7XCJ1c2VySWRcIjpcIlJFR
y1ETy0wMDAwMDA1MDA1MzFcIixcImVtYWlsXCI6XCJzcmloYXJ5YXRpMjU5
OUBnbWFpbC5jb21cIixcImdyb3VwSWRcIjpcIkRPXCIsXCJleHBcIjoxNzQ1OD
QzMDQ0NjU2fSJ9.C-SEEjukKDRTmYZ77GV3uHbqaT8eRYg1uN1zKQFlqm4"
     "expired":1745814244
  }
}
```


6.2. Balance

a. Info

Description	API to check the user's account balance
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/user/get-balance
Prod URL	https://<<domain>>/scrt/myads/api/v1/user/get-balance
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Request body example:

```
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location 'https://<<domain>>/scrt/myads/api/v1/user/get-balance'
\
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
balanceMain	Numeric	-	-	-
expiredBalance	Numeric	-	-	-

Response body example:

HTTP Status: 200


```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "balanceMain": 1000000,
    "expiredBalance": 1745814244   41b 24
  }
}
```


6.3. Create Campaign (SMS and MMS)

Broadcast

a. Info

Description	API to create a new SMS broadcast campaign.
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/broadcast/add
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/broadcast/add
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
campaignName	String	≤ 100	Yes	Nama kampanye

				SMS
channel	String	≤ 10	Yes	Jenis kanal pengiriman pesan (misalnya: SMS)
senderName	String	≤ 50	Yes	Nama pengirim yang tampil di perangkat penerima
message	String	-	Yes	Isi pesan SMS yang akan dikirim
msisdnFile	String		Yes	Ambil dari response upload content
msisdnFileName	String	-	Yes	Ambil dari response upload content
mmsFile	String	-	No	Ambil dari response upload content
mmsSubject	String	-	No	Subjek MMS opsional
deliveries	Array <Object>		Yes	Jadwal pengiriman
└ deliveryDate	String (YYYYMMDD)	8	Yes	Tanggal pengiriman dalam format YYYYMMDD
└ deliveryTime	String (HHMM)	4	Yes	Waktu pengiriman dalam format HHMM
controlNumbers	Array <String>	≤ 15/digit	No	Nomor kontrol untuk validasi atau pengujian

Request body example


```
{
   "campaignName": "UAT SMS Broadcast",
   "channel": "SMS",
   "senderName": "MyAds",
   "message": "description",
   "msisdnFile":
"oTXA0bELSRVp4prXdiGIka4nJ+bg69O6PgMDwoCfIkePiYYp480EJIYMn9nV
Z/JR50rGcGMNm2+iBIN1syi1ehkofPGQolSd+slxQYu8a2y8SpFBOaygXD9pIL
OGuKv3A06qmg0HuyOJgSTMkdcFFRs=",
   "msisdnFileName": "Template_1761585157137.csv",
   "mmsFile": "",
   "mmsSubject": "",
   "deliveries": [
      {
```

```
        "deliveryDate": "20251028",
        "deliveryTime": "0800"
      }
  ],
  "controlNumbers": [
     "6282381600326"
  ]
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/broadcast/add' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{
  "campaignName": "UAT SMS Broadcast",
  "channel": "SMS",
  "senderName": "MyAds",
  "message": "description",
  "msisdnFile": "<<encrypted_file>>",
  "msisdnFileName": "Template_xxx.csv",
  "mmsFile": "",
  "mmsSubject": "",
  "deliveries": [{"deliveryDate": "20251028", "deliveryTime": "0800"}],
  "controlNumbers": ["6282381600326"]
}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	-	-

Response body example:

HTTP Status: 200

```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "campaignId": 2171
  }
}
```

Targeted

a. Info

Description	API to create a new SMS Targeted campaign.
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/targeted/add

Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/targeted/add
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
channel	String	≤ 10	Yes	Jenis saluran komunikasi, contoh: "MMS", “SMS”
campaignName	String	≤ 100	Yes	-
message	String		Yes	Pesan teks yang menyertai MMS
senderName	String	≤ 25	Yes	Nama pengirim yang tampil di perangkat penerima
mmsFile	String	-	Yes	Hasil dari API upload
mmsSubject	String	≤ 100	Yes	Subjek MMS yang ditampilkan
profileGender	String	1	No	Value sesuai dengan list profile
profileAge	Integer		No	Value sesuai dengan list profile
profileMobileDataSubs	String	1	No	Value sesuai dengan list profile
profileArpu	String	≤ 100	No	Value sesuai dengan list profile
profileOs	String	≤ 20	No	Value sesuai dengan list profile
profileMaritalStatus	String	≤ 20	No	Value sesuai dengan list profile
profileLifestyleSegment	String	≤ 50	No	Value sesuai dengan list profile
profileReligion	String	≤ 100	No	Value sesuai

Confidential & Proprietary

				dengan list profile
profileCardType	String	≤ 20	No	Value sesuai dengan list profile
profileHometown	String	≤ 50	No	Value sesuai dengan list profile
profileWork	String	≤ 50	No	Value sesuai dengan list profile
recepientTotal	Integer	≤ 5 digits	Yes	-
deliveries	Array		Yes	-
└ deliveryDate	String (YYYYMMDD)	8	Yes	Tanggal pengiriman dalam format YYYYMMDD
└ deliveryTime	String (HHMM)	4	Yes	Waktu pengiriman dalam format HHMM
controlNumbers	Array		No	-

Request body example


```
{
   "channel": "MMS",
   "campaignName": "UAT SMS Targeted",
   "message": "testing SIT",
   "senderName": "MyAds",
   "mmsFile":
"SgyNg9I+D+EsxqgmhT4cxNQGoDtkyb+GOg+I2LLsTgjRn5KB/IJIrGTfzrohujs
i2l7PNQvf1geJdyebpk9r3EUhMyN0ijIR4ar0uJBp9nI+IPimSnt0gyMDL7CoiE1H
FC3CVDPwsIN47B/dqzd9XBs=",
   "mmsSubject": "MMS Campaign",
   "profileGender": "M",
   "profileAge": null,
   "profileMobileDataSubs": "Y",
   "profileArpu": "0-10000001000001-15000001500001-2000000",
   "profileOs": "Android",
   "profileMaritalStatus": null,
   "profileLifestyleSegment": null,
   "profileReligion": "KRISTEN|ISLAM",
   "profileCardType": "",
   "profileHometown": null,
   "profileWork": "",
   "recepientTotal": 10,
   "deliveries": [
      {
         "deliveryDate": "20251029",
         "deliveryTime": "0800"
      }
   ],
   "controlNumbers": [
      "6282381600327"
   ]
}
```


Confidential & Proprietary

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/targeted/add' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{
  "channel": "MMS",
  "campaignName": "UAT SMS Targeted",
  "message": "testing SIT",
  "senderName": "MyAds",
  "mmsFile": "<<encrypted_file>>",
  "mmsSubject": "MMS Campaign",
  "profileGender": "M",
  "profileOs": "Android",
  "recepientTotal": 10,
  "deliveries": [{"deliveryDate": "20251029", "deliveryTime":
"0800"}],
  "controlNumbers": ["6282381600327"]
}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	-	-

Response body example:

HTTP Status: 200

```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "campaignId": 2171
  }
}
```

LBA

a. Info

Description	API to create a new SMS LBA campaign
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/lba/add
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/lba/add
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
channel	String	≤20	Yes	Jenis kanal kampanye, misalnya SMS atau MMS
campaignName	String	≤100	Yes	Nama kampanye
message	String	≤255	Yes	Deskripsi kampanye
senderName	String	≤50	Yes	Nama pengirim yang akan tampil di perangkat penerima
recepientTotal	Integer	≤6 digits	Yes	Total jumlah penerima kampanye
deliveries	Array	1–N	Yes	Daftar jadwal pengiriman
└ deliveryStartDate	String	8	Yes	Tanggal mulai pengiriman (format: YYYYMMDD)
└ deliveryStartTime	String	4	Yes	Waktu mulai pengiriman (format: HHmm)
└ deliveryEndDate	String	8	Yes	Tanggal akhir pengiriman (format: YYYYMMDD)
└ deliveryEndTime	String	4	Yes	Waktu akhir pengiriman (format: HHmm)
controlNumbers	Array	≤20 digits	Yes	Nomor kontrol untuk validasi atau pengecualian
contents	Object		Yes	Detail konten kampanye
└ contentName	String	≤50	Yes	Nama konten
└ message	String	≤255	Yes	Isi pesan kampanye

Confidential & Proprietary

└ mmsFile	String		Optional	File MMS yang dienkode dalam base64
└ mmsSubject	String	≤100	Optional	Subjek MMS
└ locations	Object		Yes	Informasi lokasi target kampanye
└ address	String	≤255	Yes	Alamat lokasi
└ latitude	Float		Yes	Koordinat lintang lokasi
└ longitude	Float		Yes	Koordinat bujur lokasi
└ locationNameMap	String	≤255	Yes	Nama lokasi berdasarkan peta
└ locationNameUser	String	≤255	Yes	Nama lokasi yang ditentukan pengguna
└ radius	Integer	≤5 digits	Yes	Radius target lokasi dalam meter
└ locationType	String	≤20	Yes	Jenis lokasi (misalnya: ALL, OFFICE, MALL)
└ recepientMax	String	≤20	Optional	Rentang ID penerima maksimum
└ profileGender	String	1	Optional	Value sesuai dengan list profile
└ profileAge	String	≤10	Optional	Value sesuai dengan list profile
└ profileMobileDataSubs	String	1	Optional	Value sesuai dengan list profile
└ profileArpu	String	≤20	Optional	Value sesuai dengan list profile
└ profileArpuMin	Integer	≤10 digits	Optional	Value sesuai dengan list profile
└ profileArpuMax	Integer	≤10 digits	Optional	Value sesuai dengan list profile
└ profileReligion	String	≤50	Optional	Value sesuai dengan list profile
└ profileOs	String	≤20	Optional	Value sesuai dengan list profile

Confidential & Proprietary

└ profileCardType	String	≤50	Optional	Value sesuai dengan list profile
└ profileHometown	String	≤100	Optional	Value sesuai dengan list profile
└ profileMaritalStatus	String	≤50	Optional	Value sesuai dengan list profile
└ profileLifeStyleSegment	String	≤50	Optional	Value sesuai dengan list profile

Request body example


```
{
   "channel": "SMS",
   "campaignName": "UAT SMS LBA",
   "message":"description campaign add",
   "senderName": "MyAds",
   "recepientTotal": 10,
   "deliveries": [
      {
         "deliveryEndDate": "20251127",
         "deliveryEndTime": "1344",
         "deliveryStartDate": "20251126",
         "deliveryStartTime": "0844"
      }
   ],
   "controlNumbers": [
      "6282381600326"
   ],
   "contents": {
      "contentName": "test",
      "message": "coba description",
      "mmsFile": "",
      "mmsSubject": "",
      "locations": {
         "address": "Mampang Prapatan, South Jakarta City, Jakarta,
Indonesia",
         "latitude": -6.2481661,
         "longitude": 106.8262565,
         "locationNameMap": "Mampang Prapatan, South Jakarta City,
Jakarta, Indonesia",
         "locationNameUser": "Mampang Test 1",
         "radius": 500,
         "locationType": "ALL",
         "recepientMax": "12338-15078"
      },
      "profileGender": "f",
      "profileAge": "",
      "profileMobileDataSubs": "Y",
      "profileArpu": "0-10000000",
      "profileArpuMin": "0",
      "profileArpuMax": "10000000",
      "profileReligion": "Hindu",
      "profileOs": "iOS",
      "profileCardType": "Telkomsel Halo",
      "profileHometown": "",
      "profileMaritalStatus": "Married with Children",
      "profileLifeStyleSegment": ""
   }
}
```


Confidential & Proprietary

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/lba/add' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{
  "channel": "SMS",
  "campaignName": "UAT SMS LBA",
  "message": "description campaign add",
  "senderName": "MyAds",
  "recepientTotal": 10,
  "deliveries": [{
       "deliveryEndDate": "20251127", "deliveryEndTime": "1344",
       "deliveryStartDate": "20251126", "deliveryStartTime": "0844"
  }],
  "controlNumbers": ["6282381600326"],
  "contents": {
       "contentName": "test", "message": "coba description",
       "locations": {
       "address": "Mampang Prapatan, Jakarta",
       "latitude": -6.2481661, "longitude": 106.8262565,
       "locationNameMap": "Mampang Prapatan",
       "locationNameUser": "Mampang Test 1",
       "radius": 500, "locationType": "ALL"
       }
  }
}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	-	-

Response body example:

HTTP Status: 200

```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "campaignId": 2171
  }
}
```

6.4. Upload File Content

a. Info

Description	API to upload files for use in campaigns
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/content/upload
Prod URL	https://<<domain>>/scrt/myads/api/v1/content/upload
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Request Form data example :

Name	Data Type	Length	Mandatory	Description
file	Multipart	-	-	-
type	String	-	-	MULTIPART, FILE

```
--form 'file=@"<<file>>"' \
--form 'type="MULTIMEDIA"'
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location 'https://<<domain>>/scrt/myads/api/v1/content/upload' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--form 'file=@"/path/to/your/file.csv"' \
--form 'type="MULTIMEDIA"'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
nameFile	String	-	-	-
pathFile	String	-	-	-
fileSize	String	-	-	-
type	String	-	-	-

Confidential & Proprietary

Response body example:

HTTP Status: 200


```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "nameFile": "1745296512995_sendiri.csv",
    "pathFile":
"wtc5iqU3imUNXMTSpGULStgV3QaxDUc+U7E9yCyTy/0QiH8ZmyhjwMFq8xd
7CmCRVRdZ7wXfQim3Ml/mdT3igwXx2KVMlYcimckfB+jdxhCfW66jopNVjth+r
2CaDA1VdMnyNSM3goVQCeVNyuqIKSjm",
    "fileSize": 4584,
    "type": "FILE"
  }
}
```


6.5. Pricebook

a. Info

Description	API to view the pricebook related to a specific campaign
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/price-view
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/price-view
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
campaignType	Integer	-	NO	BROADCAST, TARGETED, LBA, WABA, ALL

Request body example


```
{
   "campaignType": "ALL"
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/price-view' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{"campaignType": "ALL"}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
BROADCAST_SMS	Numeric	-	-	-
BROADCAST_MMS	Numeric	-	-	-
WABA_BROADCAST	Numeric	-	-	-
WABA_TARGETED	Numeric	-	-	-
WABA_LBA	Numeric	-	-	-
LBA_SMS	Numeric	-	-	-
LBA_MMS	Numeric	-	-	-
TARGETED_MMS	Numeric	-	-	-
TARGETED_SMS	Numeric	-	-	-

Response body example:

HTTP Status: 200


```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "BROADCAST_SMS": 100,
    "BROADCAST_MMS": 100
  }
}
```


6.6. List Profile

a. Info

Description	API to retrieve available profiles for use in a campaign
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/profile-dropdown-list
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/profile-dropdown-list
Protocol	HTTP(S) POST

Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Request body example:

```
{
   "profile": "ALL"
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/profile-dropdown-list' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{"profile": "ALL"}'
```

d. Request body

Response body example:

```
{
   "code": 0,
   "desc": "Success",
   "data": {
      "gender": [
         {
            "label": "Laki-laki",
            "value": "m"
         },
         {
            "label": "Perempuan",
            "value": "f"
         }
      ],
      "os": [
         {
            "label": "Android",
            "value": "Android"
         },
         {
            "label": "iOS",
            "value": "Apple iOS"
         },
         {
            "label": "Blackberry",
            "value": "Blackberry"
```

```
        },
        {
            "label": "Symbian",
            "value": "Symbian"
        },
        {
            "label": "Windows",
            "value": "Windows"
        },
        {
            "label": "Lainnya",
            "value": "Other"
        }
    ],
    "province": [
        {
            "label": "BALI",
            "value": "BALI"
        },
        {
            "label": "BANTEN",
            "value": "BANTEN"
        },
        {
            "label": "BENGKULU",
            "value": "BENGKULU"
        },
        {
            "label": "DI YOGYAKARTA",
            "value": "DI YOGYAKARTA"
        },
        {
            "label": "DKI JAKARTA",
            "value": "DKI JAKARTA"
        },
        {
            "label": "GORONTALO",
            "value": "GORONTALO"
        },
        {
            "label": "JAMBI",
            "value": "JAMBI"
        },
        {
            "label": "JAWA BARAT",
            "value": "JAWA BARAT"
        },
        {
            "label": "JAWA TENGAH",
            "value": "JAWA TENGAH"
        },
        {
            "label": "JAWA TIMUR",
            "value": "JAWA TIMUR"
        },
        {
            "label": "KALIMANTAN BARAT",
            "value": "KALIMANTAN BARAT"
        },
        {
            "label": "KALIMANTAN SELATAN",
            "value": "KALIMANTAN SELATAN"
        },
        {
            "label": "KALIMANTAN TENGAH",
            "value": "KALIMANTAN TENGAH"
        },
```

```
{
    "label": "KALIMANTAN TIMUR",
    "value": "KALIMANTAN TIMUR"
},
{
    "label": "KALIMANTAN UTARA",
    "value": "KALIMANTAN UTARA"
},
{
    "label": "KEPULAUAN BANGKA BELITUNG",
    "value": "KEPULAUAN BANGKA BELITUNG"
},
{
    "label": "KEPULAUAN RIAU",
    "value": "KEPULAUAN RIAU"
},
{
    "label": "LAMPUNG",
    "value": "LAMPUNG"
},
{
    "label": "MALUKU",
    "value": "MALUKU"
},
{
    "label": "MALUKU UTARA",
    "value": "MALUKU UTARA"
},
{
    "label": "NANGGROE ACEH DARUSSALAM",
    "value": "NANGGROE ACEH DARUSSALAM"
},
{
    "label": "NULL",
    "value": "NULL"
},
{
    "label": "NUSA TENGGARA BARAT",
    "value": "NUSA TENGGARA BARAT"
},
{
    "label": "NUSA TENGGARA TIMUR",
    "value": "NUSA TENGGARA TIMUR"
},
{
    "label": "PAPUA",
    "value": "PAPUA"
},
{
    "label": "PAPUA BARAT",
    "value": "PAPUA BARAT"
},
{
    "label": "RIAU",
    "value": "RIAU"
},
{
    "label": "SULAWESI BARAT",
    "value": "SULAWESI BARAT"
},
{
    "label": "SULAWESI SELATAN",
    "value": "SULAWESI SELATAN"
},
{
    "label": "SULAWESI TENGAH",
    "value": "SULAWESI TENGAH"
```


Confidential & Proprietary

```
        },
        {
            "label": "SULAWESI TENGGARA",
            "value": "SULAWESI TENGGARA"
        },
        {
            "label": "SULAWESI UTARA",
            "value": "SULAWESI UTARA"
        },
        {
            "label": "SUMATERA BARAT",
            "value": "SUMATERA BARAT"
        },
        {
            "label": "SUMATERA SELATAN",
            "value": "SUMATERA SELATAN"
        },
        {
            "label": "SUMATERA UTARA",
            "value": "SUMATERA UTARA"
        }
    ],
    "lifestyleseg": [
        {
            "label": "Automotive Enthusiasts",
            "value": "ls_automotive"
        },
        {
            "label": "Beauty enthusiast",
            "value": "ls_beauty"
        },
        {
            "label": "Book lover",
            "value": "ls_book"
        },
        {
            "label": "Business / professional Domestic traveller",
            "value": "ls_business"
        },
        {
            "label": "Career Woman",
            "value": "ls_cwoman"
        },
        {
            "label": "Cashless user",
            "value": "ls_cashlesh"
        },
        {
            "label": "Chatting lover",
            "value": "ls_chat"
        },
        {
            "label": "Comic & Animation Lovers",
            "value": "ls_comic"
        },
        {
            "label": "Commuter",
            "value": "ls_commuter"
        },
        {
            "label": "Cooking lover",
            "value": "ls_cooking"
        },
        {
            "label": "Dating app user",
            "value": "ls_dating"
        },
```

```
{
    "label": "Device Change within 6-12 months",
    "value": "ls_dev_change"
},
{
    "label": "Device Change within last > 12 months",
    "value": "ls_dev_change"
},
{
    "label": "Technology and Science Enthusiast",
    "value": "ls_tech"
},
{
    "label": "Movie lover",
    "value": "ls_movie"
},
{
    "label": "E-commerce shopper",
    "value": "ls_ecommerce"
},
{
    "label": "Family-oriented",
    "value": "ls_family"
},
{
    "label": "Fashion Lovers",
    "value": "ls_fashion"
},
{
    "label": "Finance Enthusiasts",
    "value": "ls_finance"
},
{
    "label": "Food lover",
    "value": "ls_food"
},
{
    "label": "Football Fans",
    "value": "ls_football"
},
{
    "label": "Gadget Enthusiast",
    "value": "ls_gadget"
},
{
    "label": "Gamer",
    "value": "ls_gamer"
},
{
    "label": "Gardening",
    "value": "ls_gardening"
},
{
    "label": "Health & Fitness",
    "value": "ls_health"
},
{
    "label": "Hijabers",
    "value": "ls_hijabers"
},
{
    "label": "Home & Decor",
    "value": "ls_homedecor"
},
{
    "label": "Home Cooking ",
    "value": "ls_homecooking"
```

```
},
{
   "label": "Manual seeker",
   "value": "ls_manual"
},
{
   "label": "insurance seeker",
   "value": "ls_insurance"
},
{
   "label": "Job Seeker",
   "value": "ls_job"
},
{
   "label": "Korean Lovers",
   "value": "ls_korean"
},
{
   "label": "Language enthusiast",
   "value": "ls_language"
},
{
   "label": "Male Mobile Gamer",
   "value": "ls_male_gamer"
},
{
   "label": "Medicine-seeker",
   "value": "ls_medicine"
},
{
   "label": "Premium Device Owner",
   "value": "ls_premiumdevice"
},
{
   "label": "MOM WITH BABY",
   "value": "ls_momwithbaby"
},
{
   "label": "Music & Radio",
   "value": "ls_music"
},
{
   "label": "News Reader",
   "value": "ls_news"
},
{
   "label": "Mom With Kids",
   "value": "ls_momwithkids"
},
{
   "label": "Online Banking User",
   "value": "ls_onlinebanking"
},
{
   "label": "Outdoor Enthusiast",
   "value": "ls_outdoor"
},
{
   "label": "Pets Lover",
   "value": "ls_pets"
},
{
   "label": "Photography & Design",
   "value": "ls_photo"
},
{
   "label": "Politics",
```

```
        "value": "ls_photo"
    },
    {
        "label": "Pop-Culture Enthusiast",
        "value": "ls_pop"
    },
    {
        "label": "Promo-seeker",
        "value": "ls_promo"
    },
    {
        "label": "Property Seeker",
        "value": "ls_property"
    },
    {
        "label": "Religious",
        "value": "ls_religius"
    },
    {
        "label": "Remote Workers",
        "value": "ls_remote"
    },
    {
        "label": "Shoppers enthusiast",
        "value": "ls_shoppers"
    },
    {
        "label": "Ridehailing Dualist",
        "value": "ls_ridehailing"
    },
    {
        "label": "Online Transportation user",
        "value": "ls_onlinetransport"
    },
    {
        "label": "Road Tripper user",
        "value": "ls_roadtripper"
    },
    {
        "label": "SMOKER",
        "value": "ls_smoker"
    },
    {
        "label": "Social Networking",
        "value": "ls_social"
    },
    {
        "label": "Staycation",
        "value": "ls_staycation"
    },
    {
        "label": "Travellers",
        "value": "ls_travellers"
    },
    {
        "label": "Video enthusiast",
        "value": "ls_video"
    },
    {
        "label": "Domestic Traveller",
        "value": "ls_domestic_traveller"
    },
    {
        "label": "Wedding enthusiast",
        "value": "ls_wedding"
    },
    {
```

```
            "label": "Women Household",
            "value": "ls_women_household"
        },
        {
            "label": "Young Couple With No Kids",
            "value": "ls_couplewithnokids"
        }
    ],
    "cardType": [
        {
            "label": "Telkomsel Halo",
            "value": "Telkomsel Halo"
        },
        {
            "label": "Telkomsel PraBayar",
            "value": "Telkomsel PraBayar"
        }
    ],
    "maritalStatus": [
        {
            "label": "Single",
            "value": "Single"
        },
        {
            "label": "Married",
            "value": "Married"
        },
        {
            "label": "Married with Children",
            "value": "Married with Children"
        }
    ],
    "religion": [
        {
            "label": "Budha",
            "value": "BUDHA"
        },
        {
            "label": "Hindu",
            "value": "Hindu"
        },
        {
            "label": "Islam",
            "value": "ISLAM"
        },
        {
            "label": "Katolik",
            "value": "KATOLIK"
        }
    ],
    "work_province": [
        {
            "label": "BALI",
            "value": "BALI"
        },
        {
            "label": "BANTEN",
            "value": "BANTEN"
        },
        {
            "label": "BENGKULU",
            "value": "BENGKULU"
        },
        {
            "label": "DI YOGYAKARTA",
            "value": "DI YOGYAKARTA"
        },
```

```
{
    "label": "DKI JAKARTA",
    "value": "DKI JAKARTA"
},
{
    "label": "GORONTALO",
    "value": "GORONTALO"
},
{
    "label": "JAMBI",
    "value": "JAMBI"
},
{
    "label": "JAWA BARAT",
    "value": "JAWA BARAT"
},
{
    "label": "JAWA TENGAH",
    "value": "JAWA TENGAH"
},
{
    "label": "JAWA TIMUR",
    "value": "JAWA TIMUR"
},
{
    "label": "KALIMANTAN BARAT",
    "value": "KALIMANTAN BARAT"
},
{
    "label": "KALIMANTAN SELATAN",
    "value": "KALIMANTAN SELATAN"
},
{
    "label": "KALIMANTAN TENGAH",
    "value": "KALIMANTAN TENGAH"
},
{
    "label": "KALIMANTAN TIMUR",
    "value": "KALIMANTAN TIMUR"
},
{
    "label": "KALIMANTAN UTARA",
    "value": "KALIMANTAN UTARA"
},
{
    "label": "KEPULAUAN BANGKA BELITUNG",
    "value": "KEPULAUAN BANGKA BELITUNG"
},
{
    "label": "KEPULAUAN RIAU",
    "value": "KEPULAUAN RIAU"
},
{
    "label": "LAMPUNG",
    "value": "LAMPUNG"
},
{
    "label": "MALUKU",
    "value": "MALUKU"
},
{
    "label": "MALUKU UTARA",
    "value": "MALUKU UTARA"
},
{
    "label": "NANGGROE ACEH DARUSSALAM",
    "value": "NANGGROE ACEH DARUSSALAM"
```


Confidential & Proprietary

```
        },
        {
            "label": "NULL",
            "value": "NULL"
        },
        {
            "label": "NUSA TENGGARA BARAT",
            "value": "NUSA TENGGARA BARAT"
        },
        {
            "label": "NUSA TENGGARA TIMUR",
            "value": "NUSA TENGGARA TIMUR"
        },
        {
            "label": "PAPUA",
            "value": "PAPUA"
        },
        {
            "label": "PAPUA BARAT",
            "value": "PAPUA BARAT"
        },
        {
            "label": "RIAU",
            "value": "RIAU"
        },
        {
            "label": "SULAWESI BARAT",
            "value": "SULAWESI BARAT"
        },
        {
            "label": "SULAWESI SELATAN",
            "value": "SULAWESI SELATAN"
        },
        {
            "label": "SULAWESI TENGAH",
            "value": "SULAWESI TENGAH"
        },
        {
            "label": "SULAWESI TENGGARA",
            "value": "SULAWESI TENGGARA"
        },
        {
            "label": "SULAWESI UTARA",
            "value": "SULAWESI UTARA"
        },
        {
            "label": "SUMATERA BARAT",
            "value": "SUMATERA BARAT"
        },
        {
            "label": "SUMATERA SELATAN",
            "value": "SUMATERA SELATAN"
        },
        {
            "label": "SUMATERA UTARA",
            "value": "SUMATERA UTARA"
        }
    ],
    "hobby": [
        {
            "label": "Pengamat Otomotif",
            "value": "int_auto_seeker"
        },
        {
            "label": "Pengguna Transportasi Online",
            "value": "int_ol_trans"
        },
```

```
{
    "label": "Pencari Otomotif",
    "value": "int_auto_enthusiast"
},
{
    "label": "Penggemar Animasi & Komik",
    "value": "int_comic_animation"
},
{
    "label": "Penggemar Buku",
    "value": "int_book"
},
{
    "label": "Pengamat Keuangan",
    "value": "int_finance"
},
{
    "label": "Pengguna Online Bank",
    "value": "int_ol_bank"
},
{
    "label": "Pencari Kerja",
    "value": "int_job_seek"
},
{
    "label": "Berorientasi Keluarga",
    "value": "int_family_oriented"
},
{
    "label": "Mahasiswa/i",
    "value": "int_college"
},
{
    "label": "Penggemar Bahasa",
    "value": "int_language"
},
{
    "label": "Pengakses Konten Perjudian",
    "value": "int_gambling"
},
{
    "label": "Penggemar Film",
    "value": "int_movie"
},
{
    "label": "Penggemar Musik",
    "value": "int_music"
},
{
    "label": "Penggemar Fashion",
    "value": "int_fashion"
},
{
    "label": "Pengamat Politik",
    "value": "int_politics"
},
{
    "label": "Pencari Pasangan",
    "value": "int_dating"
},
{
    "label": "Pencari Konten Pernikahan",
    "value": "int_wedding"
},
{
    "label": "Penggemar photography",
    "value": "int_photo"
```


Confidential & Proprietary

```
},
{
   "label": "Hobi Memasak",
   "value": "int_cooking"
},
{
   "label": "Pencinta kuliner",
   "value": "int_foodie"
},
{
   "label": "Hobi Fitness",
   "value": "int_fitness"
},
{
   "label": "Penggemar seni",
   "value": "int_arts"
},
{
   "label": "Hobi berkebun",
   "value": "int_gardening"
},
{
   "label": "Penggemar Home Interior",
   "value": "int_homedecor"
},
{
   "label": "Penonton Video",
   "value": "int_video"
},
{
   "label": "Pengguna Chatting",
   "value": "int_chatting"
},
{
   "label": "Pengguna Social Media",
   "value": "int_socnet"
},
{
   "label": "Pencari Kebutuhan Kesehatan",
   "value": "int_medicine"
},
{
   "label": "Penggemar Drama",
   "value": "int_drama"
},
{
   "label": "Pengakses Berita",
   "value": "int_news"
},
{
   "label": "Pengguna Non-Tunai",
   "value": "int_cashless"
},
{
   "label": "Pengakses Asuransi",
   "value": "int_insurance"
},
{
   "label": "Pecinta Hewan",
   "value": "int_pets"
},
{
   "label": "Penggemar Budaya Pop",
   "value": "int_popcult"
},
{
   "label": "Pencari Properti",
```


Confidential & Proprietary

```
            "value": "int_property"
        },
        {
            "label": "Umat Kristen",
            "value": "int_christianity"
        },
        {
            "label": "Umat Islam",
            "value": "int_islam"
        },
        {
            "label": "Penggemar Ilmu Science",
            "value": "int_science"
        },
        {
            "label": "Pencari diskon",
            "value": "int_promo"
        },
        {
            "label": "Pelanggan e-commerce",
            "value": "int_ecomm"
        },
        {
            "label": "Penggemar sepakbola",
            "value": "int_soccer"
        },
        {
            "label": "Penggemar Balapan Otomotif",
            "value": "int_autorace"
        },
        {
            "label": "Penggemar Olahraga",
            "value": "int_sportsoth"
        },
        {
            "label": "Penggemar kecantikan",
            "value": "int_beauty"
        },
        {
            "label": "Penggemar Gadget",
            "value": "int_gadget"
        },
        {
            "label": "Penggemar Teknologi",
            "value": "int_techie"
        },
        {
            "label": "Penonton Televisi",
            "value": "int_tv"
        },
        {
            "label": "Pelancong",
            "value": "int_travel"
        },
        {
            "label": "Penggemar Game",
            "value": "int_game"
        },
        {
            "label": "Pengakses Konten Dewasa",
            "value": "int_adults"
        }
    ]
  }
}
```

e. Data response

HTTP Status: 200

Gender

Label	Value
Laki-laki	m
Perempuan	f

Operating System (OS)

Label	Value
Android	Android
iOS	Apple iOS
Blackberry	Blackberry
Symbian	Symbian
Windows	Windows
Lainnya	Other

Lifestyle Segment

Label	Value
Automotive Enthusiasts	ls_automotive
Beauty enthusiast	ls_beauty
Book lover	ls_book
Business / professional Domestic traveller	ls_business
Career Woman	ls_cwoman
Cashless user	ls_cashlesh
Chatting lover	ls_chat
Comic & Animation Lovers	ls_comic
Commuter	ls_commuter
Cooking lover	ls_cooking
Dating app user	ls_dating
Device Change within 6-12 months	ls_dev_change
Device Change within last > 12 months	ls_dev_change
Technology and Science Enthusiast	ls_tech
Movie lover	ls_movie
E-commerce shopper	ls_ecommerce

Confidential & Proprietary

Family-oriented	ls_family
Fashion Lovers	ls_fashion
Finance Enthusiasts	ls_finance
Food lover	ls_food
Football Fans	ls_football
Gadget Enthusiast	ls_gadget
Gamer	ls_gamer
Gardening	ls_gardening
Health & Fitness	ls_health
Hijabers	ls_hijabers
Home & Decor	ls_homedecor
Home Cooking	ls_homecooking
Manual seeker	ls_manual
Insurance seeker	ls_insurance
Job Seeker	ls_job
Korean Lovers	ls_korean
Language enthusiast	ls_language
Male Mobile Gamer	ls_male_gamer
Medicine-seeker	ls_medicine
Premium Device Owner	ls_premiumdevice
MOM WITH BABY	ls_momwithbaby
Music & Radio	ls_music
News Reader	ls_news
Mom With Kids	ls_momwithkids
Online Banking User	ls_onlinebanking
Outdoor Enthusiast	ls_outdoor
Pets Lover	ls_pets
Photography & Design	ls_photo
Politics	ls_photo
Pop-Culture Enthusiast	ls_pop
Promo-seeker	ls_promo
Property Seeker	ls_property

Confidential & Proprietary

Religious	ls_religius
Remote Workers	ls_remote
Shoppers enthusiast	ls_shoppers
Ridehailing Dualist	ls_ridehailing
Online Transportation user	ls_onlinetransport
Road Tripper user	ls_roadtripper
SMOKER	ls_smoker
Social Networking	ls_social
Staycation	ls_staycation
Travellers	ls_travellers
Video enthusiast	ls_video
Domestic Traveller	ls_domestic_traveller
Wedding enthusiast	ls_wedding
Women Household	ls_women_household
Young Couple With No Kids	ls_couplewithnokids

Card Type

Label	Value
Telkomsel Halo	Telkomsel Halo
Telkomsel PraBayar	Telkomsel PraBayar

Marital Status

Label	Value
Single	Single
Married	Married
Married with Children	Married with Children

Religion

Label	Value
Budha	BUDHA
Hindu	Hindu
Islam	ISLAM

Confidential & Proprietary

Katolik	KATOLIK

6.7. Campaign List

a. Info

Description	API to retrieve a list of created campaigns
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/list
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/list
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	-	Default null

Request body example

```
{
   "campaignId": null
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location 'https://<<domain>>/scrt/myads/api/v1/campaign/list' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{"campaignId": null}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
keyword	String	-	-	-
keywordByRequestList	String	-	-	-
pageNo	Numeric	-	-	-

Confidential & Proprietary

rowPerPage	Numeric	-	-	-
pageTotal	Numeric	-	-	-
rowTotal	Numeric	-	-	-
sortBy	String	-	-	-
sortType	String	-	-	-
list	Object	-	-	-
└ id	Numeric	-	-	-
└ campaignType	String	-	-	-
└ inventoryType	String	-	-	-
└ campaignName	String	-	-	-
└ bucketMain	Numeric	-	-	-
└ status	String	-	-	-
└ basePriceProduct	Numeric	-	-	-
└ totalTarget	Numeric	-	-	-
└ reason	String	-	-	-
└ startDate	String	-	-	-
└ endDate	String	-	-	-
└ createdDate	String	-	-	-
└ updatedDate	String	-	-	-
└ startDateTime	String	-	-	-
└ endDateTime	String	-	-	-

Response body example:

HTTP Status: 200


```
{
   "code": 0,
   "desc": "Success",
   "data": {
      "keyword": "",
      "keywordByRequestList": [],
      "pageNo": 1,
      "rowPerPage": 10,
      "pageTotal": 158,
      "rowTotal": 1577,
      "sortBy": "created_date",
      "sortType": "DESC",
      "list": [
         {
            "id": 1436995,
            "campaignType": "LBA",
            "inventoryType": "SMS",
```


Confidential & Proprietary

```
            "campaignName": "LBA SMS Hero Test",
            "bucketMain": 2000,
            "status": "REJECT",
            "basePriceProduct": 200,
            "totalTarget": 10,
            "reason": "Saat ini Iklan Anda ter reject otomatis pada sistem kami, mohon agar dapat membuat kembali iklan Anda sesuai dengan ketentuan beriklan pada menu Syarat & Ketentuan",
            "startDate": "2025-04-22",
            "endDate": "2025-04-22",
            "createdDate": "2025-04-21 10:02:58",
            "updatedDate": "2025-04-22 10:00:13",
            "startDateTime": "2025-04-22 10:00:00",
            "endDateTime": "2025-04-22 10:10:00",
        },
        {
            "id": 1436995,
            "campaignType": "BROADCAST",
            "inventoryType": "SMS",
            "campaignName": "LBA SMS Hero Test",
            "bucketMain": 2000,
            "status": "REJECT",
            "basePriceProduct": 200,
            "totalTarget": 10,
            "reason": "Saat ini Iklan Anda ter reject otomatis pada sistem kami, mohon agar dapat membuat kembali iklan Anda sesuai dengan ketentuan beriklan pada menu Syarat & Ketentuan",
            "startDate": "2025-04-22",
            "endDate": "2025-04-22",
            "createdDate": "2025-04-21 10:02:58",
            "updatedDate": "2025-04-22 10:00:13",
            "startDateTime": "2025-04-22 10:00:00",
            "endDateTime": null,
        }
    ]
  }
}
```


6.8. Stop/Rejected Campaign

a. Info

Description	API to stop a running campaign
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/stop
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/stop
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	Yes	-

Request body example

```
{
   "campaignId": 10717
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location 'https://<<domain>>/scrt/myads/api/v1/campaign/stop' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{"campaignId": 10717}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	-	-

Response body example:

HTTP Status: 200

```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "campaignId": 2171
  }
}
```

6.9. Create WABA Campaign

WABA Broadcast

a. Info

Description	API to create a new WABA broadcast campaign

Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/waba/broadcast/add
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/waba/broadcast/add
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
campaignName	String	≤ 255	Yes	Nama kampanye broadcast WhatsApp.
wabaUserTemplateId	Integer		Yes	ID template pengguna WABA (WhatsApp Business API) yang digunakan.
msisdnFile	String		Yes	File MSISDN terenkripsi dalam format Base64, berisi daftar nomor tujuan.
msisdnFileName	String	≤ 255	Yes	Nama file CSV asli yang berisi daftar MSISDN.
deliveries	Array of Object		Yes	Daftar jadwal pengiriman pesan broadcast.
└ deliveryDate	String (YYYYMMDD)	8	Yes	Tanggal pengiriman pesan dalam format tahun-bulan-hari.
└ deliveryTime	String (HHMM)	4	Yes	Waktu pengiriman pesan dalam format jam-menit (24 jam).
controlNumbers	Array of String		Optional	Nomor MSISDN yang digunakan sebagai kontrol untuk validasi atau

Confidential & Proprietary

				pengujian.

Request body example :


```
{
   "campaignName": "Test Iklan Broadcast 2",
   "wabaUserTemplateId": 484,
   "msisdnFile":
"l+6sFJwMHMrWk1ikARfAsgg1M8OM/WrN6wAZzU5pLENT4tezQp8IrgeVPiQ
C0TJ0MklCHHEwuLg57w0cl/GPPM92YHSZWfJB6jxQNXlB5aTss6UagJ/sQ4r
CnV7+2aR5RW+mJBjy+ZU/C62w9R8vydM=",
   "msisdnFileName": "Template_1761581740831.csv",
   "deliveries": [
      {
         "deliveryDate": "20251028",
         "deliveryTime": "0800"
      }
   ],
   "controlNumbers": [
      "6282381600326"
   ]
}
```


cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/waba/broadcast/add' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{
  "campaignName": "Test Iklan Broadcast 2",
  "wabaUserTemplateId": 484,
  "msisdnFile": "<<encrypted_file>>",
  "msisdnFileName": "Template_xxx.csv",
  "deliveries": [{"deliveryDate": "20251028", "deliveryTime": "0800"}],
  "controlNumbers": ["6282381600326"]
}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	-	-

Response body example:

HTTP Status: 200


```
{
 "code": 0,
 "desc": "Success",
 "data": {
  "campaignId": 2171
 }
}
```

WABA Targeted

a. Info

Description	API to create a new WABA Targeted campaign
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/waba/tergeted/add
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/waba/tergeted/add
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
wabaUserTemplateId	Integer		Yes	ID template pengguna WABA (WhatsApp Business API) yang digunakan.
campaignName	String	≤ 255 chars	Yes	Nama kampanye yang sedang dijalankan
profileGender	String		No	Value sesuai dengan list profile
profileAge	String		No	Value sesuai dengan list profile
profileMobileDataSubs	String		No	Value sesuai dengan list profile
profileArpu	String		No	Value sesuai dengan list profile
profileOs	String		No	Value sesuai dengan list profile

Confidential & Proprietary

profileMaritalStatus	String		No	Value sesuai dengan list profile
profileLifestyleSegment	Stringl		No	Value sesuai dengan list profile
profileReligion	String		No	Value sesuai dengan list profile
profileCardType	String		No	Value sesuai dengan list profile
profileHometown	String		No	Value sesuai dengan list profile
profileWork	String		No	Value sesuai dengan list profile
recepientTotal	Integer		Yes	Total jumlah penerima pesan kampanye
deliveries	Array of Objects		Yes	Jadwal pengiriman pesan
└ deliveryDate	String (YYYYMMDD)	8	Yes	Tanggal pengiriman dalam format `YYYYMMDD`
└ deliveryTime	String (HHMM)	4	Yes	Waktu pengiriman dalam format `HHMM` (24 jam)
controlNumbers	Array of Strings		No	

Request body example

```
{
    "wabaUserTemplateId": 484,
    "campaignName": "Test Iklan Targeted 2",
    "profileGender": "m",
    "profileAge": null,
    "profileMobileDataSubs": "Y",
    "profileArpu": "0-1000000|1000001-1500000|1500001-2000000",
    "profileOs": "Android",
    "profileMaritalStatus": "Married",
    "profileLifestyleSegment": "Pengguna Transportasi Online",
    "profileReligion": null,
    "profileCardType": "",
    "profileHometown": "",
    "profileWork": null,
    "recepientTotal": 10,
    "deliveries": [
        {
            "deliveryDate": "20251028",
            "deliveryTime": "0800"
        }
```

```
  ],
  "controlNumbers": [
     "6282381600326"
  ]
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/waba/tergeted/add' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{
  "wabaUserTemplateId": 484,
  "campaignName": "Test Iklan Targeted 2",
  "profileGender": "m",
  "profileOs": "Android",
  "recepientTotal": 10,
  "deliveries": [{"deliveryDate": "20251028", "deliveryTime": "0800"}],
  "controlNumbers": ["6282381600326"]
}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
campaignId	-	-	-	-

Response body example:

HTTP Status: 200

```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "campaignId": 2171
  }
}
```

WABA LBA

a. Info

Description	API to create a new WABA LBA campaign
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/campaign/waba/lba/add
Prod URL	https://<<domain>>/scrt/myads/api/v1/campaign/waba/lba/add
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
wabaUserTemplateId	Integer		Yes	ID template pengguna WABA yang digunakan untuk kampanye
campaignName	String	≤ 255	Yes	Nama kampanye iklan
profileGender	String	1	Yes	Value sesuai dengan list profile
profileAge	Null/Integer		No	Value sesuai dengan list profile
profileMobileDataSubs	String	1	Yes	Value sesuai dengan list profile
profileArpu	String	≤ 255	Yes	Value sesuai dengan list profile
profileOs	String	≤ 50	Yes	Value sesuai dengan list profile
profileMaritalStatus	String	≤ 50	Yes	Value sesuai dengan list profile
profileLifestyleSegment	String	≤ 100	Yes	Value sesuai dengan list profile
profileReligion	String	≤ 50	No	Value sesuai dengan list profile
profileCardType	String	≤ 50	No	Value sesuai dengan list profile
profileHometown	String	≤ 100	No	Value sesuai dengan list profile
profileWork	Null/String	≤ 100	No	Value sesuai dengan list profile

Confidential & Proprietary

recepientTotal	Integer		Yes	Total jumlah penerima kampanye
deliveries	Array		Yes	Jadwal pengiriman kampanye
└ deliveryDate	String	8	Yes	Tanggal pengiriman dalam format YYYYMMDD
└ deliveryTime	String	4	Yes	Waktu pengiriman dalam format HHMM
controlNumbers	Array of String		Optional	Nomor kontrol untuk validasi atau pengecualian penerima

Request body example

```
{
   "campaignName": "Test Iklan LBA 1",
   "recepientTotal": 10,
   "wabaUserTemplateId": 478,
   "deliveries": {
      "deliveryEndDate": "20251029",
      "deliveryEndTime": "1344",
      "deliveryStartDate": "20251029",
      "deliveryStartTime": "0844"
   },
   "controlNumbers": [
      "6282381600326"
   ],
   "contents": {
      "locations": {
         "address": "Mampang Prapatan, South Jakarta City, Jakarta,
Indonesia",
         "latitude": -6.2481661,
         "longitude": 106.8262565,
         "locationNameMap": "Mampang Prapatan, South Jakarta City, Jakarta,
Indonesia",
         "locationNameUser": "Mampang Test 1",
         "radius": 500,
         "locationType": "ALL",
         "recepientMax": "12338-15078"
      },
      "profileGender": "f",
      "profileAge": "",
      "profileMobileDataSubs": "",
      "profileArpu": "0-10000000",
      "profileArpuMin": "0",
      "profileArpuMax": "10000000",
      "profileReligion": "",
      "profileOs": "",
      "profileCardType": "",
      "profileHometown": "",
      "profileMaritalStatus": "",
      "profileLifeStyleSegment": ""
   }
}
```

Confidential & Proprietary

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/campaign/waba/lba/add' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{
  "campaignName": "Test Iklan LBA 1",
  "recepientTotal": 10,
  "wabaUserTemplateId": 478,
  "deliveries": {
       "deliveryEndDate": "20251029", "deliveryEndTime": "1344",
       "deliveryStartDate": "20251029", "deliveryStartTime": "0844"
  },
  "controlNumbers": ["6282381600326"],
  "contents": {
       "locations": {
       "address": "Mampang Prapatan, Jakarta",
       "latitude": -6.2481661, "longitude": 106.8262565,
       "radius": 500, "locationType": "ALL"
       }
  }
}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
campaignId	-	-	-	-

Response body example:

HTTP Status: 200

```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "campaignId": 2171
  }
}
```

6.10. Create WABA Template

a. Info

Description	API to add a new template message for WhatsApp Business Account (WABA)
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/waba/template/add
Prod URL	https://<<domain>>/scrt/myads/api/v1/waba/template/add
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
templateName	String	≤255	Yes	Nama template WABA
language	String		Yes	INDONESIA, ENGLISH
headerType	String	≤50	Yes	Jenis header (misal: TEXT, IMAGE, VIDEO)
headerLabel	String	≤255	Optional	Label header jika menggunakan tipe TEXT
headerPathFile	String	≤255	Optional	Value ambil dari API upload
bodyMessage	String	≤1000	Yes	Isi pesan utama dalam body
bodyType	String	≤50	Yes	(STATIC)
bodyPathFile	String	≤255	Optional	Path file body jika menggunakan media
useButton	Integer	1	Yes	Menandakan apakah template menggunakan tombol
buttons	Array		Optional	Daftar tombol yang digunakan dalam template
└ showModalShortUrl	Boolean		Optional	Menampilkan modal short URL
└ label	String	≤255	Yes	Label tombol
└ action	String	≤50	Yes	Jenis aksi tombol (QUICK_REPLY, URL, dll)
└ actionReplay	String	≤255	Optional	Teks balasan untuk QUICK_REPLY
└ actionNumber	String	≤20	Optional	Nomor tujuan jika tombol berupa panggilan
└ actionUrlTarget	String	≤255	Optional	URL tujuan jika tombol berupa tautan

Confidential & Proprietary

└ shortUrl	String	≤255	Optional	Short URL jika digunakan
└ actionVoucherCode	String	≤50	Optional	Kode voucher jika tombol berupa promosi
wabaAccountId	Integer	19	Yes	
wabaButtonId	String	≤50	Optional	ID tombol WABA
phoneNumberId	Integer	19	Yes	

Request body example

```
{
   "templateName": "test_template_waba2",
   "language": "INDONESIA",
   "headerType": "TEXT",
   "headerLabel": "Test",
   "headerPathFile": "",
   "bodyMessage": "Test",
   "bodyType": "STATIC",
   "bodyPathFile": "",
   "useButton": 1,
   "buttons": [
      {
         "showModalShortUrl": false,
         "label": "Test",
         "action": "QUICK_REPLY",
         "actionReplay": "",
         "actionNumber": "",
         "actionUrlTarget": "",
         "shortUrl": null,
         "actionVoucherCode": ""
      }
   ],
    "wabaAccountId": 3735503976689341,
    "phoneNumberId": 337795902761255
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location 'https://<<domain>>/scrt/myads/api/v1/waba/template/add'
\
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{
  "templateName": "test_template_waba2",
  "language": "INDONESIA",
  "headerType": "TEXT",
  "headerLabel": "Test",
  "bodyMessage": "Test",
  "bodyType": "STATIC",
  "useButton": 1,
  "buttons": [{"label": "Test", "action": "QUICK_REPLY"}],
  "wabaAccountId": 3735503976689341,
  "phoneNumberId": 337795902761255
}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description

campaignId	-	-	-	-

Response body example:

HTTP Status: 200

```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "campaignId": 2171
  }
}
```

6.11. List WABA Template

a. Info

Description	API to get list WABA Template
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/waba/template/list
Prod URL	https://<<domain>>/scrt/myads/api/v1/waba/template/list
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)

c. Request body

Name	Data Type	Length	Mandatory	Description
templateId	Numeric	-	No	Default null

Request body example

```
{ "templateId": null }
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/waba/template/list' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--data '{"templateId": null}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
pageNo	Numeric	-	-	-
rowPerPage	Numeric	-	-	-
pageTotal	Numeric	-	-	-
rowTotal	Numeric	-	-	-
sortBy	String	-	-	-
sortType	String	-	-	-
list	Object	-	-	-
└ id	Numeric	-	-	-
└ templateName	String	-	-	-
└ verifiedName	String	-	-	-
└ createDateTime	String	-	-	-
└ activationStatus	String	-	-	-
└ language	String	-	-	-
└ phoneNumberId	Numeric	-	-	-
└ wabaAccountId	Numeric	-	-	-
└ isOfficialBusinessAccount	String	-	-	-

Response body example:

HTTP Status: 200


```
{
   "code": 0,
   "desc": "Success",
   "data": {
      "keyword": "",
      "keywordByRequestList": [],
      "pageNo": 1,
      "rowPerPage": 1000,
      "pageTotal": 1,
      "rowTotal": 4,
      "sortBy": "id",
      "sortType": "DESC",
      "list": [
         {
            "id": 482,
            "templateName": "test_template_waba2",
            "verifiedName": "Telkomsel-campaign-myads",
            "createDatetime": "2025-10-26 17:32:13",
            "activationStatus": "WAITING",
            "language": "INDONESIA",
```

```
            "phoneNumberId": 444467585427058,
            "wabaAccountId": 464406580095815,
            "isOfficialBusinessAccount": "true",
            "creditId": null
        }
    ]
  }
}
```


6.12. List WABA Display Name

a. Info

Description	API to retrieve a list of WhatsApp Business Account (WABA) display names
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/waba/display-name/list
Prod URL	https://<<domain>>/scrt/myads/api/v1/waba/display-name/list
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)
AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Request body example

```
{}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location
'https://<<domain>>/scrt/myads/api/v1/waba/display-name/list' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
displayNameStatus	String	-	-	-

displayName	String	-	-	-
displayPhoneNumber	String	-	-	-
isOfficialBusinessAccount	String	-	-	-
codeVerificationStatus	String	-	-	-
status	String	-	-	-
phoneNumberId	Numeric	-	-	-
wabaAccountId	Numeric	-	-	-

Response body example:

HTTP Status: 200


```
{
  "code": 0,
  "desc": "Success",
  "data": [
    {
      "displayNameStatus": "APPROVED",
      "displayName": "Telkomsel-Myads-Adv",
      "displayPhoneNumber": "6285893866329",
      "isOfficialBusinessAccount": "true",
      "codeVerificationStatus": "VERIFIED",
      "status": "READY",
      "phoneNumberId": 373674942494211,
      "wabaAccountId": 337907949413604
    }
  ]
}
```


6.13.Report Campaign

a. Info

Description	API to give notification status
Prep URL	https://<<domain>>/preprod-web/scrt/myads/api/v1/report/view
Prod URL	https://<<domain>>/scrt/myads/api/v1/report/view
Protocol	HTTP(S) POST
Interaction Type	Synchronous

b. Header

Content-Type: application/json
X-API-SECRET : base64(api-screet-key-peruser:YYYYMMDD)
api_key : api-key
X-signature : md5(api-key secret timestamp) (tanpa spasi)

AUTHORIZATION : Bearer Token (Token MyAds)

c. Request body

Name	Data Type	Length	Mandatory	Description
campaignId	Numeric	-	Yes	-

Request body example

```
{
   "campaignId":111233
}
```

cURL — Copy & Import to Postman

Tip: In Postman → Import → Raw Text → paste the curl below.

```
curl --location 'https://<<domain>>/scrt/myads/api/v1/report/view' \
--header 'Content-Type: application/json' \
--header 'X-API-SECRET: {{x-api-secret}}' \
--header 'api_key: {{api_key}}' \
--header 'X-signature: {{signature}}' \
--header 'Authorization: Bearer {{token}}' \
--data '{"campaignId": 111233}'
```

d. Response body

Name	Data Type	Length	Mandatory	Description
date	String	-	-	-
success	Numeric	-	-	-
failed	Numeric	-	-	-
read	Numeric	-	-	-
delivered	Numeric	-	-	-

Response body example (ex: exception)

HTTP Status: 200


```
{
  "code": 0,
  "desc": "Success",
  "data": {
    "report": [
      {
        "date": "2025-09-23",
        "success": 6,
        "failed": 0,
        "read": 0,
        "delivered": 0
      },
      {
        "date": "2025-09-23",
        "success": 6,
```

```
        "failed": 0,
        "read": 0,
        "delivered": 0
      }
    ]
  }
}
```