


第四课预习报告

defines.c

- 作用: 演示系统限制常量的使用
- 功能: 显示当前系统的整数和浮点数限制, 包括最大整数、最小长整型、字节位数、最大双精度浮点数等

• 演 示 效 果 :

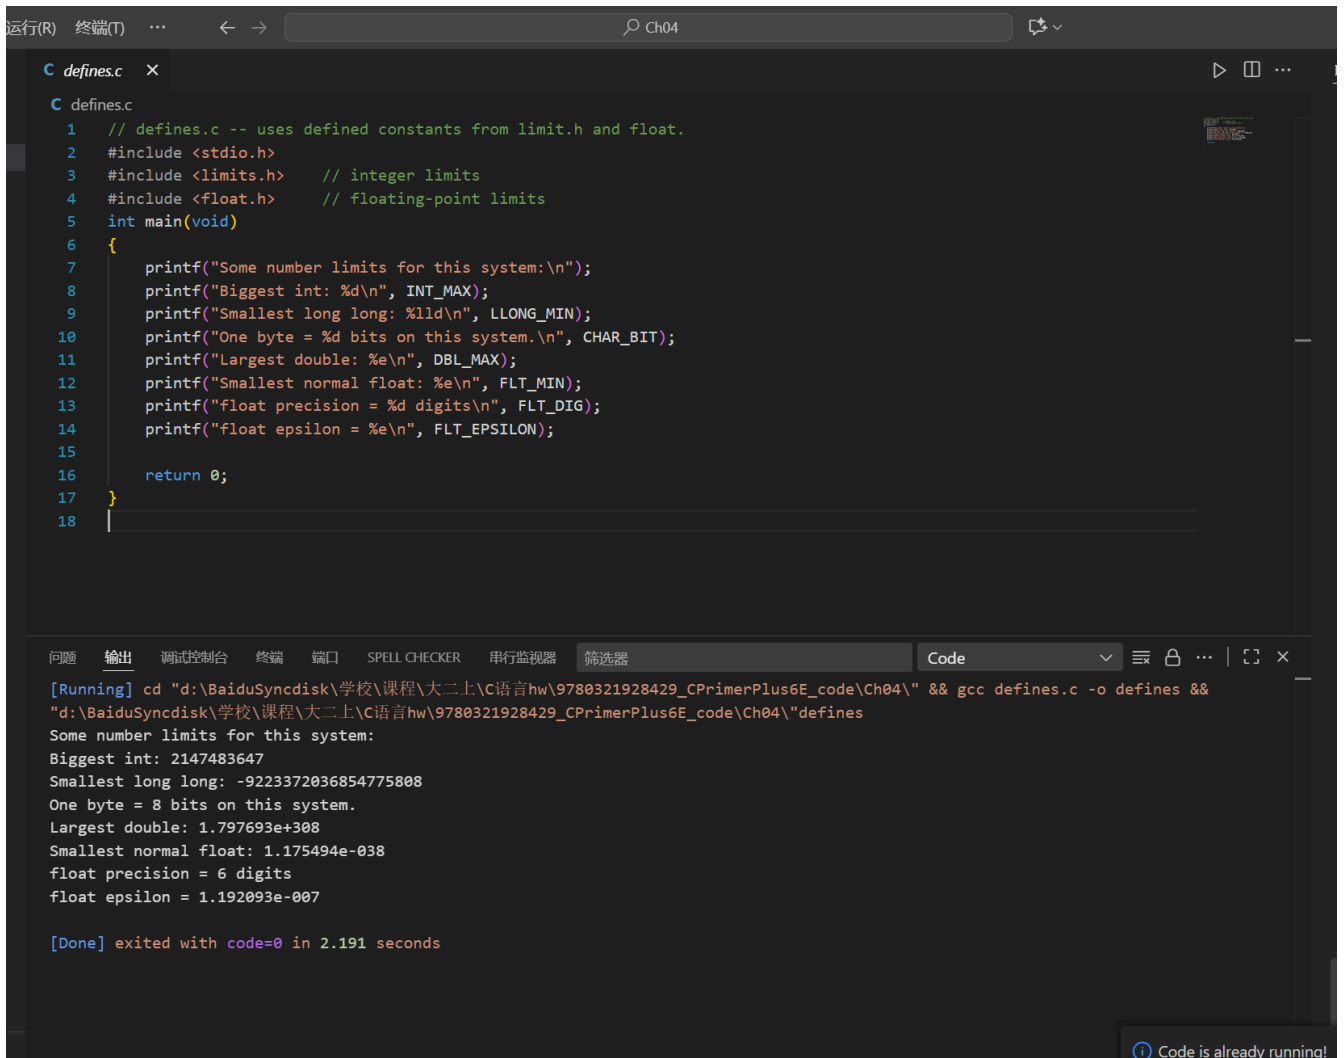

```
C defines.c x
C defines.c
1 // defines.c -- uses defined constants from limit.h and float.
2 #include <stdio.h>
3 #include <limits.h> // integer limits
4 #include <float.h> // floating-point limits
5 int main(void)
6 {
7     printf("Some number limits for this system:\n");
8     printf("Biggest int: %d\n", INT_MAX);
9     printf("Smallest long long: %lld\n", LLONG_MIN);
10    printf("One byte = %d bits on this system.\n", CHAR_BIT);
11    printf("Largest double: %e\n", DBL_MAX);
12    printf("Smallest normal float: %e\n", FLT_MIN);
13    printf("float precision = %d digits\n", FLT_DIG);
14    printf("float epsilon = %e\n", FLT_EPSILON);
15
16    return 0;
17 }
18

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc defines.c -o defines &&
"d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\defines
Some number limits for this system:
Biggest int: 2147483647
Smallest long long: -9223372036854775808
One byte = 8 bits on this system.
Largest double: 1.797693e+308
Smallest normal float: 1.175494e-038
float precision = 6 digits
float epsilon = 1.192093e-007

[Done] exited with code=0 in 2.191 seconds

Code is already running!
```

flags.c

- 作用: 演示格式化标志的使用
- 功能: 展示不同格式化标志对输出格式的影响, 包括十六进制、空格填充、零填充等
- 演示效果:

```
(G) 运行(R) 终端(T) ... < -> Ch04 08 [ ] [ ] [ ] -
```

```
C flags.c x
```

```
C flags.c
```

```
1  /* flags.c -- illustrates some formatting flags */
2  #include <stdio.h>
3  int main(void)
4  {
5      printf("%x %X %#x\n", 31, 31, 31);
6      printf("***d**% d**% d**\n", 42, 42, -42);
7      printf("***5d**%5.3d**%05d**%05.3d**\n", 6, 6, 6, 6);
8
9      return 0;
10 }
11
```

```
问题 输出 调试控制台 终端 窗口 SPELL CHECKER 串行监视器 筛选器 Code
```

```
Smallest long long: -9223372036854775808
One byte = 8 bits on this system.
Largest double: 1.797693e+308
Smallest normal float: 1.175494e-038
float precision = 6 digits
float epsilon = 1.192093e-007

[Done] exited with code=0 in 2.191 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc flags.c -o flags && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"flags
1f 1f 0x1f
**42** 42*-42**
**      6** 006**00006** 006**

[Done] exited with code=0 in 0.308 seconds
```

floatenv.c

- **作用:** 演示不匹配的浮点数转换
- **功能:** 展示当格式化说明符与变量类型不匹配时的输出结果
- **语义错误:** 第10行和第12行使用了不匹配的格式化说明符，可能导致未定义行为
- **演示效果:**

```
C floatcnv.c
1  /* floatcnv.c -- mismatched floating-point conversions */  "floatcnv": Unknown word.
2  #include <stdio.h>
3  int main(void)
4  {
5      float n1 = 3.0;
6      double n2 = 3.0;
7      long n3 = 2000000000;
8      long n4 = 1234567890;
9
10     printf("%.1e %.1e %.1e %.1e\n", n1, n2, n3, n4);
11     printf("%ld %ld\n", n3, n4);
12     printf("%ld %ld %ld %ld\n", n1, n2, n3, n4);
13
14     return 0;
15 }
16
```

```
[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc flags.c -o flags && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\flags"
1f 1F 0x1f
**42** 42**-42**
** 6** 006**00006** 006**

[Done] exited with code=0 in 0.308 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc floatcnv.c -o floatcnv && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\floatcnv"
3.0e+000 3.0e+000 3.1e+046 2.2e+261
2000000000 1234567890
0 1074266112 0 1074266112

[Done] exited with code=0 in 0.297 seconds
```

floats.c

- **作用:** 演示浮点数的不同格式化输出
- **功能:** 展示浮点数在不同格式化选项下的显示效果
- **演示效果:**

```
(R) 终端(T) ...  ← →  Ch04  ⚙️  📄  📄  📄  -  🗑️

C floats.c ×
C floats.c
1 // floats.c -- some floating-point combinations
2 #include <stdio.h>
3
4 int main(void)
5 {
6     const double RENT = 3852.99; // const-style constant
7
8     printf("%f\n", RENT);
9     printf("%e\n", RENT);
10    printf("%4.2f\n", RENT);
11    printf("%3.1f\n", RENT);
12    printf("%10.3f\n", RENT);
13    printf("%10.3E\n", RENT);
14    printf("%+4.2f\n", RENT);
15    printf("%010.2f\n", RENT);
16
17    return 0;
18 }
19

问题  输出  调试控制台  终端  窗口  SPELL CHECKER  串行监视器  筛选器  Code  📄  🗑️  ...

0 1074266112 0 1074266112


[Done] exited with code=0 in 0.297 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言\hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc floats.c -o floats && "d:\BaiduSyncdisk\学校\课程\大二上\C语言\hw\9780321928429_CPrimerPlus6E_code\Ch04\"floats
*3852.990000*
*3.852990e+003*
*3852.99*
*3853.0*
* 3852.990*
*3.853E+003*
*+3852.99*
*0003852.99*

[Done] exited with code=0 in 0.32 seconds
```

input.c

- **作用:** 演示scanf函数中&的使用
- **功能:** 展示何时需要在scanf中使用&操作符，以及何时不需要
- **演示效果:**

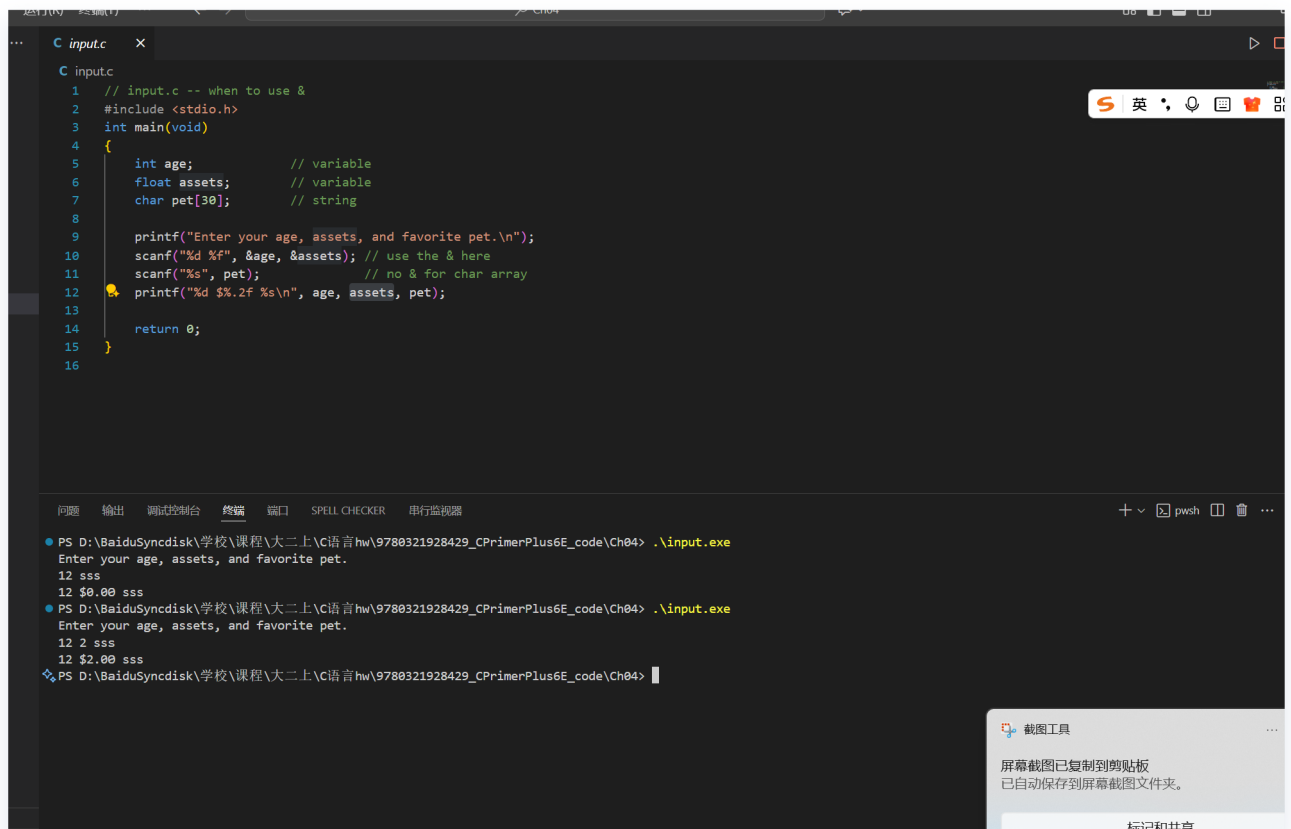

```
1 // input.c -- when to use &
2 #include <stdio.h>
3 int main(void)
4 {
5     int age;           // variable
6     float assets;      // variable
7     char pet[30];      // string
8
9     printf("Enter your age, assets, and favorite pet.\n");
10    scanf("%d %f", &age, &assets); // use the & here
11    scanf("%s", pet);           // no & for char array
12    printf("%d $%.2f %s\n", age, assets, pet);
13
14    return 0;
15 }
16
```

问题 输出 调试控制台 终端 端口 SPELL CHECKER 串行监视器

PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> .\input.exe
Enter your age, assets, and favorite pet.
12 sss
12 \$0.00 sss

PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> .\input.exe
Enter your age, assets, and favorite pet.
12 2 sss
12 \$2.00 sss

PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> █

截图工具
屏幕截图已复制到剪贴板
已自动保存到屏幕截图文件夹。
标记和共享

intconv.c

- **作用:** 演示不匹配的整数转换
- **功能:** 展示整数在不同类型转换下的输出结果
- **语义错误:** 第15行使用了不匹配的格式化说明符，可能导致未定义行为
- **演示效果:**

```
C intconv.c x
C intconv.c
1  /* intconv.c -- some mismatched integer conversions */
2  #include <stdio.h>
3  #define PAGES 336
4  #define WORDS 65618
5  int main(void)
6  {
7      short num = PAGES;
8      short mnum = -PAGES;
9
10     printf("num as short and unsigned short: %hd %hu\n", num,
11           num);
12     printf("-num as short and unsigned short: %hd %hu\n", mnum,
13           mnum);
14     printf("num as int and char: %d %c\n", num, num);
15     printf("WORDS as int, short, and char: %d %hd %c\n",
16           WORDS, WORDS, WORDS);
17     return 0;
18 }
19

[Done] exited with code=0 in 0.32 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc input.c -o input && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\input

[Done] exited with code=1 in 241.222 seconds


[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc intconv.c -o intconv && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\intconv
num as short and unsigned short:  336 336
-num as short and unsigned short: -336 65200
num as int and char: 336 P
WORDS as int, short, and char: 65618 82 R

[Done] exited with code=0 in 0.299 seconds

Code is already running!
```

longstrg.c

- 作用: 演示长字符串的打印方法
- 功能: 展示三种不同的长字符串打印方式
- 演示效果:

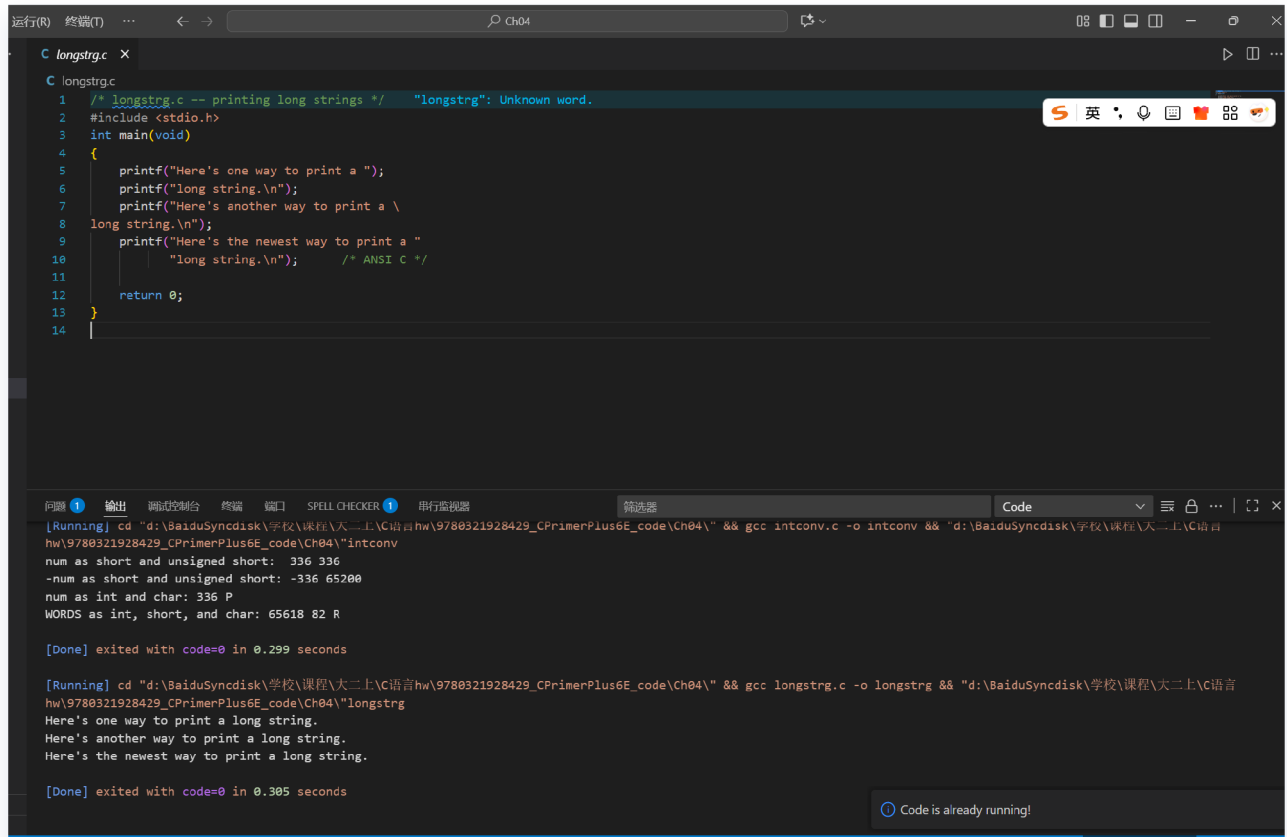

```
C longstrg.c
1  /* longstrg.c -- printing long strings */      "longstrg": Unknown word.
2  #include <stdio.h>
3  int main(void)
4  {
5      printf("Here's one way to print a ");
6      printf("long string.\n");
7      printf("Here's another way to print a \
8  long string.\n");
9      printf("Here's the newest way to print a "
10     "long string.\n"); /* ANSI C */
11
12     return 0;
13 }
14
```

```
[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc intconv.c -o intconv && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"intconv
num as short and unsigned short:  336 336
-num as short and unsigned short: -336 65200
num as int and char: 336 P
WORDS as int, short, and char: 65618 82 R

[Done] exited with code=0 in 0.299 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc longstrg.c -o longstrg && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"longstrg
Here's one way to print a long string.
Here's another way to print a long string.
Here's the newest way to print a long string.

[Done] exited with code=0 in 0.305 seconds
```

pizza.c

- **作用:** 在披萨场景中使用定义常量
- **功能:** 计算披萨的周长和面积
- **演示效果:**

```
C pizza.c x
C pizza.c
1  /* pizza.c -- uses defined constants in a pizza context */
2  #include <stdio.h>
3  #define PI 3.14159
4  int main(void)
5  {
6      float area, circum, radius;
7
8      printf("What is the radius of your pizza?\n");
9      scanf("%f", &radius);
10     area = PI * radius * radius;
11     circum = 2.0 * PI * radius;
12     printf("Your basic pizza parameters are as follows:\n");
13     printf("circumference = %1.2f, area = %1.2f\n", circum,
14           area);
15     return 0;
16 }
17

问题 输出 调试控制台 终端 窗口 SPELL CHECKER 串行监视器
● PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\input.exe
Enter your age, assets, and favorite pet.
12
12 聚焦资源管理器中的文件夹 (Ctrl + 单击)
● PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\input.exe
Enter your age, assets, and favorite pet.
12 2 sss
12 $2.00 sss
● PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\pizza.exe
What is the radius of your pizza?
4
Your basic pizza parameters are as follows:
circumference = 25.13, area = 50.27
❖ PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> |
```

praisel.c

- 作用: 使用字符串数组
- 功能: 简单的用户交互程序, 询问姓名并显示赞美信息
- 演示效果:

A screenshot of a Windows terminal window. The title bar shows '运行(R) 终端(T) ...' and the address bar shows 'C:\Ch04'. The terminal content shows a C program being executed. The program prompts for a name and prints a message. The terminal output shows the program running successfully. The command prompt is 'PS D:\BaiduSyncdisk\学校\课程\大二上\VC语言\hw\9780321928429_CPrimerPlus6E_code\Ch04> .\praise1.exe'. The output is 'What's your name? ' followed by a space, then 'Hello, ' followed by the name '王子恒' and a newline character. The program then prints 'You are an extraordinary being.' and returns 0. The terminal also shows the command prompt for the 'pizza.exe' program, which prompts for the radius of a pizza and prints the circumference and area. The output for 'pizza.exe' is 'What is the radius of your pizza?' followed by a space, then 'Your basic pizza parameters are as follows:' followed by a space, then 'circumference = 25.13, area = 50.27'. The command prompt is 'PS D:\BaiduSyncdisk\学校\课程\大二上\VC语言\hw\9780321928429_CPrimerPlus6E_code\Ch04> .\pizza.exe'. The output is 'What is the radius of your pizza?' followed by a space, then 'Your basic pizza parameters are as follows:' followed by a space, then 'circumference = 0.00, area = 0.00'. The command prompt is 'PS D:\BaiduSyncdisk\学校\课程\大二上\VC语言\hw\9780321928429_CPrimerPlus6E_code\Ch04> .\praise1.exe'. The output is 'What's your name? ' followed by a space, then 'Hello, ' followed by the name '王子恒' and a newline character. The program then prints 'You are an extraordinary being.' and returns 0. The terminal also shows the command prompt for the 'pizza.exe' program, which prompts for the radius of a pizza and prints the circumference and area. The output for 'pizza.exe' is 'What is the radius of your pizza?' followed by a space, then 'Your basic pizza parameters are as follows:' followed by a space, then 'circumference = 25.13, area = 50.27'. The command prompt is 'PS D:\BaiduSyncdisk\学校\课程\大二上\VC语言\hw\9780321928429_CPrimerPlus6E_code\Ch04> .\pizza.exe'. The output is 'What is the radius of your pizza?' followed by a space, then 'Your basic pizza parameters are as follows:' followed by a space, then 'circumference = 0.00, area = 0.00'. The command prompt is 'PS D:\BaiduSyncdisk\学校\课程\大二上\VC语言\hw\9780321928429_CPrimerPlus6E_code\Ch04> .\praise1.exe'. The output is 'What's your name? ' followed by a space, then 'Hello, ' followed by the name '王子恒' and a newline character. The program then prints 'You are an extraordinary being.' and returns 0.

praise2.c

- **作用:** 演示字符串长度和内存占用
- **功能:** 显示字符串长度和占用的内存空间
- **演示效果:**

```
R) 终端(T) ... < -> Ch04
C praise2.c X
C praise2.c
1  /* praise2.c */
2  // try the %u or %lu specifiers if your implementation
3  // does not recognize the %zd specifier
4  #include <stdio.h>
5  #include <string.h> /* provides strlen() prototype */
6  #define PRAISE "You are an extraordinary being."
7  int main(void)
8  {
9      char name[40];
10
11     printf("What's your name? ");
12     scanf("%s", name);
13     printf("Hello, %s. %s\n", name, PRAISE);
14     printf("Your name of %zd letters occupies %zd memory cells.\n",
15           strlen(name), sizeof name);
16     printf("The phrase of praise has %zd letters ",
17           strlen(PRAISE));
18     printf("and occupies %zd memory cells.\n", sizeof PRAISE);
19
20     return 0;
21 }
22

问题 输出 调试控制台 终端 端口 SPELL CHECKER 串行监视器
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\pizza.exe
What is the radius of your pizza?
4
Your basic pizza parameters are as follows:
circumference = 25.13, area = 50.27
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\pizza.exe
What is the radius of your pizza?
王子恒
Your basic pizza parameters are as follows:
circumference = 0.00, area = 0.00
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\praise1.exe
What's your name? 王子恒
Hello, 王子恒. You are an extraordinary being.
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\praise2.exe
What's your name? 王子恒
Hello, 王子恒. You are an extraordinary being.
Your name of 6 letters occupies 40 memory cells.
The phrase of praise has 31 letters and occupies 32 memory cells.
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> 
```

printout.c

- 作用: 使用转换说明符
- 功能: 展示不同数据类型的格式化输出
- 演示效果:

```
运行(R) 终端(T) ... < -> Ch04
C printout.c x
C printout.c
1  /* printout.c -- uses conversion specifiers */
2  #include <stdio.h>
3  #define PI 3.141593
4  int main(void)
5  {
6      int number = 7;
7      float pies = 12.75;
8      int cost = 7800;
9
10
11      printf("The %d contestants ate %f berry pies.\n", number,
12            pies);
13      printf("The value of pi is %f.\n", PI);
14      printf("Farewell! thou art too dear for my possessing,\n");
15      printf("%c%d\n", '$', 2 * cost);
16
17      return 0;
18  }
19

问题 输出 调试控制台 终端 窗口 SPELL CHECKER 串行监视器 筛选器 Code
[Done] exited with code=1 in 4.533 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc praise2.c -o praise2 && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"praise2

[Done] exited with code=1 in 2.203 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc printout.c -o printout && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"printout
The 7 contestants ate 12.750000 berry pies.
The value of pi is 3.141593.
Farewell! thou art too dear for my possessing,
$15600

[Done] exited with code=0 in 0.308 seconds
```

prntval.c

- 作用: 查找printf函数的返回值
- 功能: 显示printf函数打印的字符数量
- 演示效果:

```
C prntval.c x
C prntval.c
1  /* prntval.c -- finding printf()'s return value */    "prntval": Unknown word.
2  #include <stdio.h>
3  int main(void)
4  {
5      int bph2o = 212;
6      int rv;
7
8      rv = printf("%d F is water's boiling point.\n", bph2o);
9      printf("The printf() function printed %d characters.\n",
10             rv);
11      return 0;
12  }
13

问题 1  输出  调试控制台  终端  端口  SPELL CHECKER 1  串行监视器  筛选器  Code
[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc printout.c -o printout && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\printout
The 7 contestants ate 12.750000 berry pies.
The value of pi is 3.141593.
Farewell! thou art too dear for my possessing,
$15600

[Done] exited with code=0 in 0.308 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc prntval.c -o prntval && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\prntval
212 F is water's boiling point.
The printf() function printed 32 characters.

[Done] exited with code=0 in 0.297 seconds
```

skiptwo.c

- 作用: 跳过输入的前两个整数
- 功能: 使用*修饰符跳过scanf中的某些输入
- 演示效果:

```
C skiptwo.c x
C skiptwo.c
1  /* skiptwo.c -- skips over first two integers of input */
2  #include <stdio.h>
3  int main(void)
4  {
5      int n;
6
7      printf("Please enter three integers:\n");
8      scanf("%d %d %d", &n);
9      printf("The last integer was %d\n", n);
10
11     return 0;
12 }
13
```

问题 输出 调试控制台 终端 窗口 SPELL CHECKER 串行监视器

PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> .\pizza.exe
Your basic pizza parameters are as follows:
circumference = 0.00, area = 0.00

● PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> .\praise1.exe
What's your name? 王子恒
Hello, 王子恒. You are an extraordinary being.

● PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> .\praise2.exe
What's your name? 王子恒
Hello, 王子恒. You are an extraordinary being.
Your name of 6 letters occupies 40 memory cells.
The phrase of praise has 31 letters and occupies 32 memory cells.

● PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> .\skiptwo.c
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04>


○ ^C

● PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04> .\skiptwo.exe
Please enter three integers:
1 2 3
The last integer was 3

◆ PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9788321928429_CPrimerPlus6E_code\Ch04>

stringf.c

- 作用: 字符串格式化
- 功能: 展示字符串的不同格式化选项
- 演示效果:

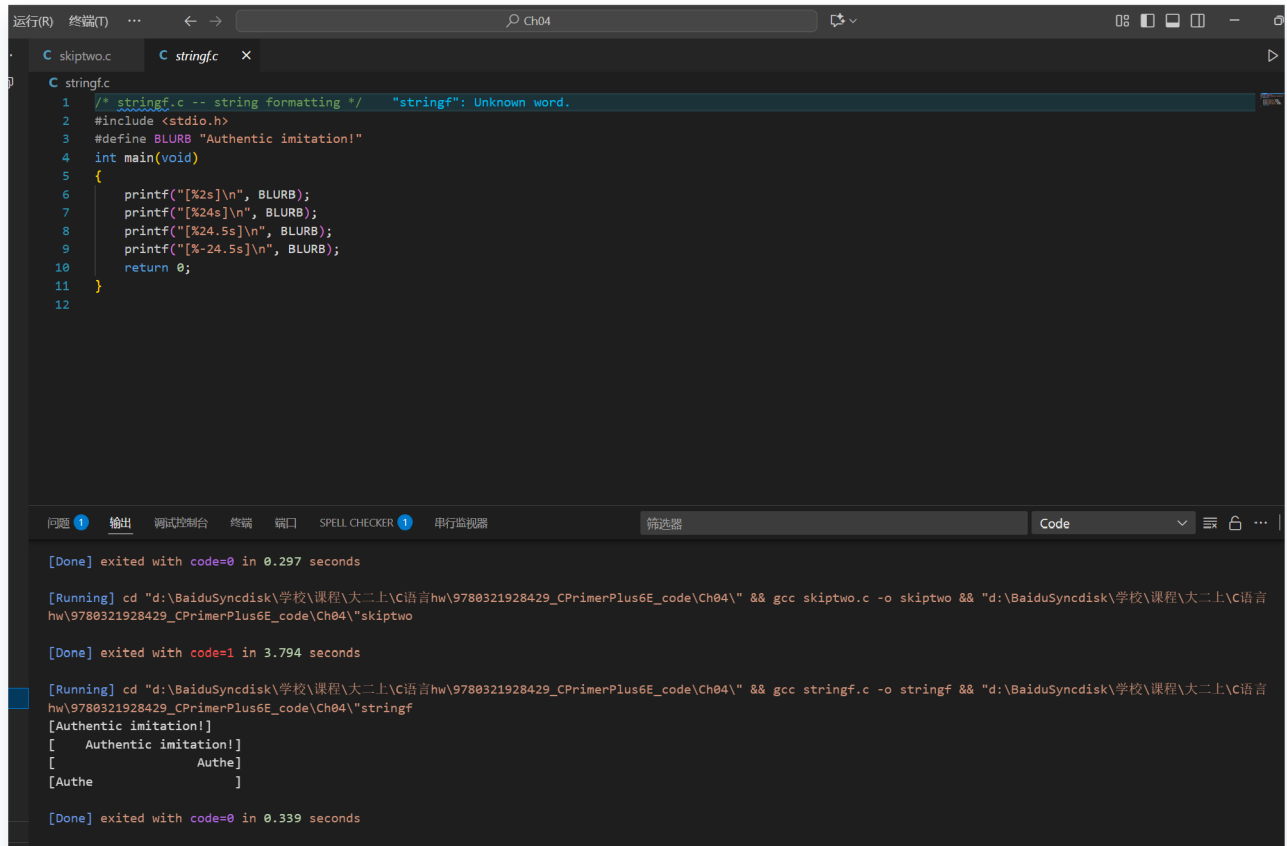

```
1 /* stringfc -- string formatting */ "stringf": Unknown word.
2 #include <stdio.h>
3 #define BLURB "Authentic imitation!"
4 int main(void)
5 {
6     printf("[%2s]\n", BLURB);
7     printf("[%24s]\n", BLURB);
8     printf("[%24.5s]\n", BLURB);
9     printf("[%24.5s]\n", BLURB);
10    return 0;
11 }
12
```

[Done] exited with code=0 in 0.297 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc skiptwo.c -o skiptwo && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"skiptwo

[Done] exited with code=1 in 3.794 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc stringf.c -o stringf && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"stringf

[Authentic imitation!]
[Authentic imitation!]
[Authe
[Authe]

[Done] exited with code=0 in 0.339 seconds

talkback.c

- 作用: 交互式信息程序
- 功能: 计算用户体积并显示相关信息
- 演示效果:

```
行(R) 终端(T) ... < --> Ch04
C skiptwo.c C talkback.c X
C talkback.c
1 // talkback.c -- nosy, informative program "talkback": Unknown word.
2 #include <stdio.h>
3 #include <string.h> // for strlen() prototype
4 #define DENSITY 62.4 // human density in lbs per cu ft
5 int main()
6 {
7     float weight, volume;
8     int size, letters;
9     char name[40]; // name is an array of 40 chars
10
11     printf("Hi! What's your first name?\n");
12     scanf("%s", name);
13     printf("%s, what's your weight in pounds?\n", name);
14     scanf("%f", &weight);
15     size = sizeof name;
16     letters = strlen(name);
17     volume = weight / DENSITY;
18     printf("Well, %s, your volume is %.2f cubic feet.\n",
19           name, volume);
20     printf("Also, your first name has %d letters,\n",
21           letters);
22     printf("and we have %d bytes to store it.\n", size);
23 }

问题 1 输出 调试控制台 终端 端口 SPELL-CHECKER 1 串行监视器
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\praise2.exe
Your name of 6 letters occupies 40 memory cells.
The phrase of praise has 31 letters and occupies 32 memory cells.
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\skiptwo.c
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> ^C
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\skiptwo.exe
Please enter three integers:
1 2 3
The last integer was 3
PS D:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04> .\talkback.exe
Hi! What's your first name?
王
王, what's your weight in pounds?
10000
Well, 王, your volume is 160.26 cubic feet.
Also, your first name has 2 letters,
and we have 40 bytes to store it.
```

varwid.c

- 作用: 使用可变宽度输出字段
- 功能: 允许用户输入字段宽度和精度来控制输出格式
- 演示效果:


```
终端(T) ... Ch04
C skiptwo.c C width.c x
C width.c
1  /* width.c -- field widths */
2  #include <stdio.h>
3  #define PAGES 959
4  int main(void)
5  {
6      printf("%d\n", PAGES);
7      printf("%2d\n", PAGES);
8      printf("%10d\n", PAGES);
9      printf("%-10d\n", PAGES);
10
11     return 0;
12 }
13

问题 输出 调试控制台 终端 SPELL CHECKER 串行监视器 筛选器 Code
[Done] exited with code=1 in 4.459 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc varwid.c -o varwid && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"varwid

[Done] exited with code=1 in 2.081 seconds

[Running] cd "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\" && gcc width.c -o width && "d:\BaiduSyncdisk\学校\课程\大二上\C语言hw\9780321928429_CPrimerPlus6E_code\Ch04\"width
*959*
*959*
*          959*
*959      *

[Done] exited with code=0 in 0.32 seconds
```