

# Flexible User-Friendly Trip Planning Queries

Bachelorarbeit  
von

cand. inform. Violina Zhekova

an der Fakultät für Informatik

Erstgutachter:	Prof. Klemens Böhm
Zweitgutachter:	Dr. Ing. Martin Schäler
Betreuender Mitarbeiter:	M.-Sc. Saeed Taghizadeh

Bearbeitungszeit: 01. November 2018 – 13. Mai 2019



---

Ich versichere wahrheitsgemäß, die Arbeit selbstständig verfasst, alle benutzten Hilfsmittel vollständig und genau angegeben und alles kenntlich gemacht zu haben, was aus Arbeiten anderer unverändert oder mit Abänderungen entnommen wurde sowie die Satzung des KIT zur Sicherung guter wissenschaftlicher Praxis in der jeweils gültigen Fassung beachtet zu haben.

Karlsruhe, den 1. Mai 2019

# Abstract

Trip planning queries are often from the type Sequenced Route Queries (SRQ), a form of nearest neighbor queries, which define a starting point and a list of categories to be visited in a consecutive order, given by the user. This type of queries are gaining significant interest, because of advances in location based mobile services and they are also of great importance in developing robust systems, where crisis management is of utter importance.

Existing approaches strive to find a best route, based on length, duration or other prime factors, passing through multiple location, called Points of Interest (PoIs), and they match the route perfectly. However, users may be also interested in other qualities of the route, such as the relationship among sequence points, hierarchy, order and priority of the PoIs. Therefore, in this thesis I introduce a set of operators, which the users may be interested in applying to SRQ, and propose approaches to designing and implementing some of the possible operators. The implementation considers metric spaces, as these are mostly relevant to the user, when working with road networks in real-life maps. The query operators this thesis has focused on are the following: equality operator (EO), not-equality operator (NEO), or operator (OR) and order operator (ORDER). The equality operator gives the user the flexibility to build a query, where two PoIs of the same category must be equal. The not-equality answers the opposite problem. The or operator provides the user with the opportunity to give multiple variants of a SRQ, using or operands. With the order operator the user is able to assign fixed positions to one or more categories in the route query, whereas it is then no longer viewed as a sequenced route query and should thus be answered differently than a simple SRQ.

The approaches used to implement the query operators include the Progressive Neighbor Exploration (PNE) approach, presented in [5] and heuristic methods for shrinking the search space. The extensive experiments, which were done using a real-world dataset verified that the created algorithms perform as expected and outperform the baseline approaches in terms of processing time and required workspace.

# Contents

<b>Abstract</b>	<b>iv</b>
<b>Contents</b>	<b>1</b>
<b>1 Abbreviations</b>	<b>3</b>
<b>2 Introduction</b>	<b>4</b>
2.1 Motivation . . . . .	4
2.2 Problem definition . . . . .	6
2.3 Challenges . . . . .	6
2.4 Contributions . . . . .	7
2.5 Outline . . . . .	8
<b>3 Notations and Preliminaries</b>	<b>9</b>
<b>4 Related Work</b>	<b>11</b>
<b>5 Operators</b>	<b>13</b>
5.1 Equality operator . . . . .	14
5.1.1 Motivation . . . . .	14
5.1.2 Problem definition . . . . .	14
5.1.3 Precomputations . . . . .	14
5.1.4 Proposed approach . . . . .	14
5.1.5 Baseline approach . . . . .	22
5.2 Not-Equality operator . . . . .	26
5.2.1 Motivation . . . . .	26
5.2.2 Problem definition . . . . .	26
5.2.3 Proposed approach . . . . .	26
5.3 Or operator . . . . .	30
5.3.1 Motivation . . . . .	30
5.3.2 Problem definition . . . . .	30

5.3.3	Proposed approach . . . . .	30
5.3.4	Baseline approach . . . . .	37
5.4	Order operator . . . . .	38
5.4.1	Motivation . . . . .	38
5.4.2	Problem definition . . . . .	38
5.4.3	Proposed approach . . . . .	38
5.4.4	Baseline approach . . . . .	43
<b>6</b>	<b>Experimental studies</b>	<b>44</b>
6.1	Equality operator . . . . .	45
6.2	Not-Equality operator . . . . .	48
6.3	Or operator . . . . .	51
6.4	Order operator . . . . .	52
6.5	Evaluation . . . . .	53
<b>7</b>	<b>Conclusion and Future work</b>	<b>54</b>
	<b>Bibliography</b>	<b>59</b>

# Chapter 1

## Abbreviations

In this chapter I introduce terms and abbreviations, often used in the context of this thesis.

Table 1.1 summarizes the used abbreviations.

<i>Abbreviation</i>	<i>Explanation</i>
SRQ	Sequenced Route Query
PoI	Point of Interest
OSR	Optimal Sequenced Route
PNE	Progressive Neighbor Exploration [5]
PSR	Partial Sequenced Route
SR	Sequenced Route (referring to full SR)
CRQ	Complex Route Query
EO	Equality Operator
NEO	Not-Equality Operator
OR	Or Operator
ORDER	Order Operator

Table 1.1: Abbreviations

# Chapter 2

## Introduction

### 2.1 Motivation

A sequenced route query (SRQ) is defined as finding the shortest path from a starting point towards a possible destination, passing through multiple locations, defined by their category type. There has been significant research and proposed approaches on the topic of sequenced route queries, but there has not been developed a query language to provide more flexibility to this types of queries. The work in this thesis has been focused on researching the topic of sequenced route queries and designing a language to enable the user to express his need in the form of a user query in a flexible manner, such as applying different constraints on the route to be found.

#### **Example:**

Figure 2.1 presents a small example network with four different types of point sets, illustrated with different colors. The colored circles represent the PoIs and the lines between them represent the roads, whereas on each road there is a label with its length. In total there is two restaurants, a movie theater, two banks and two pharmacies. The starting point *sp* is represented by a rhombus.

Suppose that a user is planning a trip to town: he first wants to go to a restaurant for lunch, then he wants to stop by a bank, then he meets a friend in the movie theater and after that he plans to have a dinner at a restaurant. In this specific scenario, the user wants to express his wish for both restaurants to be the same, because he may prefer a route where the equality of the two restaurant PoIs is more important to him than the length of the route itself.



With existing approaches, the user can get the shortest route [5] approach or all routes that satisfy the semantic similarity and length conditions equally [6], but that does not guarantee the equality of the two restaurant PoIs. Also finding  $k$  number of optimal routes, which answering the user's SRQ and then filtering out the routes where the two PoIs of type restaurant are equal has proven to not always generate a result, which is why in this thesis a better optimal approach is presented.

Using Figure 2.1, we see that the user query in the example above, when answered as an *Optimal Sequenced Route* (OSR) query [5], delivers the route  $(r_1, b_1, mt_1, r_2)$  with length 11 (shown with red lines in the figure), where both restaurants  $r_1$  and  $r_2$  are different. Our proposed approach, on the other hand, strives to find the optimal route, where the two restaurants are equal. The delivered route will not necessarily be the shortest possible sequenced route, but it will be the shortest route out of all possible routes, where the two PoIs are equal to each other. Such route in our example graph would be  $(r_1, b_1, mt_1, r_1)$  with length 12 (shown with dashed lines in the figure).

Specific constrains such as the equality in this example are proposed in the thesis as operators on the query. We modified and extended existing approaches, which answer the Optimal Sequenced Route (OSR) Query such as the *Progressive Neighbor Exploration* (PNE), proposed in [5], in order to transform the complex user query and retrieve a desired result.

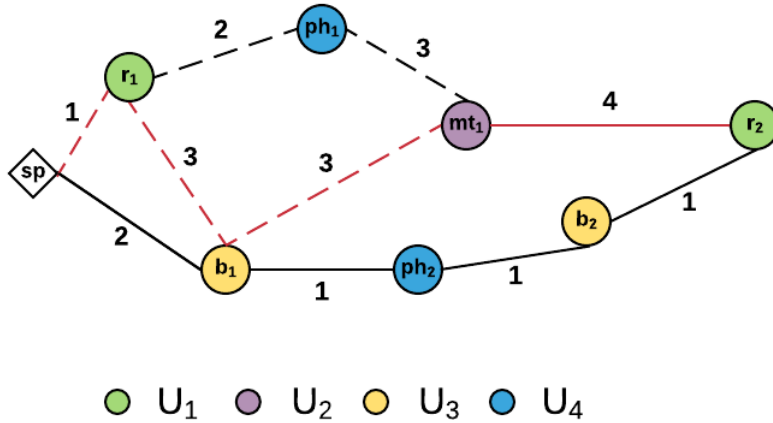


Figure 2.1: A network with four different types of point sets

## 2.2 Problem definition

With the rise of location based mobile services the need for a query language to answer complex route queries has emerged. To the best of our knowledge, although different approaches to answer the sequenced route query have been proposed, no one has yet identified the need for a unified query language to answer this complex route query types. What we would like to achieve with this thesis is to identify the problem, which is the need for flexibility in terms of route queries, and to propose a comprehensive solution to the problem. Through scientific research and research on the user's specific needs in this area of route queries, we have come up with several important operators that should be a part of this query language. Since the query language is entirely based on the user's requirements, which include individual personal needs, the query language operators that we propose are not a complete set. We propose four operators, that we deem the most important in terms of the level of flexibility they give to the user, and give an outlook on other ones, which can enrich the language in the future.

One of the most important comparison operators in programming and query languages is the equality operator. Therefore we decided to develop an articulate version of the equality operator for the route query type, and also developed the opposite not-equality operator in addition. Another very important programming and database language operator is the logical or operator, which gives the user the flexibility to define a subset of possible query variants that have to be filtered to obtain the best result. And lastly, we propose the order operator, which transforms the *sequenced* route query in a *partially sequenced* or *not sequenced* route query. This type of operator is closely related to the *Traveling Salesman Problem (TSP)*, which asks for the sequence in which a set of given points from a starting point is visited. The reason for choosing to design this operator is the strive for maximum flexibility. In this respect, the order operator represents the highest level of flexibility when it comes to planning a trip as a tourist with the intention of visiting multiple locations in a short period of time, without much need for order of the different types of locations.

## 2.3 Challenges

When working with real-life road networks, we are usually posed with the challenge of having big datasets with many PoIs. This makes it difficult to design fast algorithms for route query problems without the need for optimizations techniques. Trivial approaches usually explore the entire dataset in order to find one optimal solution, which especially in the case of route queries can increase the

time significantly. If we need to check all neighbors to one PoIs of one category and do this for all categories in order to find the shortest route from a category sequence, the time in the case of the trivial approaches increases exponentially with increase in the size of the category sequence. The *Optimal Sequenced Route Query* [5] presents the PNE approach, which solves the OSR query in metric spaces efficiently. The challenge for our task is to be able to use this designed approach to implement the proposed operators.

As shown in the example in Section 2.1 the Progressive Neighbor Exploration (PNE) approach doesn't always answer the equality operator query, therefore we need to modify the algorithm to serve our needs. In order to make sure that the algorithm delivers an optimal result, all routes must be checked, where two specific PoIs of one category are equal. This means that all PoIs of this category must be somehow inspected, which increases the work space significantly, which in turn spikes the processing time of the query. This poses the need for an optimization technique, such as the heuristic approach, presented in Chapter 5.1, to narrow the search space.

The not-equality operator is an extension of the PNE algorithm, because in comparison to the equality operator, there is a greater possibility that the PNE approach finds a route with different PoIs from the same category. With a little tweak of the algorithm, it is solved by PNE without the need for an optimization technique.

Furthermore, the or operator and the order operator are faced with the challenge for exponentially growing permutations, depending on the size of the query. Therefore the trivial approaches, which simply build all permutations and perform the PNE approach on them, can generate a big work space and increase the time exponentially with the increase in the number of permutations. In our proposed approaches for these two operators we modify the PNE algorithm to be able to work on the possible permutations simultaneously, while pruning longer routes, which may be generated when the algorithm operates on the permutations separately. In this way we shrink the search space, while also making sure that no necessary routes are missed in the process.

## 2.4 Contributions

In this thesis, we introduce four different operators, which can be applied to a route query, and propose alternative approaches for solving them, which outperform the trivial solutions. The presented algorithms relate to the following operators: equality operator (EO), not-equality operator (NEO), or operator (OR) and order operator (ORDER). The equality operator addresses the need for flexibility,

introduced in the example in Section 2.1, and the not-equality solves the opposite problem, in which the user specifically wants two different PoIs of the same category type in the query. Furthermore, the or operator represents the disjunction operator, usually present in query languages, and it gives the user the possibility to apply multiple category options to one or more route query points. Lastly, the order operator provides the user with the option to have a partially or fully not sequenced route query, where he can define zero or multiple categories to be at fixed positions in the route query sequence.

The algorithms for solving the operators are largely inspired by the PNE approach, presented in the *Optimal Sequenced Route Query* [5]. For answering the equality operator query, a heuristic approach is explored, as well, for shrinking the search space and reducing the processing time. For the three of the operators (EO, OR and ORDER) baseline approaches are also introduced and compared to the proposed approaches in the experiment results. Our introduced algorithms outperform the trivial solutions in the experiments with a real dataset significantly, especially with increasing the search space with the help of different evaluation parameters, which lets us to believe that they represent a meaningful solution to give more flexibility to the user for building route queries.

## 2.5 Outline

The remainder of the thesis is organized as follows: First, in Section 3 I introduce the notations used in the thesis, then I review the related work that has been done on the topic of SRQ in Section 4. In Section 5 I cover the proposed operators and go into details on some of them in separate sections for each of them: Motivation, Problem definition and Proposed approach. In Section 6 I present the results from the experimental studies, performed on the implemented operators and I evaluate the results. Finally, in Chapter 7 I conclude the thesis by summing up the progress made on the subject and discuss future work.

# Chapter 3

## Notations and Preliminaries

In this chapter, I would like to introduce some terms, notations and definitions that are used throughout the thesis, such as the definition for a sequenced route query (SRQ), which we need in order to define the operators.

**PoIs sets:** We assume that we have  $n$  sets  $U_1, U_2, \dots, U_n$ , which contain points in a 2-dimensional space  $\mathbb{R}^2$  and  $dist(.,.)$  is a distance function, which obtains the distance between two points in a two dimensional road network. The sets  $U_i$  represent the data sets for the different categories of points of interest, e.g. restaurants, gas stations etc..

**Category sequence:**  $M = (c_1, c_2, \dots, c_l)$  is a sequence of categories, if  $1 \leq c_i \leq n$  for  $1 \leq i \leq l$ , where  $n$  is the number of points sets  $U_i$ . The user is only allowed to ask for existing location types.

**Route:**  $R = (r_1, r_2, \dots, r_r)$  is a route, if  $r_i \in \mathbb{R}^2$  for each  $1 \leq i \leq r$ .  $R_{sp}$  is a route that starts from the starting point  $sp$ :  $R_{sp} = (sp, r_1, r_2, \dots, r_r)$

**Route length:** The length of a route  $R = (r_1, r_2, \dots, r_r)$  is defined as:

$$length(R) = \sum_{i=1}^{r-1} dist(P_i, P_{i+1}) \quad (3.1)$$

For  $r = 1$   $length(R) = 0$ .

**Sequenced route:** Let  $M = (c_1, c_2, \dots, c_l)$  be a sequence of point of interest categories.  $R = (r_1, r_2, \dots, r_l)$  is a sequenced route that follows the category sequence  $M$ , if  $P_i \in U_{M_i}$  where  $1 \leq i \leq l$ . The points of interest in the route should belong to the corresponding category sets, defined in the category sequence.

**Optimal sequenced route (OSR) query:** Given a sequence of categories  $M = (c_1, c_2, \dots, c_l)$  and a starting point  $sp$  in  $\mathbb{R}^2$ ,  $Q(sp, M)$  is the Optimal Sequenced Route (OSR) Query, which searches for the shortest (in terms of function *length*) sequenced route  $R$  that follows  $M$ .

$$length(sp, R) = dist(sp, P_1) + length(R) \quad (3.2)$$

All other sequenced routes that follow  $M$  are referred to as candidate sequenced routes (SR).

Table 3.1 summarizes all used notations.

<i>Symbol</i>	<i>Meaning</i>
$U_i$	a point set for a category in $\mathbb{R}^2$
$ U_i $	cardinality of the set $U_i$
$n$	number of point sets $U_i$
$dist(., .)$	distance function in $\mathbb{R}^2$
$M$	category sequence, $= (c_1, c_2, \dots, c_l)$
$ M $	$l$ , size of sequence $M$ = number of items in $M$
$c_i$	$i$ th member of $M$
$R$	route, $= (r_1, r_2, \dots, r_r)$
$ R $	$r$ , size of route $R$ = number of points in $R$
$r_i$	$i$ th point in $R$
$length(R)$	length of $R$
$length(sp, R)$	length of $R_{sp} = (sp, r_1, r_2, \dots, r_r)$ , $= length(R_{sp})$
$Q(sp, M)$	sequenced route query

Table 3.1: Notations

# Chapter 4

## Related Work

In this section I would like to review some existing research, related to the topic of this thesis. Sequenced route queries have been extensively researched and different algorithms that optimize the problem and address different use scenarios have been developed. Usually, existing approaches differentiate between vector and metric spaces, considering the Euclidean distance between geographic points or the real-life road-network-based distances accordingly. Some algorithms are focused on returning a single optimal route, where the PoIs match the given categories in the category sequence perfectly, whereas others consider semantic hierarchy or multiple route factors such as rating, distance and category weights.

In *The Optimal Sequenced Route* the researchers propose two effective algorithms for solving the sequenced route query problem. They first elaborate on why a classic shortest path algorithm such as Dijkstra would be impractical for real-life scenarios and then go on to propose the LORD (Light Optimal Route Discoverer) and R-LORD algorithm, which uses a R-tree, which are Dijkstra-based and made for vector spaces and the PNE (Progressive Neighbor Exploration) algorithm, which employs the nearest neighbour search and is designed specifically for metric spaces. Both of their proposed algorithms calculate a perfect route and only return one optimal route (while modification of the PNE algorithm also allow for finding k optimal routes), significantly outperforming Dijkstra's algorithm. [5]

A different approach to the SRQ, designed for metric spaces, is proposed in *Sequenced Route Query with Semantic Hierarchy*. The authors suggest a Skyline based algorithm, called bulk SkySR (BSSR), which searches for all preferred routes to users by extending the shortest route search with the semantic similarity of PoIs' categories. This approach expects a category tree, representing the semantic hierarchy of categories, and applies the Skyline concept, which is

searching for routes that are not worse than any other routes in terms of their scores, to the route length and semantic similarity, also known as the route scores. The BSSR algorithm also exploits the branch-and-bound concept by searching for routes simultaneously to reduce the search space. [6]

Another research article proposes the Personalized and Sequenced Route (PSR) Query, which considers both personalization and sequenced constraints. The approach takes into account multiple factors of a route, such as distance rating and associates different weight with each PoI category and a distance weight. The framework designed to obtain one optimal route consists of three phases: guessing, crossover and refinement, and is focused on spatial databases. [3]

In *In-Route Skyline Querying for Location-Based Services* queries are issued by user moving along a routes towards destinations (PoIs), also defined as query points. The movement of the user is constrained to a road network and the travel distance is considered. In-route queries know the destination and current location of the user, which dynamically changes, and the anticipated route towards the end-point. Users can apply weights to several spatially-related criteria, when deciding on PoIs to visit next, such as the total distance difference, known as detour, and the relative distance of the current data point. [4]

An article *Sequenced Route Queries: Getting Things Done on the Way Back Home* suggest speedup techniques for sequenced route queries. A contraction hierarchy is proposed for preprocessing results for faster retrieval of answers by shortest path queries in road networks. The second technique uses the distance sensitivity of routes ("most queries are of a local kind"), which it bases on users' typical behavior. In this approach, one optimal route is returned, but queries where the order of PoIs is not necessarily fixed are possible as long as the number of PoIs remains moderate. Also, constraints on the order of visited PoIs can be made, e.g. visiting a restaurant before a shopping center. [2]



# Chapter 5

## Operators

In this chapter the proposed operators are covered in terms of their design, implementation and evaluation.

We have a starting point and a category sequence, which constitutes the SRQ. In addition to this two query parameters, the user can define other parameters, which are applied to the route query as query operators. Such possible query operators, presented in this thesis, are the equality operator, not-equality operator, or operator and order operator.

We define the *Complex Route Query* (CRQ):

**Complex route query (CRQ):** Given a starting point  $sp$ , a category sequence  $M = (c_1, c_2, \dots, c_n)$  and an operator  $OPERATOR$ ,  $Q(sp, M, OPERATOR)$  is a Complex Route (CR) Query, which searches for the optimal route  $R = (r'_1, r'_2, \dots, r'_l)$ , defined as a sequence of PoIs.

## 5.1 Equality operator

### 5.1.1 Motivation

The equality operator is based on the need of a user to express that some PoIs of the same category in the SRQ should be equal, as presented in the example in Section 2.1.

### 5.1.2 Problem definition

The equality operator is defined as follows:

**Equality operator:** Given a sequence of categories  $M = (c_1, c_2, \dots, c_l)$ , a starting point  $sp$  in  $\mathbb{R}^2$  and indices  $i$  and  $j$ , where  $r_i \in U_{M_i}$ ,  $r_j \in U_{M_j}$  and  $M_i = M_j$ ,  $EQUAL(i, j)$  is an equality operator, which states that  $r_i$  and  $r_j$  in the found route  $R = (r_1, r_2, \dots, r_l)$  should be the same points of interest.  $Q(sp, M, EQUAL(i, j))$  is a Sequenced Route (SR) Query, which searches for the shortest (in terms of function *length*) sequenced route  $R$  that follows  $M$  and where  $r_i = r_j$ .

### 5.1.3 Precomputations

In order to faster calculate the heuristic for the partial routes, the nearest neighbors of all PoIs' categories to each node are precalculated and kept in a 2-dimensional table in memory for easy access. For precalculation a modified Dijkstra is executed for every node, which terminates as soon as it reaches the nearest neighbors of every category to a the given graph vertex.

### 5.1.4 Proposed approach

The equality operator is designed using the PNE approach, proposed in [5]. It uses the progressive neighbour explorer as its base to upgrade on and extends it with a heuristic approach to shrink the search space.

#### Heuristic

For generating the routes and deciding which of them are worth further expanding on, the proposed approach uses an initially calculated *upper bound* of an arti-

ficially build OSR, which satisfies the equality condition, and compares it to a lower bound of a route, considered by the algorithm. The *lower bound* of a certain route represents the sum of its length and its heuristic. The heuristic of a certain PSR is the maximum distance out of the distances to PoIs from the set of categories that are yet to be expanded. The function  $heuristic(PSR)$  Heuristic calculates the heuristic for a given route  $R$ .

---

**Function**  $heuristic(R)$ 


---

```

1 // Calculates the heuristic for the given route
   $R = (r_1, r_2, \dots, r_k)$ 
2 // For every route, which already contains  $r_i$ 
   $R = (r_1, r_2, \dots, r_i, \dots, r_k)$  the distance to  $r_j$  is
  calculated as the  $dist(r_k, r_i)$ 
3 for  $c_{k+1}$  to  $c_n$  do For all direct neighbors to  $r_k$  of every subsequent
  category find the maximum distance
4   | find maximum;
```

---

**Algorithm**

The algorithm for the equality operator as shown in  $equalityOperator()$  is constructed using multiple procedures.

---

**Algorithm 1:**  $equalityOperator()$ 


---

**Input :**  $Q(sp, M = (c_1, c_2, \dots, c_l)), EQUAL(i, j)$

**Output:**  $R = (r_1, r_2, \dots, r_l)$

```

1 initialize heap; // Heap with PSR
2 initialize found; // The candidate SR
3 initialize UB;
4  $optimalRoute = PNE(Q)$ ;
5 if  $optimalRoute[i] = optimalRoute[j]$  then
6   | optimal route has been found;
7   | return  $optimalRoute$ ;
8 else
9   |  $dummySR()$ ;
10  |  $modifiedPNE()$ ;
```

---

*heap*, *found* and *UB* are initialized (line 1 to 3). In *heap* the PSR which are to be examined by the algorithm are stored. It is sorted by the *lower bound* of the PSR. *found* stores a candidate SR. *UB* is the length of the candidate route and it is updated each time a full SR is found. The update is performed in *trim*(*SR*) 10

First, an optimal sequenced route is found using the PNE algorithm 9 (line 4). It is checked, if the two PoIs that the user has asked to be equal (line 5), are equal in the OSR. If so, the OSR is returned (line 7), else the equality operator continues with the creation of an artificial SR *dummySR* and the modified PNE algorithm (line 9, 10).

Second, we artificially create a sequenced route from the optimal route, found by PNE, as seen in 3. The optimal route is changed, so that  $r_j$  is made to be equal to  $r_i$  (line 2, 3) and the length of the artificially created PSR is the initial upper bound (line 4), by which later partial sequenced routes are either kept or discarded.

---

**Procedure** *dummySR*(*optimalRoute*)

---

```

1 // Creating a dummy SR (partial sequence route)
  from the found optimal route; replacing  $r_j$ 
  with  $r_i$ 
2  $dummySR = (r_1, r_2, \dots, r_{i-1}, r_i, \dots, r_i)$ ; // First part of the
  route
3  $dummySR \leftarrow add\ PNE(r_i, (c_{j+1}, \dots, c_l))$ ;
4  $UB = length(dummySR)$ ;
5 place dummySR on the heap;
```

---

The modified PNE algorithm 4 begins iterating all  $r_1$  from the category set  $U_{M_1}$ , which are subsequent to *sp* (line 1 to 7) in the and it compares the *lower bound*, generated by them, to the global *upper bound* (line 4). They are only considered in further steps of the algorithm, if the partial sequenced route has a smaller lower bound than the upper bound.

Next, the modified PNE algorithm acts as a PNE algorithm and it fetches partial sequenced routes from the heap and generates new routes (line 8 to 24). This process is repeated until the *heap* runs out of PSRs, which means that all possible candidate routes have been expanded and taken into account.

At each subsequent iteration of the algorithm 4 (line 9 to 26) there are four distinct cases depending on the length of the route. Case one (line 11) 5 and four (line 20) 8 follow the original PNE. Case two (line 14) 6 is focused on finding the travel distance between  $r_{j-1}$  and  $r_i$ . In each of the cases after fetching the route first the *lower bound* of the fetched PSR is compared to the global *upper bound* to see

if the route should be modified or discarded (lines 1 to 3). After that the PSR is modified accordingly and again a length check is performed before finally putting the route on the *heap*. The length check is performed to make sure that the PSR is not longer than the already found SR with a length, which is the upper bound  $UB$ .

---

**Algorithm 2:** *modifiedPNE* returns Route
 

---

```

1 foreach  $r_1$  in  $U_{M_1}$  do Checking the upper bound for every  $r_1$  neighbor of
    $sp$  in the category set  $U_{M_1}$ 
2   build a new  $PSR$  with  $r_1$ ;
3    $LB = \text{length}(PSR) + \text{heuristic}(PSR)$ ;
4   if  $LB \leq UB$  then
5     place the new  $PSR(r_1)$  on the heap;
6 while heap is not empty do
7    $current = \text{fetch a } PSR \text{ from the heap}$ ;
8   switch  $s = \text{size}(current)$  do
9     case  $s \leq j - 1$  do Finding PSRs before  $r_j$ 
10    case1 ();
11    case  $s = j$  do Finding PSR containing  $r_j$ 
12    case2 ();
13    case  $s = j + 1$  do Finding PSR after/containing  $r_j$ 
14    case3 ();
15    case  $s \geq j + 2$  do Finding PSRs after  $r_j$ 
16    case4 ();
17 return found

```

---

In case one 5 we find PSRs before  $r_j$ . Two modifications of the PSR are performed, which follow the PNE algorithm 9. In a) (line 4 to 9) the nearest neighbor to the last PoI in the PSR  $r_k$  in  $U_{M_{k+1}}$  is found and the PSR is updated to contain  $r_{k+1}$  and placed back on the heap. In b) (line 11 to 15) the k-th nearest neighbor to the second to last PoI  $r_{k+1}$  in  $U_{M_k}$  is found and the last PoIs in the PSR  $r_k$  is replaced with it.

---

**Procedure caseOne**


---

```

1  $LB = \text{length}(\text{current}) + \text{heuristic}(\text{current});$ 
2 // Heuristic check
3 if  $LB \leq UB$  then
4   a)  $\text{nearestNeighbour}(r_k, U_{M_{k+1}});$ 
5   update  $PSR$  to contain  $r_{k+1}$ ;
6   // Length check
7   if  $\text{length}(PSR) \leq UB$  then
8     | place  $PSR$  on the heap;
9 b)  $\text{kNearestNeighbour}(r_{k-1}, U_{M_k});$ 
10 update  $PSR$ ;
11 if  $\text{length}(PSR) \leq UB$  then
12   | place  $PSR$  on the heap;
```

---

In case two 6  $r_j$  is to be found. In a) (line 4 to 10) instead of finding the nearest neighbor like the PNE algorithm does, the travel distance between the last PoI in the PSR  $r_{j-1}$  and  $r_i$  is found, because we want  $r_j$  to be equal to  $r_i$  and the route. In b) (line 12 to 16) the k-th nearest neighbor to the second to last PoI  $r_{j-2}$  in  $U_{M_{j-1}}$  is found and the last PoIs in the PSR  $r_{j-1}$  is replaced with it.

---

**Procedure caseTwo**


---

```

1  $LB = \text{length}(\text{current}) + \text{heuristic}(\text{current});$ 
2 // Heuristic check
3 if  $LB \leq UB$  then
4   a)  $\text{dist}(r_{j-1}, r_i);$ 
5   update  $PSR$  to contain  $r_i$  in the place  $j$ ;
6   // Length check
7   if  $\text{length}(PSR) \leq UB$  then
8     | // Trimming part
9     | trim( $PSR$ );
10 b)  $\text{kNearestNeighbour}(r_{j-2}, U_{M_{j-1}});$ 
11 update  $PSR$ ;
12 if  $\text{length}(PSR) \leq UB$  then
13   | place  $PSR$  on the heap;
```

---

In case three 7  $r_{j+1}$  is to be found. In a) (line 4 to 10) the nearest neighbor to the last PoI in the PSR  $r_j$  in  $U_{M_{j+1}}$  is found and the PSR is updated to contain  $r_{j+1}$  and placed back on the heap. In b) (line 12) the k-th nearest neighbor to the

second to last PoI  $r_{j-1}$  in  $U_{M_{j-2}}$  is expected to be found, but in our case this is  $r_j$  and we have already calculated the travel distance between  $r_{j-1}$  and  $r_i$  in case two 6, so here nothing further needs to be done.

---

**Procedure caseThree**


---

```

1  $LB = \text{length}(\text{current}) + \text{heuristic}(\text{current});$ 
2 // Heuristic check
3 if  $LB < UB$  then
4   a)  $\text{nearestNeighbour}(r_j, U_{M_{j+1}});$ 
5   update  $PSR$  to contain  $r_{j+1}$ ;
6   // Length check
7   if  $\text{length}(PSR) \leq UB$  then
8     // Trimming part
9      $\text{trim}(PSR);$ 
10 b) // Found in caseTwo
```

---

In case four 8 we find  $PSR$  after  $r_j$ . The case is similar to case one 5, except that in a) instead of directly putting the  $PSR$  on the heap, trimming 10 is performed in a) (line 10) to check if the route is a full  $SR$  and if the candidate route *found* and the upper bound  $UB$  must be updated.

---

**Procedure caseFour**


---

```

1 // Same procedure as caseOne() + trimming part to
  filter  $SR$  and update  $UB$  if needed
2  $LB = \text{length}(\text{current}) + \text{heuristic}(\text{current});$ 
3 // Heuristic check
4 if  $LB \leq UB$  then
5   a)  $\text{nearestNeighbour}(r_k, U_{M_{k+1}});$ 
6   update  $PSR$  to contain  $r_{k+1}$ ;
7   // Length check
8   if  $\text{length}(PSR) \leq UB$  then
9     // Trimming part
10     $\text{trim}(PSR);$ 
11 b)  $\text{kNearestNeighbour}(r_{k-1}, U_{M_k});$ 
12 update  $PSR;$ 
13 if  $\text{length}(PSR) \leq UB$  then
14    $\text{place } PSR \text{ on the heap};$ 
```

---

**Algorithm 3:** PNE [5]

---

```

1 // Incrementally create the set of candidate
  routes for  $Q(sp, M)$  from starting point  $sp$ 
  towards PoI set  $U_{M_l}$ 
2 // Candidate routes are stored in a heap sorted
  by length of the routes
3 // At each iteration of PNE a  $PSR$  (partial
  sequenced route) is fetched and examined based
  on its length
4 // Trimming: There must be only one candidate SR
  on the heap
5 switch  $s = size(PSR)$  do
6   case  $s == l$  do
7      $PSR$  is the optimal route;
8     return  $PSR$ ;
9   case  $s \neq l$  do
10    a)  $nearestNeighbour(r_{|PSR|}, U_{M_{|PSR|+1}})$ ;
11    update  $PSR$  and put it back on the heap;
12    b)  $kNearestNeighbour(r_{|PSR|-1}, U_{M_{|PSR|}})$ ;
13    generate a new  $PSR$  and place it on the heap;

```

---

**Procedure** trim( $PSR$ )

---

```

1 if  $size(PSR) = l$  then
2   if  $length(PSR) \leq UB$  then
3     update  $UB$ ;
4     update  $found$ ;
5 else
6   place  $PSR$  on the heap;

```

---

**Running example**

We describe the algorithm for the equality operator using the example in Section 2.1. The user in the example wanted to visit a restaurant, a bank, a movie theater and a restaurant again, but he wanted both restaurants to be equal ( $M = (r, b, mt, r)$ ,  $|M| = l = 4$ ,  $EQUAL(0, 3)$ ). In Figure 5.1 the partial routes stored in the *heap* in each step of the algorithm are displayed. First, the *optimalRoute*



is found with PNE:  $(r_1, b_1, mt_1, r_2)$ . The algorithm checks if the PoIs at indices 0 and 3 are equal and since they are not, it continues with building the *dummySR*:  $(r_1, b_1, mt_1, r_1)$ . The *upper bound* is initialized with the length of the *dummySR*, which is 12, and also *found* is initialized with *dummySR* until a better route is possibly found. In step 2 of the *modifiedPNE()* all neighbors to the starting point *sp* from type restaurant  $(r_1, r_2)$  are found and if their calculated *lowerbound* is smaller than the *upperbound*, which is the case for both restaurant, they are put on the heap: Partial routes  $R_1 = (r_1)$  with length 1 and heuristic 5 and  $R_2 = (r_2)$  with length 5 and heuristic 9 are generated and placed on the heap. Since the heap is ordered ascending by *lowerbound*, which is calculated as the sum of length and heuristic,  $R_1$  is at the top of the heap and fetched in step 3. Here we have *caseOne()*, where we first check if the *LB* of the PSR satisfies the condition to be smaller than the *UB*, and step a) of the PNE algorithm is performed. The nearest neighbor to  $r_1$  of type bank  $b_1$  is found and the new generated PSR  $(r_1, b_1)$  with length 4 and heuristic 3 is calculated and placed on the heap. In step 4,  $(r_1, b_1)$  is fetched and we enter *caseOne()* again and since the condition for the *lower bound* to be smaller than the *upper bound* is fulfilled, steps a) and b) are performed; in a) the nearest neighbor to  $b_1$  from type movie theater is found, which is  $mt_1$ , and the PSR is extended, then in b) the next nearest neighbor to  $r_1$  from type bank  $b_2$  is found and a new PSR  $(r_1, b_2)$  is generated. For both PSR their length is less the global *upper bound* and they are put on the heap. The process is repeated until a route with  $size(PSR) = 3$  is reached. This is the case with step 8, where we have fetches PSR  $(r_1, b_1, mt_1)$ . Here *caseTwo()* is performed: the next PoI is forcefully set to be the PoI at index 0, which is  $r_1$  and the travel distance from  $mt_1$  to  $r_1$  is calculated. *Trimming* is performed on new SR  $(r_1, b_1, mt_1, r_1)$  with length 12: it is compared with the found route and *found*, but it is the same and *found* and *UB* are not updated. In another scenario, if the newly found SR was shorter than *found*, then it would be updated together with *UB*. In the next step 9, again we have *caseTwo()* and a new full SR  $(r_2, b_1, mt_1, r_2)$  with length 15 is generated, but when compared with *found*, it is longer, so it gets discarded. The same steps are executed in the next two step 10 and 11, until all routes have been developed and checked, which is the case when heap is empty. Then the optimal sequenced route with equal PoIs at indices 0 and 3 in *found* is returned:  $(r_1, b_1, mt_1, r_1)$ .

## Correctness

Todo: Correctness

Step	PSR $R : length(R), heuristic(R)$
1	$(r_1 : 1, 5), (r_2 : 5, 4)$
2	$(r_1, b_1 : 4, 3), (r_2 : 5, 4)$
3	$(r_2 : 5, 4), (r_1, b_2 : 6, 5), (r_1, b_1, mt_1 : 7, 5)$
4	$(r_1, b_2 : 6, 5), (r_2, b_2 : 6, 5), (r_1, b_1, mt_1 : 7, 5)$
5	$(r_2, b_2 : 6, 5), (r_1, b_1, mt_1 : 7, 5), (r_1, b_2, mt_1 : 11, 5)$
6	$(r_2, b_1 : 8, 3), (r_1, b_1, mt_1 : 7, 5), (r_2, b_2, mt_1 : 11, 4), (r_1, b_2, mt_1 : 11, 5)$
7	$(r_1, b_1, mt_1 : 7, 5), (r_2, b_1, mt_1 : 11, 4), (r_2, b_2, mt_1 : 11, 4), (r_1, b_2, mt_1 : 11, 5)$
8	$(r_2, b_1, mt_1 : 11, 4), (r_2, b_2, mt_1 : 11, 4), (r_1, b_2, mt_1 : 11, 5)$
9	$(r_2, b_2, mt_1 : 11, 4), (r_1, b_2, mt_1 : 11, 5)$
10	$(r_1, b_2, mt_1 : 11, 5)$
11	<i>heap is empty</i>

Table 5.1: Steps of the algorithm for EO using the road network from Figure 2.1

### 5.1.5 Baseline approach

The baseline approach to the equality operator is entirely based on PNE by simply forcing  $r_i$  and  $r_j$  to be equal in the process of modifying the routes. In this variant, there is no heuristic and also no length checks.

#### Algorithm

The algorithm (shown in 11) starts by finding an optimal sequenced route with PNE (line 2), as mentioned in the proposed approach 5.1.4 and checks if  $r_i$  and  $r_j$  are already equal (line 3). If this is the case, it returns the found optimal route (line 5), otherwise (line 7) it continues with the modified PNE 12.

---

#### Algorithm 4: equalityOperator-baseline

---

**Input** :  $Q(sp, M = (c_1, c_2, \dots, c_l)), EQUAL(i, j)$

**Output**:  $R = (r_1, r_2, \dots, r_l)$

```

1 initialize heap;                                     // Heap with PSR
2 optimalRoute = PNE(Q);
3 if optimalRoute[i] = optimalRoute[j] then
4     optimal route has been found;
5     return optimalRoute;
6 else
7     modifiedPNE-baseline;
```

---

Modified PNE proceeds with examining the routes on the *heap*, ordered by length, by size and modifying them according to PNE (line 4 to 38). When the current route on the heap is a full SR, then the optimal route has been found (line 34). The four cases (line 5, 13, 21 and 27) correspond to the cases in algorithm of the proposed approach, with the only difference being that no heuristic and length checks are performed.

**Algorithm 5:** modifiedPNE-baseline returns Route

---

```

1 firstPSR = nearestNeighbour (sp,  $U_{M_1}$ );
2 place firstPSR on heap;
3 current = fetch a PSR from the heap;
4 switch  $s = \text{size}(\text{current})$  do
5   case  $s \leq j - 1$  do Finding PSRs before  $r_j$ 
6     a) nearestNeighbour ( $r_k, U_{M_{k+1}}$ );
7     update PSR to contain  $r_{k+1}$ ;
8     place PSR on the heap;
9     b) kNearestNeighbour ( $r_{k-1}, U_{M_k}$ );
10    update PSR;
11    place PSR on the heap;
12   case  $s = j$  do Finding PSR containing  $r_j$ 
13     a) dist ( $r_{j-1}, r_i$ );
14     update PSR to contain  $r_i$  in the place  $j$ ;
15     trim(PSR) ; // Trimming part
16     b) kNearestNeighbour ( $r_{j-2}, U_{M_{j-1}}$ );
17     update PSR;
18     place PSR on the heap;
19   case  $s = j + 1$  do Finding PSR after/containing  $r_j$ 
20     a) nearestNeighbour ( $r_j, U_{M_{j+1}}$ );
21     update PSR to contain  $r_{j+1}$ ;
22     trim(PSR) ; // Trimming part
23     b) // Found in caseTwo
24   case  $s \geq j + 2$  do Finding PSRs after  $r_j$ 
25     a) nearestNeighbour ( $r_k, U_{M_{k+1}}$ );
26     update PSR to contain  $r_{k+1}$ ;
27     trim(PSR) ; // Trimming part
28     b) kNearestNeighbour ( $r_{k-1}, U_{M_k}$ );
29     update PSR;
30     place PSR on the heap;
31   case  $s == l$  do Optimal route with equal PoIs at  $i$  and  $j$  has been
    found
32   return current;
33 return found;

```

---

**Correctness**

---

Todo: Correctness of baseline

## 5.2 Not-Equality operator

### 5.2.1 Motivation

The not-equality operator is based on the need to express that some PoIs in the SRQ of the same category shouldn't be equal. Following a similar example of the one in Section 2.1 for the road network in Figure 2.1, a user is planning a trip to town: he first wants to go to a restaurant for lunch, then he wants to stop by a pharmacy and after that he wants to go to a different restaurant for coffee. In this specific scenario, the user wants to express his wish for the restaurants to be the different, but with the existing PNE [5] approach, which finds an OSR, the user would get the route  $(r_1, ph_1, r_1)$  with length 5, where both restaurants are the same. The proposed approach in this chapter strives to find the optimal route, where the two restaurants are different. It will not necessarily be the shortest possible sequenced route, but it will be the shortest route out of all possible routes, where the two PoIs are different. Such route in our example graph would be  $(r_1, ph_2, r_2)$  with length 7 (shown with dashed lines in the figure).

### 5.2.2 Problem definition

The not-equality operator is defined as follows:

**Not-Equality operator:** Given a sequence of categories  $M = (c_1, c_2, \dots, c_l)$ , a starting point  $sp$  in  $\mathbb{R}^2$  and indices  $i$  and  $j$ , , where  $r_i \in U_{M_i}$ ,  $r_j \in U_{M_j}$  and  $M_i \neq M_j$ ,  $NOTEQUAL(i, j)$  is an equality operator, which states that  $r_i$  and  $r_j$  in the found route  $R = (r_1, r_2, \dots, r_l)$  should be different points of interest.  $Q(sp, M, NOTEQUAL(i, j))$  is a Sequenced Route (SR) Query, which searches for the shortest (in terms of function *length*) sequenced route  $R$  that follows  $M$  and where  $r_i \neq r_j$ .

### 5.2.3 Proposed approach

The not-equality operator is designed using the PNE approach, proposed in [5]. It uses the progressive neighbour explerator as its base to upgrade on and explore all the possible optimal routes until it finds an optimal route, in which the given PoIs are different.

**Algorithm**

The algorithm (shown in 13) starts by initializing the heap, ordered by the length of the routes, and the first PSR (line 1, 2, 3). It then proceeds to inspect and modify the routes on the heap based on their length, until a full SR is found (line 7 to 20). Each full SR (line 8 to 11) is checked if it is a full SR. If this is the case, the found optimal SR is returned, otherwise the next PSR on the heap is fetched. If the fetched PSR is not a full SR but a partial route (line 12 to 19), then the algorithm performs a) and b) as in the PNE algorithm 9.

**Algorithm 6: notEqualityOperator**


---

**Input :**  $(sp, M = (c_1, c_2, \dots, c_l)), NOTEQUAL(i, j)$   
**Output:**  $R = (r_1, r_2, \dots, r_l)$

---

```

1 initialize heap;
2 initialize candidate;
3 firstPSR = nearestNeighbour(sp,  $U_{M_1}$ );
4 place firstPSR on heap;
5 // At each iteration of PNE a PSR (partial
   sequenced route) is fetched and examined based
   on its length and it is checked
6 fetch a PSR from the heap;
7 switch s = size(PSR) do
8   case s == l do
9     PSR is the optimal route;
10    return PSR;
11   case s ≠ l do
12     a) nearestNeighbour( $r_{|PSR|}, U_{M_{|PSR|+1}}$ );
13     update PSR;
14     trim(PSR);
15     b) kNearestNeighbour( $r_{|PSR|-1}, U_{M_{|PSR|}}$ );
16     generate a new PSR;
17     trim(PSR);

```

---

Each time a PSR is generated the trim procedure 14 is performed. It is checked if the generated PSR is a full SR (line 1) and if that is the case (line 1 to 16) the routes gets further examined. In the case that the route satisfies the requirement for  $i$  and  $j$  to not be equal (line 2 to 8), its length is compared of that of the candidate route and if it is shorter or equal, the candidate route is updated and the sequenced route is placed on the heap. Otherwise (line 8 to 15) we check if  $j$  is

the last index in the route and in this case (line 10 to 14) the  $k$ th neighbor of the previous PoI to the last one is found and a new  $PSR$  is generated. If the route doesn't satisfy the requirements for  $i$  and  $j$  to not be equal and  $j$  to be last index, it is simply discarded as not possible SR. If the generated route is still not a full SR (line 16 to 21) the  $PSR$  is placed on the *heap*.

---

**Procedure** trim( $PSR$ )

---

```

1 if size( $PSR$ ) =  $l$  then
2   if  $PSR[i] \neq PSR[j]$  then
3     // Optimization: length check
4     if length( $PSR$ ) ≤ length(candidate) then
5       update candidate;
6       place  $PSR$  on the heap;
7   else
8     // In case  $j$  is the last index in the route,
8       we find the  $k$ th neighbor of the previous
8       PoI to the last one
9     if size( $PSR$ ) =  $j + 1$  then
10      kNearestNeighbour( $r_{|PSR|-1}, U_{M_{|PSR|}}$ );
11      generate a new  $PSR$ ;
12      trim( $PSR$ );
13 else
14   // Optimization: length check
15   if length( $PSR$ ) ≤ length(candidate) then
16     place  $PSR$  on the heap;

```

---

**Running example**

We describe the algorithm for the not-equality operator using the example in Section 5.2.1. The user in the example wanted to visit a restaurant, a pharmacy and a restaurant again, but he wanted both restaurants to not be equal ( $M = (r, ph, r)$ ,  $|M| = l = 3$ , NOTEQUAL(0, 2)). In Figure 5.2 the partial routes stored in the *heap* in each step of the algorithm are displayed. First, the nearest neighbor to the starting point  $sp$ ,  $r_1$  is found and a new *firstPSR* is generated and put on the heap: ( $r_1$ ) with length 1. In step 2 route ( $r_1$ ) is fetched from the heap and modified according to a) and b) as in the PNE algorithm. Similarly, this process is repeated until the route on top of the heap follows the sequence  $M = (r, ph, r)$ .



the difference here from the PNE algorithm comes from the trimming part. For example in step 2, route  $(r_1, ph_1)$  is fetched from the heap and in a) the full SR  $(r_1, ph_1, r_1)$  is generated. In the trimming function, it is checked if the restaurants at positions 0 and 2 are equal. In case they are not the candidate route is initialized and placed on the heap, but in our case, they are equal and  $j$  is also the last index 2, which means that the next neighbor to  $ph_1$  is found and the alternate route  $(r_1, ph_1, r_2)$  with length 10 is generated and placed on the heap. Then some more PSR are generated, until in step 4  $(r_1, ph_2)$  again a full SR  $(r_1, ph_2, r_2)$  with length 7 is generated. The route is then trimmed and since the restaurants are not equal and also the route is shorter than the current candidate route, the candidate route is updated and the new SR is place on the heap. In step 5 the fetched route  $(r_1, ph_2, r_2)$  is a full SR, which satisfies the condition for the restaurant at indices 0 and 2 to not be equal, is returned as the optimal route.

Step	PSR $R : length(R)$
1	$(r_1 : 1)$
2	$(r_1, ph_1 : 3), (r_2 : 5)$
3	$(r_2 : 5), (r_1, ph_2 : 5), (r_1, ph_1, r_2 : 10)$
4	$(r_1, ph_2 : 5), (r_2, ph_2 : 7), (r_1, ph_1, r_2 : 10)$
5	$(r_1, ph_2, r_2 : 7), (r_2, ph_2 : 7), (r_1, ph_1, r_2 : 10)$

Table 5.2: Steps of the algorithm for NEO using the road network from Figure 2.1

### Correctness

Todo: Correctness

## 5.3 Or operator

### 5.3.1 Motivation

The or operator gives the user flexibility to express his need for different route alternatives. It represents the disjunction operator, usually present in query languages. In the context of a sequenced route query, the user can specify multiple categories or a list of categories, which can be disjoint. Then the query is responsible for finding the best route out of all the options that the user has specified. The best route is qualified based on length.

Suppose that a user poses the following query: first he has time to go to either a bank or a pharmacy, then he has a date in a movie theater and after that he plans to go to the restaurant. The proposed approach uses a modified PNE to generate an optimal result for this type of query.

### 5.3.2 Problem definition

In order to explain the or query, first we need to define what an OR sequence is:

**OR sequence:** An or sequence  $OR = (M_1, M_2, \dots, M_m)$  represents the disjunction of category sequences, such as  $M_1 = (c_1, c_2, \dots, c_l)$ . At least one of the category sequences, defined in this or sequence, must be present in the final result of the query.

The or query is defined as follows:

**Or query:** Given a sequence of OR sequences  $S = (OR_1, OR_2, \dots, OR_n)$  and a starting point  $sp$  in  $\mathbb{R}^2$   $Q(sp, S)$  is a Sequenced Route (SR) Query, which searches for the shortest (in terms of function *length*) sequenced route  $R$  that follows one of the possible permutations of the sequence  $S$ . For example  $P = (M_a, M_b, \dots, M_z)$  is a permutation of  $S$ , where  $M_a = (c_{a1}, c_{a2}, \dots, c_{al})$ ,  $M_b = (c_{b1}, c_{b2}, \dots, c_{bl})$  and  $M_z = (c_{z1}, c_{z2}, \dots, c_{zl})$  build a category sequence  $M = (c_{a1}, c_{a2}, \dots, c_{al}, c_{b1}, c_{b2}, \dots, c_{bl}, c_{z1}, c_{z2}, \dots, c_{zl})$ .

### 5.3.3 Proposed approach

The or operator is designed using the PNE approach, proposed in [5]. It progressively inspects each option  $M_i$  from the or sequences  $OR_i$  in  $S = (OR_1, OR_2, \dots, OR_n)$ , compares them and continues with the best one, based on length, until it reaches a full sequenced route.

### Algorithm

The algorithm (shown in 15) starts by initializing the heap, ordered by the length of the routes, and the first PSR (line 1 to 16). It then proceeds to inspect and modify the routes on the heap based on their length, until a SR is reached. As can be seen in line 2, a PSR is build with each  $M_i$  from the first or sequences  $OR_1$  in  $S = (OR_1, OR_2, \dots, OR_n)$ . The algorithm also checks for each  $M_i$  (line 5) if it contains a single category or a sequence of categories. In the first case, it finds the nearest neighbor in  $U_{M_i}$  to the starting point as the PNE algorithm would, otherwise it finds the nearest neighbor in  $U_{M_i[1]}$  to the starting point and initializes the list of categories  $PSR.categories$  for the  $PSR$ . From all these generated PSR the shortest one is chosen and put on the heap.

Modified PNE proceeds with examining the routes on the heap by  $index(PSR)$  and modifying them according to PNE.  $index(PSR)$  indicates the index of the last found or sequence  $OR_s$  in  $S = (OR_1, OR_2, \dots, OR_n)$  for the fetched  $PSR$ . It is a full SR, . When the current route on the heap is a full SR, where  $s = n$ , which indicates the last or sequence  $OR_n$ , then the optimal route has been found (line 21 to 24). Otherwise the algorithm modifies the current PSR according to cases a) and b) as in the PNE algorithm 9 (line 25 to 30).

**Algorithm 7:** orOperator**Input** :  $(sp, S = (OR_1, OR_2, \dots, OR_n))$ **Output:**  $R = (r_1, r_2, \dots, r_l)$ 


---

```

1 initialize heap;
2 foreach  $M_i$  in  $OR_1$  do Finding all the possible neighbors to the starting
   point
3   initialize shortestPSR;
4   // Building a new PSR with  $M_i$ 
5   if  $|M_i| = 1$  then
6     //  $M_i$  only contains one category
7     nearestNeighbour( $sp, U_{M_i}$ );
8     update shortestPSR;
9   else
10    //  $M_i$  is a sequence of categories
11    // The neighbor from the first category  $M_i[1]$ 
        is found and the rest of the categories
        from  $M_i$  are put into categories for the
        specific PSR
12    nearestNeighbour( $sp, U_{M_i[1]}$ );
13     $PSR.categories \leftarrow M_i[2..l]$ ;
14    update shortestPSR;
15  $firstPSR \leftarrow shortestPSR$ ;
16 place  $firstPSR$  on heap;
17 // At each iteration of PNE a PSR (partial
        sequenced route) is fetched and examined based
        on its length and it is checked
18 fetch a PSR from the heap;
19 //  $index(PSR)$  indicates the index of the last
        found or sequence  $OR_s$  in  $S = (OR_1, OR_2, \dots, OR_n)$ 
        for the fetched PSR. It is a full SR, when
         $s = n$ , which indicates the last or sequence
         $OR_n$ .
20 switch  $s = index(PSR)$  do
21   case  $s == n$  do
22     PSR is the optimal route;
23     return PSR;
24   case  $s \neq n$  do
25     // a)
26     modifyRouteA(PSR);
27     // b)
28     modifyRouteB(PSR);

```

---

In case a) 16 it is differentiated between a complete PSR and incomplete PSR. A complete PSR has an empty list of  $PSR.categories$ , which means that the next OR sequence can be examined (line 1 to 19). A PSR is build with each  $M_i$  from the or sequences  $OR_s$  in  $S = (OR_1, OR_2, \dots, OR_n)$ . The algorithm also checks for each  $M_i$  (line 6) if it contains a single category or a sequence of categories. In the first case, it finds the nearest neighbor to  $r_{|PSR|}$  in  $U_{M_i}$  as the PNE algorithm would (line 6 to 10), otherwise it finds the nearest neighbor to  $r_{|PSR|}$  in  $U_{M_i[1]}$  and initializes the list of categories  $PSR.categories$  for the  $PSR$  (line 10 to 16). From all these PSR the shortest one is chosen and put on the heap. For an incomplete PSR the next nearest neighbor to  $r_{|PSR|}$  in  $U_{PSR.categories[1]}$  is found (line 20 to 25). The indicator  $PSR.prevPosition$  for the PSR is also updated to indicate that in  $modifyRouteB(PSR)$  the k-th neighbor to the second to last PoI should be found. Trimming is also performed (see 10).

---

**Procedure** `modifyRouteA( $PSR$ )`


---

```

1 if  $PSR.categories$  is empty then
2   // We continue with next OR sequence
3   foreach  $M_i$  in  $OR_s$  do
4     initialize  $shortestPSR$ ;
5     // Building a new  $PSR$  with  $M_i$ 
6     if  $|M_i| = 1$  then
7       //  $M_i$  only contains one category
8       nearestNeighbour( $r_{|PSR|}, U_{M_i}$ );
9       update  $shortestPSR$ ;
10    else
11      //  $M_i$  is a sequence of categories
12      // The neighbor from the first category
13      //  $M_i[1]$  is found and the rest of the
14      // categories from  $M_i$  are put into  $categories$ 
15      // for the specific  $PSR$ 
16      nearestNeighbour( $r_{|PSR|}, u_{M_i[1]}$ );
17       $PSR.categories \leftarrow M_i[2..l]$ ;
18      update  $shortestPSR$ ;
19   $newPSR \leftarrow shortestPSR$ ;
20 else
21   // We continue to find the PoI of the next
22   // category in the  $PSR.categories$ 
23   nearestNeighbour( $r_{|PSR|}, U_{PSR.categories[1]}$ );
24   remove  $M_i[1]$  from  $PSR.categories$ ;
25   //  $PSR.prevPosition$ , when set to true indicates
26   // that in modifyRouteB( $PSR$ ) all the sequences
27   // in the OR sequence of the previous position
28   //  $OR_s$  should be traversed and checked again,
29   // otherwise the k-th neighbor to the second to
30   // last PoI is found
31    $PSR.prevPosition \leftarrow false$ ;
32   update  $newPSR$ ;
33 // Trimming is also done (see 10)
34 place  $newPSR$  on heap;

```

---

In case b) 17 it is checked if the indicator  $PSR.prevPosition$  for the  $PSR$  is set to *true* (line 1). If that is the case, it means, that the OR sequence of the previous

position  $OR_{s-1}$  should be examined again (line 1 to 19). A PSR is build with each  $M_i$  from the or sequences  $OR_{s-1}$  in  $S = (OR_1, OR_2, \dots, OR_n)$ . The algorithm also checks for each  $M_i$  (line 5) if it contains a single category or a sequence of categories. In the first case, it finds the kth nearest neighbor  $r_{|PSR|-1}$  in  $U_{M_i}$  as the PNE algorithm would (line 6), otherwise it finds the k-th nearest neighbor to  $r_{|PSR|-1}$  in  $U_{M_i[1]}$  and initializes the list of categories  $PSR.categories$  for the  $PSR$  (line 10 to 16). From all these PSR the shortest one is chosen and put on the heap. If the indicator  $PSR.prevPosition$  for the PSR is set ot *false* it means that the k-th nearest neighbor to  $r_{|PSR|}$  in  $U_{PSR.categories[1]}$  is found (line 20 to 25). The indicator  $PSR.prevPosition$  for the PSR is also updated to indicate that in  $modifyRouteB(PSR)$  the k-th neighbor to the second to last PoI should be found.

---

**Procedure** `modifyRouteB( $PSR$ )`


---

```

1 if  $PSR.prevPosition$  then
2   // We check the OR sequence of the previous
   position  $OR_{s-1}$ 
3   foreach  $M_i$  in  $OR_{s-1}$  do
4     initialize shortestPSR;
5     // Building a new  $PSR$  with  $M_i$ 
6     if  $|M_i| = 1$  then
7       //  $M_i$  only contains one category
8        $kNearestNeighbour(r_{|PSR|-1}, U_{M_i});$ 
9       update shortestPSR;
10    else
11      //  $M_i$  is a sequence of categories
12      // The neighbor from the first category
         $M_i[1]$  is found and the rest of the
        categories from  $M_i$  are put into categories
        for the specific  $PSR$ 
13       $kNearestNeighbour(r_{|PSR|-1}, U_{M_i[1]});$ 
14       $PSR.categories \leftarrow M_i[2..l];$ 
15      update shortestPSR;
16     $newPSR \leftarrow shortestPSR;$ 
17 else
18   // We find the k-th neighbor to the second to
   last PoI
19    $kNearestNeighbour(r_{|PSR|-1}, U_{M_{|PSR|}});$ 
20   update newPSR;
21 place  $newPSR$  on heap;

```

---

**Running example**

We describe the algorithm for the *or* operator using the example in Section 5.3.1, using the road network in Figure 2.1. The user wanted to visit either a bank or a pharmacy, then go to the movies and then to a restaurant (i.e.,  $S = (OR_1, OR_2, OR_3)$ ,  $|S| = n = 3$ ,  $OR_1 = ((b), (ph))$ ,  $OR_2 = ((mt))$ ,  $OR_3 = ((r))$ ). In Figure 5.3 the partial routes stored in the *heap* in each step of the algorithm are displayed. First, all routes from the starting point  $sp$  to all possible category sequences in OR sequence  $OR_1$  ( $b$ ) and ( $ph$ ) are generated. Since there is only one category the



simple case is executed, where the nearest neighbor is found. Routes  $(b_1)$  with length 2 and  $(ph_1)$  with length 3 are generated and compared and the second one is chosen, based on its length, and placed on the heap. In step 1 route  $(b_1)$  fetched and the nearest neighbor from the next OR sequence  $OR_2$  is found.  $OR_2$  only contains one category sequence with one category, therefore this is a simple case a), where the nearest neighbor is found. In b) the next nearest neighbor to the starting point from the OR sequence  $OR_1$  is found, which is  $ph_1$  with length 3, because  $b_2$  with length 4 is further apart. In step 5 a full route  $(b_1, mt_1, r_2)$  with length 9 is generated and placed on the heap as the candidate route. Then in step 6 another SR  $(ph_1, mt_1, r_2)$  with length 10 is generated, but it is longer than the candidate route, previously generated, so it gets discarded. Finally, the optimal route  $(b_1, mt_1, r_2)$  with length 9 is returned.

Step	PSR $R : length(r), index(R)$
1	$(b_1 : 2, 1)$
2	$(ph_1 : 3, 1), (b_1, mt_1 : 5, 2)$
3	$(ph_2 : 3, 1), (ph_1, mt_1 : 6, 2), (b_1, mt_1 : 5, 2)$
4	$(b_2 : 4, 1), (b_1, mt_1 : 5, 2), (ph_1, mt_1 : 6, 2), (ph_2, mt_1 : 7, 2)$
5	$(b_1, mt_1 : 5, 2), (ph_1, mt_1 : 6, 2), (ph_2, mt_1 : 7, 2), (b_2, mt_1 : 9, 2)$
6	$(ph_1, mt_1 : 6, 2), (ph_2, mt_1 : 7, 2), (b_1, mt_1, r_2 : 9, 3), (b_2, mt_1 : 9, 2)$
7	$(ph_2, mt_1 : 7, 2), (b_1, mt_1, r_2 : 9, 3), (b_2, mt_1 : 9, 2), (\cancel{ph_1, mt_1, r_2 : 10, 3})$
8	$(b_1, mt_1, r_2 : 9, 3), (b_2, mt_1 : 9, 2), (\cancel{ph_2, mt_1, r_2 : 11, 3})$

Table 5.3: Steps of the algorithm for OR using the road network from Figure 2.1

### 5.3.4 Baseline approach

A naive solution to find an optimal route with the or operator would be to run the PNE algorithm on all possible permutations of the query and to find the shortest route out of all. This is known as the baseline approach.

#### Correctness

Todo: Correctness

## 5.4 Order operator

### 5.4.1 Motivation

The order operator gives the user the opportunity to provide the algorithm with route alternatives that satisfy his needs, from which the best can be found according to length. In the context of a sequenced route query, the user can specify single, none or multiple categories out of a sequenced category list to be in a specific order. Then only these categories are found in the form of a sequenced route query (SRQ) while the others are inspected and prioritized algorithmically. The query is responsible for finding the best route, based on length, out of all possible permutations of the category sequence.

Suppose that a user poses the following query: he wants the place he visits to be a restaurant, before and after that he wants to visit a bank and a pharmacy, but it is not important for him to visit one before the other. So the query only knows that restaurant must be visited second. The proposed approach in this chapter uses a modified PNE to generate an optimal result for this type of query.

### 5.4.2 Problem definition

First we need to define what an ORDER sequence is:

**ORDER sequence:** An order sequence  $ORDER = (i_1, i_2, \dots, i_k)$ , with  $k \leq l$  and  $1 \leq i_i \leq l$  is a sequence of indices in a category sequence  $M_1 = (c_1, c_2, \dots, c_l)$ . They represent the categories at the given indices and indicate that these categories should remain in the given places in this category sequence  $M$ . The PoIs from categories, of which no indices are specified in the ORDER sequence can be placed at any other index from the remaining indices for the not ordered categories.

The order query is then defined as follows:

**Order query:** Given a sequence of categories  $M = (c_1, c_2, \dots, c_l)$ , a starting point  $sp$  in  $\mathbb{R}^2$  and an ORDER sequence  $ORDER = (i_1, i_2, \dots, i_k)$ ,  $Q(sp, M, ORDER)$  is a Route Query, which searches for the shortest (in terms of function *length*) sequenced route  $R$  that follows partially  $M$  as defined by the ORDER sequence.

### 5.4.3 Proposed approach

The order operator is designed using the PNE approach, proposed in [5]. It keeps a sequence of the not ordered categories, which is the complement of the ORDER

sequence:  $NOTORDERED = \overline{ORDER}$ , and inspects progressively each category option for the indices out of the NOTORDERED sequence, compares them and continues with the best one, based on length, until it reaches a full sequenced route. For the categories, the indices of which are in the ordered list, the algorithm finds them according to PNE. The NOTORDERED sequence is accordingly updated for every PSR, as it is specific to a route. Each time a PSR is build with one of the not ordered categories, it is removed from the NOTORDERED sequence for this specific route.

### Algorithm

The algorithm (shown in 18) starts by initializing the heap, ordered by the length of the routes, and the NOTORDERED sequence, which is simply the complement of the ordered category list (line 1, 2). For building the first PSR (line 3 to 14), the algorithm checks if the first index is contained in the ORDER sequence and if that is the case it finds the nearest neighbor to the starting point from the first category, otherwise it builds partial routes with all possible categories for the first position, which are all the categories in the NOTORDERED list. From all these PSR the shortest one is chosen and put on the heap. It then proceeds to inspect and modify the routes on the heap based on their length, until a SR is reached.

The algorithm proceeds with examining the routes on the heap by size and modifying them according to PNE. When the current route on the heap is a full SR, then the optimal route has been found. When the current route on the heap is a full SR, where  $s = l$ , then the optimal route has been found (line 18 to 21). Otherwise the algorithm modifies the current PSR according to cases a) and b) as in the PNE algorithm 9 (line 22 to 27).

---

**Algorithm 8:** orderOperator

---

**Input** :  $(sp, M = (c_1, c_2, \dots, c_l), ORDER = (i_1, i_2, \dots, i_k))$ **Output:**  $R = (r_1, r_2, \dots, r_l)$ 

```

1 initialize heap;
2 initialize NOTORDERED =  $\overline{ORDER}$ ;
3 if ORDER contains 1 then
4   | firstPSR = nearestNeighbour(sp,  $U_{M_1}$ );
5 else
6   | foreach i in NOTORDERED do Finding all the possible neighbors
   |   to the starting point
7     | initialize shortestPSR;
8     | // Building a new PSR with  $c_i$ 
9     | nearestNeighbour(sp,  $U_{M_i}$ );
10    | update shortestPSR;
11    | firstPSR  $\leftarrow$  shortestPSR;
12 place firstPSR on heap;
13 // At each iteration of PNE a PSR (partial
   | sequenced route) is fetched and examined based
   | on its length and it is checked
14 fetch a PSR from the heap;
15 switch s = size(current) do
16   | case s == l do
17     | PSR is the optimal route;
18     | return PSR;
19   | case s  $\neq$  l do
20     | // a)
21     | modifyRouteA(PSR);
22     | // b)
23     | modifyRouteB(PSR);

```

---

In case a) 19 it is checked if the category to be found next is part of the ORDER sequence. If this is the case it finds the nearest neighbor to the last PoI in the current PSR  $r_{s-1}$  from the category set  $U_{M_s}$ , otherwise it finds all nearest neighbors to  $r_{s-1}$  from the categories in the NOTORDERED list  $M_i$  and builds multiple partial routes, which are then compared and the shortest one is chosen and put on the heap. Trimming is also performed (see 10).

---

**Procedure** modifyRouteA( $PSR$ )

---

```

1 if ORDER contains  $s$  then
2   |  $newPSR = \text{nearestNeighbour}(r_{s-1}, U_{M_s});$ 
3 else
4   | foreach  $i$  in NOTORDERED do Finding all the possible neighbors
      | out of the remaining categories in the not ordered list
5     |  $initialize\ shortestPSR;$ 
6     | // Building a new  $PSR$  with  $c_i$ 
7     |  $\text{nearestNeighbour}(r_{s-1}, U_{M_i});$ 
8     |  $update\ shortestPSR;$ 
9   |  $newPSR \leftarrow shortestPSR;$ 
10  |  $update\ PSR.NOTORDERED;$ 
11 // Trimming is also done (see 10)
12 place  $newPSR$  on heap;

```

---

In case b) 20 an alternative PSR with the  $k$ th nearest neighbor to  $r_{s-2}$  is found. The algorithm checks again if the category to be found next is part of the ORDER sequence. If this is the case it simply finds the  $k$ th nearest neighbor to  $r_{s-2}$  from the category set  $U_{M_{s-1}}$ , otherwise it finds all nearest neighbors to  $r_{s-2}$  from the categories in the NOTORDERED list  $M_i$  and builds multiple partial routes, which are then compared and the shortest one is chosen and put on the heap.

---

**Procedure** modifyRouteB( $PSR$ )
 

---

```

1 if  $ORDER$  contains  $s - 1$  then
2   |  $newPSR = kNearestNeighbour(r_{s-2}, U_{M_{s-1}});$ 
3 else
4   | foreach  $i$  in  $NOTORDERED$  do Finding all the possible neighbors
      | out of the remaining categories in the not ordered list
5     |  $initialize\ shortestPSR;$ 
6     | // Building a new  $PSR$  with  $c_{i-1}$ 
7     |  $kNearestNeighbour(r_{s-2}, U_{M_{i-1}});$ 
8     |  $update\ shortestPSR;$ 
9   |  $newPSR \leftarrow shortestPSR;$ 
10  |  $update\ PSR.NOTORDERED;$ 
11  $place\ newPSR\ on\ heap;$ 

```

---

**Running example**

We describe the algorithm for the order operator using the example in Section 5.4.1, using the road network in Figure 2.1. The user wanted to visit the restaurant at second place in his route and also visit a bank and a pharmacy (i.e.,  $M = (b, r, ph)$ ,  $|M| = l = 3$ ,  $ORDER = (1)$ ). In Figure 5.4 the partial routes stored in the *heap* in each step of the algorithm are displayed. First, the *notordered* list is initiated:  $[b, ph]$ . Since the first position of the category sequence in the query is not fixed, routes from the starting point  $sp$  with both categories in the *notordered* list are generated:  $b_1$  with length 2 and  $ph_1$  with length 3. Route  $b_1$  is shorter and is therefore placed on the heap. In step one, we have the case, where the searched PoI is at a fixed position 1. In this case in a) the nearest neighbor to  $b_1$  from type restaurant  $r_2$  is found, while in b) the next nearest neighbor to the starting point types bank and pharmacy are found and compared again. In step 5 the first SR  $(ph_1, r_1, b_1)$  with length 8 is generated and placed as a candidate route on the heap.

This process continues until in step 11 the optimal route  $(ph_2, r_2, b_2)$  with length 6 is returned.

Step	PSR $R : length(r), r.notordered$
1	$(b_1 : 2, [ph])$
2	$(ph_1 : 3, [b]), (b_1, r_2 : 5, [ph])$
3	$(ph_2 : 3, [b]), (ph_1, r_1 : 5, [b]), (b_1, r_2 : 5, [ph])$
4	$(b_2 : 4, [ph]), (ph_2, r_2 : 5, [b]), (ph_1, r_1 : 5, [b]), (b_1, r_2 : 5, [ph])$
5	$(ph_1, r_1 : 5, [b]), (b_2, r_2 : 5, [ph]), (ph_2, r_2 : 5, [b]), (b_1, r_2 : 5, [ph])$
6	$(b_2, r_2 : 5, [ph]), (ph_2, r_2 : 5, [b]), (b_1, r_2 : 5, [ph]), (ph_1, r_1, b_1 : 8, [])$
7	$(b_1, r_2 : 5, [ph]), (b_2, r_2, ph : 5, [ph]), (ph_2, r_2 : 5, [b]), (b_2, r_2, ph_2 : 7, []),$ <del><math>(ph_1, r_1, b_1 : 8, [])</math></del> , $(b_2, r_1 : 9, [ph]), (ph_1, r_2 : 10, [b])$
8	$(b_2, r_2 : 5, [ph]), (ph_2, r_2 : 5, [b]), (b_1, r_1 : 5, [ph]), (b_2, r_2, ph_2 : 7, []),$ <del><math>(b_1, r_2, ph_2 : 7, [])</math></del> , $(b_2, r_1 : 9, [ph]), (ph_1, r_2 : 10, [b])$
9	$(b_1, r_1 : 5, [ph]), (b_2, r_2 : 5, [ph]), (ph_2, r_2, b_2 : 6, []),$ <del><math>(b_2, r_2, ph_2 : 7, [])</math></del> , $(ph_2, r_1 : 7, [b]), (b_2, r_1 : 9, [ph]), (ph_1, r_2 : 10, [b])$
10	$(b_2, r_2 : 5, [ph]), (ph_2, r_2, b_2 : 6, []),$ <del><math>(b_1, r_1, ph_1 : 7, [])</math></del> , $(ph_2, r_1 : 7, [b]), (b_2, r_1 : 9, [ph]), (ph_1, r_2 : 10, [b])$
11	$(ph_2, r_2, b_2 : 6, []), (ph_2, r_1 : 7, [b]), (b_2, r_1 : 9, [ph]), (ph_1, r_2 : 10, [b])$

Table 5.4: Steps of the algorithm for ORDER using the road network from Figure 2.1

#### 5.4.4 Baseline approach

A naive solution, similar to the one with the order operator in Chapter 5.3.4, to find an optimal route with the order operator would be to run the PNE algorithm on all possible permutations of the query and to find the shortest route out of all. This is known as the baseline approach.

#### Correctness

Todo: Correctness

## Chapter 6

# Experimental studies

**Graph model:** The road network or also known as spatial network is modeled as weighted graph where the crossroads are represented by nodes and roads are represented by the edges connecting the nodes. The weights on the edges in this specific research problem are the distances between the nodes on the edges. The distance between any two points can be found by summing up the lengths of the edges that belong to the shortest path between the two points.

**Dataset:** The graph used to conduct the experiments on is constructed using Berlin's spatial datasets from [1], structured in separate CSV files for the crossroads, roads and points of interest. For the implementation of the operators the datasets are imported into a graph structure of nodes and edges, where each node has a unique id, its latitude and longitude and a list of PoIs that have been mapped to it and each edge has a source and destination node and the distance between the two nodes in kilometers as parameters. Each PoI is mapped to the nearest crossroad and has a unique id, a type, its latitude and longitude and the distance to the node it is mapped to.

The map used for the experiments is the road network of Berlin, with 428769 crossroad nodes, 504229 road edges, 5548 PoIs and 7 category types: restaurant, coffee shop, atms/bank, movie theater, pharmacy, pubs/bar, gas station (see 6.1).



<i>Points</i>	<i>Size</i>	<i>Frequency</i>
Restaurants	2081	High
Coffee shops	1002	
Pubs and bars	958	
Atms/Banks	597	Middle
Pharmacies	589	
Gas stations	180	Low
Movie theaters	141	

Table 6.1: PoIs in Berlin's dataset

**Technical details:** The experiments were performed on AMD Opteron Processor 6212 and with 2,60 GHz and Intel Xeon E5-2630 processor with 2.40GHz and respectively 16 CPUs and 128 GB RAM. The experiments for each parameter type were executed on 1000 queries with randomly selected starting points and the average of the results is reported.

Several experiments were conducted to evaluate the performance of the proposed algorithms. The evaluation criteria, which relate to all the operators, presented in the thesis are the following: (1) processing time (in milliseconds), (2) total number of heap fetches and (3) maximum heap size, representing the work space (WS) of the method.

## 6.1 Equality operator

The equality operator was evaluated with respect to the effect of following 3 parameters: (1) query length (cardinality of the category sequence  $|M|$ ), (2) frequency of the categories in place of the equal indices  $i, j$  and (3) distance between the equal indices  $i, j$  in the category sequence  $M$ .

In the first set of experiments, shown in Figure 6.1 a), b), c), the equality operator was evaluated in terms of query length, which varies from 3 to 7. Queries with length less than 3 would be immediately solved with PNE, which is why we do not consider them in these experiments. As we can see in Figure 6.1 a), the query processing time increases proportionately to the query length. Figure 6.1 a) also shows what portion of the total processing time of the proposed approach belongs to executing PNE in the first step of the algorithm. And as expected, both PNE's time and the proposed approach's time is increasing with the query length. Figure 6.1 b), c) follow the same trend of a). As query length increases, number of heap fetches and maximum heap size also increase.

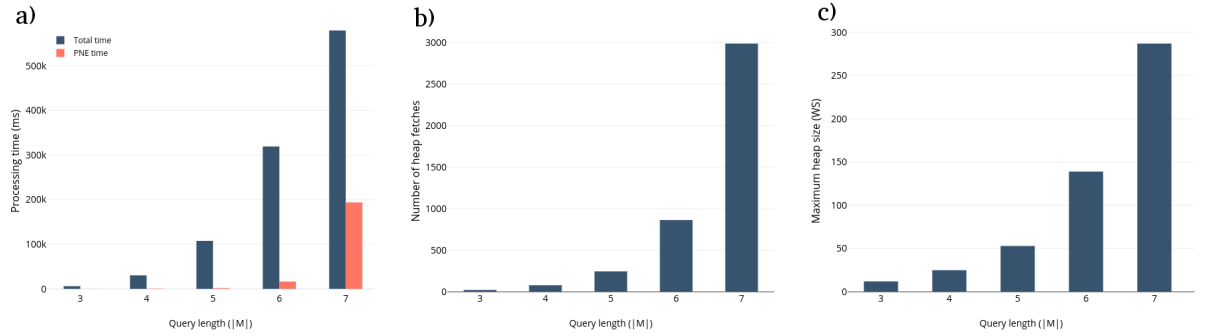


Figure 6.1: Equality operator - query length experiments

In the next set of experiments, shown in Figure 6.2 a), b), c), the equality operator was evaluated in terms of the frequency of the categories in place of the equal indices  $i, j$ . Frequency relates to the size of each PoI dataset (see Table 6.1) and is categorized into low, middle and high, for a query length of 5. Figure 6.2 b), c) follow the same trend as the experiments for query length. As frequency of the categories, which are selected to be equal, increases, the processing time, number of heap fetches and heap maximum size increase proportionately. This can be explained with the fact that having more points in the PoI dataset of the equal categories increases the search space of the algorithm and respectively more partial routes are being generated, which increases the heap size, number of heap fetches and logically in turn the processing time.

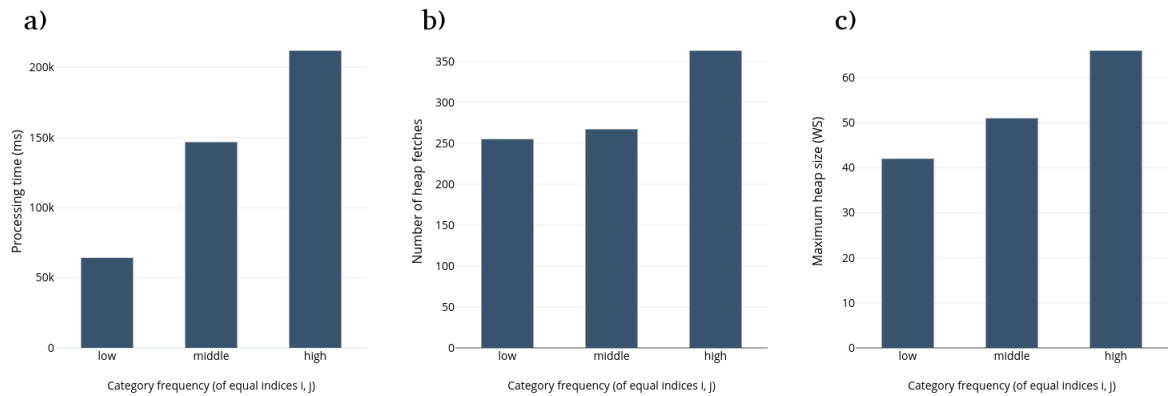


Figure 6.2: Equality operator - category frequency experiments

In the third set of experiments, shown in Figure 6.3 a), b), c), the equality operator

was evaluated in terms of the distance between the equal indices  $i, j$  in the category sequence  $M$ , which varies from 1 to 3, for a query length of 5. When the distance between the equal indices is 0, the result is always found with PNE, therefore we do not consider distance 1 in the experiments. As distance of the categories, which are selected to be equal, increases, the processing time, number of heap fetches and heap maximum size increase proportionately. This stems from the fact that by increasing the distance, the probability that the PoIs at indices  $i$  and  $j$  would be equal decreases, therefore less of the routes are found in the first step of the algorithm with PNE. This in turn causes the algorithm to continue with the heuristic approach in order to find an optimal route, which increases the processing time, number of heap fetches and also the work space (maximum heap size).

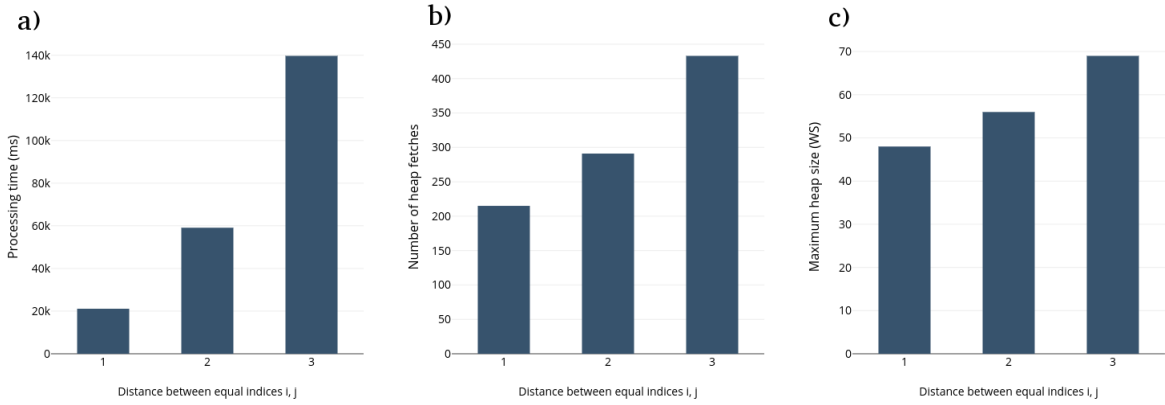


Figure 6.3: Equality operator - distance between equal indices experiments

Finally, the last set of experiments, shown in Figure 6.3 a), b), c), compare the baseline approach with the proposed approach in terms of query length. It can be seen that the proposed approach outperforms the baseline approach for all values of the query length. Also with increase in query length, the processing time, number of heap fetches and maximum heap size of the baseline approach increase with a rate that is more of that of the proposed approach, in 6.3 a) for query length 7 the processing time of the baseline approach is so long that it exceeds the graphic's range and is not fully depicted.

In conclusion, the proposed approach outperforms the baseline approach by a significant amount and it performs as expected in all parameters.

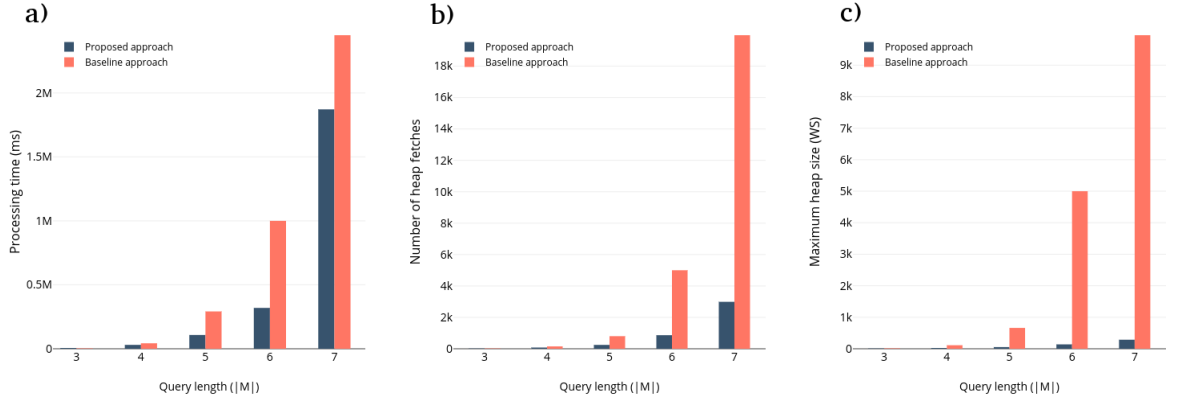


Figure 6.4: Equality operator - comparison between the proposed approach and the baseline approach

## 6.2 Not-Equality operator

The not-equality operator was also evaluated with respect to the effect of following 3 parameters: (1) query length (cardinality of the category sequence  $|M|$ ), (2) frequency of the categories in place of the equal indices  $i, j$  and (3) distance between the equal indices  $i, j$  in the category sequence  $M$ .

In the first set of experiments, shown in Figure 6.5 a), b), c), the not-equality operator was evaluated in terms of query length, which varies from 3 to 7. As we can see in Figure 6.5 a), the query processing time increases proportionately to the query length. Figure 6.5 b), c) follow the same trend of a). As query length increases, number of heap fetches and maximum heap size also increase.

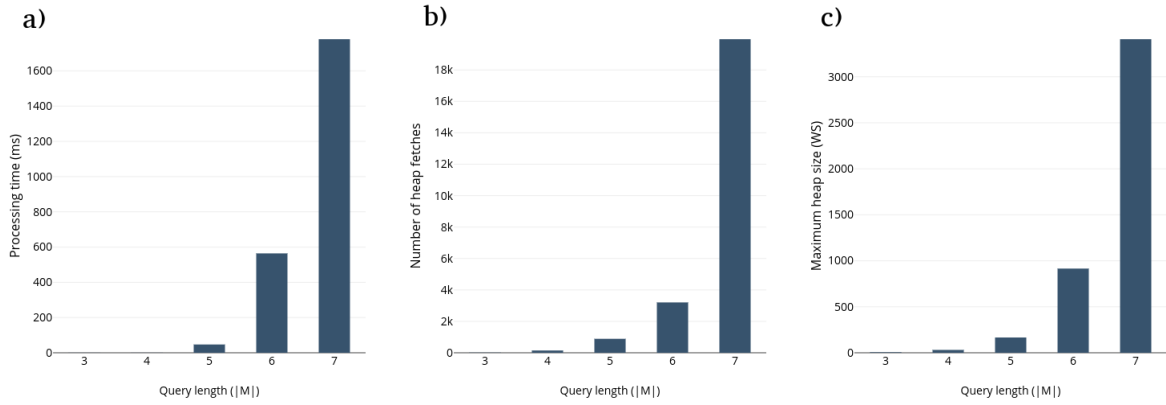


Figure 6.5: Not-equality operator - query length experiments

In the second set of experiments, shown in Figure 6.6 a), b), c), the equality operator was evaluated in terms of the frequency of the categories in place of the equal indices  $i, j$ , which can be low, middle and high, for a query length of 5. Here we can see more interesting results than with the equality operator. The low frequency has higher results on all parameters than the middle frequency. This can be explained with the fact that when the categories which have to not be equal are less frequent, then the possibility of PNE reaching a route with different PoIs at places of the not equal categories is lower, therefore the not-equality algorithm searches for longer for not equal PoIs, compared to when the category has a middle frequency. And when the frequency is high, if PNE doesn't directly find a route with equal PoIs then the not-equality algorithm must inspect more points, therefore generates more routes and the time increases significantly. Figure 6.6 b), c) follow the same trend as processing time.

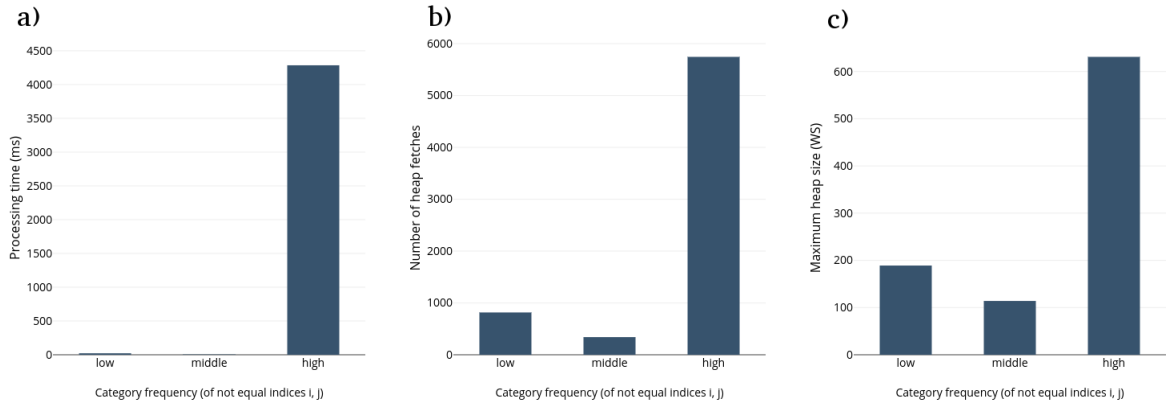


Figure 6.6: Not-equality operator - category frequency experiments

In the third set of experiments, shown in Figure 6.7 a), b), c), the equality operator was evaluated in terms of the distance between the equal indices  $i, j$  in the category sequence  $M$ , which varies from 0 to 3, for a query length of 5. Here we can also see more interesting results than with the equality operator. When the distance between the equal indices is 0, the result, usually found with PNE, always delivers equal points at indices  $i$  and  $j$ . Therefore the algorithm for the not-equality operator has to inspect more points in order to find the optimal route, where the PoIs at indices  $i$  and  $j$  are not equal to each other. This increases the search space and in turn the number of heap fetches, maximum heap size and the processing time increase as well. For distances 1, 2, 3 no obvious argumentation can be applied, because here we can not judge the possibility for equal PoIs found with PNE objectively. Nevertheless, all three performance parameters - processing time, number of heap fetches and maximum heap size, follow the same trend and increase proportionately to each other.

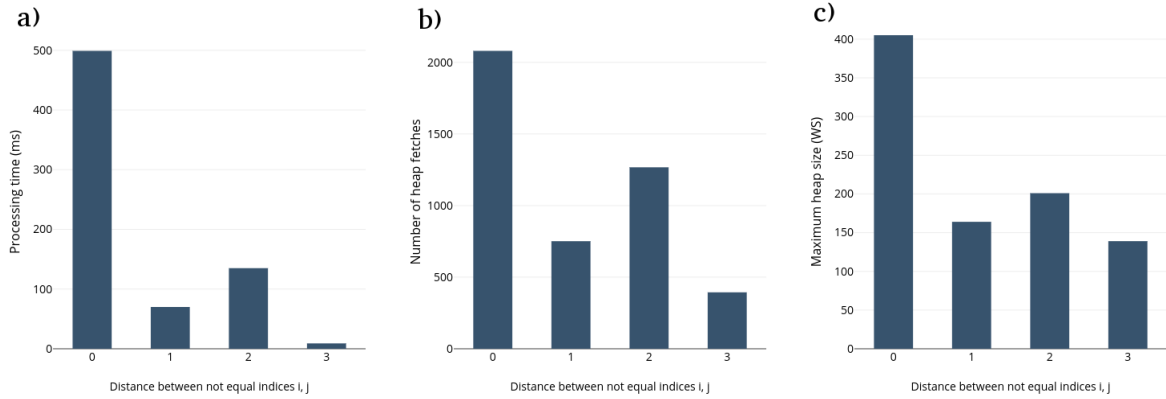


Figure 6.7: Not-equality operator - distance between not equal indices experiments

## 6.3 Or operator

The or operator was evaluated with respect to the type of number of operands, for a default query length of 5. Three different types of queries were issued, where we changed the type and number of or operands in the first  $OR_1$  sequence of the query, while the other four OR sequences only contained one category sequence with a single category. For 2 simple operands the first OR sequence contained two category sequenced with one single category each, for 3 simple operands the first OR sequence contained three category sequenced with one single category each and for 2 complex operands the first OR sequence contained two complex category sequences with 2 categories in each. In this way the complexity of the problem was gradually increased to see how the baseline approach compares to proposed approach of the algorithm. Figure 6.8 a), b), c) shows that the processing time, number of heap fetches and maximum heap size increase proportionately with the complexity of the query. As seen from the experiments the proposed approach is also by magnitudes faster and also more efficient in terms of heap size, as the complexity of the query increases.

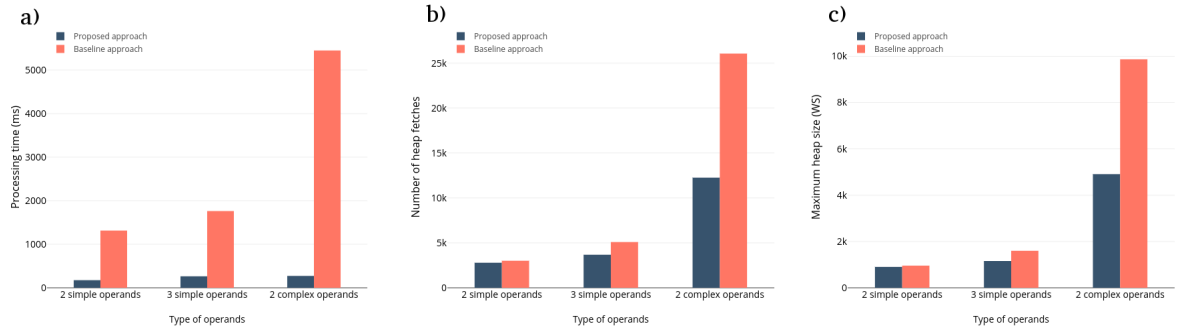


Figure 6.8: Or operator - type and number of operands experiments

## 6.4 Order operator

The order operator was evaluated with respect to the number of fixed positions in a default query length of 5. The number ranges between 0 and 3. When the number of fixed positions is 4 or 5, the problem can be solved with simple PNE, therefore we do not consider these numbers in the experiments. The complexity of the problem is gradually decreased to see how the baseline approach compares to proposed approach of the algorithm. Figure 6.9 a), b), c) shows that the processing time, number of heap fetches and maximum heap size decrease proportionately with the complexity of the query. As seen from the experiments the proposed approach is also by magnitudes faster and also more efficient in terms of heap size.

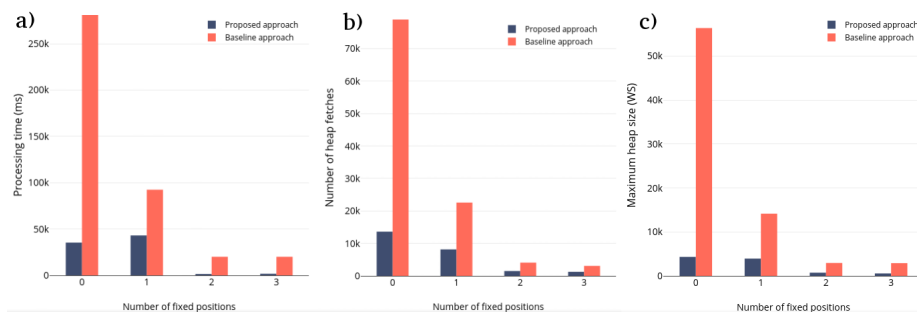


Figure 6.9: Order operator - number of fixed positions experiments



## 6.5 Evaluation

---

Todo: Evaluation

## Chapter 7

### Conclusion and Future work

I studied the different types of route queries, that are currently present in the research, and I identified the lack of a query language designed for the user's specific needs for flexibility when it comes to route queries. In order to attempt to fill this gap, I proposed four operators, which are specifically designed for route queries in metric spaces and the prime factor upon which routes are quantified is length. We first presented the equality operator, which was designed using the PNE approach [5] and a heuristic to reduce the search space. We showed through evaluation experiments that the proposed approach outperforms the baseline approach in all of the experiment parameters. Next, we introduced the not-equality operator as extension to the equality operator. For this operator we modified the PNE algorithm in order to get the desired result. Furthermore, we presented the or operator, which strives to give the user maximum flexibility when it comes to building a multiple-option route query. For this operator we extended the PNE approach to work with multiple query options simultaneously and when we compared with the baseline approach, it proved to perform significantly better, especially when many or operands are presents. Last but not least, we designed the order operator, which gives the user the ability to construct partially or even fully not sequenced route query. This approach was also designed similarly to the or operator by extending the PNE approach to handle multiple query options at once. When comparing with the baseline approach, we concluded that the proposed approach performs exponentially better than the trivial solution whenever the number of ordered elements decreases.

With these finding in mind, I consider my work to has successfully delivered four query language operators that could be implemented and used in location based services. It is important to note that the mentioned operators are definitely not a complete set of query language operators, but they represent the four ones, that

have proved to be the most desired in query language overall and therefore fulfill the user requirements the most. Nevertheless, while researching the topic of route queries, we came up with multiple ideas for operators that could be further researched and implemented. Such operator is for example the hops operator, with which the user can explicitly define how many location visits he wants to make between two categories in the category sequence. This operator is very similar to the order operator and could be designed similarly. Furthermore, an operator could be developed, with the help of which the user can specify necessary categories, which must be present in the final result. Considering this, the query route would only contain the PoIs of unnecessary categories, if these are situated on the way between the necessary points and the route's length does not increase with by adding them. Although still useful as a separate operator, the user could also achieve the same with our already developed or operator.

Another ideas for operators, which are targeted more towards the semantic hierarchy of the categories in the user-specified category sequence, could be the and and not operators. These two operators could be applied to specific categories in the user query's category sequence and could be useful in the case that a single PoI has many category types. For example of the and operator, a user may want to go to a cafe, that is also a restaurant, or in the case of the not operator, he may want to visit a restaurant, which is also specifically not categorized as a coffee shop.

All of these mentioned operators could be also based on the PNE approach that we used for the four operator in this thesis. But another solution could be to expand on the *Skyline Sequenced Route Query* (SkySR) [2]. This method searches for routes based on the Skyline concept, which entails finding routes that are not worse than any other routes in terms of their scores - route length and semantic similarity. This could be another alternative to give more flexibility to the user by making use of the semantic similarity of PoIs' categories. An operator that could be useful in this case is the perfection operator, applied to categories in the category sequence. With this operator, a user can specifically force the Skyline algorithm to match the category to which the operator has been applied perfectly in terms of semantic similarity. Finally, there is probably many other operators that would come up with further scientific work and research on the topic of route queries and the ones we summarize here are only our suggestions to the topic.

In conclusion, I think that with the development of four operators for the route query language we have successfully contributed to this field of research. We have also managed to identify linked topics for further study and to make recommendations on how to expand the query language.

# List of Figures

2.1	A network with four different types of point sets . . . . .	5
6.1	Equality operator - query length experiments . . . . .	46
6.2	Equality operator - category frequency experiments . . . . .	46
6.3	Equality operator - distance between equal indices experiments . .	47
6.4	Equality operator - comparison between the proposed approach and the baseline approach . . . . .	48
6.5	Not-equality operator - query length experiments . . . . .	49
6.6	Not-equality operator - category frequency experiments . . . . .	50
6.7	Not-equality operator - distance between not equal indices exper- iments . . . . .	51
6.8	Or operator - type and number of operands experiments . . . . .	52
6.9	Order operator - number of fixed positions experiments . . . . .	52

# List of Tables

1.1	Abbreviations . . . . .	3
3.1	Notations . . . . .	10
5.1	Steps of the algorithm for EO using the road network from Figure 2.1 . . . . .	22
5.2	Steps of the algorithm for NEO using the road network from Figure 2.1 . . . . .	29
5.3	Steps of the algorithm for OR using the road network from Figure 2.1 . . . . .	37
5.4	Steps of the algorithm for ORDER using the road network from Figure 2.1 . . . . .	43
6.1	PoIs in Berlin's dataset . . . . .	45

# List of Algorithms

-	Function heuristic( $R$ ) . . . . .	15
1	equalityOperator() . . . . .	15
-	Procedure dummySR( <i>optimalRoute</i> ) . . . . .	16
2	modifiedPNE returns Route . . . . .	17
-	Procedure caseOne . . . . .	18
-	Procedure caseTwo . . . . .	18
-	Procedure caseThree . . . . .	19
-	Procedure caseFour . . . . .	19
3	PNE [5] . . . . .	20
-	Procedure trim( $PSR$ ) . . . . .	20
4	equalityOperator-baseline . . . . .	22
5	modifiedPNE-baseline returns Route . . . . .	24
6	notEqualityOperator . . . . .	27
-	Procedure trim( $PSR$ ) . . . . .	28
7	orOperator . . . . .	32
-	Procedure modifyRouteA( $PSR$ ) . . . . .	34
-	Procedure modifyRouteB( $PSR$ ) . . . . .	36
8	orderOperator . . . . .	40
-	Procedure modifyRouteA( $PSR$ ) . . . . .	41
-	Procedure modifyRouteB( $PSR$ ) . . . . .	42

# Bibliography

- [1] E. Ahmadi and M.A. Nascimento. Datasets of roads, public transportation and points-of-interest in Amsterdam, Berlin and Oslo. In: <https://sites.google.com/uAlberta.ca/nascimentodatasets/>, 2017.
- [2] Xuegang Huang and Christian S. Jensen. In-route skyline querying for location-based services. Department of Computer Science, Aalborg University, Denmark.
- [3] Jiajie Xu<sup>4</sup> Zhiming Ding Jian Dai, Chengfei Liu. On personalized and sequenced route planning. Institute of Software, Chinese Academy of Sciences, Beijing, China, University of Chinese Academy of Sciences, Beijing, China, Department of Computer Science and Software Engineering, School of Software and Electrical Engineering, Faculty of Science, Engineering and Technology, Swinburne University of Technology, Melbourne, Australia, School of Computer Science and Technology, Soochow University, Suzhou, China, School of Computer Science, Beijing University of Technology, Beijing , China.
- [4] Stefan Funke Jochen Eisner. Sequenced route queries: Getting things done on the way back home. Universitat Stuttgart, Institut für Formale Methoden der Informatik.
- [5] Mehdi Sharifzadeh and Cyrus Shahabi Mohammad Kolahdouzan. The optimal sequenced route query. Computer Science Department, University of Southern California.
- [6] Yasuhiro Fujiwara Makoto Onizuka Yuya Sasaki, Yoshiharu Ishikawa. Sequenced route query with semantic hierarchy. Graduate School of Information Science and Technology, Osaka University, Osaka, Japan, Graduate School of Information Science, Nagoya University, Nagoya, Japan, NTT Software Innovation Center, Tokyo, Japan.