Performed by: Vipul Jadhav

Assignment 8

Task: Create three Git repositories and establish dedicated branches in each: 2026Q1 in Repository 1, 2026Q2 in Repository 2, and 2026Q3 in Repository 3. Add an index.html file in each branch. Configure a Jenkins environment with one master node and two slave nodes, and create three Jenkins jobs, each linked to its respective repository and branch. Set up GitHub webhooks so that any modification to the index.html file automatically triggers the corresponding Jenkins job. The deployments should be distributed as follows: 2026Q1 to the Jenkins Master node, 2026Q2 to Slave Node 1, and 2026Q3 to Slave Node 2.

Steps:

1. Used the same repositories from assignment number 3 in which there is 2026Q1 in Repository 1, 2026Q1 in Repository 2, and 2026Q3 in Repository 3 are present. And in each repo index.html file is present

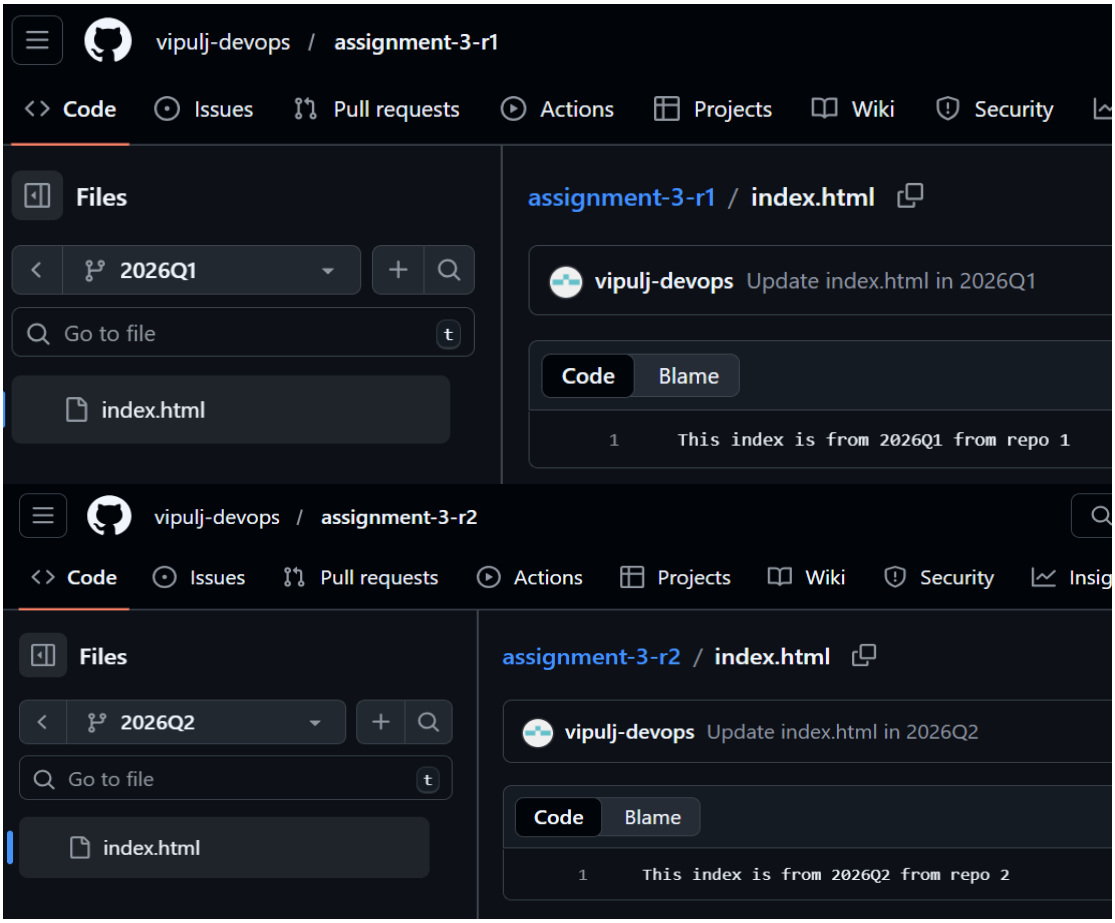

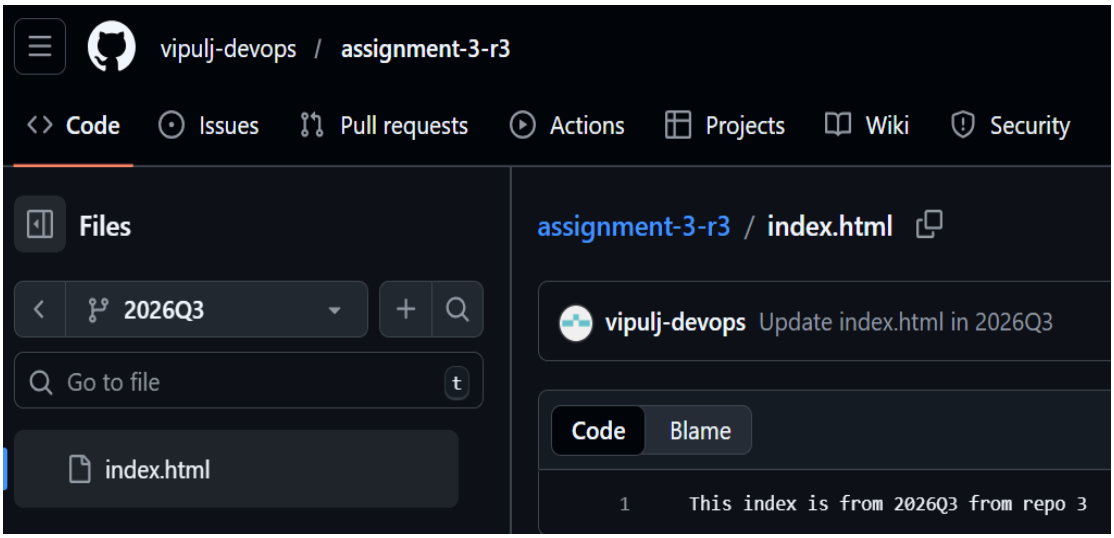

2. Created GitHub token using secrete text credential to smoothly access repositories from GitHub.

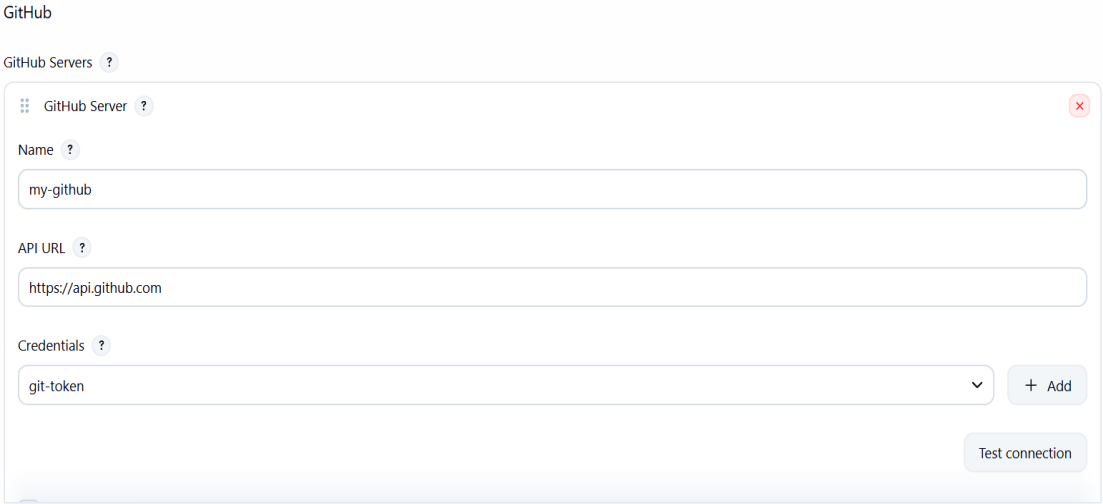

3. In the repository setting of each repository we configured webhook for each repository

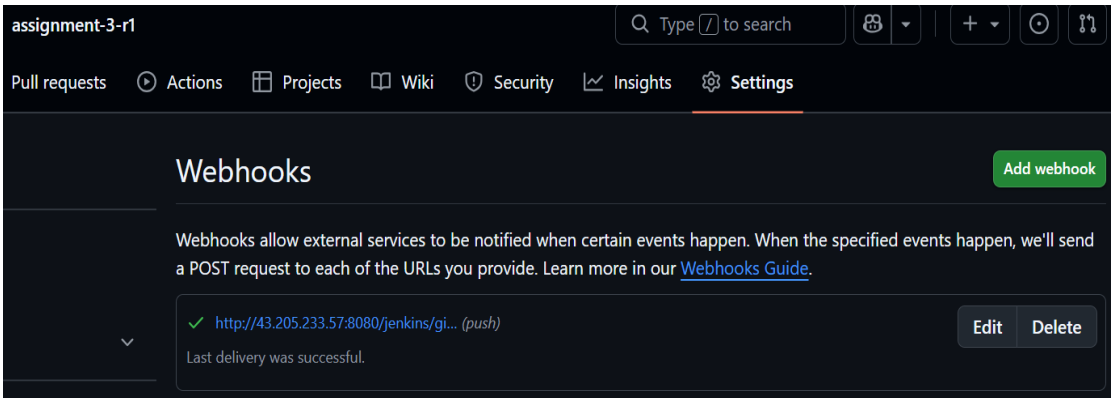

4. Created 3 different instances, One master instance and two slave instances

jenkins-master	i-0cb48a18624a4b8d7	Running	t3.micro	3/3 checks passed	View alarms +	ap-south-1a
slave1-repo2	i-0534acd673fe04b92	Running	t3.micro	3/3 checks passed	View alarms +	ap-south-1a
slave2-repo3	i-02ac9e95aa217fe30	Running	t3.micro	3/3 checks passed	View alarms +	ap-south-1a

5. Creating slave 1 node and in the same way created slave 2 node also

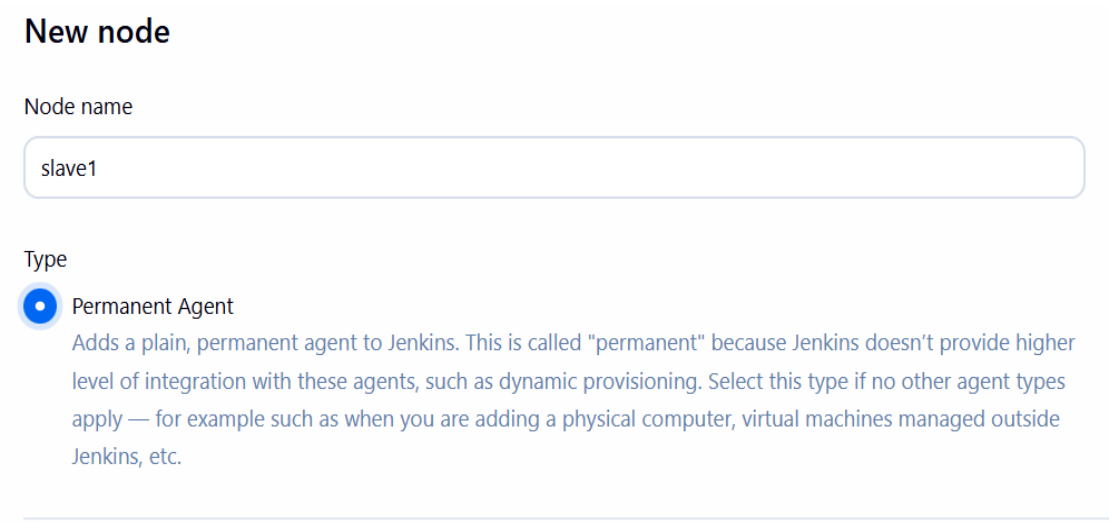

6. Created remote root directory in instances and selected same remote root directory in "Remote root directory" section in slave configuration section

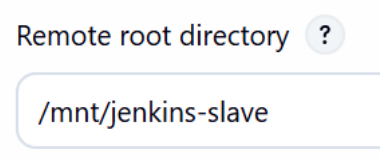

7. selected label slave 1 for slave 1 node and slave 2 for slave 2 node



8. Selected usage as "Use this node as much as possible"



9. Created credentials as username with private key

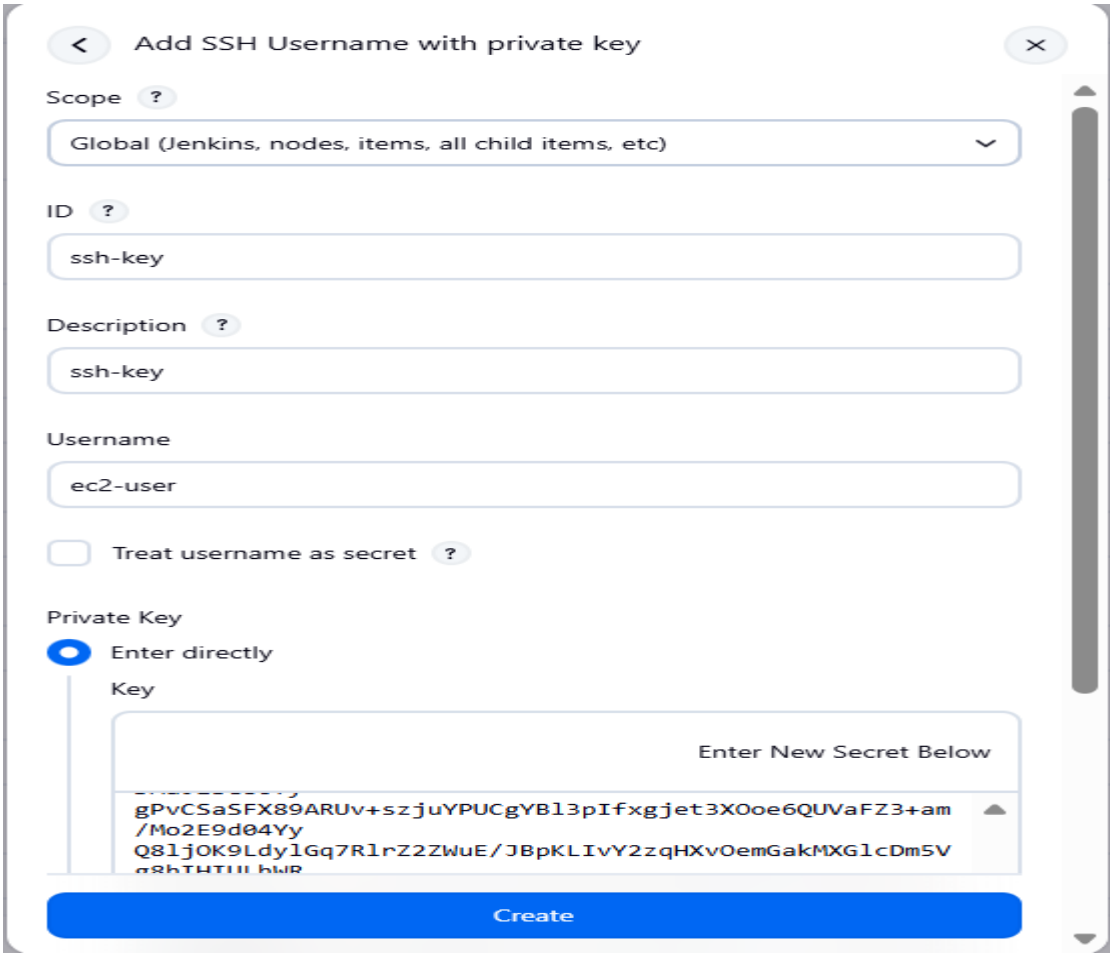

10. Selected launch method as “Launch agent via SSH” and provided private Ip and attached credentials and selected manually tested key verification strategy.

11. Selected availability as “Keep this agent online as much as possible”

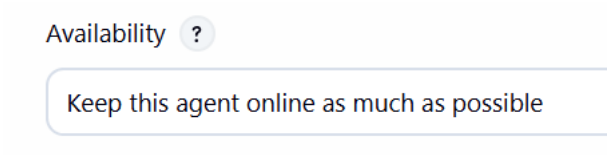

12. Made all disk space monitoring thresholds as 0 in node properties and then clicked to apply and save and did same steps for slave 2 also

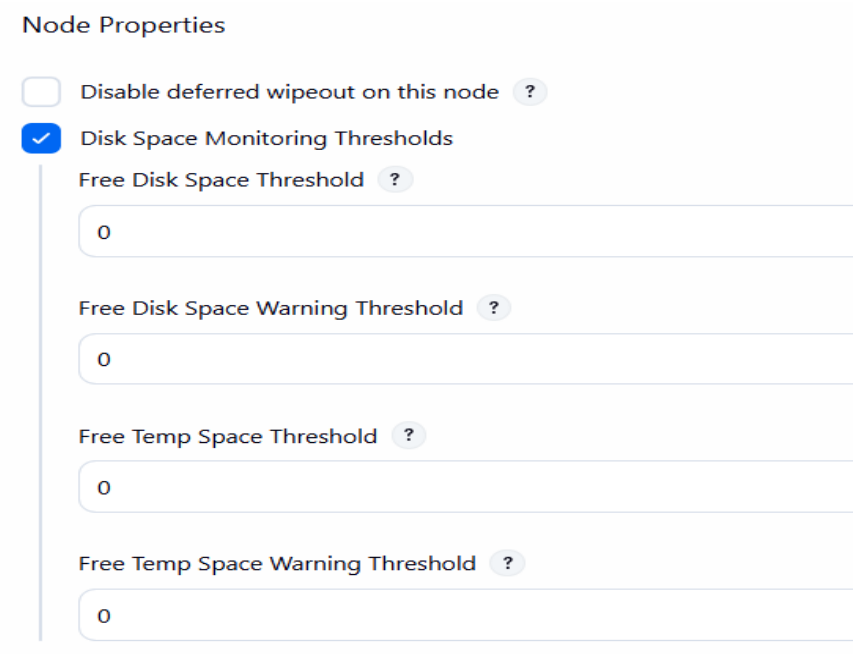

13. This way we can see one built in node and 2 slave node that we just created

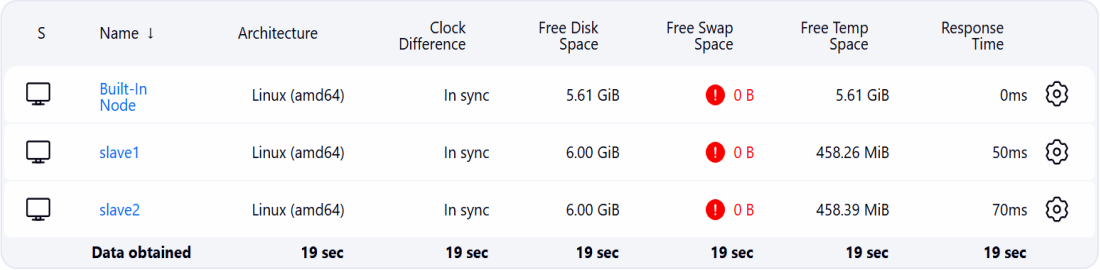

S	Name ↓	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-In Node	Linux (amd64)	In sync	5.61 GiB	0 B	5.61 GiB	0ms
	slave1	Linux (amd64)	In sync	6.00 GiB	0 B	458.26 MiB	50ms
	slave2	Linux (amd64)	In sync	6.00 GiB	0 B	458.39 MiB	70ms
	Data obtained	**19 sec**	**19 sec**	**19 sec**	**19 sec**	**19 sec**	**19 sec**

14. Gave /mnt folder full permission



15. Creating freestyle job for master, Slave 1 and slave 2

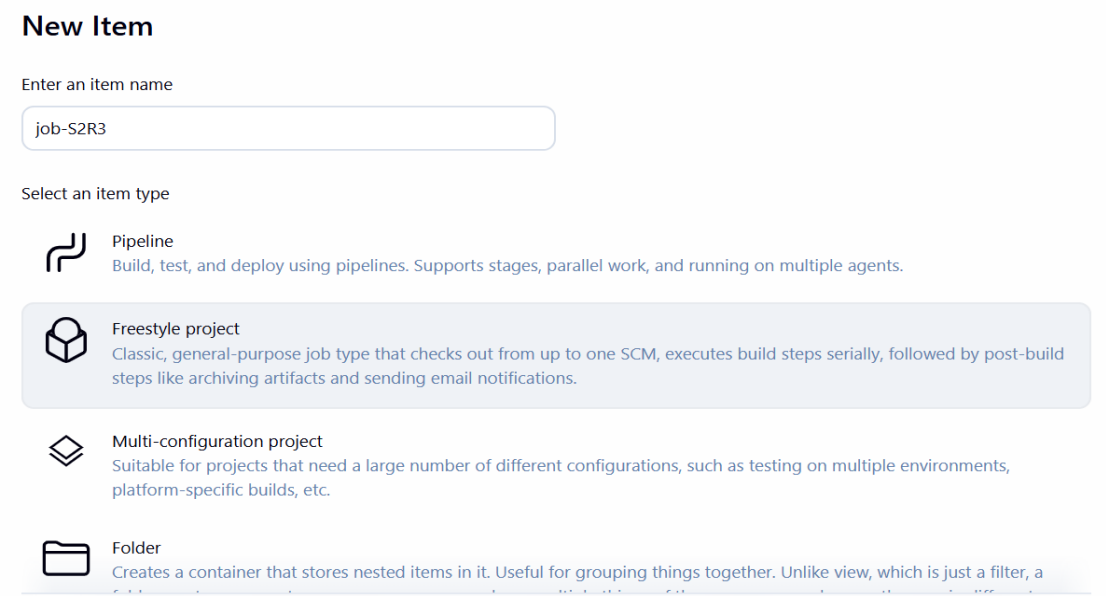

16. Selected “Restrict where this project can run” as slave 1 in slave 1 node and slave 2 in slave 2 node

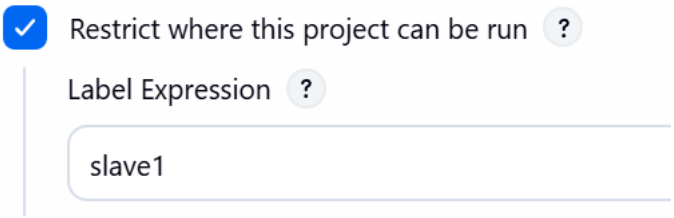

17. Selected the respective repository for respective job. Here selected repository 2 for slave 1

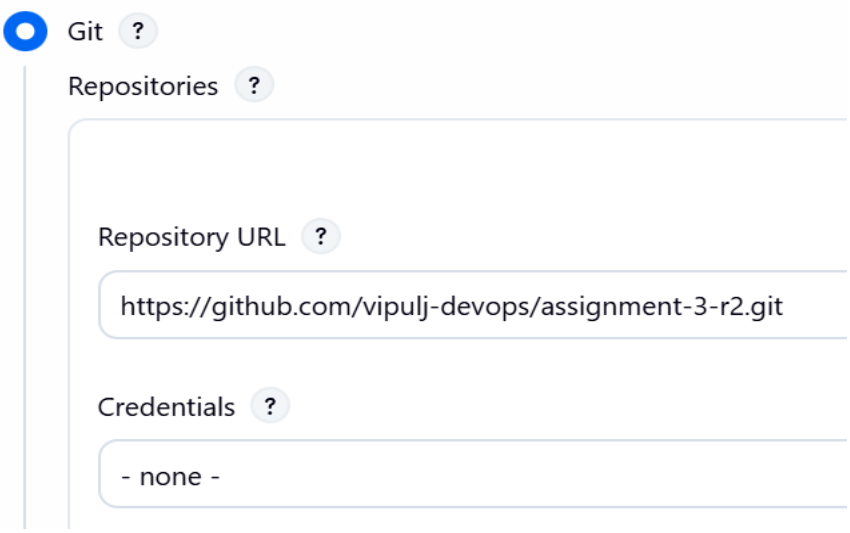

18. Selected the 2026Q2 branch for slave 2 and respective branch for other jobs

Branches to build ?

Branch Specifier (blank for 'any') ?

*/2026Q2

19. Selected GitHub hook trigger

GitHub hook trigger for GITScm polling ?

20. Selected “Delete workspace before the build starts” option

Environment

Configure settings and variables that define

Delete workspace before build starts

Advanced

21. Wrote the below script and clicked on apply and save

Execute shell ?

Command

See the list of available environment variables

```
APP_DIR="/mnt/servers/apache-tomcat-10.1.52/webapps/myapp"
# remove old deployment
rm -rf $APP_DIR
# create fresh directory
mkdir -p $APP_DIR
# copy new index.html
cp /mnt/jenkins-slave/index.html $APP_DIR/
```

22. So, we got 3 jobs

S	W	Name ↓	Last Success	Last Failure	Last Duration	
		job-S1R2	N/A	N/A	N/A	
		job-S2R3	N/A	N/A	N/A	
		master-job	N/A	N/A	N/A	

23. All the job ran successfully for the first time

#2 (Mar 16, 2026, 7:25:18 PM)

Started by user vipul

This run spent:

- 6 ms waiting;
- 0.86 sec build duration;
- 0.87 sec total from scheduled to completion.

git **Revision**: 756b5f55b498a96252537d73df19b00957abf7c0
Repository: https://github.com/vipulj-devops/assignment-3-r1.git

- refs/remotes/origin/2026Q1

No changes.

#1 (Mar 16, 2026, 7:30:18 PM)

Started by user vipul

This run spent:

- 5 ms waiting;
- 9.3 sec build duration;
- 9.3 sec total from scheduled to completion.

git **Revision**: 960b66d8350a3fc12b879079282313a2f00456a5
Repository: https://github.com/vipulj-devops/assignment-3-r2.git

- refs/remotes/origin/2026Q2

No changes.

#1 (Mar 16, 2026, 7:28:07 PM)

Started by user vipul

This run spent:

- 5 ms waiting;
- 9.5 sec build duration;
- 9.5 sec total from scheduled to completion.

git **Revision**: 96037b821216f270a7f536e3aa969773ae5cb231
Repository: https://github.com/vipulj-devops/assignment-3-r3.git

- refs/remotes/origin/2026Q3

No changes.

24. The first builds of the master-job ran on built in note, job-S1R2 on slave 2 node and job-S2R3 on slave 3 node

```
Started by user vipul
Running as SYSTEM
Building on the built-in node in workspace /mnt/master
```

```
Started by user vipul
Running as SYSTEM
Building remotely on slave1 in workspace /mnt/jenkins-slave
```

```
Started by user vipul
Running as SYSTEM
Building remotely on slave2 in workspace /mnt/jenkins-slave
```

25. After running 1 build manually website got hosted on tomcat server

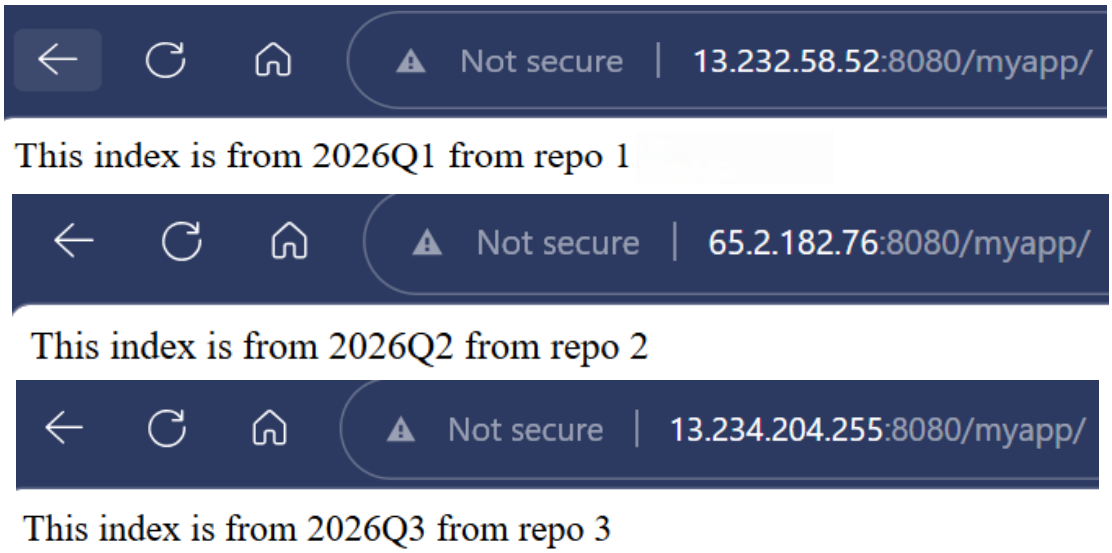

26. Now we made first commit on all those three repos to see if webhook is working well or not

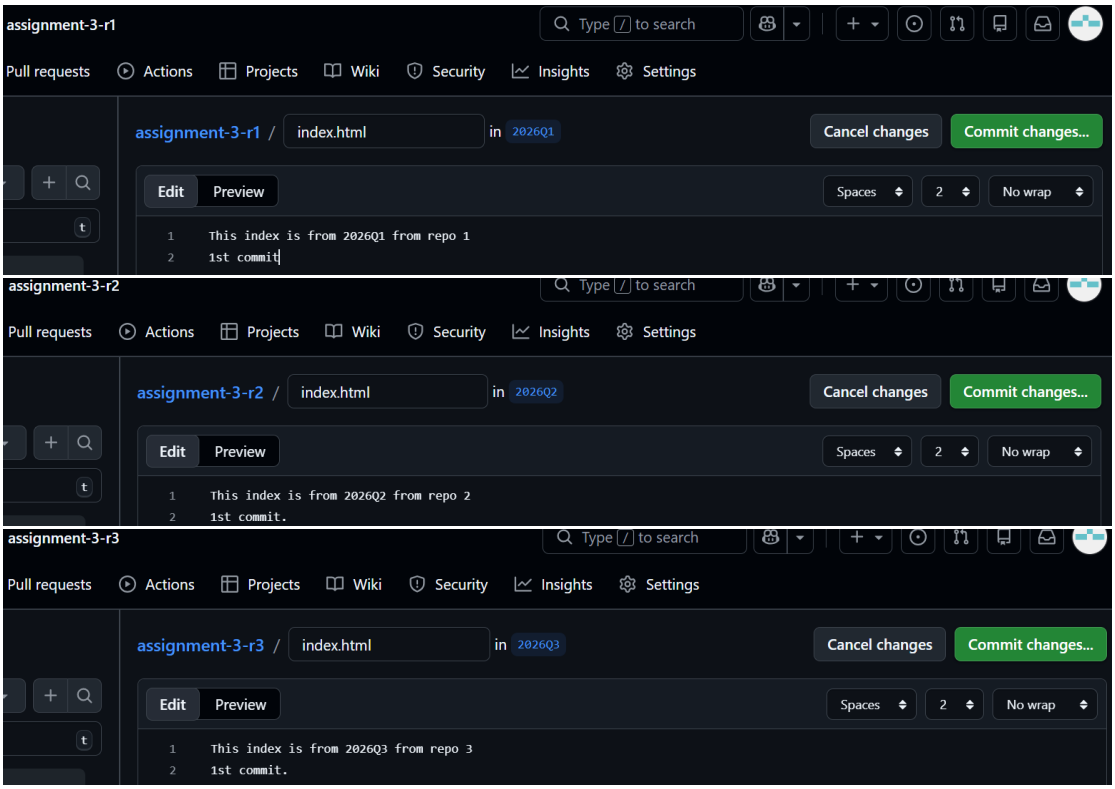

27. After the first commit made in all the repositories, build immediately got triggered in all three jobs

#3 (Mar 16, 2026, 8:12:47 PM)

Started by GitHub push by vipulj-devops

This run spent:

- 9.5 sec waiting;
- 0.9 sec build duration;
- 10 sec total from scheduled to completion.

git **Revision**: 04aef3ebad0ad9faa2ce3d29224e1c548150472c
Repository: https://github.com/vipulj-devops/assignment-3-r1.git

- refs/remotes/origin/2026Q1

Update index.html 1370a83
noreply at 7:40 PM 3/16/26

#2 (Mar 16, 2026, 8:16:12 PM)

Started by GitHub push by vipulj-devops

This run spent:

- 6.9 sec waiting;
- 1.1 sec build duration;
- 8.1 sec total from scheduled to completion.

git **Revision**: 22e76dac5b61cb1ba1a64e5c3ab0a695206e5a9a
Repository: https://github.com/vipulj-devops/assignment-3-r2.git

- refs/remotes/origin/2026Q2

Update index.html 22e76da
noreply at 8:16 PM 3/16/26

#2 (Mar 16, 2026, 8:19:52 PM)

Started by GitHub push by vipulj-devops

This run spent:

- 7.7 sec waiting;
- 1.2 sec build duration;
- 8.9 sec total from scheduled to completion.

git **Revision**: 04edb8ff6282c7a39cb7f82a096d72a8103f3677
Repository: https://github.com/vipulj-devops/assignment-3-r3.git

- refs/remotes/origin/2026Q3

Update index.html 04edb8f
noreply at 8:19 PM 3/16/26

28. After the all builds ran on commit by webhooks the updated website got hosted on tomcat server

Not secure | 13.232.58.52:8080/myapp/

This index is from 2026Q1 from repo 1 1st commit.

Not secure | 65.2.182.76:8080/myapp/

This index is from 2026Q2 from repo 2 1st commit.

Not secure | 13.234.204.255:8080/myapp/

This index is from 2026Q3 from repo 3 1st commit.