

AWS|VPC Task

1. Create VPC with 2 private and 2 public subnets.

First created VPC using IP 195.169.0.0/22
2 public subnets → IP 196.169.0.0/26 & IP 196.169.0.64/26
2 public subnets → IP 196.169.0.128/26 & IP 196.169.0.192/26


Results Below:

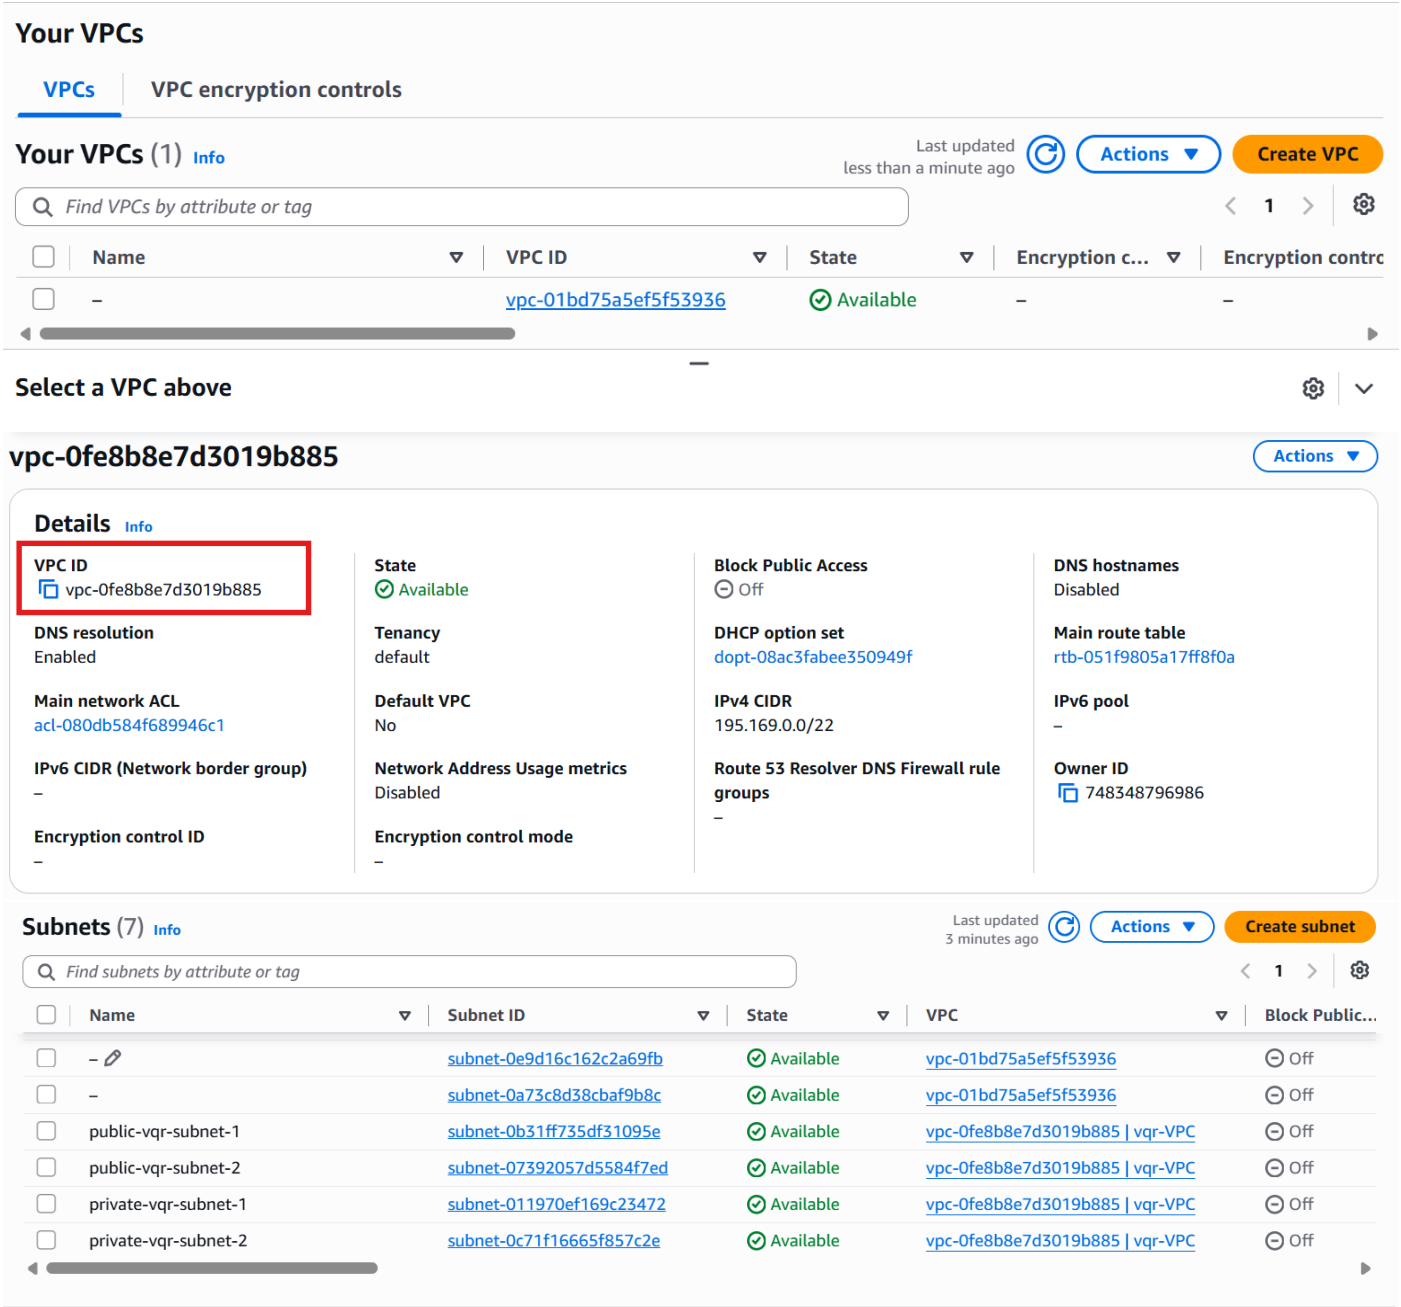

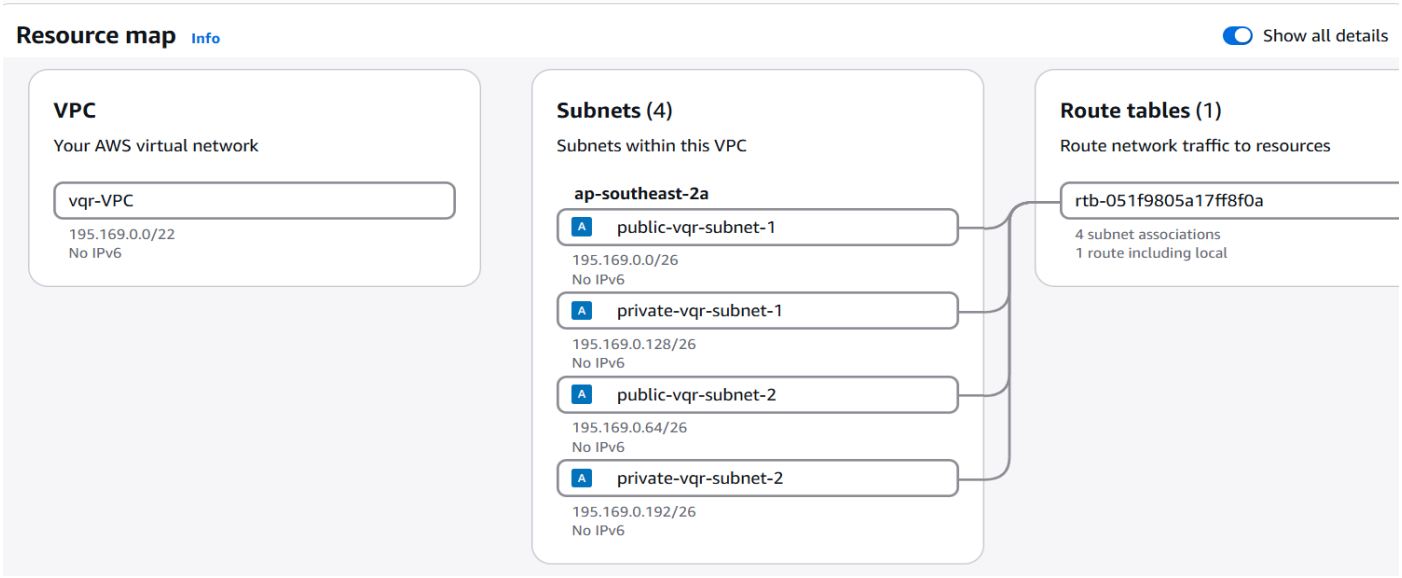

2. Enable DNS Hostname in VPC.


Open VPC which created and go to **Actions** → list will open choose **Edit VPC Settings**
Then a new page will open Just check ☐ **Enable DNS hostnames** and **save**
Results Below:

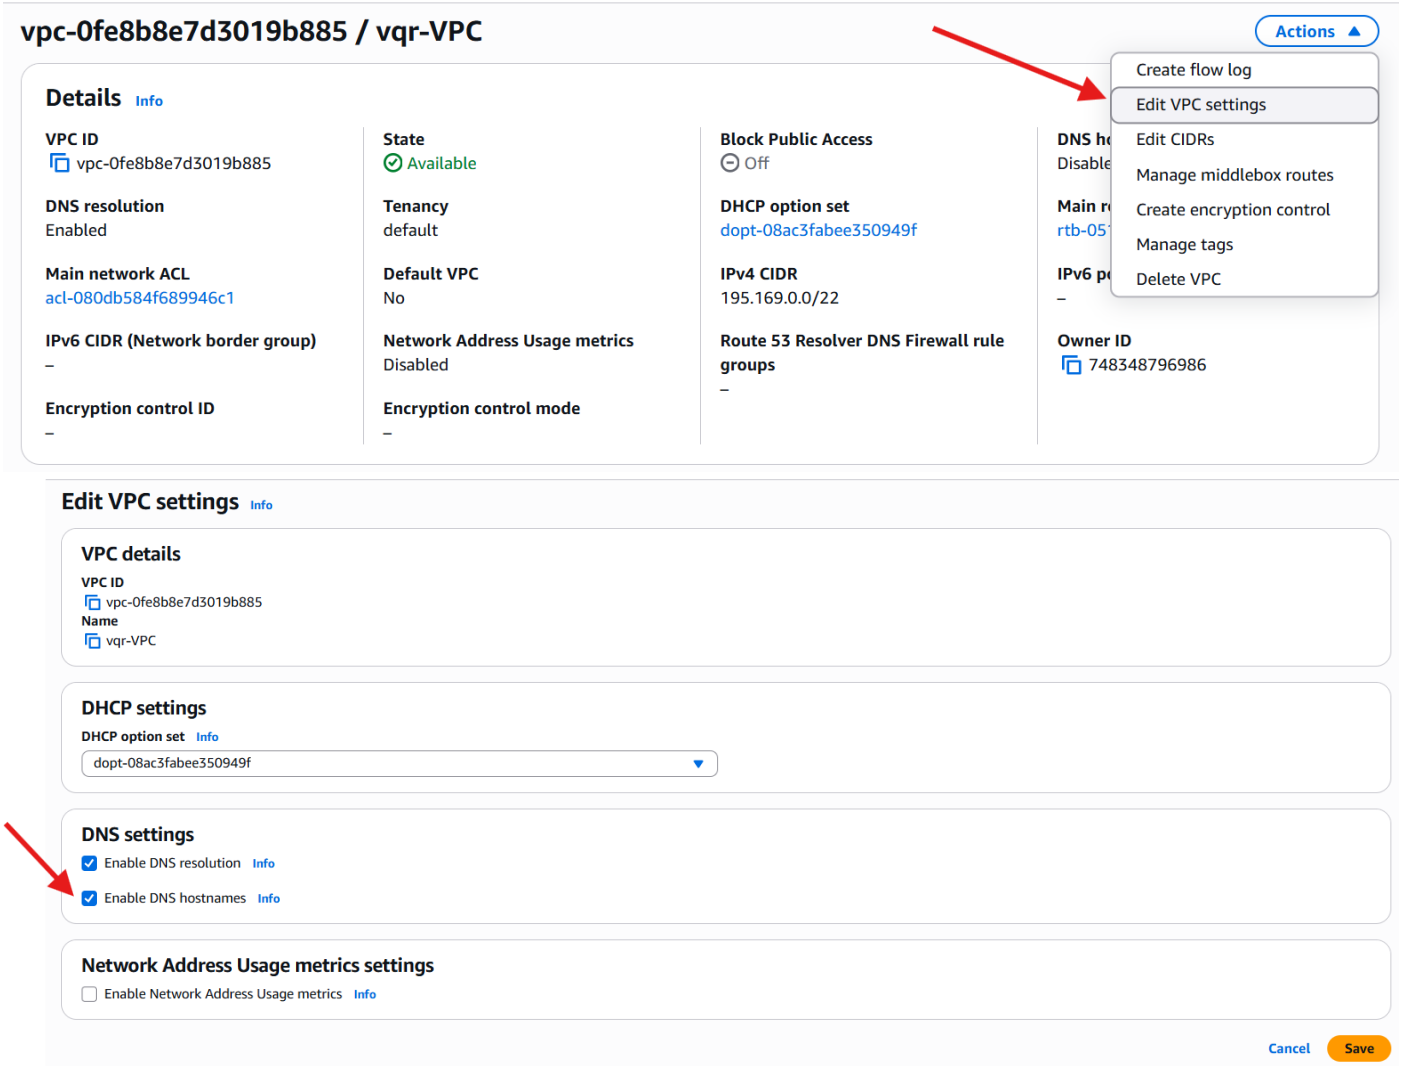

3. Enable Auto Assign Public IP in 2 public subnets.

Go to public subnet that created and click on **Actions** it will open a list → click on **Edit subnet settings**
It will open a page look for ■ **Enable auto-assign public IPv4 address** and **save**

Results Below:

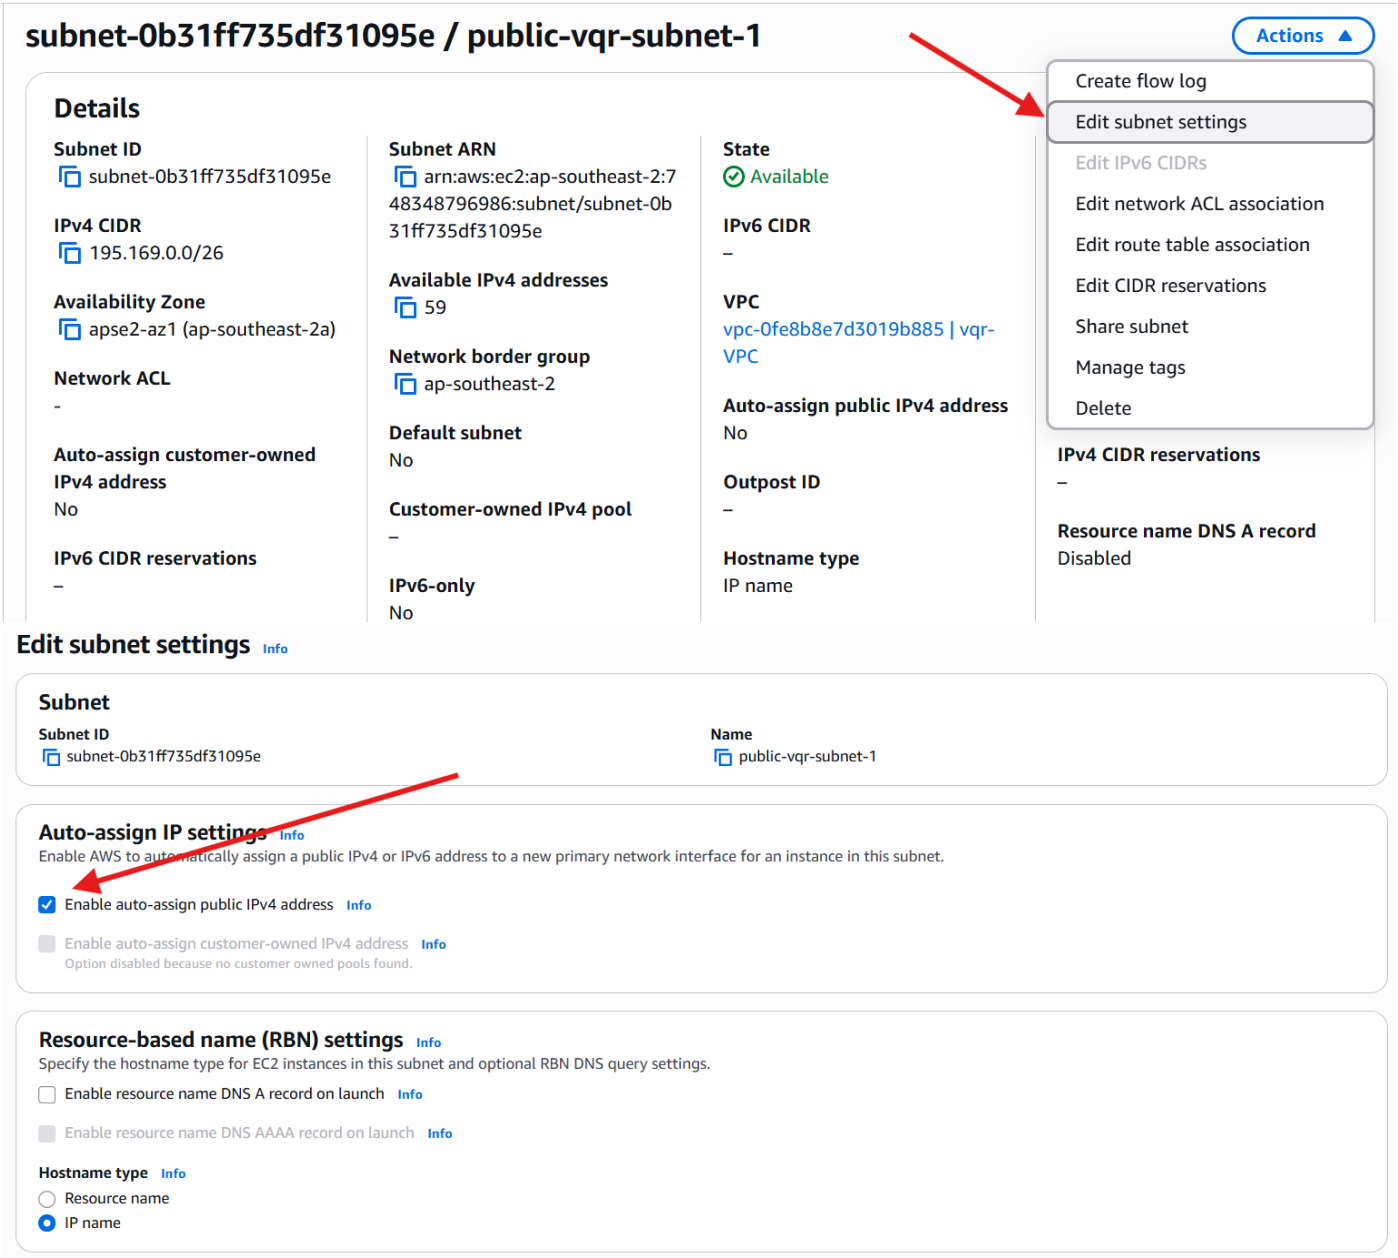


4. Add 2 private subnets in private route table.

First created a **Private route table**

Open a **private route table** and click on **Actions** → select **Edit subnet association**

Selects the 2 private subnets which created

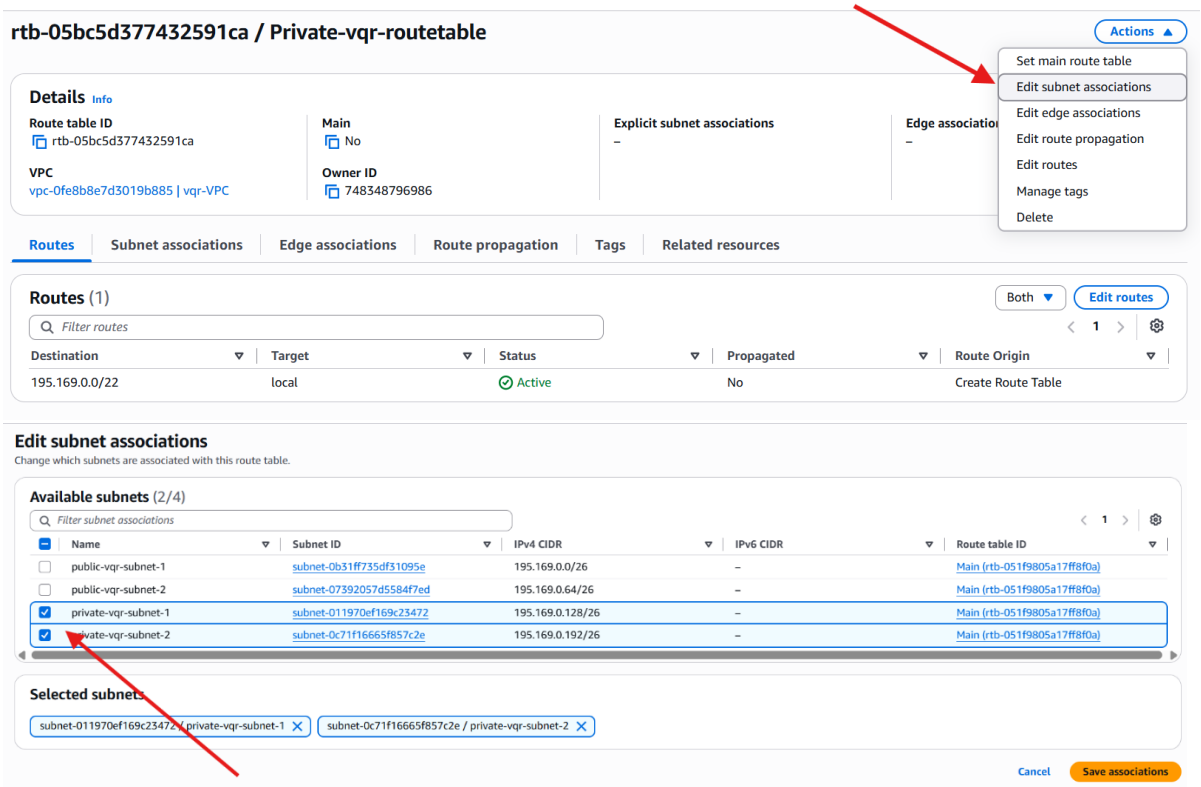


5. Add 2 public subnets in public route table.

First created a **Public route table**


Open a **public route table** and click on **Actions** → select **Edit subnet association**

Selects the 2 public subnets which created

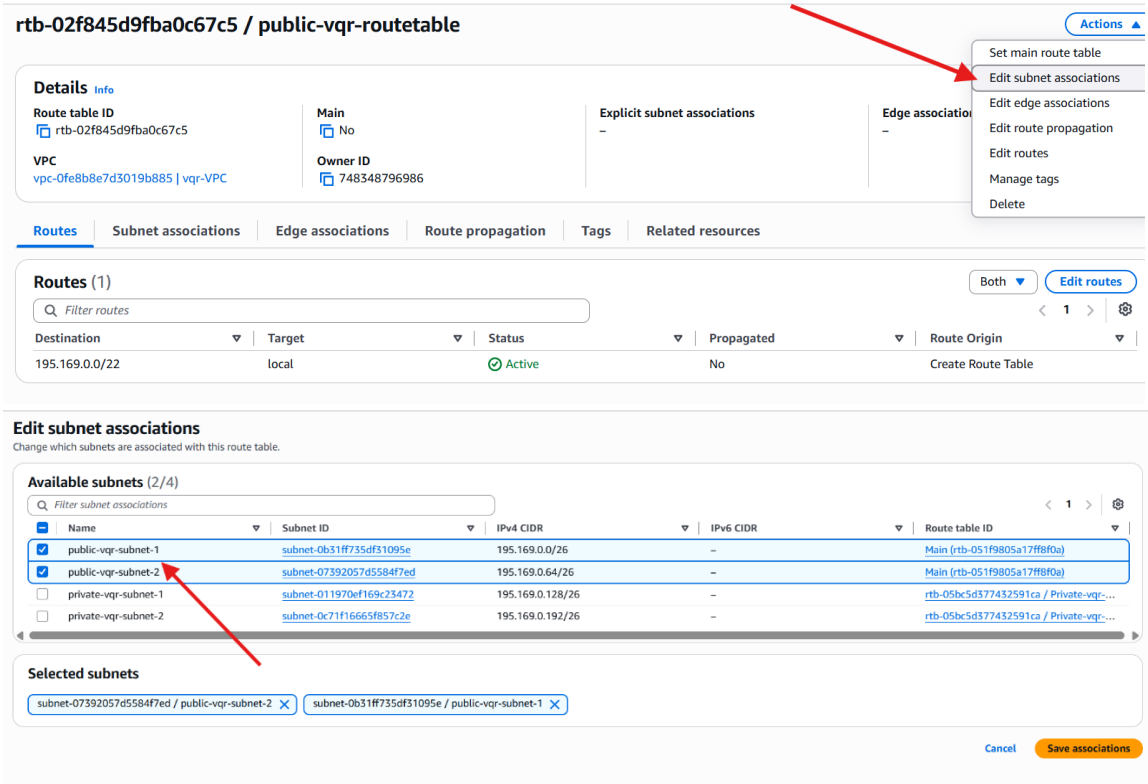

6. Public route table will have the routes to internet and local.


Created a Internet gateway click on **Actions** → click on attach to **VPC** → select the VPC which created
Open Public Route table and click on **Actions** → click on **Edit Routes** → Add route IGW which created.

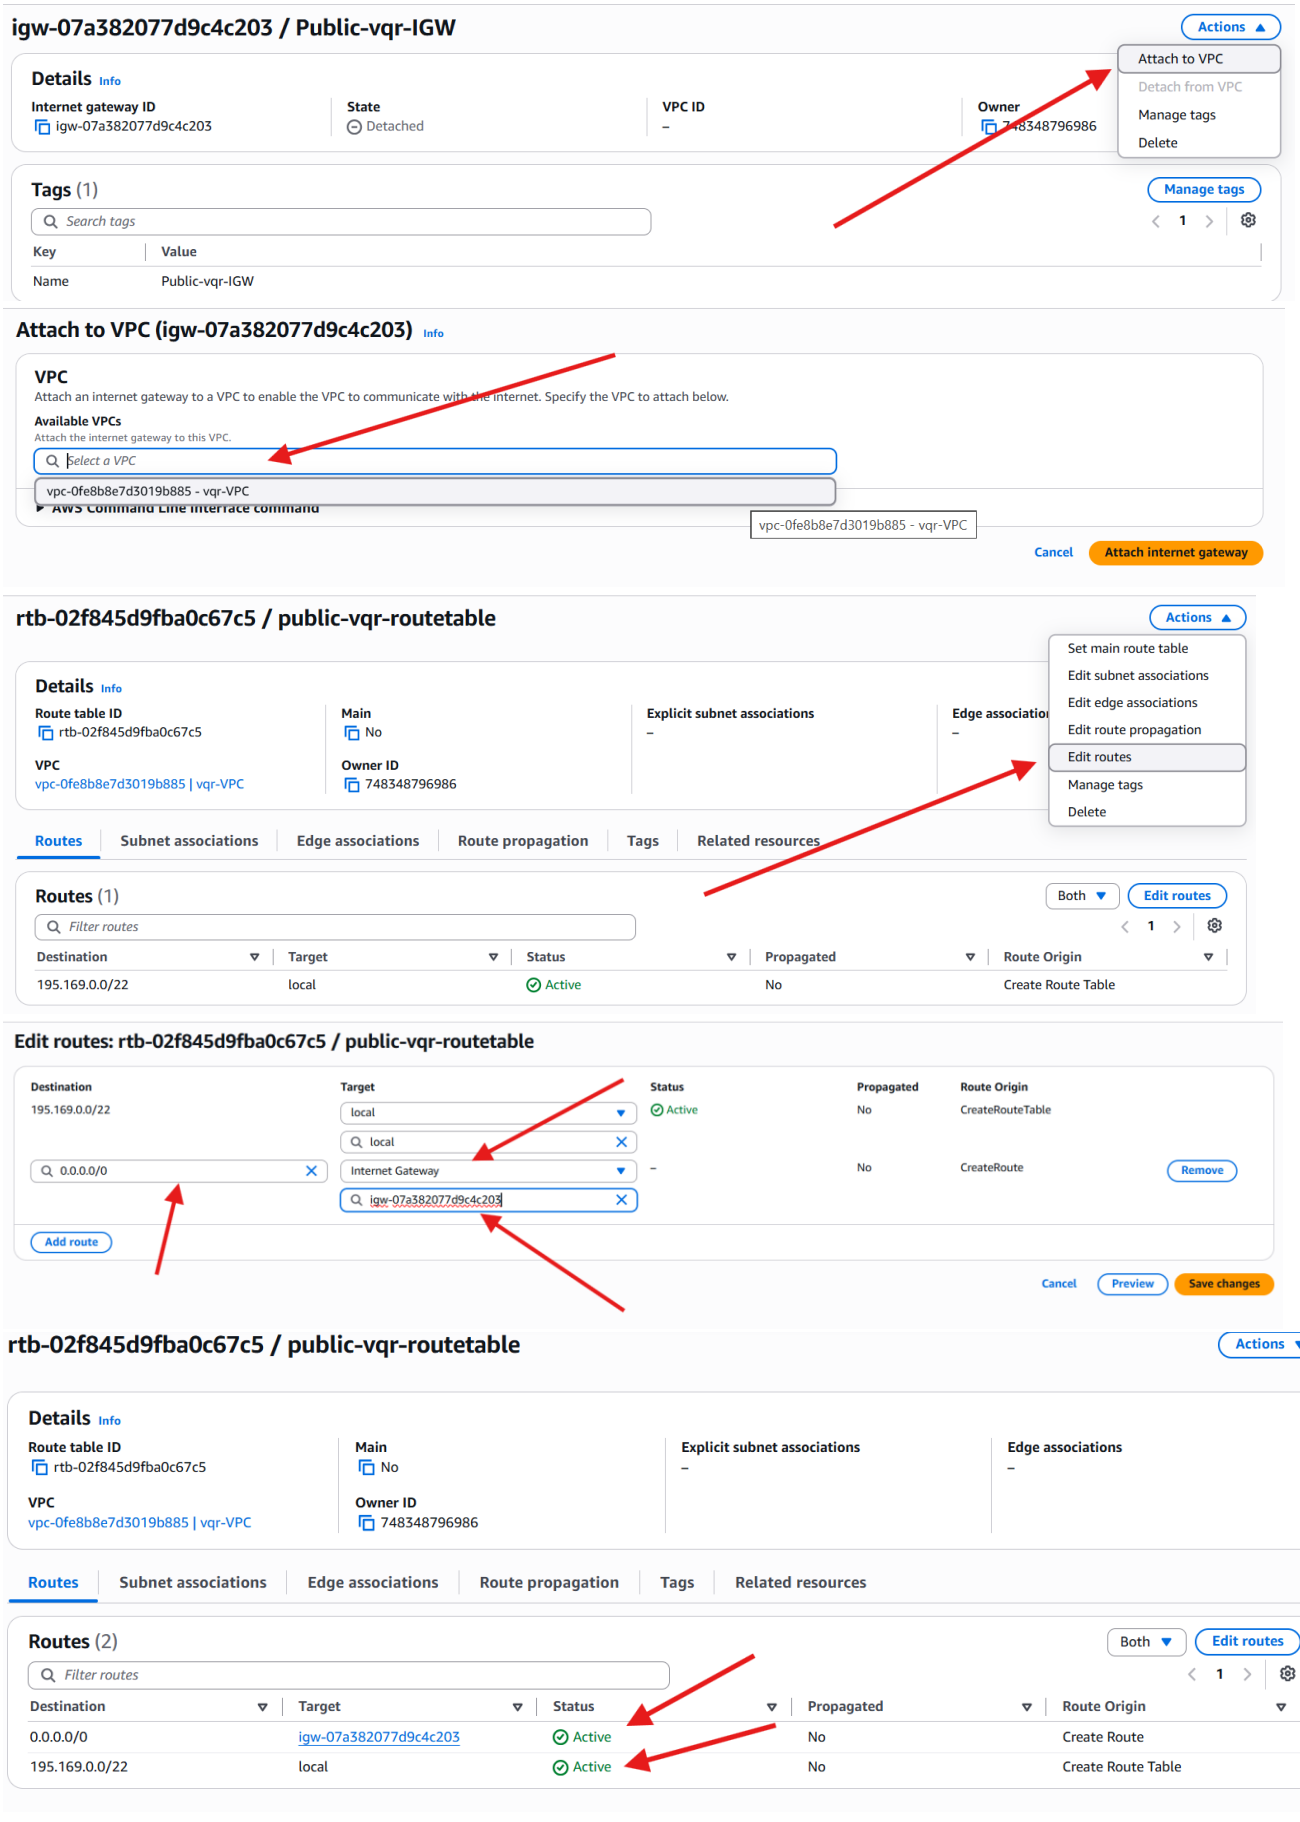


7. Create EC2 in public subnet with t2.micro and install PHP.

Launched instances with created VPC and using public subnet.

Results Below:

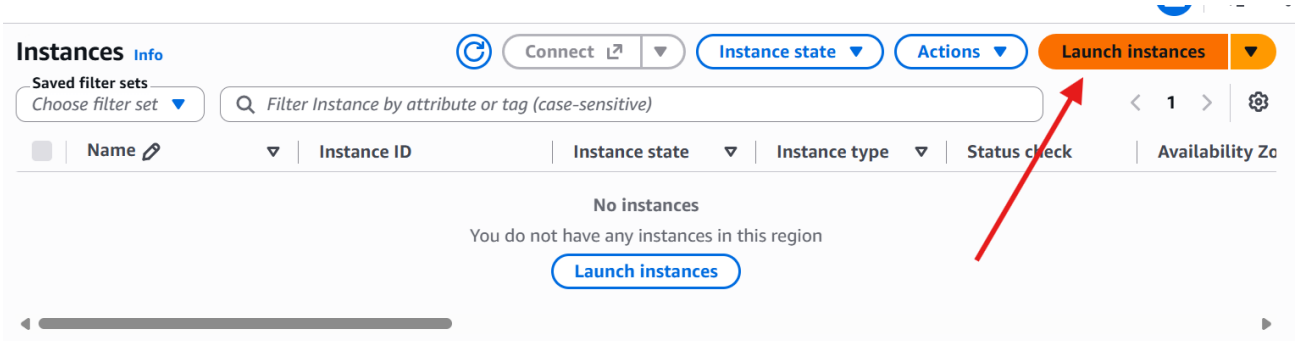

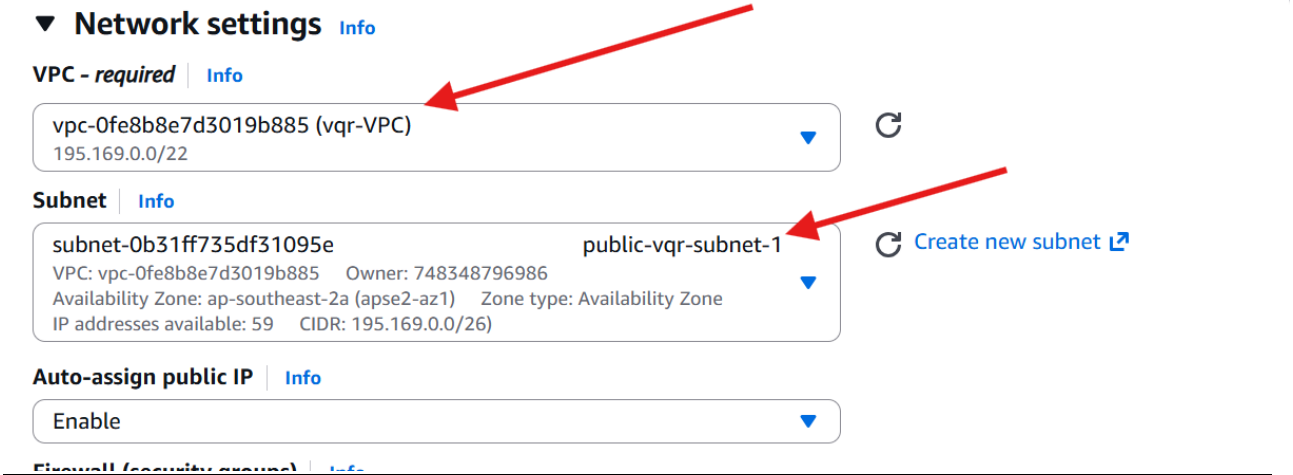


```
User@DESKTOP-2QHC9VQ UCRT64 ~/Downloads
$ ssh -i "key.pem" ec2-user@ec2-13-211-78-50.ap-southeast-2.compute.amazonaws.com
The authenticity of host 'ec2-13-211-78-50.ap-southeast-2.compute.amazonaws.com (13.211.78.50)' can't be established.
ED25519 key fingerprint is: SHA256:sstTxDU9R/gwCUCvx7pmn2+gkMfYV+4Lc2we14Xhh7M
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-13-211-78-50.ap-southeast-2.compute.amazonaws.com' (ED25519) to the list of known hosts.
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-195-169-0-47 ~]$
```


```
root@ip-195-169-0-47:~
[ec2-user@ip-195-169-0-47 ~]$ sudo su -
[root@ip-195-169-0-47 ~]# yum install php
Amazon Linux 2023 repository                                                    73 MB/s |  86 MB     00:01
Amazon Linux 2023 Kernel Livepatch repository                                  816 kB/s |  89 kB     00:00
Dependencies resolved.
================================================================================
 Package                 Architecture    Version                 Repository  Size
================================================================================
Installing:
 php8.5                  x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 13 k
Installing dependencies:
 apr                     x86_64          1.7.5-1.amzn2023.0.4    amazonlinux 129 k
 apr-util                x86_64          1.6.5-1.amzn2023.0.1    amazonlinux 100 k
 apr-util-lmdb           x86_64          1.6.5-1.amzn2023.0.1    amazonlinux 15 k
 generic-logos-httpd     noarch          18.0.0-12.amzn2023.0.3  amazonlinux 19 k
 httpd-core              x86_64          2.4.69-1.amzn2023.0.2   amazonlinux 1.4 M
 httpd-filesystem        noarch          2.4.69-1.amzn2023.0.2   amazonlinux 12 k
 httpd-tools             x86_64          2.4.69-1.amzn2023.0.2   amazonlinux 79 k
 libbrotli               x86_64          1.1.0-1.amzn2023.0.2    amazonlinux 333 k
 libsodium               x86_64          1.0.19-5.amzn2023       amazonlinux 174 k
 mailcap                 noarch          2.1.49-3.amzn2023.0.3   amazonlinux 33 k
 nginx-filesystem        noarch          1:1.30.6-1.amzn2023.0.1 amazonlinux 10 k
 php8.5-cli              x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 6.2 M
 php8.5-common           x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 870 k
 php8.5-process          x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 48 k
 php8.5-xml              x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 249 k
Installing weak dependencies:
 apr-util-openssl        x86_64          1.6.5-1.amzn2023.0.1    amazonlinux 17 k
 httpd                   x86_64          2.4.69-1.amzn2023.0.2   amazonlinux 45 k
 mod_http2               x86_64          1:2.4.69-1.amzn2023.0.2 amazonlinux 130 k
 mod_lua                 x86_64          2.4.69-1.amzn2023.0.2   amazonlinux 58 k
 php8.5-fpm              x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 3.1 M
 php8.5-mbstring         x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 538 k
 php8.5-pdo              x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 100 k
 php8.5-sodium           x86_64          8.5.12-1.amzn2023.0.1   amazonlinux 44 k


Transaction Summary
```


8. Configure NAT gateway in public subnet and connect to private instance.

Launched Instances with created VPC and using private subnet then check if it connected or not with gitbash which results request timed out.

Then went to Public EC2 and copied key.pem into a file and used ssh method using privateIPv6
And installed PHP

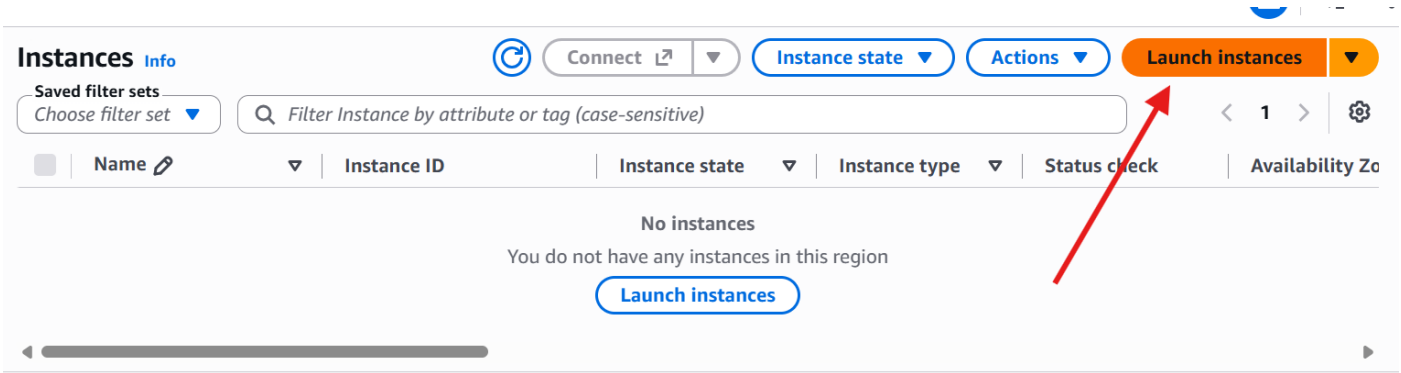

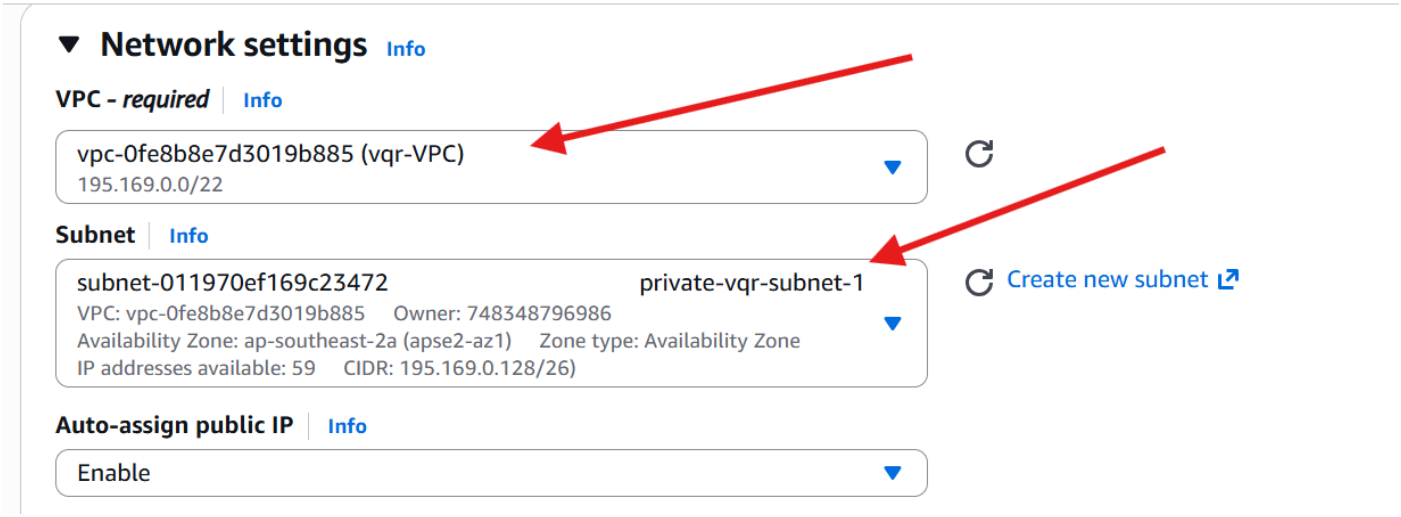

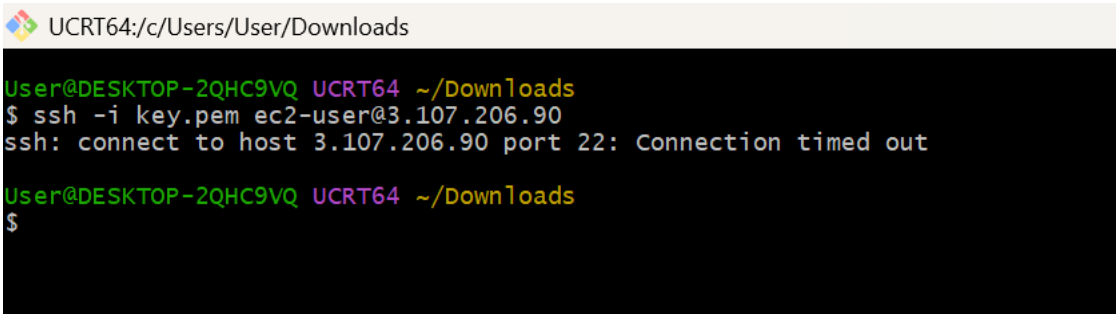

ec2-user@ip-195-169-0-171:~

```
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
Last login: Fri Oct 30 12:39:05 2026 from 103.203.172.230
[ec2-user@ip-195-169-0-47 ~]$ ls
[ec2-user@ip-195-169-0-47 ~]$ pwd
/home/ec2-user
[ec2-user@ip-195-169-0-47 ~]$ mkdir viquar
[ec2-user@ip-195-169-0-47 ~]$ cd viquar
[ec2-user@ip-195-169-0-47 viquar]$ vi test.pem
[ec2-user@ip-195-169-0-47 viquar]$ ssh -i test.pem ec2-user@3.107.206.90
ssh: connect to host 3.107.206.90 port 22: Connection timed out
[ec2-user@ip-195-169-0-47 viquar]$ ssh -i test.pem ec2-user@195.169.0.171
The authenticity of host '195.169.0.171 (195.169.0.171)' can't be established.
ED25519 key fingerprint is SHA256:bGvBzuWVerIswZpKlORGmYcCHfGBej464NhDY69ZNrE.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '195.169.0.171' (ED25519) to the list of known hosts.
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@         WARNING: UNPROTECTED PRIVATE KEY FILE!          @
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
Permissions 0644 for 'test.pem' are too open.
It is required that your private key files are NOT accessible by others.
This private key will be ignored.
Load key "test.pem": bad permissions
ec2-user@195.169.0.171: Permission denied (publickey,gssapi-keyex,gssapi-with-mic).
[ec2-user@ip-195-169-0-47 viquar]$ chmod 600 test.pem
[ec2-user@ip-195-169-0-47 viquar]$ ssh -i test.pem ec2-user@195.169.0.171
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-195-169-0-171 ~]$ ping www.google.com
```

Create NAT gateway Info

A highly available, managed Network Address Translation (NAT) service that instances in private subnets can use to connect to services in other VPCs, on-premises networks, or the internet.

NAT gateway settings

Name - *optional*

Create a tag with a key of 'Name' and a value that you specify.

Nat-vqr-gateway

The name can be up to 256 characters long.

Availability mode Info

Choose whether to deploy across all zones in the region or restrict to a single availability zone.

- (●) Regional - *new* — Scales automatically across all regional AZs, simplifying management for multi AZ deployments.
- ( ) Zonal — Provides granular control within a specific availability zone, adhering to subnet level settings.

VPC

Select a VPC in which to create the regional NAT gateway.

vpc-0fe8b8e7d3019b885 (vqr-VPC)

Connectivity type

Edit routes: rtb-05bc5d377432591ca / Private-vqr-routetable

Destination	Target	Status	Propagated	Route Origin	
195.169.0.0/22	local	Active	No	CreateRouteTable	
	local				
0.0.0.0/0	NAT Gateway	–	No	CreateRoute	Remove
	nat-1978ecc61f563241f				

Add route

Cancel | Preview | Save changes

ec2-user@ip-195-169-0-171:~

```
[ec2-user@ip-195-169-0-47 viquar]$ ssh -i test.pem ec2-user@195.169.0.171
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
Last login: Fri Oct 30 12:57:38 2026 from 195.169.0.47
[ec2-user@ip-195-169-0-171 ~]$ sudo yum update
Last metadata expiration check: 0:01:09 ago on Fri Oct 30 13:12:13 2026.
Dependencies resolved.
Nothing to do.
Complete!
[ec2-user@ip-195-169-0-171 ~]$
```

9. Install Apache Tomcat in private EC2 and deploy a sample app.

Used sudo Yum Install Java-21 then installed tomcat10 using same command yum install tomcat then check the connectivity by ping https://localhost:8080

```
ec2-user@ip-195-169-0-171:~
[ec2-user@ip-195-169-0-171 ~]$ sudo yum install tomcat10
Last metadata expiration check: 0:10:14 ago on Fri Oct 30 13:12:13 2026.
Dependencies resolved.
================================================================================
 Package                    Architecture  Version                    Repository  Size
================================================================================
Installing:
 tomcat10                   noarch        1:10.1.60-1.amzn2023.0.1   amazonlinux  94 k
Installing dependencies:
 apr                        x86_64        1.7.5-1.amzn2023.0.4       amazonlinux 129 k
 ecj                        noarch        1:4.23-1.amzn2023.0.4      amazonlinux 2.4 M
 java-17-amazon-corretto-headless x86_64  1:17.0.21.0.10-1.amzn2023.1 amazonlinux  91 M
 javapackages-tools         noarch        6.0.0-7.amzn2023.0.6       amazonlinux  25 k
 tomcat10-el-5.0-api        noarch        1:10.1.60-1.amzn2023.0.1   amazonlinux 109 k
 tomcat10-jsp-3.1-api       noarch        1:10.1.60-1.amzn2023.0.1   amazonlinux  77 k
 tomcat10-lib               noarch        1:10.1.60-1.amzn2023.0.1   amazonlinux 7.1 M
 tomcat10-servlet-6.0-api   noarch        1:10.1.60-1.amzn2023.0.1   amazonlinux 361 k
Installing weak dependencies:
 tomcat-native              x86_64        2.0.16-1.amzn2023.0.1      amazonlinux  45 k

Transaction Summary
================================================================================
Install  10 Packages
```

```
Installed:
  apr-1.7.5-1.amzn2023.0.4.x86_64
  ecj-1:4.23-1.amzn2023.0.4.noarch
  java-17-amazon-corretto-headless-1:17.0.21.0.10-1.amzn2023.1.x86_64
  javapackages-tools-6.0.0-7.amzn2023.0.6.noarch
  tomcat-native-2.0.16-1.amzn2023.0.1.x86_64
  tomcat10-1:10.1.60-1.amzn2023.0.1.noarch
  tomcat10-el-5.0-api-1:10.1.60-1.amzn2023.0.1.noarch
  tomcat10-jsp-3.1-api-1:10.1.60-1.amzn2023.0.1.noarch
  tomcat10-lib-1:10.1.60-1.amzn2023.0.1.noarch
  tomcat10-servlet-6.0-api-1:10.1.60-1.amzn2023.0.1.noarch

Complete!
[ec2-user@ip-195-169-0-171 ~]$
```

```
[ec2-user@ip-195-169-0-171 ~]$ sudo systemctl enable tomcat10
Created symlink /etc/systemd/system/multi-user.target.wants/tomcat10.service → /usr/lib/systemd/system/tomcat10.service.
[ec2-user@ip-195-169-0-171 ~]$ sudo systemctl start tomcat10
[ec2-user@ip-195-169-0-171 ~]$ sudo systemctl status tomcat10
● tomcat10.service - Apache Tomcat 10 Web Application Container
     Loaded: loaded (/usr/lib/systemd/system/tomcat10.service; enabled; preset: disabled)
     Active: active (running) since Fri 2026-10-30 13:23:48 UTC; 9s ago
   Main PID: 26446 (java)
      Tasks: 29 (limit: 1059)
     Memory: 102.6M
        CPU: 2.675s
     CGroup: /system.slice/tomcat10.service
             └─26446 /usr/lib/jvm/jre/bin/java -Djavax.sql.DataSource.Factory=org.apache.commons.dbcp.BasicDataSourceFactory


Oct 30 13:23:49 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:49.529 INFO [main] org.apac
Oct 30 13:23:49 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:49.529 INFO [main] org.apac
Oct 30 13:23:49 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:49.536 INFO [main] org.apac
Oct 30 13:23:49 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:49.545 INFO [main] org.apac
Oct 30 13:23:50 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:50.181 INFO [main] org.apac
Oct 30 13:23:50 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:50.242 INFO [main] org.apac
Oct 30 13:23:50 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:50.332 INFO [main] org.apac
Oct 30 13:23:50 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:50.333 INFO [main] org.apac
Oct 30 13:23:50 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:50.358 INFO [main] org.apac
Oct 30 13:23:50 ip-195-169-0-171.ap-southeast-2.compute.internal server[26446]: 30-Oct-2026 13:23:50.380 INFO [main] org.apac
lines 1-20/20 (END)
```

```
[ec2-user@ip-195-169-0-171 ~]$ ping localhost:8080
ping: localhost:8080: Name or service not known
[ec2-user@ip-195-169-0-171 ~]$ curl loclahost:8080
curl: (6) Could not resolve host: loclahost
[ec2-user@ip-195-169-0-171 ~]$ curl localhost:8080
<!doctype html><html lang="en"><head><title>HTTP Status 404 – Not Found</title><style type="text/css">body {font-family:Tahoma,Arial,sans-serif;} h1, h2, h3, b {color:white
;background-color:#525D76;} h1 {font-size:22px;} h2 {font-size:16px;} h3 {font-size:14px;} p {font-size:12px;} a {color:black;} .line {height:1px;background-color:#525D76;b
order:none;}</style></head><body><h1>HTTP Status 404 – Not Found</h1><hr class="line" /><p><b>Type</b> Status Report</p><p><b>Description</b> The origin server did not find
 a current representation for the target resource or is not willing to disclose that one exists.</p><hr class="line" /><h3>Apache Tomcat/10.1.60</h3></body></html>[ec2-user
@ip-195-169-0-171 ~]$ curl http://localhost:8080
<!doctype html><html lang="en"><head><title>HTTP Status 404 – Not Found</title><style type="text/css">body {font-family:Tahoma,Arial,sans-serif;} h1, h2, h3, b {color:white
;background-color:#525D76;} h1 {font-size:22px;} h2 {font-size:16px;} h3 {font-size:14px;} p {font-size:12px;} a {color:black;} .line {height:1px;background-color:#525D76;b
order:none;}</style></head><body><h1>HTTP Status 404 – Not Found</h1><hr class="line" /><p><b>Type</b> Status Report</p><p><b>Description</b> The origin server did not find
 a current representation for the target resource or is not willing to disclose that one exists.</p><hr class="line" /><h3>Apache Tomcat/10.1.60</h3></body></html>[ec2-user
@ip-195-169-0-171 ~]$
```

10.Configure VPC flow logs and store the logs in S3 and CloudWatch.

Goto VPC and Select on Flow Logs → Click on create flow log → Give an optional name then select interval 1 minute → send to CloudWatch Logs → Give Destination name → service access Create a new

Goto S3 and create Bucket → then goto bucket properties and copy ARN →
Goto VPC logs and Click on create flow log → Give an optional name then select interval 1 minute → send to an amazon S3 Bucket → paste that copied ARN to S3 bucket ARN .

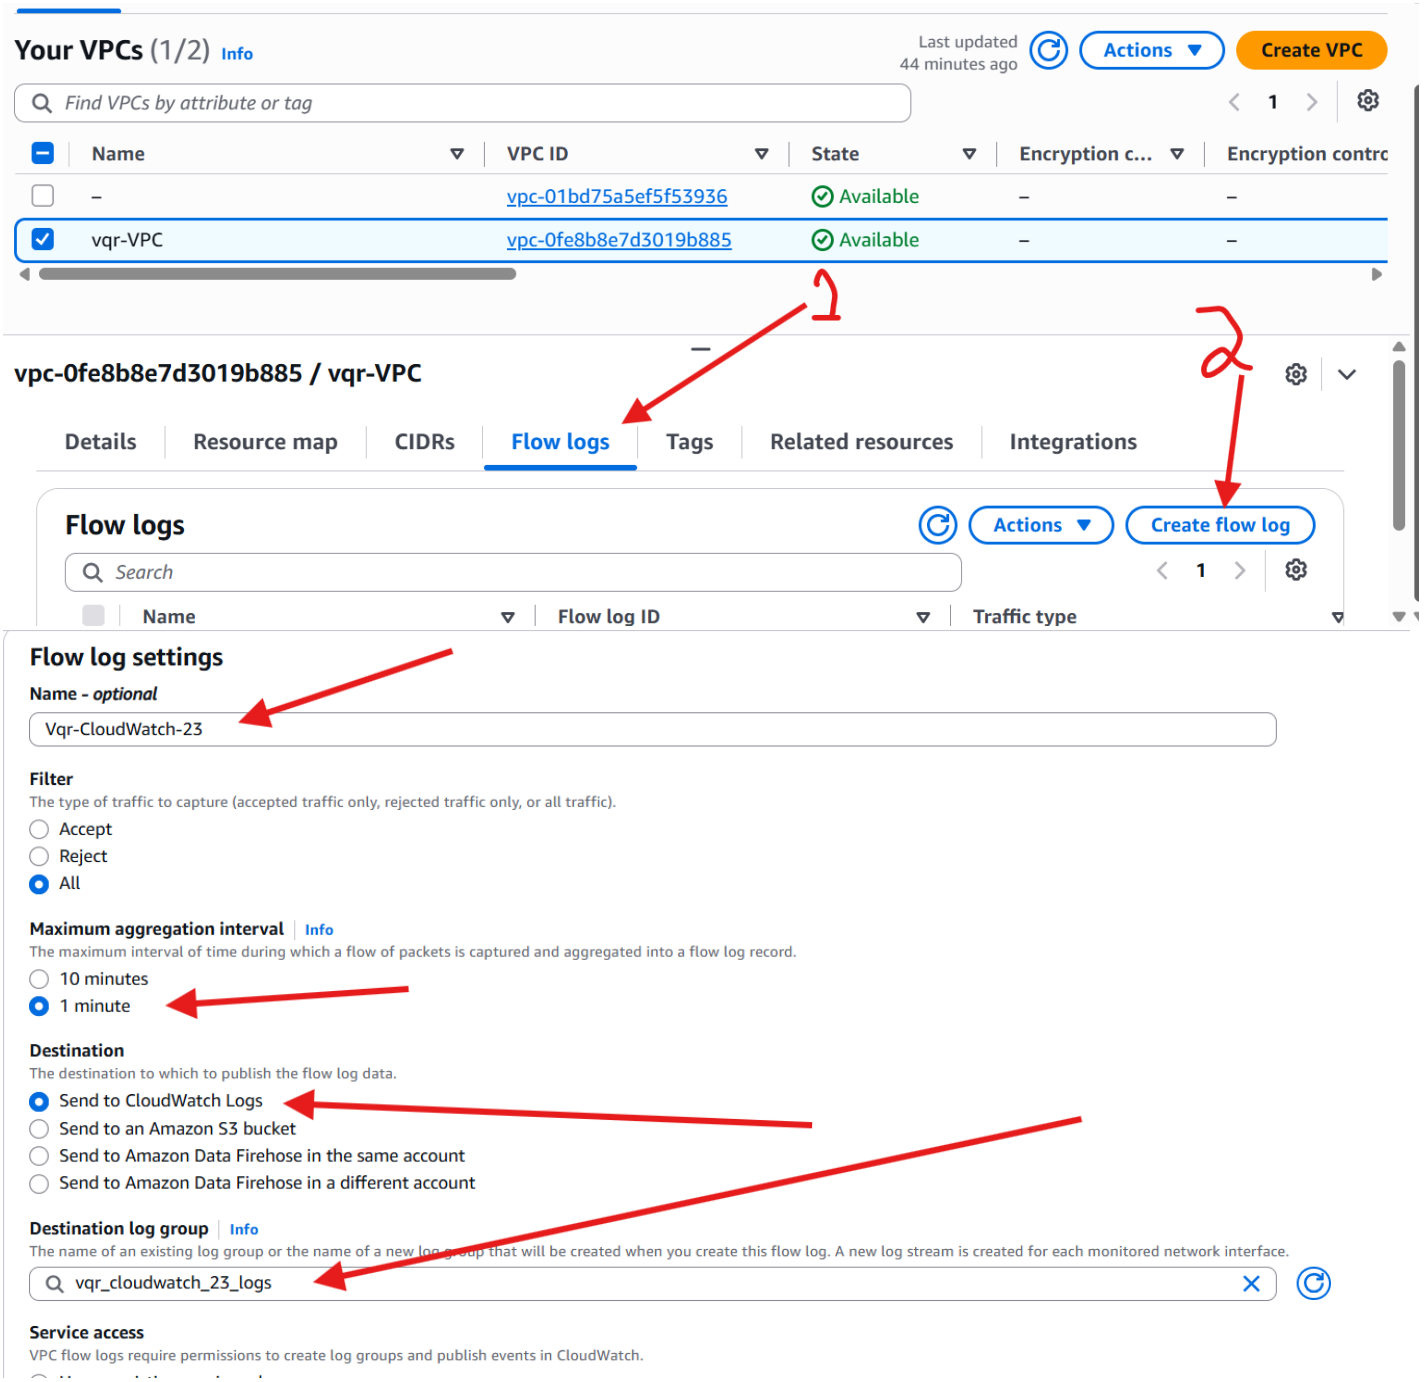

Service access

VPC flow logs require permissions to create log groups and publish events in CloudWatch.

- ○ Use an existing service role
- ◉ Create and use a new service role

Service role name | Info

VPCFlowLogs-Cloudwatch-1793366983736

Log record format

Specify the fields to include in the flow log record.

- ◉ AWS default format
- ○ Custom format

Additional metadata

Include additional metadata to AWS default log record format.

- ☐ Include Amazon ECS metadata

EC2 tag fields

Include EC2 tag information in flow log records.

- ☐ Include EC2 tag field specifications

Format preview

✓ Successfully created flow log for the following resource:

- vpc-0fe8b8e7d3019b885

fl-0002486ab1476d0d6 / Vqr-CloudWatch-23

Actions

Details

Flow Log ID fl-0002486ab1476d0d6	**Destination Type** cloud-watch-logs	**Traffic Type** All	**File Format** -
Name Vqr-CloudWatch-23	**Destination Name** vqr_cloudwatch_23_logs	**Max Aggregation Interval** 1 minute	**Hive Compatible Partitions** –
State Active	**IAM Role** arn:aws:iam::748348796986:role/service-role/VPCFlowLogs-Cloudwatch-1793366983736	**Log Format** Default	**Partition Logs** –
Creation Time Friday, October 30, 2026 at 19:03:33 GMT+5:30	**Cross Account IAM Role** –	**Tag field specifications** -	

▶ Get-set-go with unified data store

Log groups (1)

Filters | Actions | View in Logs Insights | Start tailing | Create log group

By default, we only load up to 10,000 log groups.

Filter log groups or try pattern search

☑ Exact match

1

Log group	Log class	Anomaly d...	Deletio...	Bearer ...	Data ...	Sensi...	Retenti...
vqr_cloudwatch_23_logs	Standard	Configure	Off	Off	-	-	Never exp...

1 minute ago

Retention
Never expire

Stored bytes
-

Metric filters
0

Deletion protection
Off

Data protection
-

Sensitive data count
-

Bearer token authentication
Off

Syslog ingestion Info
Configure

Log streams | Tags | Data protection | Anomaly detection | Metric filters | Subscription filters | Contributor Insights | Field indexes

Log streams (3)

Delete | Create log stream | Search all log streams

By default, we only load the most recent log streams.

Filter log streams or try prefix search | Exact match | Show expired Info | 1

Log stream	Last event time
eni-0360e8643466aa502-all	2026-10-30 13:34:07 (UTC)
nat-1978ecc61f563241f-all	2026-10-30 13:33:53 (UTC)
eni-0906ea8191e553e4c-all	2026-10-30 13:33:47 (UTC)

Storage

Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

Create a bucket

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

Create bucket

Pricing

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the AWS Simple Monthly Calculator

View pricing details

How it works



Buckets

General purpose buckets | All AWS Regions | Directory buckets

General purpose buckets (1) Info

Buckets are containers for data stored in S3.

Copy ARN | Empty | Delete | Create bucket

Find buckets by name | 1

Name	AWS Region	Creation date
vqr-log-bucket	Asia Pacific (Sydney) ap-southeast-2	October 30, 2026, 19:15:20 (UTC+05:30)

vqr-log-bucket Info

Objects | Metadata | Properties | Permissions | Metrics | Management | File systems | Access Points

Bucket overview

AWS Region
Asia Pacific (Sydney) ap-southeast-2

Amazon Resource Name (ARN)
arn:aws:s3:::vqr-log-bucket

Creation date
October 30, 2026, 19:15:20 (UTC+05:30)

Copy

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With v
recover from both unintended user actions and application failures. Learn more

Bucket Versioning
Disabled

Multi-factor authentication (MFA) delete
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API
Disabled

Flow log settings

Name - *optional*
s3-flow-logs

Filter
The type of traffic to capture (accepted traffic only, rejected traffic only, or all traffic).
- ○ Accept
- ○ Reject
- ◉ All

Maximum aggregation interval Info
The maximum interval of time during which a flow of packets is captured and aggregated into a flow log record.
- ○ 10 minutes
- ◉ 1 minute

Destination
The destination to which to publish the flow log data.
- ○ Send to CloudWatch Logs
- ◉ Send to an Amazon S3 bucket
- ○ Send to Amazon Data Firehose in the same account
- ○ Send to Amazon Data Firehose in a different account

Copied

S3 bucket ARN
The ARN of the Amazon S3 bucket to which the flow log is published. You can specify a specific folder in the bucket using the arn:aws:s3:::[bucket-name]/[folder_name]/ format.
arn:aws:s3:::vqr-log-bucket
Create S3 bucket
Must be in the format: arn:aws:s3:::[bucket-name]

Successfully created flow log for the following resource:
- vpc-0fe8b8e7d3019b885


Explore integration options

fl-05d8275958d0f0584 / s3-flow-logs

Actions

Details

Flow Log ID fl-05d8275958d0f0584	**Destination Type** s3	**Traffic Type** All	**File Format** Plain text
Name s3-flow-logs	**Destination Name** vqr-log-bucket	**Max Aggregation Interval** 1 minute	**Hive Compatible Partitions** Not enabled
State Active	**IAM Role** –	**Log Format** Default	**Partition Logs** Daily
Creation Time Friday, October 30, 2026 at 19:18:37 GMT+5:30	**Cross Account IAM Role** –	**Tag field specifications** -	

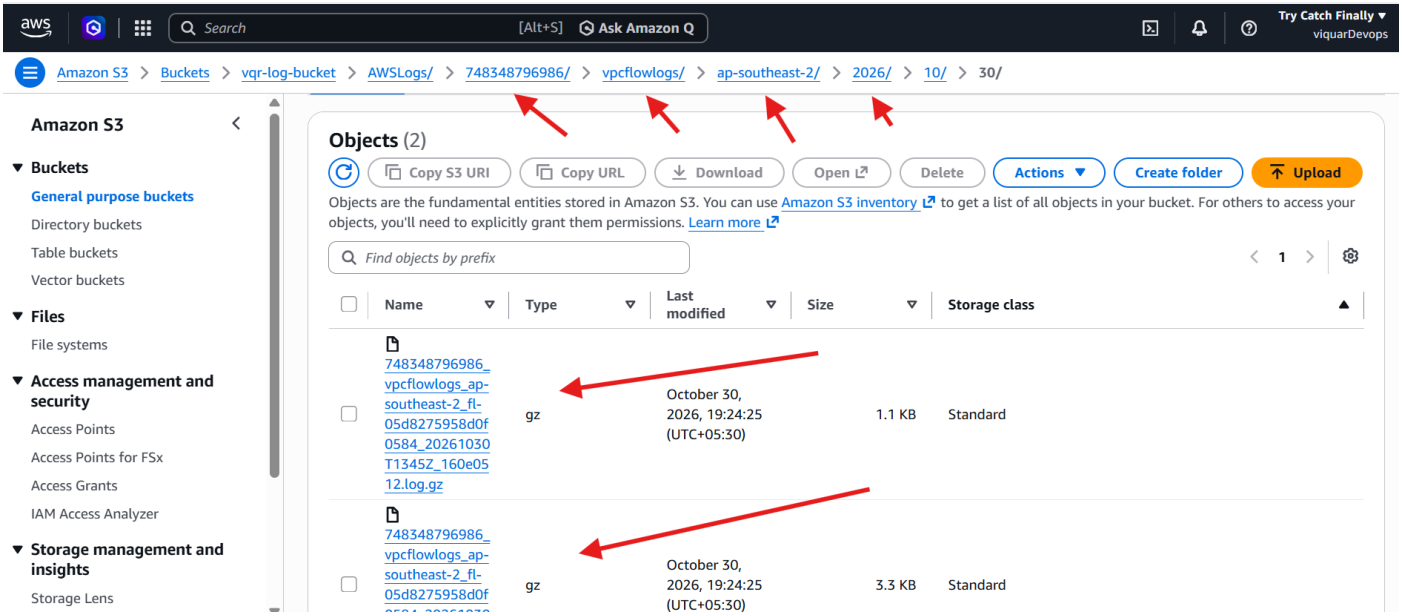
Search
[Alt+S]
Ask Amazon Q
Try Catch Finally
viquarDevops
Amazon S3 > Buckets > vqr-log-bucket > AWSLogs/ > 748348796986/ > vpcflowlogs/ > ap-southeast-2/ > 2026/ > 10/ > 30/
Amazon S3
Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets
Files
File systems
Access management and security
Access Points
Access Points for FSx
Access Grants
IAM Access Analyzer
Storage management and insights
Storage Lens
Objects (2)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
1
Name
Type
Last modified
Size
Storage class
748348796986_vpcflowlogs_ap-southeast-2_fl-05d8275958d0f0584_20261030T1345Z_160e0512.log.gz
gz
October 30, 2026, 19:24:25 (UTC+05:30)
1.1 KB
Standard
748348796986_vpcflowlogs_ap-southeast-2_fl-05d8275958d0f
gz
October 30, 2026, 19:24:25 (UTC+05:30)
3.3 KB
Standard