

S3 BUCKET


1. Create an S3 bucket and upload some objects to S3.


Steps:
Go to Amazon S3 Bucket services → Create bucket → Give name → Unblock all Public Access → Acknowledge the setting → click on create → S3 bucket is ready.
→ Go to bucket → Click on Upload → Select the File → click on Upload…. Uploaded Successfully…


Results Below:

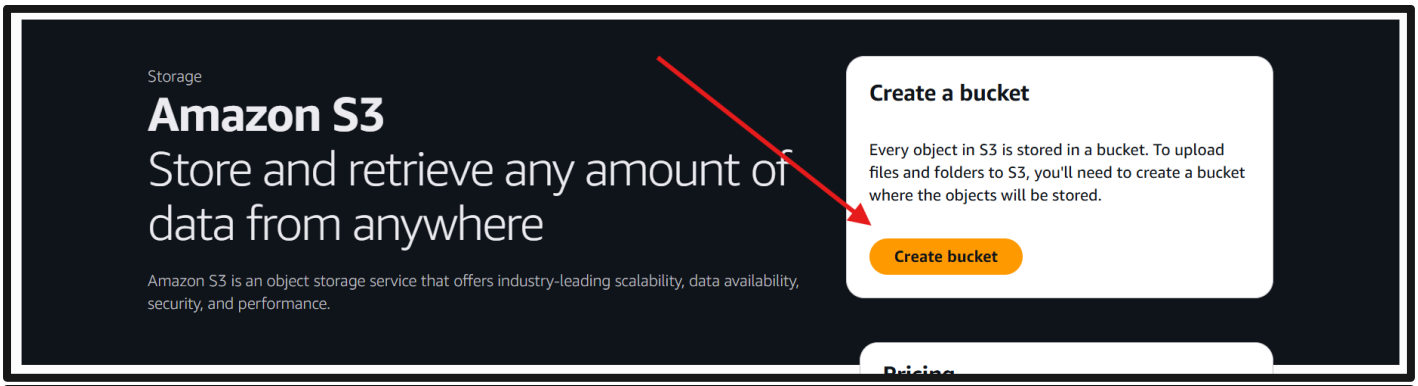


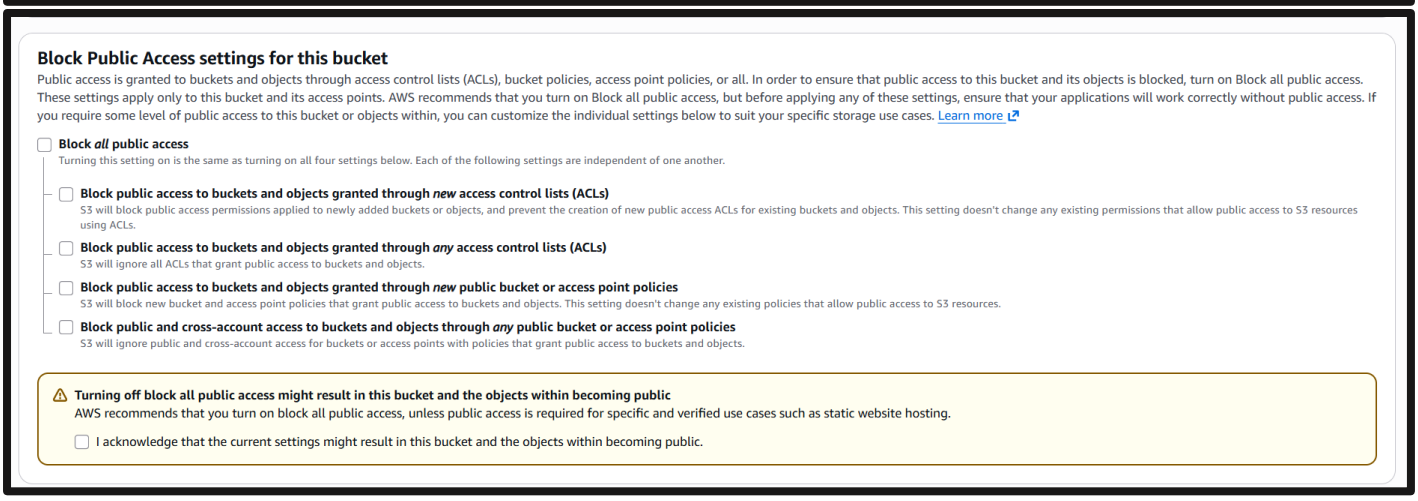


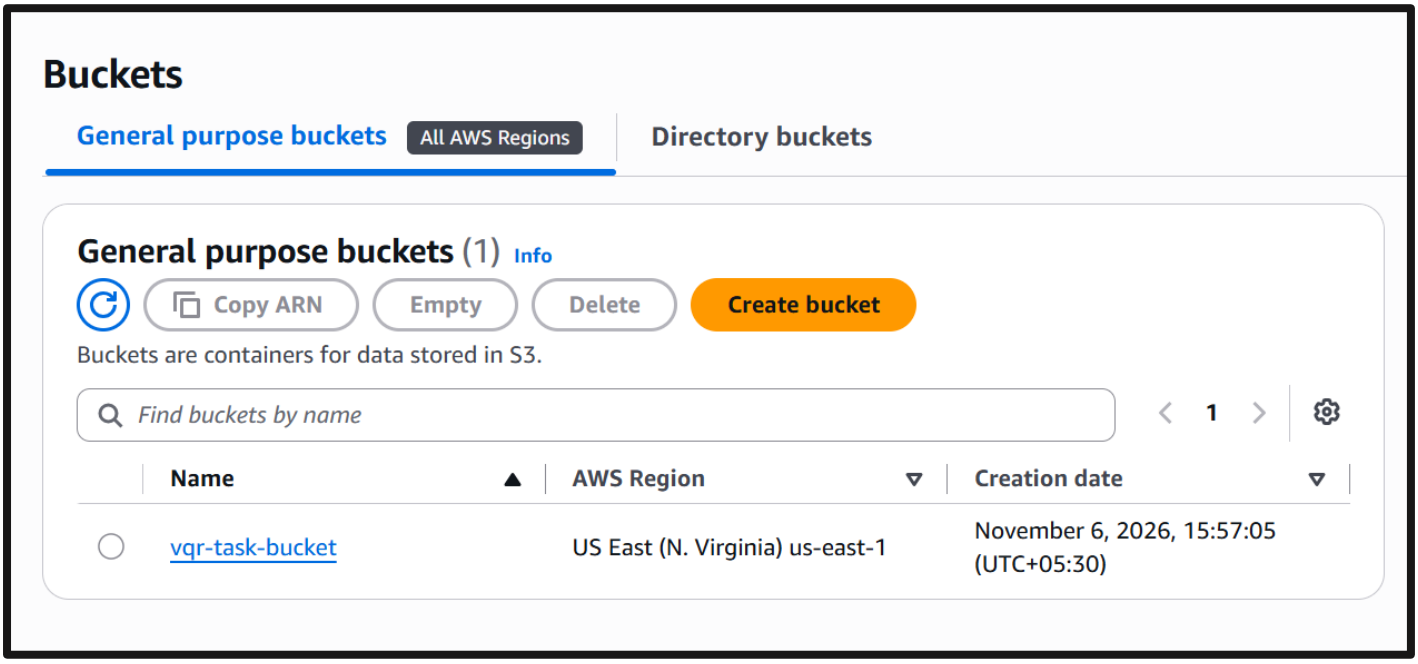

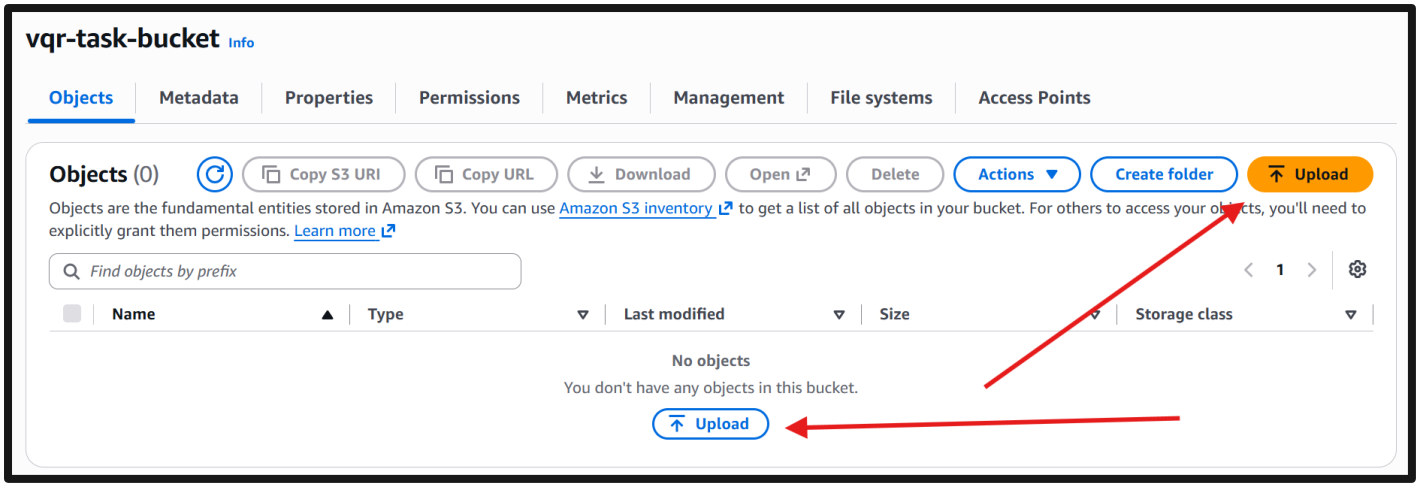
vqr-task-bucket Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems
Access Points
Objects (0)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Name
Type
Last modified
Size
Storage class
No objects
You don't have any objects in this bucket.
Upload

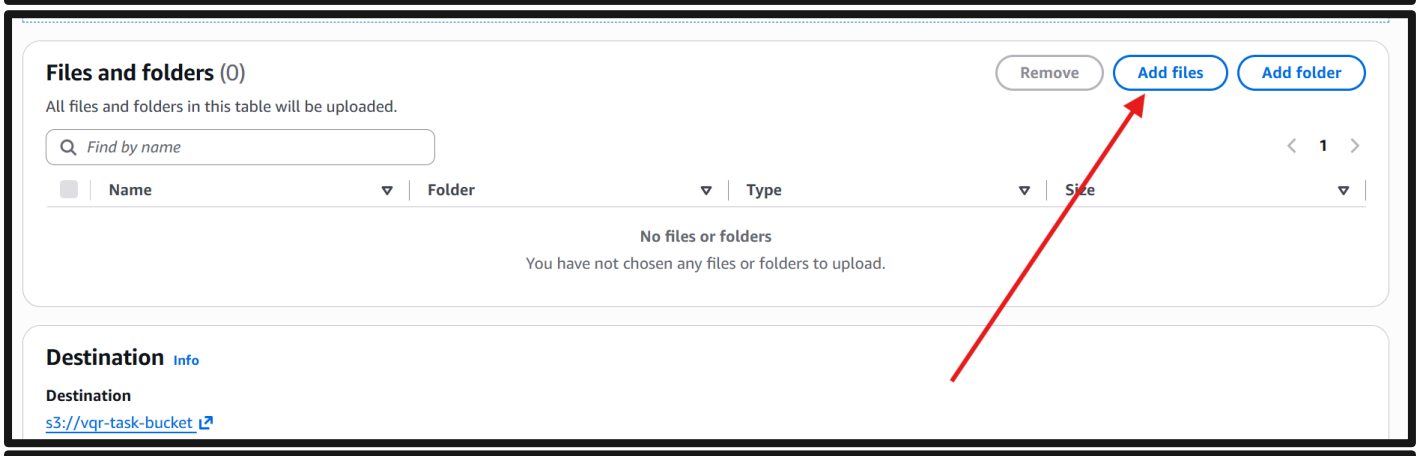
Files and folders (0)
Remove
Add files
Add folder
All files and folders in this table will be uploaded.
Find by name
Name
Folder
Type
Size
No files or folders
You have not chosen any files or folders to upload.
Destination Info
Destination
s3://vqr-task-bucket

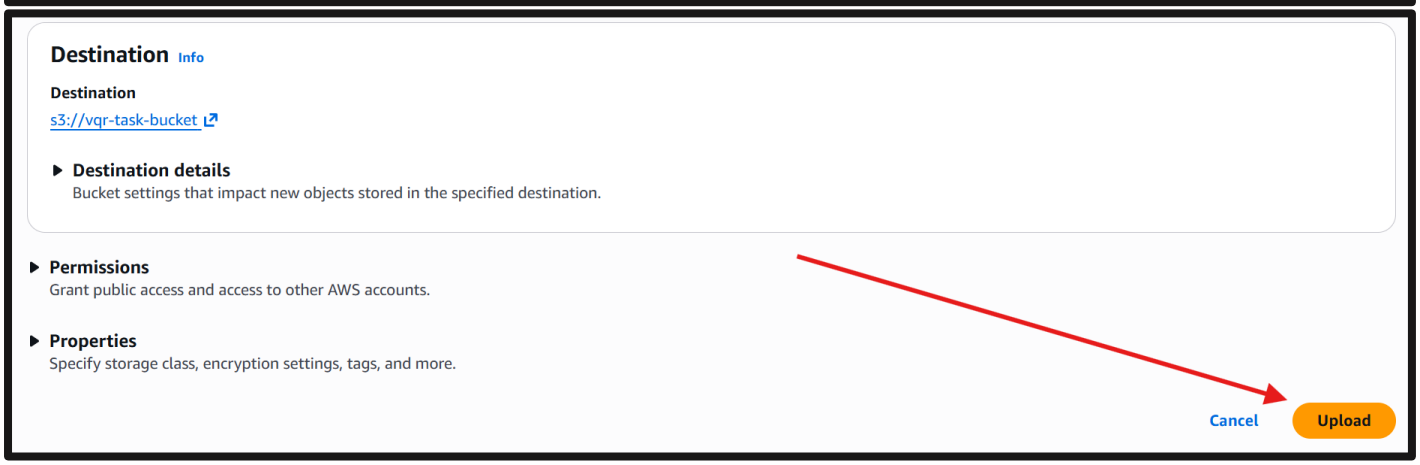
Destination Info
Destination
s3://vqr-task-bucket
Destination details
Bucket settings that impact new objects stored in the specified destination.
Permissions
Grant public access and access to other AWS accounts.
Properties
Specify storage class, encryption settings, tags, and more.
Cancel
Upload

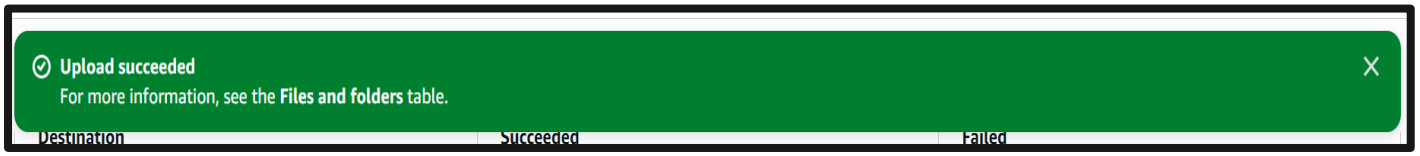

Upload succeeded
For more information, see the Files and folders table.
Destination
Succeeded
Failed


2. Deploy a static website in the S3 bucket.

Steps:


Go to Bucket Properties → Scroll down till end → Static website hosting → Click on edit → Enable → then add html file to Bucket → Enable ACLs permissions → Then goto website Hosting Click on Link Your static web page will open.

Results Below:

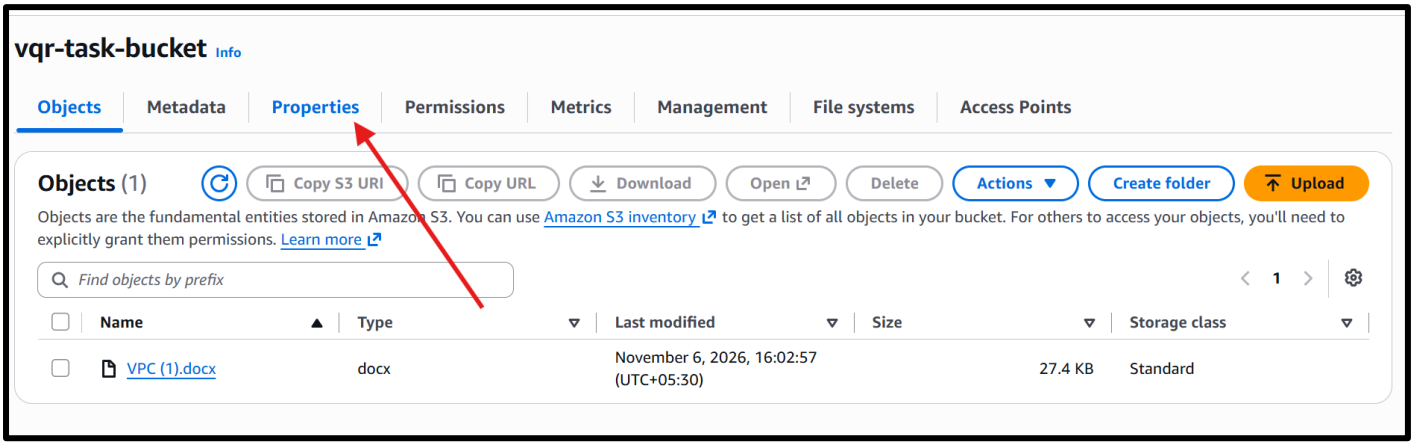

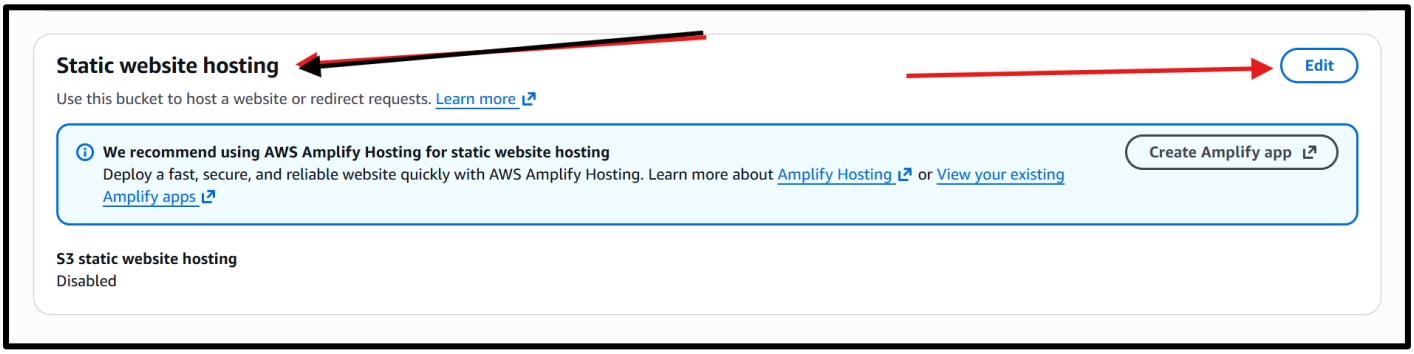



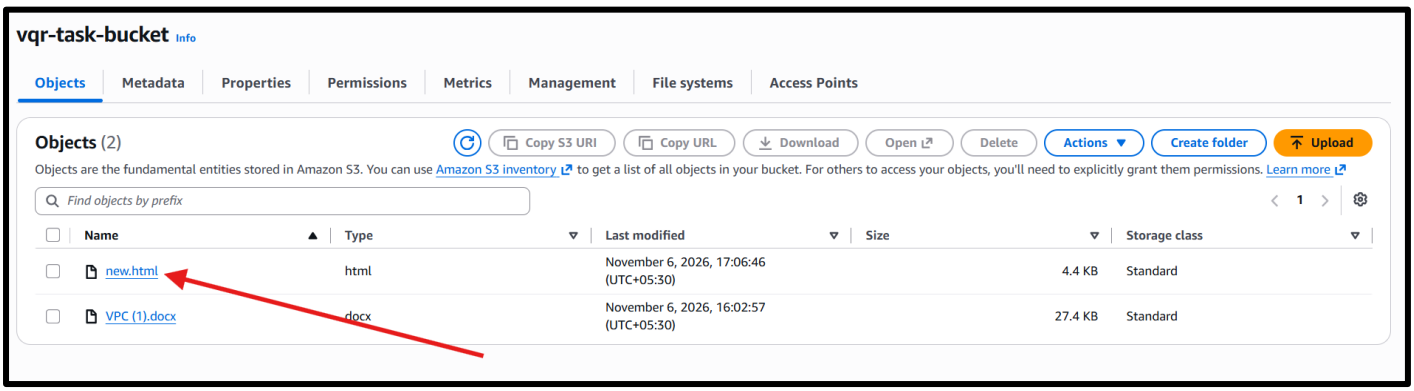

Edit Object Ownership Info

Object Ownership

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

- ○ ACLs disabled (recommended)
  All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
- ◉ ACLs enabled
  Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

⚠ We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

⚠ **Enabling ACLs turns off the bucket owner enforced setting for Object Ownership**
Once the bucket owner enforced setting is turned off, access control lists (ACLs) and their associated permissions are restored. Access to objects that you do not own will be based on ACLs and not the bucket policy.

☐ I acknowledge that ACLs will be restored.

Object Ownership

- ◉ Bucket owner preferred
  If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
- ○ Object writer
  The object writer remains the object owner.

ⓘ If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more

Cancel | Save changes

Static website hosting

Edit

Use this bucket to host a website or redirect requests. Learn more


ⓘ **We recommend using AWS Amplify Hosting for static website hosting**
Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. Learn more about Amplify Hosting or View your existing Amplify apps

Create Amplify app

S3 static website hosting
Enabled

Hosting type
Bucket hosting


Bucket website endpoint
When you configure your bucket as a static website, the website is availabl[illegible] the AWS Region-specific website endpoint of the bucket. Learn more
http://vqr-task-bucket.s3-website-us-east-1.amazonaws.com

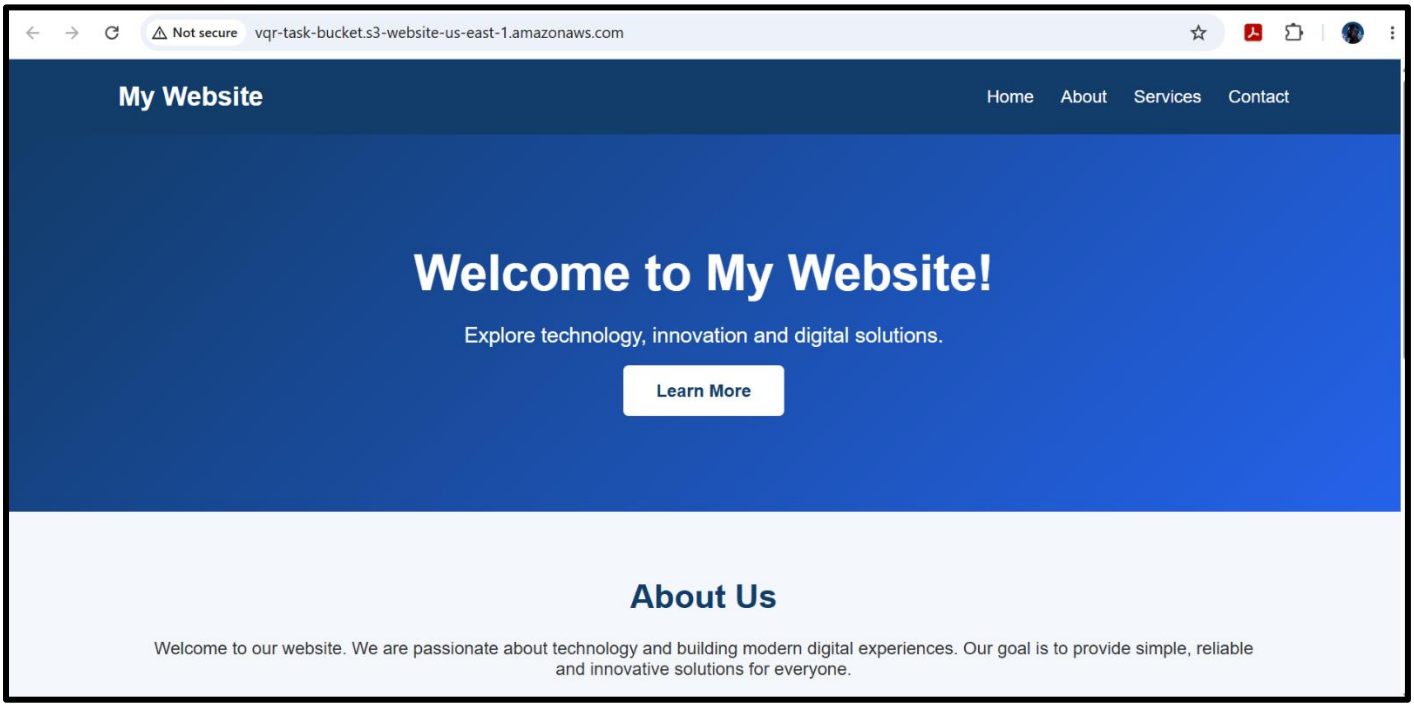



3. Enable cross-region replication on S3 buckets.


Steps:
Go to properties and Enable Bucket versioning → then go to management → Replication rule → Create replication rule → Choose destination → you can replicate existing jobs as well → it will come with IAM role use create a new role → push the document wish to push another..

Results below:

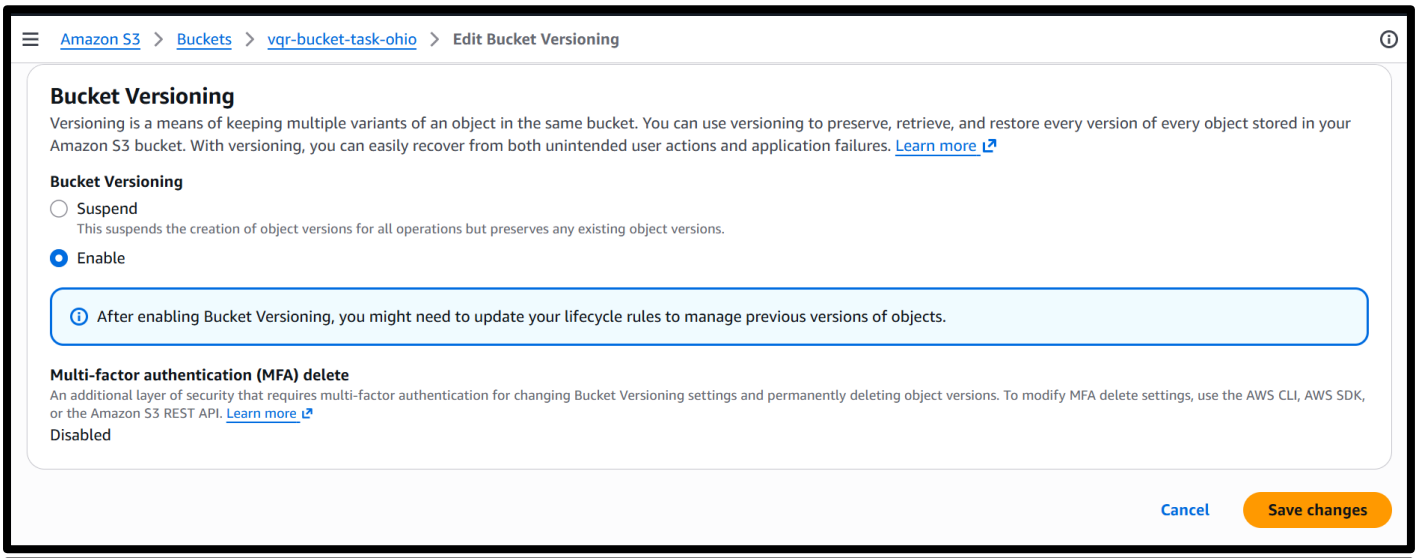


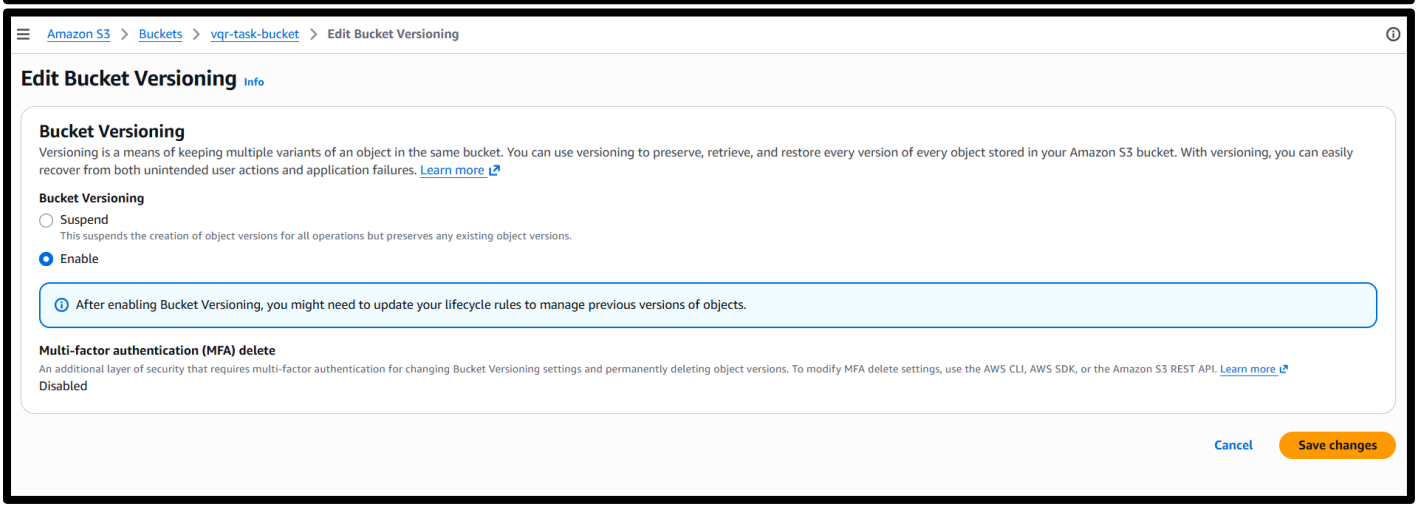


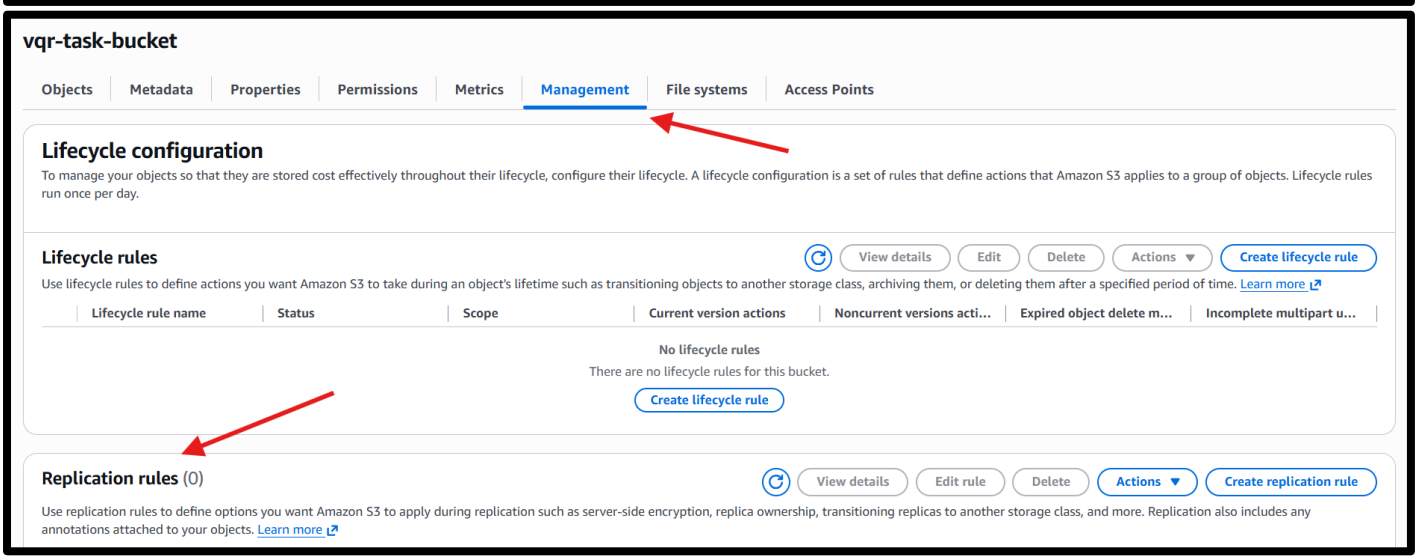

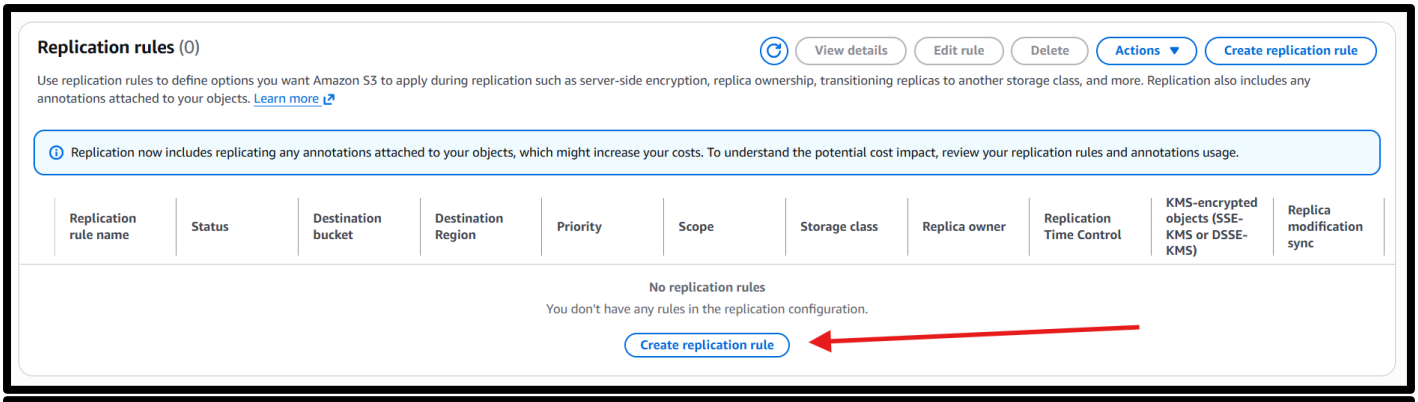
Replication rules (0)
View details
Edit rule
Delete
Actions
Create replication rule
Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Replication also includes any annotations attached to your objects. Learn more
Replication now includes replicating any annotations attached to your objects, which might increase your costs. To understand the potential cost impact, review your replication rules and annotations usage.
Replication rule name
Status
Destination bucket
Destination Region
Priority
Scope
Storage class
Replica owner
Replication Time Control
KMS-encrypted objects (SSE-KMS or DSSE-KMS)
Replica modification sync
No replication rules
You don't have any rules in the replication configuration.
Create replication rule


Destination
Destination
You can replicate objects across buckets in different AWS Regions (Cross-Region Replication) or you can replicate objects across buckets in the same AWS Region (Same-Region Replication). You can also specify a different bucket for each rule in the configuration. Learn more or see Amazon S3 pricing
Choose a bucket in this account
Specify a bucket in another account
Bucket name
vqr-bucket-task-ohio
View
Browse S3
Choose the bucket that will receive replicated objects.
Destination Region
US East (Ohio) us-east-2

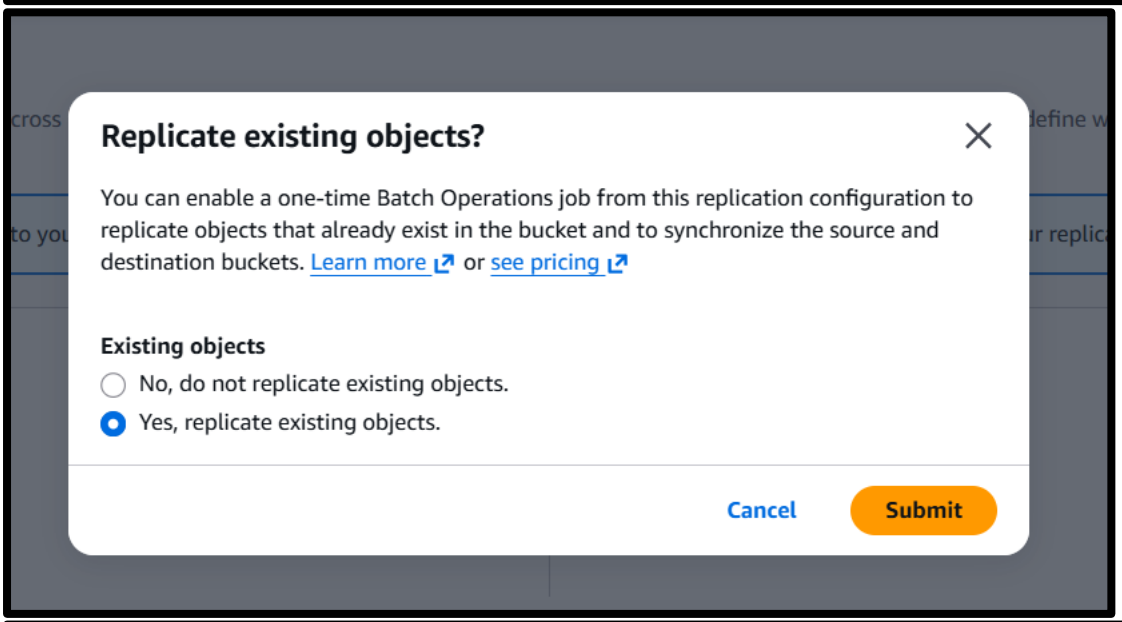

Replicate existing objects?
You can enable a one-time Batch Operations job from this replication configuration to replicate objects that already exist in the bucket and to synchronize the source and destination buckets. Learn more or see pricing
Existing objects
No, do not replicate existing objects.
Yes, replicate existing objects.
Cancel
Submit

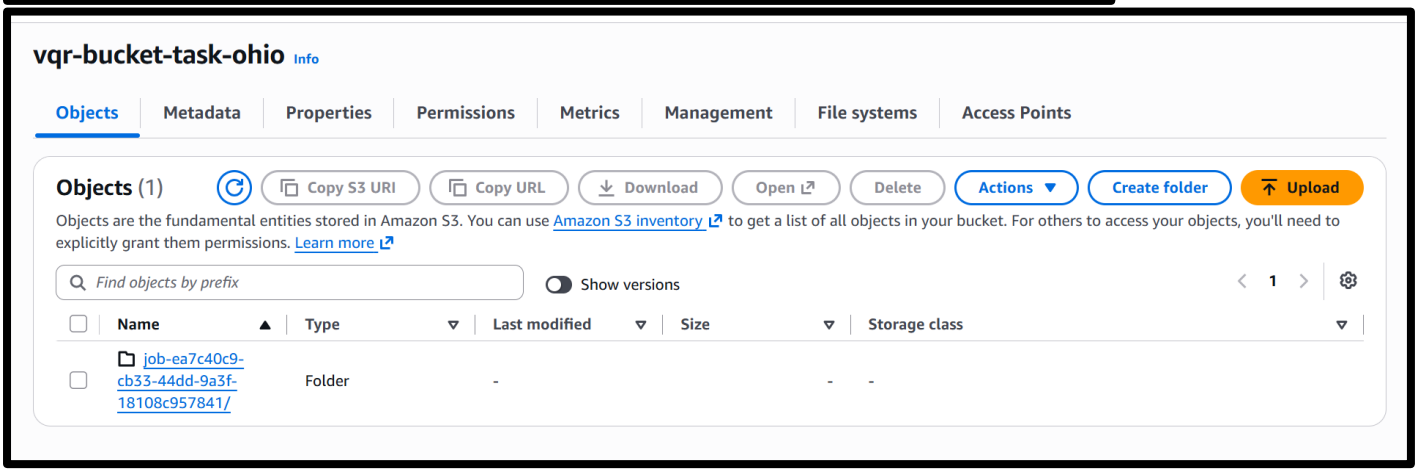

vqr-bucket-task-ohio Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems
Access Points
Objects (1)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Show versions
Name
Type
Last modified
Size
Storage class
job-ea7c40c9-cb33-44dd-9a3f-18108c957841/
Folder


4. Configure a bucket policy so only the Admin user can see the objects of the S3 bucket.


Steps:
Create IAM user and set Permissions → Attach Policies directly → AmazonS3FullAccess → User Created → Goto Bucket Permissions → Bucket policy → Edit Bucket Policy → Write JSON Script → Login with IAM user and check the S3 bucket


Results Below:

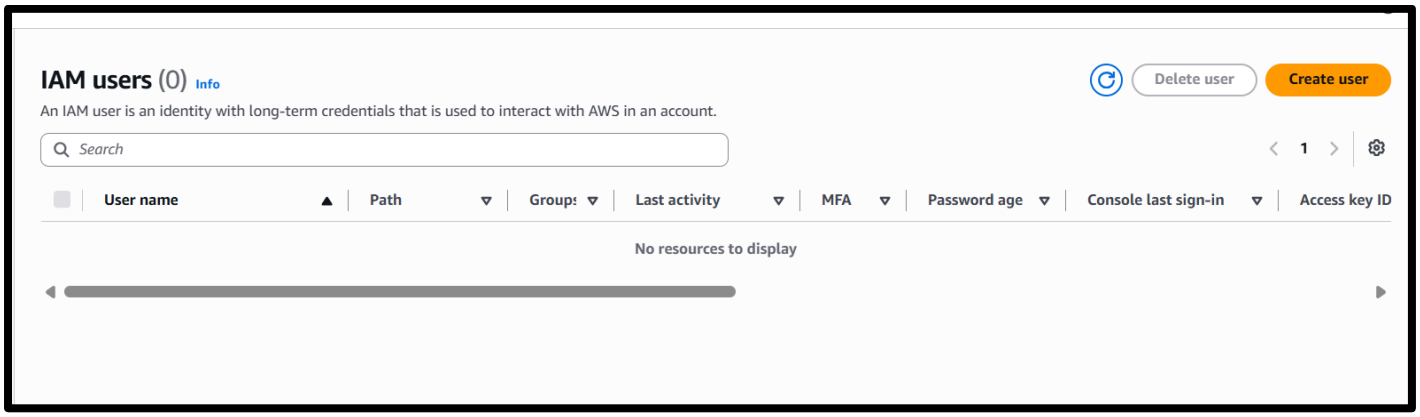

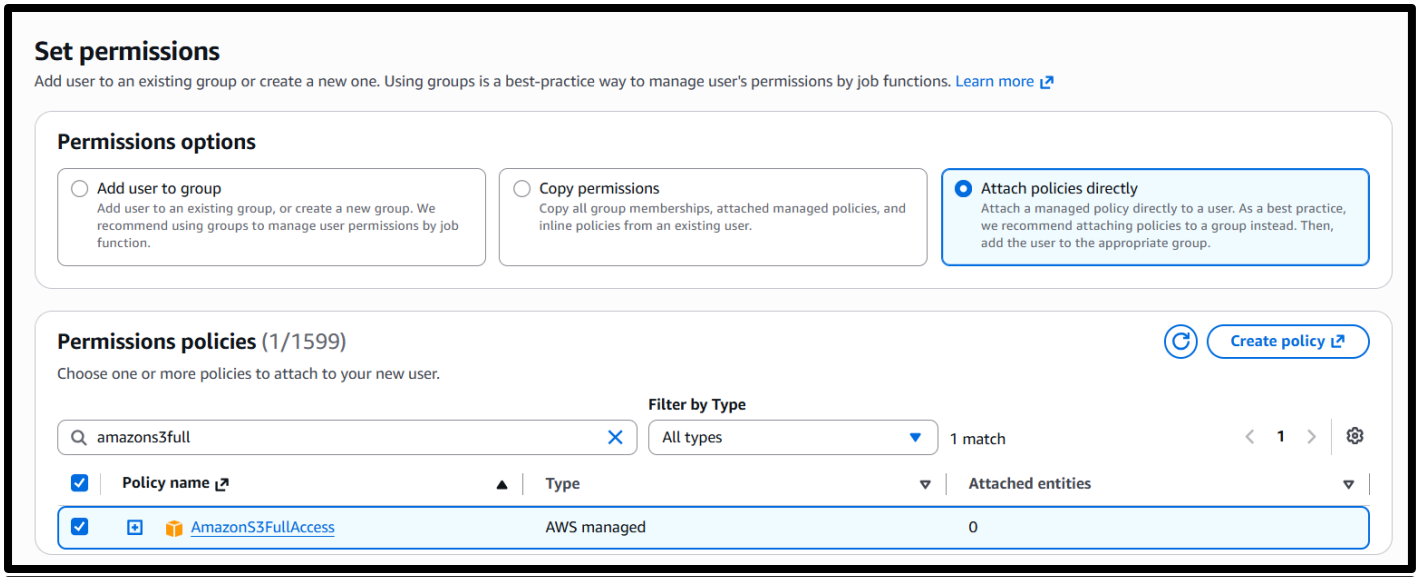


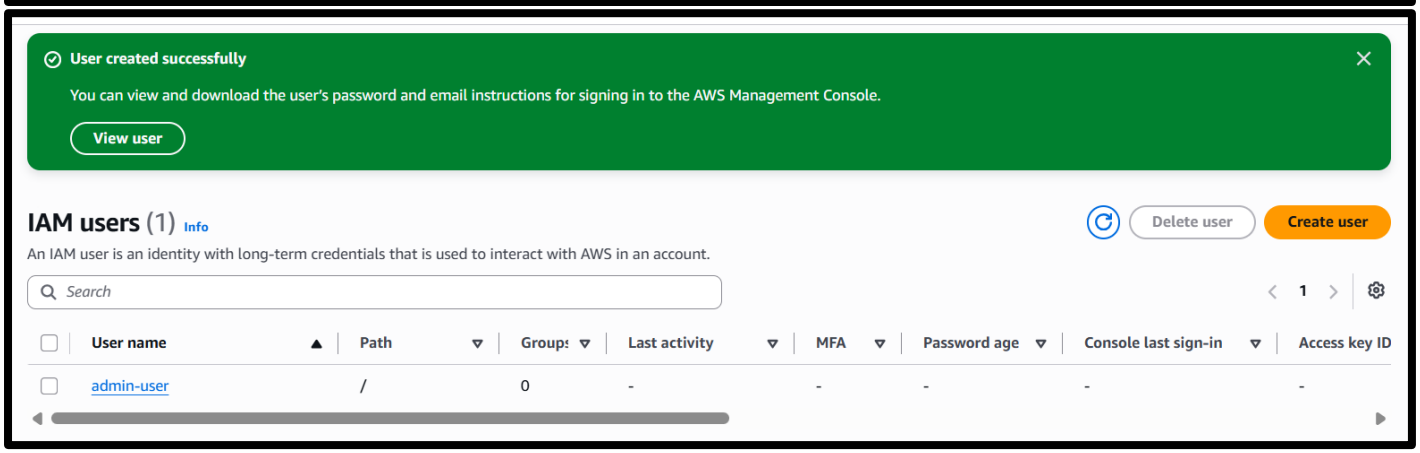

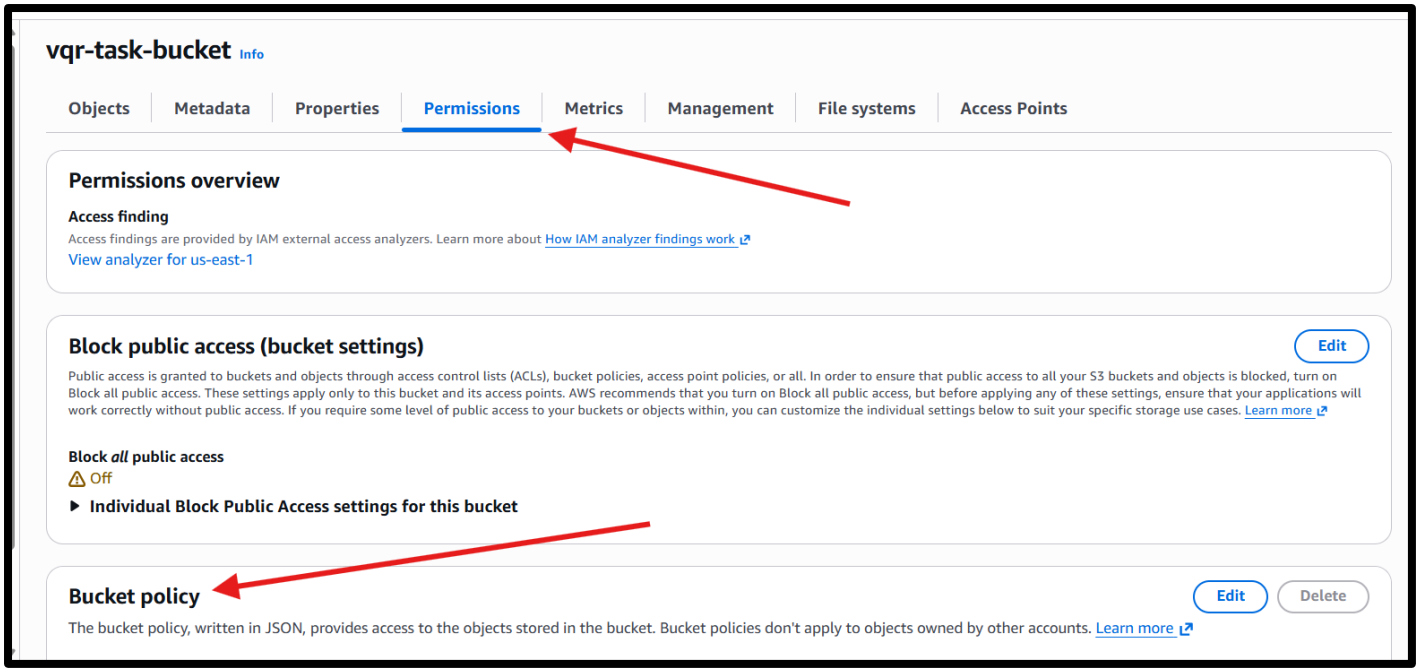

vqr-task-bucket Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems
Access Points
Permissions overview
Access finding
Access findings are provided by IAM external access analyzers. Learn more about How IAM analyzer findings work
View analyzer for us-east-1
Block public access (bucket settings)
Edit
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
Off
Individual Block Public Access settings for this bucket
Bucket policy
Edit
Delete
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more

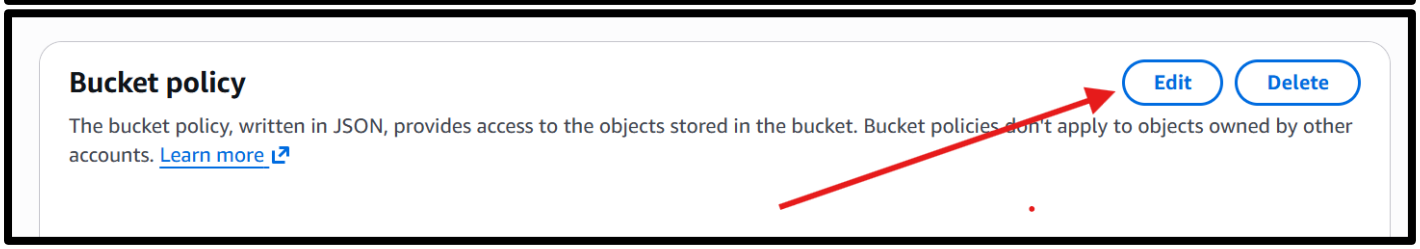

Bucket policy
Edit
Delete
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more



Edit bucket policy Info
Bucket policy
Policy examples
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more
Bucket ARN
arn:aws:s3:::vqr-task-bucket
Policy
{
"Version": "2012-10-17",
"Statement": [
{
"Sid": "AllowAdminListBucket",
"Effect": "Allow",
"Principal": {
"AWS": "arn:aws:iam::501794745645:user/admin-user"
},
"Action": "s3:ListBucket",
"Resource": "arn:aws:s3:::vqr-task-bucket"
},
{
"Sid": "AllowAdminObjectAccess",
"Effect": "Allow",
"Principal": {
"AWS": "arn:aws:iam::501794745645:user/admin-user"
},
"Action": [
"s3:GetObject",
"s3:PutObject",
Edit statement
AllowAdminObjectAccess
Remove
Add actions
Choose a service
Search services
Included
S3
Available
AI Operations
AMP

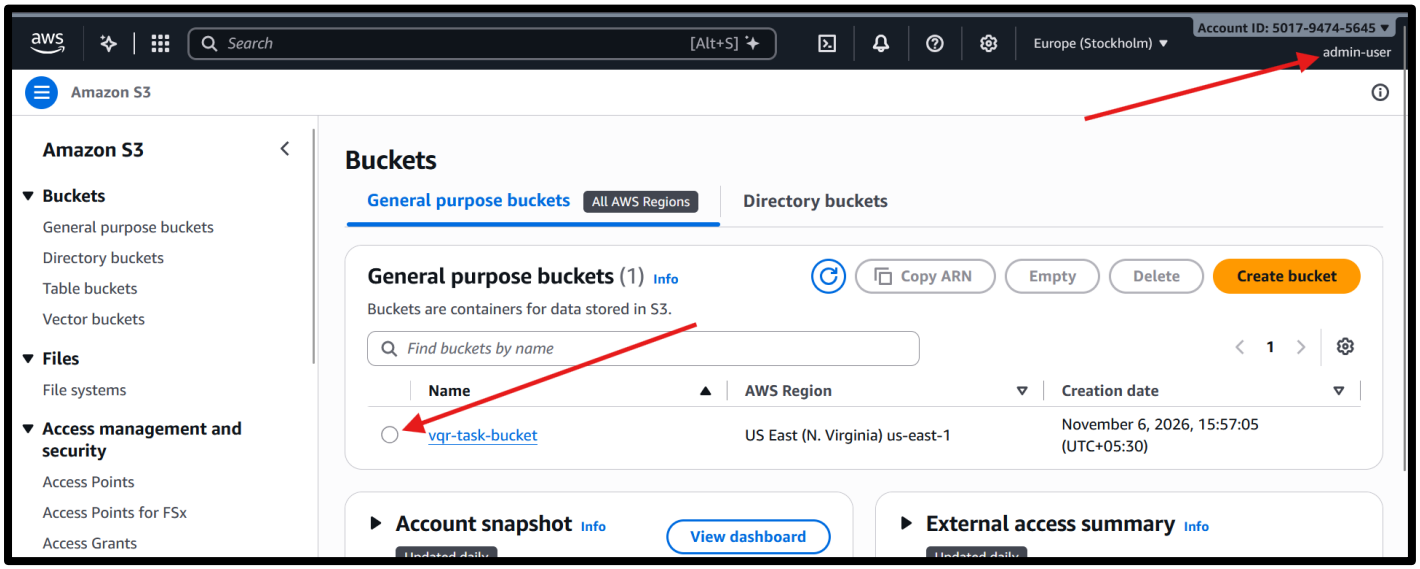

aws
Search
[Alt+S]
Europe (Stockholm)
Account ID: 5017-9474-5645
admin-user
Amazon S3
Amazon S3
Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets
Files
File systems
Access management and security
Access Points
Access Points for FSx
Access Grants
Buckets
General purpose buckets
All AWS Regions
Directory buckets
General purpose buckets (1) Info
Copy ARN
Empty
Delete
Create bucket
Buckets are containers for data stored in S3.
Find buckets by name
Name
AWS Region
Creation date
vqr-task-bucket
US East (N. Virginia) us-east-1
November 6, 2026, 15:57:05 (UTC+05:30)
Account snapshot Info
View dashboard
External access summary Info

5. Set up lifecycle policies to automatically transition or delete objects based on specific criteria.

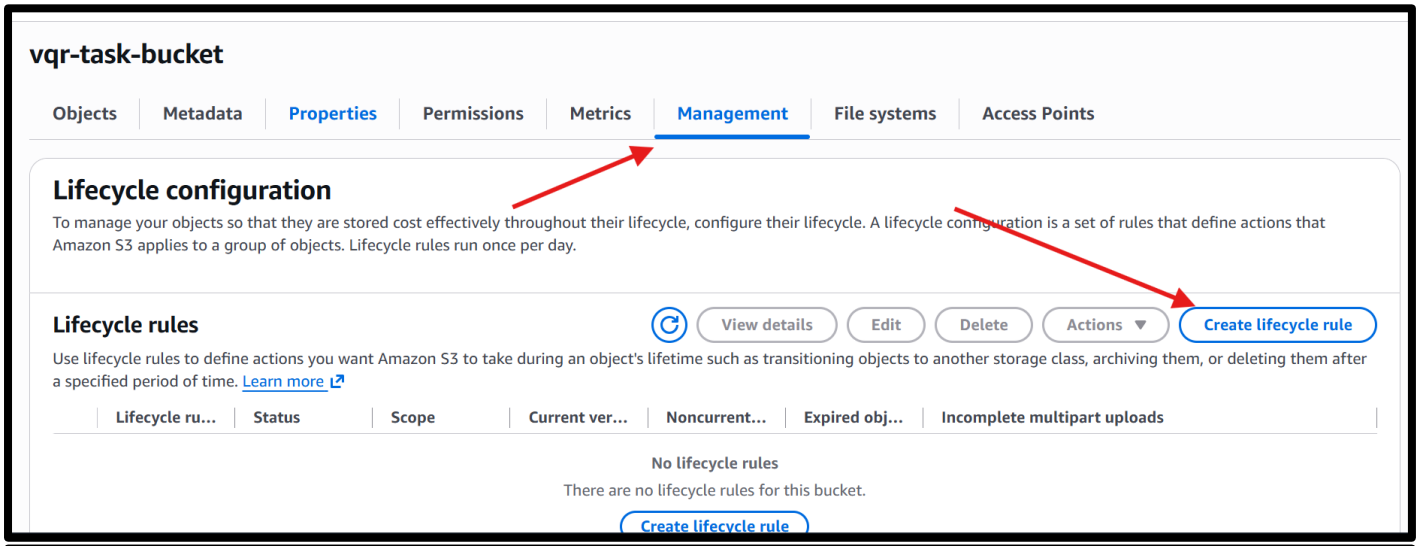

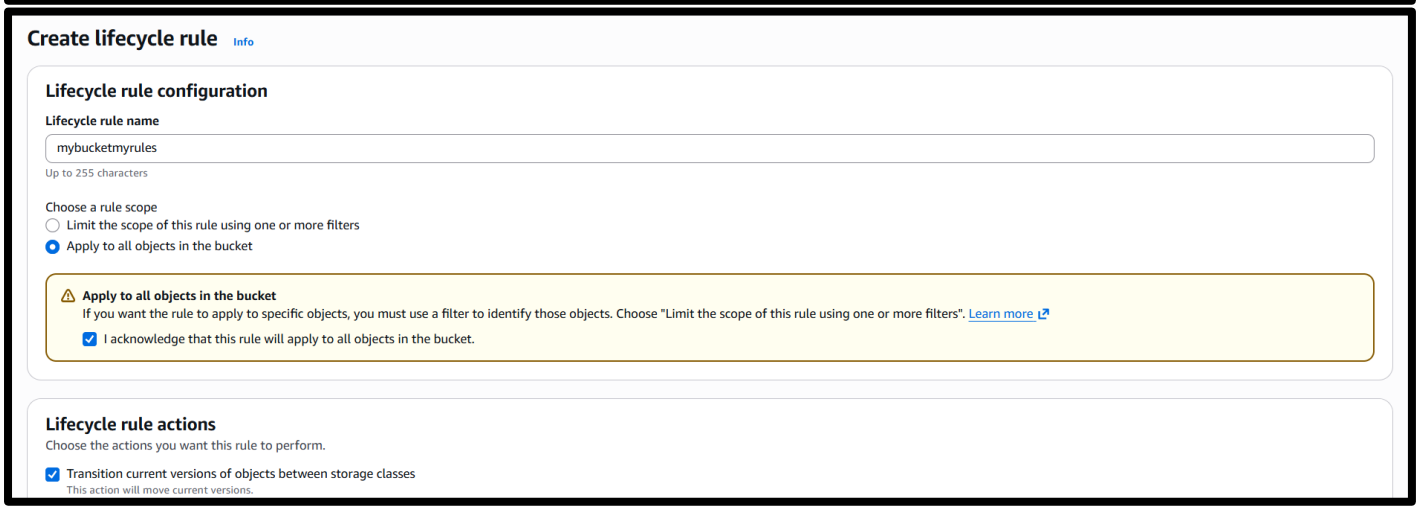

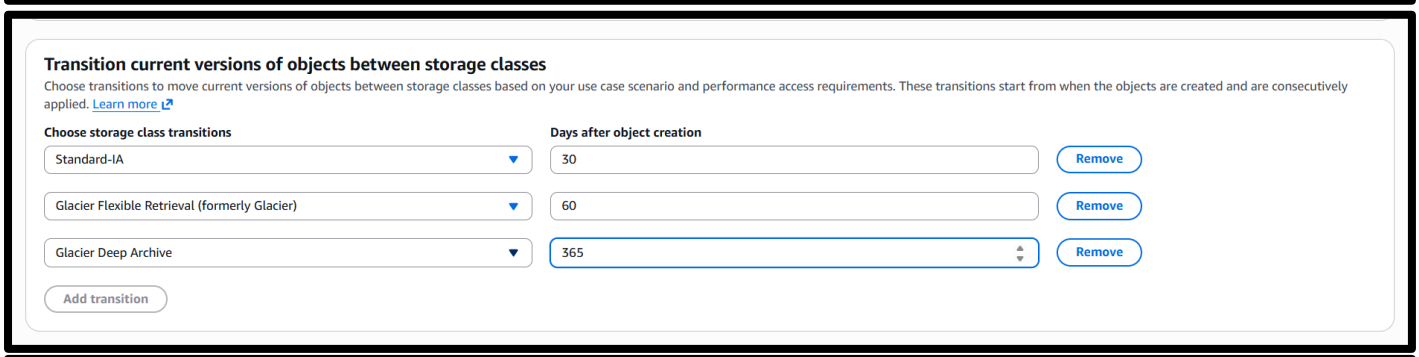


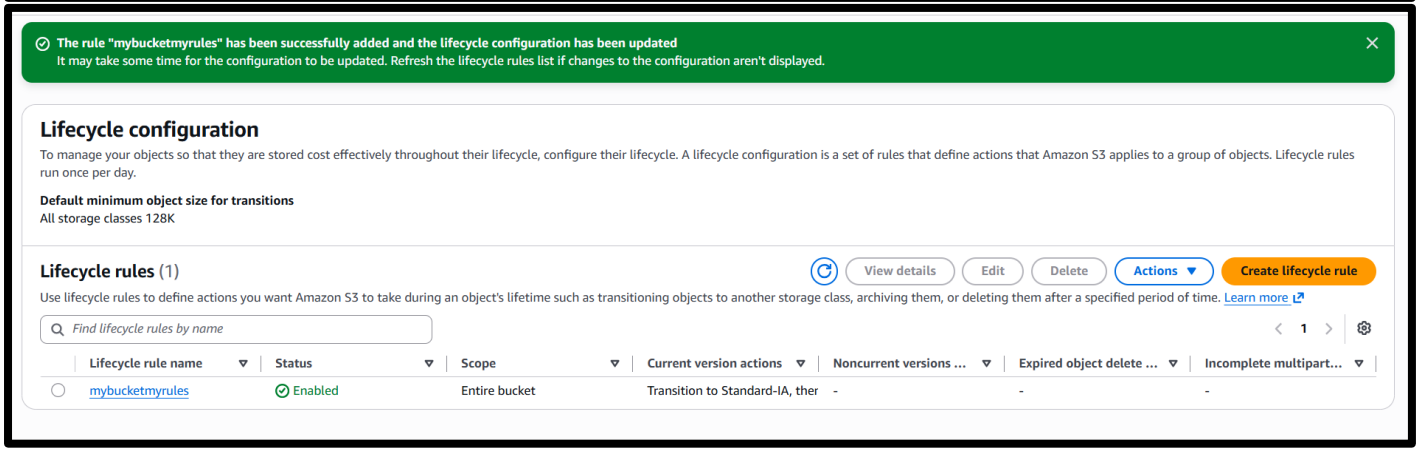



6. Push some objects to S3 using the AWS CLI.

Steps:
Create a role in IAM user → AmazonS3FullAccess → go to instance Action → Security
→ Modify IAM role
Then come to CLI → write a command AWS S3 ls → see the bucket
→ AWS S3 cp file.txt s3://vqr-task-bucket
→ check the object in S3 bucket

Results Below:

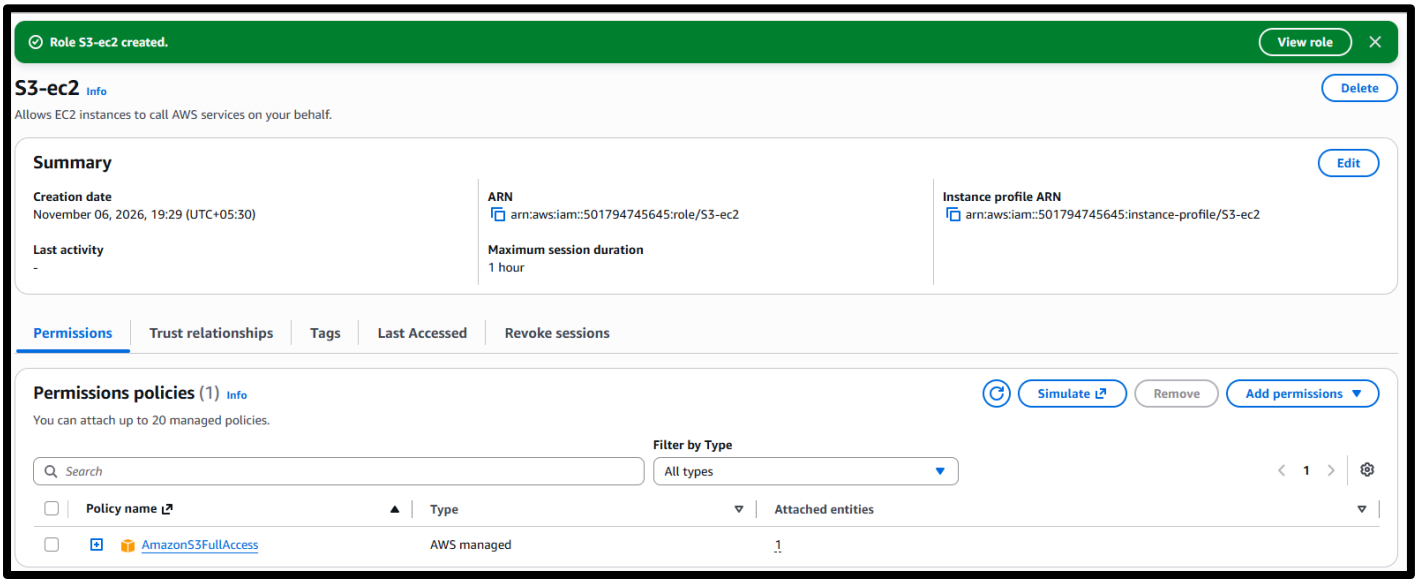

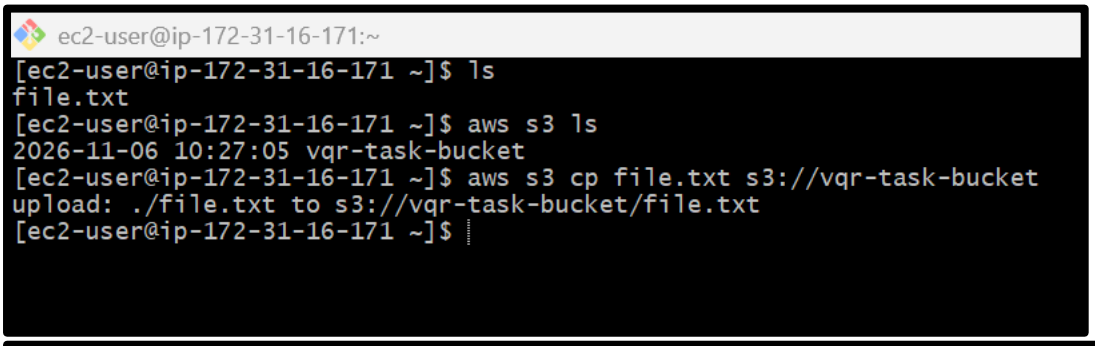


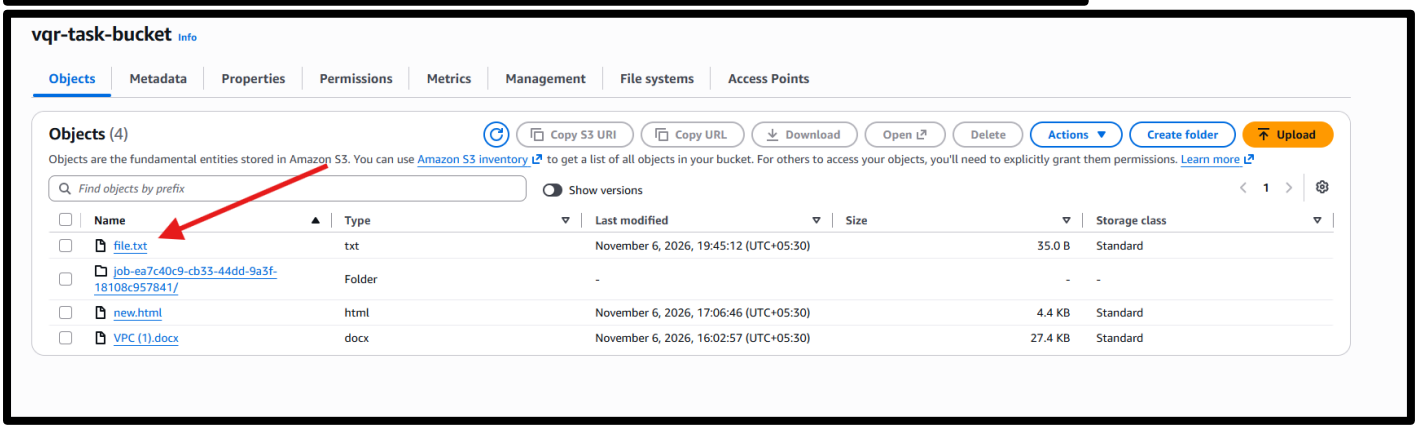

7. Write a Bash script to create an S3 bucket.

Steps:
Wrote bash script in aws cli →

```
ec2-user@ip-172-31-16-171:~
[ec2-user@ip-172-31-16-171 ~]$ ls
file.txt
[ec2-user@ip-172-31-16-171 ~]$ aws s3 ls
2026-11-06 10:27:05 vqr-task-bucket
[ec2-user@ip-172-31-16-171 ~]$ aws s3 cp file.txt s3://vqr-task-bucket
upload: ./file.txt to s3://vqr-task-bucket/file.txt
[ec2-user@ip-172-31-16-171 ~]$ vi s3-bucket
[ec2-user@ip-172-31-16-171 ~]$ chmod 600 s3-bucket
[ec2-user@ip-172-31-16-171 ~]$ chmod 700 s3-bucket
[ec2-user@ip-172-31-16-171 ~]$ ./s3-bucket
-bash: ./s3-bucket: cannot execute: required file not found
[ec2-user@ip-172-31-16-171 ~]$ ls -l
total 8
-rw-r--r--. 1 ec2-user ec2-user 35 Nov  6 14:01 file.txt
-rwx------. 1 ec2-user ec2-user 82 Nov  6 14:22 s3-bucket
[ec2-user@ip-172-31-16-171 ~]$ ./s3-bucket
-bash: ./s3-bucket: cannot execute: required file not found
[ec2-user@ip-172-31-16-171 ~]$ vi s3-bucket
[ec2-user@ip-172-31-16-171 ~]$ ./s3-bucket
make_bucket: new-task-06
[ec2-user@ip-172-31-16-171 ~]$
```

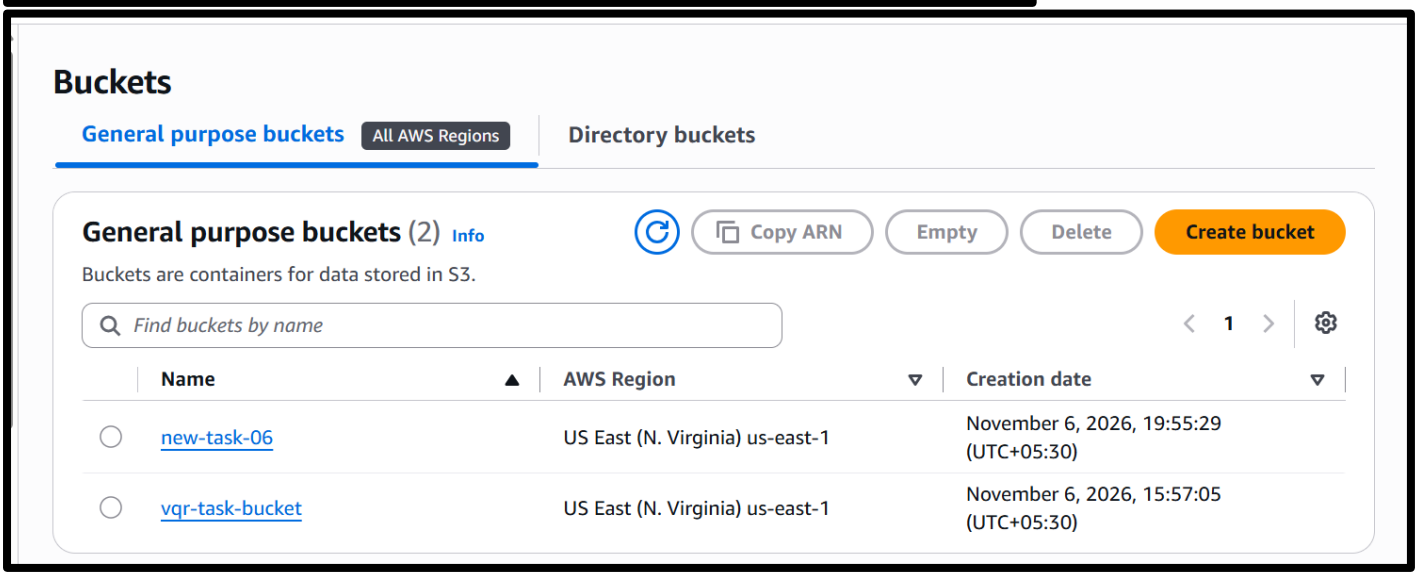

8. Upload a 1 GB file to S3 using the CLI.

Steps:

Go to AWS CLI and get the 1GB file → wget https://ash-speed.hetzner.com/1GB.bin

Upload file using command aws s3 cp 1GB.bin s3://new-task-06

Checked the file in bucket it was available

Results Below:

