Use AI without trusting the computer running it

What stays with you	What goes to each worker
The readable input	A different random-looking share
The reconstructed answer	The public model + fresh helper values

Privacy needs one honest worker in the group


Who pools their input shares?	Can they reconstruct the input?
Any one worker	No
Any two workers	No
All three workers	Yes

Keep one worker under your control

The other two are not enough

You cannot detect secret collusion. You can choose who holds a share.

Our separate training test added 2.48% perplexity

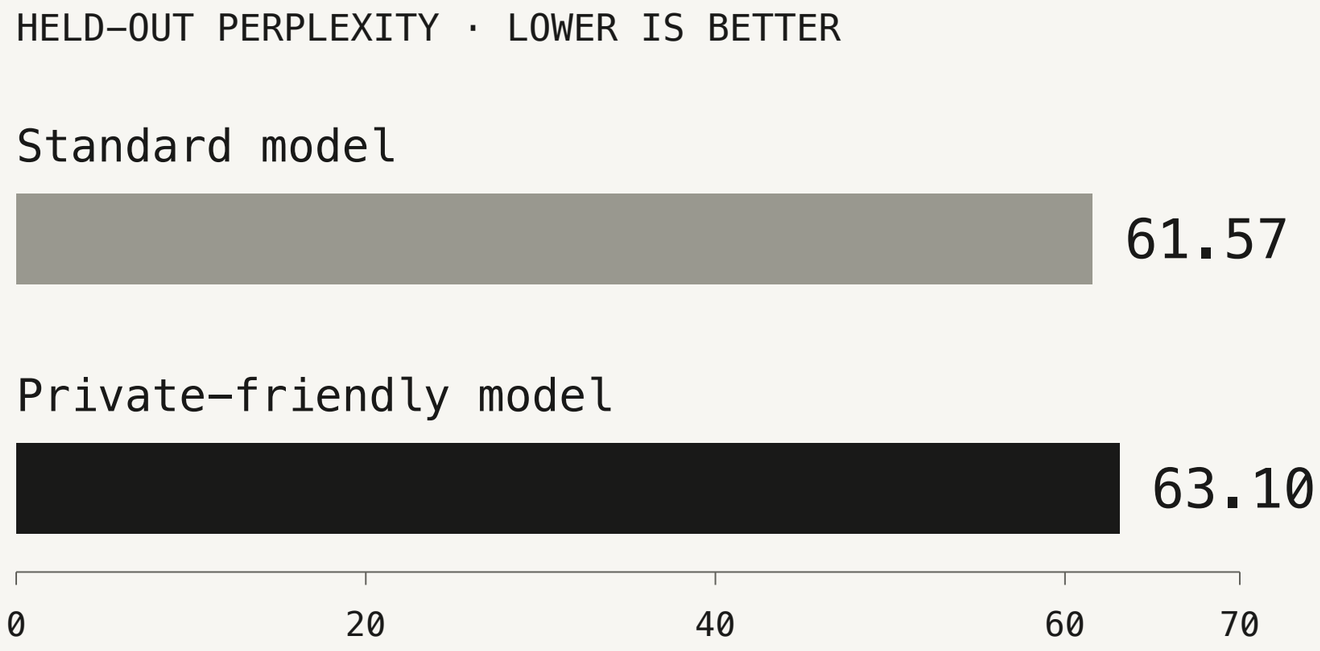

6,164,096

parameters in each research model

14,336,000

unique training tokens

Not the model in the demo. Not a private throughput result.

Saved training run · data/quality.json · percentage derived from validation-loss gap

Separate research model

The model’s only nonlinear step is a square

Operation	Where it happens	Communication
Embedding + fresh sharing	Your device	Shares sent to workers
Public-weight linear layer	Each worker, locally	No intermediate exchange
Private square	Workers + client relay	Masked opening is checked
Linear layer + output check	Workers, then your device	Checked answer shares return
This prototype	Fresh helpers + reference checks	2 client phases / character

Source: engine/device.py + engine/node.py · session setup is additional

A working mechanism today.
A useful private network next.

Working prototype	Next-stage work
19,295-parameter note model	Useful models running privately
Three workers over TCP or USB	Independent operators + secure transport
Checked output + exact reference match	End-to-end security review
Fresh client-generated helpers	Distributed helpers + direct worker links

Keep one worker yours. Use compute beyond your own machine.