

Experiment- 5

Transfer Learning with Deep CNNs

1. Aim

To study Transfer Learning with deep CNNs by using pretrained backbones for small, specialized datasets, and fine-tuning a lightweight pretrained model (VGG19 or MobileNet) on the Oxford Flowers dataset with limited training steps, while toggling layer freezing and analyzing performance through quick accuracy and loss snapshots.

2. Theory

Introduction to Transfer Learning

In most traditional supervised machine learning approaches, it is assumed that the training data and test data are represented using the same feature space and are drawn from the same probability distribution. Under this assumption, models can perform well only when sufficient training data is available. However, in many real-world scenarios, collecting high-quality data is expensive and time-consuming, which becomes a major bottleneck in practical applications.

Semi-supervised learning attempts to reduce data requirements by using unlabelled data along with training data, but it still assumes that training and test data belong to the same domain and distribution. Active learning reduces the manual effort by selecting the most informative samples, but it is limited by the available resources and may still not provide enough data to train an accurate classifier.

Domain and Task Definitions (Formal Notation)

Domain (D)

A domain consists of:

- A feature space X
- A marginal distribution $P(x)$

So, a domain is:

$$D = \{X, P(x)\}$$

Task (T)

A task consists of:

- A label space Y
- A predictive function $f(\cdot)$

So, a task is:

$$T = \{Y, f(\cdot)\}$$

Transfer Learning Definition

Given:

- Source domain D_S and task T_S
- Target domain D_T and task T_T

Transfer learning aims to improve the target predictive function $f_T(\cdot)$ in D_T using the knowledge from D_S and T_S , where:

$$D_S \neq D_T \text{ or } T_S \neq T_T$$

This means:

- The domains may have different feature spaces or distributions
- The tasks may have different label spaces or predictive distributions

When both domains and tasks are the same, the learning becomes a traditional machine learning problem.

Homogeneous vs Heterogeneous Transfer Learning

Homogeneous Transfer Learning

Homogeneous Transfer Learning refers to a type of transfer learning in which the source domain and target domain share the same or highly similar feature representation. In this case, the input data from both domains lies in an overlapping feature space, meaning that the source and target datasets are represented in a comparable manner. This type of transfer learning is widely applied in practical scenarios where the domains involve similar kinds of data, such as transferring knowledge from one image dataset to another image dataset (image $\rightarrow$ image).

Heterogeneous Transfer Learning

Heterogeneous Transfer Learning is a more complex form of transfer learning in which the feature representation of the source domain and target domain is different. Here, the datasets are described using different feature spaces, making direct transfer difficult. Since the representations do not overlap, it becomes necessary to apply feature mapping or transformation techniques to build a relationship between the source and target domains. Due to the mismatch in feature spaces, heterogeneous transfer learning is considered more challenging compared to homogeneous transfer learning and requires additional processing steps to align or bridge the domains effectively.

Deep CNNs

Convolutional neural networks or CNNs, are a specialized kind of neural network for processing data that has a known, grid-like topology. Examples include time-series data, which can be thought of as a 1D grid taking samples at regular time intervals, and image data, which can be thought of as a 2D grid of pixels. Convolutional networks have been tremendously successful in practical applications. The name “convolutional neural network” indicates that the network employs a mathematical operation called convolution. Convolution is a specialized kind of linear operation. Convolutional networks are simply neural networks that use convolution in place of general matrix multiplication in at least one of their layers.

Deep Convolutional Neural Networks (CNNs), also called ConvNets, have become one of the most important architectures for large-scale image recognition. Their success in tasks such as image classification and object recognition was made possible due to the availability of large public image repositories like ImageNet, along with high-performance computing resources such as GPUs and distributed computing systems. A major milestone in the progress of deep CNNs was the ImageNet Large-Scale Visual Recognition Challenge (ILSVRC), which provided a benchmark platform for evaluating and comparing image classification systems. Early approaches were based on shallow feature representations, but later deep CNN-based models achieved significantly better performance and became dominant in visual recognition tasks.

In deep learning, transfer learning is typically implemented by using a pretrained CNN backbone (trained on large datasets like ImageNet). The pretrained model learns rich hierarchical representations:

- Early layers learn general patterns (edges, textures)
- Middle layers learn shapes and structures
- Deep layers learn high-level category-specific features

For a small dataset like Oxford Flowers, transfer learning improves performance by:

- Reducing training time
- Preventing overfitting
- Reusing learned feature extraction ability

Hence, fine-tuning pretrained models such as VGG19 or MobileNetV2 is an effective strategy for building accurate classification models with limited training samples.

Merits of Transfer learning with deep CNNs

- **Reduced Training Time:**
Transfer learning reduces the training time because the model does not need to be trained from scratch.
- **Works Well on Small Datasets:**
It provides good accuracy even when the target dataset is small by using pretrained knowledge.
- **Better Feature Extraction:**
Pretrained CNNs already learn powerful features like edges, textures, and shapes, improving performance.
- **Reduced Overfitting:**
Since the model starts with pretrained weights, the chances of overfitting are reduced.
- **Faster Convergence:**
The model converges faster because weights are already optimized on large datasets like ImageNet.

Demerits of Transfer Learning with deep CNNs

- **Domain Dependency:**
If the source and target datasets are very different, transfer learning may not give good results.
- **Complexity in Layer Freezing:**
Choosing which layers to freeze or unfreeze needs careful tuning and experimentation.

- **Risk of Overfitting during Fine-tuning:**
Fine-tuning on a very small dataset can cause overfitting if not controlled properly.
- **High Computation for Large Models:**
Large models like VGG19 require high memory and more computation, making training slow.
- **Hardware Requirement:**
Deep CNN training may still require GPU support for faster training and performance.

3. Code and Result

Step 1: Import Libraries

INPUT:

```
# Importing Libraries

import os

import numpy as np

import matplotlib.pyplot as plt

import tensorflow as tf

import seaborn as sns

import json

from sklearn.metrics import classification_report

from tensorflow.keras.applications.mobilenet_v2 import preprocess_input

from tensorflow.keras.layers import GlobalAveragePooling2D, Dense, Dropout

from tensorflow.keras.models import Model

from tensorflow.keras.callbacks import EarlyStopping, ModelCheckpoint

from tensorflow.keras.optimizers import Adam

from tensorflow.keras.applications import MobileNetV2

print("All the required libraries are imported.\n")
```

OUTPUT:

All the required libraries are imported successfully.

Step 2: Define Parameters

INPUT:

```
# Defining Paths & Parameters

base_path = '/kaggle/input/oxford-102-flower-dataset/102 flower/flowers'
json_path = '/kaggle/input/oxford-102-flower-dataset/102 flower/cat_to_name.json'
img_size = 224
batch_size = 32
epochs = 150
patience = 15
learning_rate = 1e-5
output_dir = './mobilenetv2_outputs'
os.makedirs(output_dir, exist_ok=True)
print(f"Parameters for training are set as:")
print(f" Image Size: {img_size}")
print(f" Batch Size: {batch_size}")
print(f" Epochs: {epochs}")
print(f" Patience: {patience}")
print(f" Learning Rate: {learning_rate}\n")
```

OUTPUT:

Parameters for training are set as:

Image Size: 224

Batch Size: 32

Epochs: 150

Patience: 15

Learning Rate: 1e-05

Step 3: Visualize Dataset

INPUT:

```
# Visualizing Dataset

with open(json_path, 'r') as f:
    real_names = json.load(f)

numeric_classes = sorted(os.listdir(os.path.join(base_path, 'train')))
num_classes = len(numeric_classes)

class_names = [real_names[c] for c in numeric_classes]

print("\n===== CLASS MAPPING TABLE =====")
print(f"Number of classes: {num_classes}\n")
print(f"{'Folder':<10} | {'Flower Name'}")
print("-" * 50)

for f, cname in zip(numeric_classes, class_names):
    print(f"{'f':<10} | {cname}")

print("=====\n")

train_raw = tf.keras.utils.image_dataset_from_directory(
    os.path.join(base_path, "train"),
    image_size=(img_size, img_size),
    batch_size=9,      # small batch for visualization
    label_mode='int',
    shuffle=True,
    verbose=0)

# Showing samples from dataset

def show_samples(ds_raw, numeric_class_list, name_map, n=9):
    plt.figure(figsize=(8, 8))

    for batch_x, batch_y in ds_raw.take(1):
        imgs = batch_x.numpy().astype("uint8")
        labels = batch_y.numpy()
```

```

        break
    rows = int(np.ceil(np.sqrt(n)))
    for i in range(n):
        ax = plt.subplot(rows, rows, i+1)
        plt.imshow(imgs[i])
        folder_id = numeric_class_list[int(labels[i])]
        cls_name = name_map[folder_id]
        ax.set_title(cls_name, fontsize=9)
        ax.axis("off")
    plt.tight_layout()
    plt.show()
print("\nShowing random sample images from the dataset...\n")
show_samples(train_raw, numeric_classes, real_names, n=9)

```

OUTPUT:

===== CLASS MAPPING TABLE =====

Number of classes: 102


Folder	Flower Name
--------	-------------

1	pink primrose
10	globe thistle
100	blanket flower
101	trumpet creeper
102	blackberry lily
11	snapdragon
12	colt's foot
13	king protea
14	spear thistle

- 15 | yellow iris
- 16 | globe-flower
- 17 | purple coneflower
- 18 | peruvian lily
- 19 | balloon flower
- 2 | hard-leaved pocket orchid
- 20 | giant white arum lily
- 21 | fire lily
- 22 | pincushion flower
- 23 | fritillary
- 24 | red ginger
- 25 | grape hyacinth
- 26 | corn poppy
- 27 | prince of wales feathers
- 28 | stemless gentian

... (showing 24 of 102 classes)

Showing random sample images from the dataset...

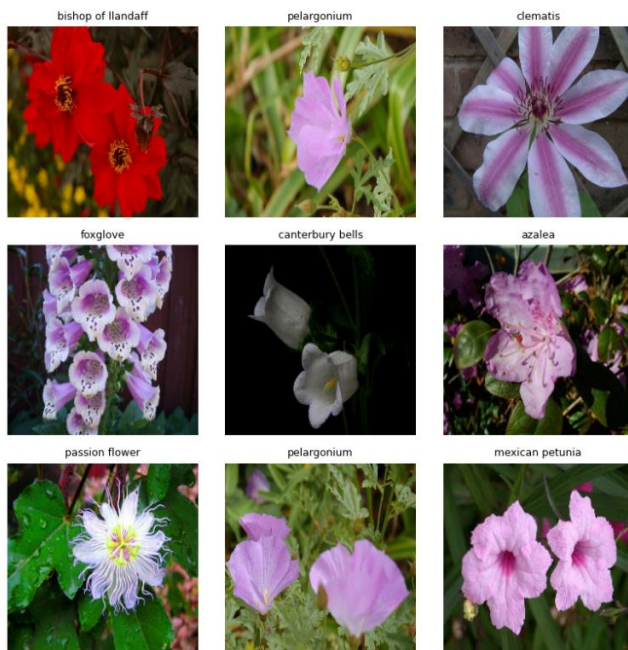

Step 4: Build & Train Model

INPUT:

```
# Model Training

# Loading dataset

train_ds = tf.keras.utils.image_dataset_from_directory(
    os.path.join(base_path, "train"),
    image_size=(img_size, img_size),
    batch_size=batch_size,
    label_mode='int',
    shuffle=True)

valid_ds = tf.keras.utils.image_dataset_from_directory(
    os.path.join(base_path, "valid"),
    image_size=(img_size, img_size),
    batch_size=batch_size,
    label_mode='int',
    shuffle=True)

test_ds = tf.keras.utils.image_dataset_from_directory(
    os.path.join(base_path, "test"),
    image_size=(img_size, img_size),
    batch_size=batch_size,
    label_mode='int',
    shuffle=False)

# Preprocess function
def preprocess(image, label):
    image = preprocess_input(tf.cast(image, tf.float32))
    label = tf.one_hot(label, num_classes)
    return image, label

train_ds = train_ds.map(preprocess).prefetch(tf.data.AUTOTUNE)
```

```

valid_ds = valid_ds.map(preprocess).prefetch(tf.data.AUTOTUNE)
test_ds = test_ds.map(preprocess).prefetch(tf.data.AUTOTUNE)

# Function to set trainable layers
def set_trainable_layers(base_model, unfreeze_percent):
    total_layers = len(base_model.layers)
    num_unfreeze = int(total_layers * unfreeze_percent)
    for i, layer in enumerate(base_model.layers):
        if i < total_layers - num_unfreeze:
            layer.trainable = False
        else:
            layer.trainable = True
    print(f"Total layers in base model: {total_layers}")
    print(f"Unfreeze percent: {unfreeze_percent*100:.1f}%")
    print(f"No. of layers unfreeze: {num_unfreeze}")
    print(f"Layers freeze: {total_layers - num_unfreeze}")
    if unfreeze_percent != 0:
        print("\nList of unfreeze layers:")
        for i, layer in enumerate(base_model.layers[-num_unfreeze:]):
            print(f" {i + (total_layers - num_unfreeze)}: {layer.name}")

# Build model
base_model = MobileNetV2(include_top=False, weights='imagenet', input_shape=(img_size, img_size, 3))

# Unfreeze last 20% of layers
set_trainable_layers(base_model, 0.20)

x = GlobalAveragePooling2D()(base_model.output)
x = Dropout(0.3)(x)
x = Dense(512, activation='relu')(x)
x = Dropout(0.3)(x)
output = Dense(num_classes, activation='softmax')(x)
model = Model(base_model.input, output)

```

```

print(f"Total layers in final model: {len(model.layers)}")

def compact_model_summary(model, base_model_name="MobileNetV2", custom_layer_start_idx=-5):

    col1_width = 52

    col2_width = 25

    col3_width = 12

    print(f"{'Layer (type)':<{col1_width}} {'Output Shape':<{col2_width}} {'Param #':>{col3_width}}")

    print("=" * (col1_width + col2_width + col3_width))

    base_output = model.layers[custom_layer_start_idx - 1].output.shape

    total_base_params = sum([l.count_params() for l in model.layers[:custom_layer_start_idx]])

    print(f"{'base_model_name.title() (Functional)'.ljust(col1_width), f'{str(base_output):<{col2_width}}', f'{total_base_params:>{col3_width}},}")

    for layer in model.layers[custom_layer_start_idx:]:

        name = layer.name

        layer_type = layer.__class__.__name__

        try:

            output_shape = str(layer.output.shape)

        except:

            output_shape = "N/A"

        params = f"{layer.count_params():,}"

        print(f"{name + ' (' + layer_type + ')':<{col1_width}} {output_shape:<{col2_width}} {params:>{col3_width}}")

    print("=" * (col1_width + col2_width + col3_width))

    total_params = model.count_params()

    trainable_params = np.sum([tf.keras.backend.count_params(w) for w in model.trainable_weights])

    non_trainable_params = np.sum([tf.keras.backend.count_params(w) for w in model.non_trainable_weights])

    print(f"Total params: {total_params:,}")

    print(f"Trainable params: {trainable_params:,}")

    print(f"Non-trainable params: {non_trainable_params:,}")

    print("\nPrinting Model Summary:")

```

```

compact_model_summary(model, base_model_name="MobileNetV2", custom_layer_start_idx=-5)

# Compile model

loss_fn = tf.keras.losses.CategoricalCrossentropy(label_smoothing=0.1)

ckpt_path = os.path.join(output_dir, "best_model.h5")

callbacks = [

    EarlyStopping(monitor='val_loss', patience=patience, restore_best_weights=True, verbose=0),

    ModelCheckpoint(ckpt_path, save_best_only=True, monitor='val_loss', verbose=0)

]

model.compile(optimizer=Adam(learning_rate), loss=loss_fn, metrics=['accuracy'])

# Train model

print("\nStarting training...\n")

history = model.fit(

    train_ds,

    validation_data=valid_ds,

    epochs=epochs,

    callbacks=callbacks,

    verbose=0)

print("\nTraining completed.")

```

OUTPUT:

Found 6552 files belonging to 102 classes.

Found 818 files belonging to 102 classes.

Found 819 files belonging to 102 classes.

Downloading data from https://storage.googleapis.com/tensorflow/keras-applications/mobilenet_v2/mobilenet_v2_weights_tf_dim_ordering_tf_kernels_1.0_224_no_top.h5

[1m9406464/9406464[0m [32m—————[0m[37m[0m [1m1s[0m
0us/step

Total layers in base model: 154

Unfreeze percent: 20.0%

No. of layers unfreeze: 30

Layers freeze: 124

List of unfreeze layers:

124: block_13_project_BN
125: block_14_expand
126: block_14_expand_BN
127: block_14_expand_relu
128: block_14_depthwise
129: block_14_depthwise_BN
130: block_14_depthwise_relu
131: block_14_project
132: block_14_project_BN
133: block_14_add
134: block_15_expand
135: block_15_expand_BN
136: block_15_expand_relu
137: block_15_depthwise
138: block_15_depthwise_BN
139: block_15_depthwise_relu
140: block_15_project
141: block_15_project_BN
142: block_15_add
143: block_16_expand
144: block_16_expand_BN
145: block_16_expand_relu
146: block_16_depthwise
147: block_16_depthwise_BN
148: block_16_depthwise_relu
149: block_16_project
150: block_16_project_BN

151: Conv_1
152: Conv_1_bn
153: out_relu

Total layers in final model: 159

Printing Model Summary:

Layer (type)	Output Shape	Param #
=====		
Mobilenetv2 (Functional)	(None, 7, 7, 1280)	2,257,984
global_average_pooling2d (GlobalAveragePooling2D)	(None, 1280)	0
dropout (Dropout)	(None, 1280)	0
dense (Dense)	(None, 512)	655,872
dropout_1 (Dropout)	(None, 512)	0
dense_1 (Dense)	(None, 102)	52,326
=====		

Total params: 2,966,182

Trainable params: 2,234,598

Non-trainable params: 731,584

Starting training...

Training completed.

Step 5: Evaluate Model

INPUT:

```
# Model Evaluation

print("\nLoading best model for evaluation...")

best_model = tf.keras.models.load_model(ckpt_path)

print("\nEvaluating on Train:")

train_loss, train_acc = best_model.evaluate(train_ds, verbose=0)
```

```
print(f"Train Accuracy: {train_acc*100:.2f}%")
print("\nEvaluating on Validation:")
val_loss, val_acc = best_model.evaluate(valid_ds, verbose=0)
print(f"Validation Accuracy: {val_acc*100:.2f}%")
print("\nEvaluating on Test:")
test_loss, test_acc = best_model.evaluate(test_ds, verbose=0)
print(f"Test Accuracy: {test_acc*100:.2f}%")
```

OUTPUT:

Loading best model for evaluation...

Evaluating on Train:

Train Accuracy: 100.00%

Evaluating on Validation:

Validation Accuracy: 96.33%

Evaluating on Test:

Test Accuracy: 95.48%

Train: 100.00%

Validation: 96.33%

Test: 95.48%

Step 6: Visualize Results

INPUT:

Visualizing Results

Training curves

```
def plot_training_curves(history):
```

```
    acc = history.history["accuracy"]
```

```
    val_acc = history.history["val_accuracy"]
```

```
    loss = history.history["loss"]
```

```
    val_loss = history.history["val_loss"]
```

```
epochs_range = range(1, len(acc) + 1)

plt.figure(figsize=(14, 5))

# Accuracy

plt.subplot(1, 2, 1)

plt.plot(epochs_range, acc, label="Train Acc")
plt.plot(epochs_range, val_acc, label="Val Acc")

plt.xlabel("Epoch")

plt.ylabel("Accuracy")

plt.title("Training vs Validation Accuracy")

plt.legend()

# Loss

plt.subplot(1, 2, 2)

plt.plot(epochs_range, loss, label="Train Loss")
plt.plot(epochs_range, val_loss, label="Val Loss")

plt.xlabel("Epoch")

plt.ylabel("Loss")

plt.title("Training vs Validation Loss")

plt.legend()

plt.tight_layout()

plt.show()

print("\nPlotting training curves...")

plot_training_curves(history)

# Classification report

y_true = []
y_pred = []

for x_batch, y_batch in test_ds:

    preds = best_model.predict(x_batch, verbose=0)
    y_pred.extend(np.argmax(preds, axis=1))
    y_true.extend(np.argmax(y_batch.numpy(), axis=1))
```



```

y_true = np.array(y_true)
y_pred = np.array(y_pred)
print("\nClassification Report:")
print(classification_report(y_true, y_pred, target_names=class_names, zero_division=0))


```

OUTPUT:

Plotting training curves...

Classification Report:

	precision	recall	f1-score	support
pink primrose	1.00	1.00	1.00	5
globe thistle	1.00	1.00	1.00	3
blanket flower	1.00	1.00	1.00	8
trumpet creeper	1.00	0.75	0.86	4
blackberry lily	1.00	1.00	1.00	6
snapdragon	1.00	0.89	0.94	9
colt's foot	1.00	0.89	0.94	9
king protea	1.00	1.00	1.00	6
spear thistle	1.00	1.00	1.00	3
yellow iris	1.00	1.00	1.00	4
globe-flower	0.75	1.00	0.86	3
purple coneflower	1.00	1.00	1.00	9
peruvian lily	1.00	1.00	1.00	6
... (102 classes total)				
accuracy			0.95	819
macro avg	0.96	0.96	0.95	819
weighted avg	0.96	0.95	0.95	819

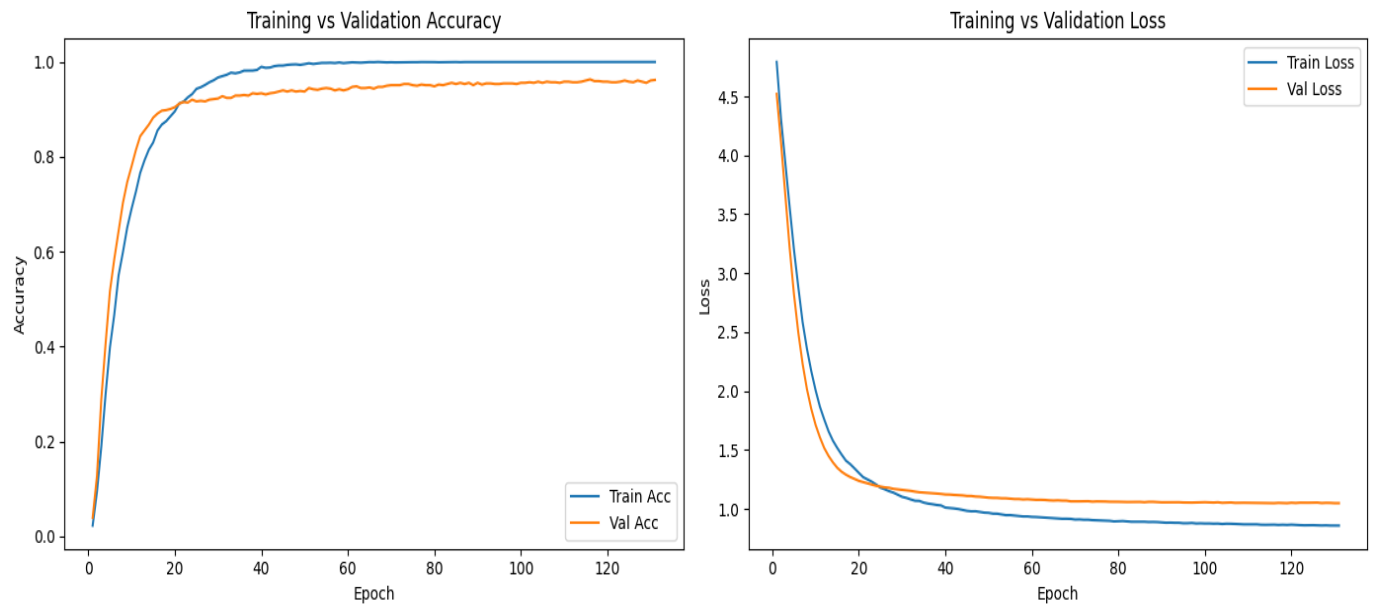

Step 7: Confusion Matrix

INPUT:

Plotting Confusion Matrix

```
from sklearn.metrics import confusion_matrix
```

```
cm = confusion_matrix(y_true, y_pred)
```

```
plt.figure(figsize=(30, 30))
```

```
sns.heatmap(cm, cmap="Blues", annot=True, fmt='d',
```

```
            xticklabels=class_names, yticklabels=class_names,)
```

```
plt.xlabel("Predicted")
```

```
plt.ylabel("True")
```

```
plt.title("Confusion Matrix")
```

```
plt.tight_layout()
```

```
plt.show()
```

[illegible]