

Agenda

- Function Object
- Conversion Function
- Streams
- File IO
- ~~Nested and Local Class~~
- ~~Singleton class~~

Overloading Call / Function Call operator:

- If we want to consider any object as a function then we should overload function call operator.

```
class Complex
{
private:
    int real;
    int imag;

public:
    Complex(int real = 0, int imag = 0)
    {
        this->real = real;
        this->imag = imag;
    }
    void operator()(int real, int imag)
    {
        this->real = real;
        this->imag = imag;
    }
    void printRecord(void)
    {
        cout << "Real Number :" << this->real << endl;
        cout << "Imag Number :" << this->imag << endl;
    }
};

int main(void)
{
    Complex c1;
    c1(10, 20); // c1.operator()( 10, 20 );
    c1.printRecord();
    return 0;
}
```

- If we use any object as a function then such object is called function object or functor.
- In above code, `c1` is function object.

Conversion Function

It is a member function of a class which is used to convert state of object of fundamental type into user defined type or vice versa. **Following are conversion functions in C++**

1. Single Parameter Constructor

```
int main( void )
{
    int number = 10;
    Complex c1 = number; //Complex c1( number );
    c1.printRecord();
    return 0;
}
```

- In above code, single parameter constructor is responsible for converting state of number into c1 object. Hence single parameter constructor is called conversion function.

2. Assignment operator function

```
int main( void )
{
    int number = 10;
    Complex c1;
    c1 = number; //c1 = Complex( number );
    //c1.operator=( Complex( number ) );
    c1.printRecord();
    return 0;
}
```

- In above code, assignment operator function is responsible for converting state of number into c1 object hence it is considered as conversion function.
- If we want to put restriction on automatic instantiation then we should declare single parameter constructor explicit.
- "explicit" is a keyword in C++.
- We can use it with any constructor but it is designed to use with single parameter constructor.


3. Type conversion operator function.

```
int main( void )
{
    Complex c1(10,20);
    int real = c1; //real = c1.operator int( )
    cout<<"Real Number : "<<real<<endl;
    return 0;
}
```

- In above code, type conversion operator function is responsible for converting state of c1 into integer variable(real). Hence it is considered as conversion function.

Stream

- We give input to the executing program and the execution program gives back the output.
- The sequence of bytes given as input to the executing program and the sequence of bytes that comes as output from the executing program are called stream.
- In other words, streams are nothing but the flow of data in a sequence.
- The input and output operation between the executing program and the devices like keyboard and monitor are known as "console I/O operation".
- The input and output operation between the executing program and files are known as "disk I/O operation".
- The I/O system of C++ contains a set of classes which define the file handling methods
- These include ifstream, ofstream and fstream classes. These classes are derived from fstream and from the corresponding istream class.
- These classes are designed to manage the disk files, are declared in fstream and therefore we must include this file in any program that uses files.
- Standard Stream Objects of C++ associated with console:
 1. cin -> Associated with Keyboard
 2. cout -> Associated with Monitor
 3. cerr -> Error Stream
 4. clog -> Logger Stream
- ifstream is a derived class of istream class which is declared in std namespace. It is used to read record from file.
- ofstream is a derived class of ostream class which is declared in std namespace. It is used to write record inside file.
- fstream is derived class of iostream class which is declared in std namespace. It is used to read/write record to/from file.

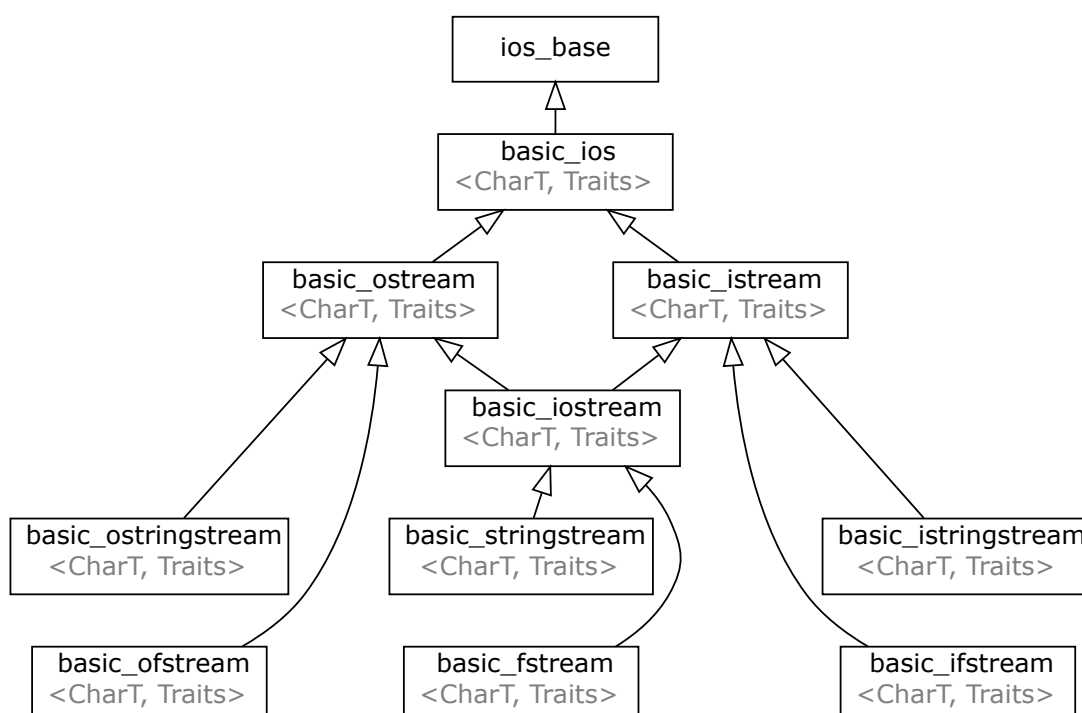

Classes for File stream operations

- ios:
 - ios stands for input output stream.
 - This class is the base class for other classes in this class hierarchy.
 - This class contains the necessary facilities that are used by all the other derived classes for input and output operations.
- istream :
 - istream stands for input stream.
 - This class is derived from the class 'ios'.
 - This class handle input stream.
 - The extraction operator(>>) is overloaded in this class to handle input streams from files to the program execution.
 - This class declares input functions such as get(), getline() and read().
- ostream :
 - ostream stands for output stream.
 - This class is derived from the class 'ios'.
 - This class handle output stream.
 - The insertion operator(<<) is overloaded in this class to handle output streams to files from the program execution.
 - This class declares output functions such as put() and write().
- ifstream :
 - This class provides input operations.
 - It contains open() function with default input mode.
 - Inherits the functions get(), getline(), read(), seekg() and tellg() functions from the istream.
- ofstream :
 - This class provides output operations.
 - It contains open() function with default output mode.
 - Inherits the functions put(), write(), seekp() and tellp() functions from the ostream.
- fstream :
 - This class provides support for simultaneous input and output operations.
 - Inherits all the functions from istream and ostream classes through iostream.

File Handling

- A variable is a temporary container, which is used to store record in RAM.
- A file is permanent container which is used to store record on secondry storage.
- File is operating system resource.
- Types of file:
 1. Text File

2. Binary File

1. Text File

1. Example : .txt,.doc, .docx, .rtf, .c, .cpp etc
2. We can read text file using any text editor.
3. Since it requires more processing, it is slower in performance.
4. If we want to save data in human readable format then we should create text file.

2. Binary File

1. Example : .mp3, .jpg, .obj, .class
2. We can read binary file using specific program/application.
3. Since it requires less processing, it is faster in performance.
4. It doesnt save data in human readable format.

File Modes in C++

- "w" mode
 - ios_base::out:
 - ios_base::out | ios_base::trunc
- "r" mode
 - ios_base::in
- "a" mode
 - ios_base::out | ios_base::app
 - ios_base::app
- "r+" mode
 - ios_base::in | ios_base::out
- "w+" mode
 - ios_base::in | ios_base::out | ios_base::trunc
- "a+" mode
 - ios_base::in | ios_base::out | ios_base::app
 - ios_base::in | ios_base::app:
- In case of binary use "ios_base::binary"
- In C++, files are mainly dealt by using three classes fstream, ifstream, ofstream available in fstream headerfile.
- ofstream: Stream class to write on files
- ifstream: Stream class to read from files

- fstream: Stream class to both read and write from/to files.

Serialization and DeSerialization in binary Files

- When working with string data types or other derived data types (like objects or pointers) in a class and writing or reading the data to/from a binary file, you need to handle serialization and deserialization properly.
- Directly reading or writing the object's memory representation as binary data may not work correctly for derived/user defined data types due to issues like memory layout, internal pointers, and dynamic memory allocation.
- To handle string data types (and other derived data types) correctly when reading or writing binary files, you should implement custom serialization and deserialization functions in your class.
- **These functions should convert your object's data into a binary representation (serialization) and reconstruct the object from binary data (deserialization).**

```
// Serializing employee class with datamembers int id,string name,double salary.
void serialize(ofstream &fout)
{
    fout.write(reinterpret_cast<const char *>(&empid), sizeof(int));
    size_t length = name.size();
    fout.write(reinterpret_cast<const char *>(&length), sizeof(size_t));
    fout.write(name.c_str(), length);
    fout.write(reinterpret_cast<const char *>(&salary), sizeof(double));
}

//Deserializing employee class
void deserialize(istream &fin)
{
    fin.read(reinterpret_cast<char *>(&empid), sizeof(int));
    size_t length;
    fin.read(reinterpret_cast<char *>(&length), sizeof(size_t));
    char *buffer = new char[length + 1];
    fin.read(buffer, length);
    buffer[length] = '\0';
    name = buffer;
    delete[] buffer;
    fin.read(reinterpret_cast<char *>(&salary), sizeof(double));
}
```