AI TRACK · SCREENSHOTS


Chapter 04 — Reranking, Security & Evaluation
Cross-encoders, Trust Boundaries & Measuring RAG

Coding Shuttle · Week 3, Class 2 · stills from the session, in order · 2026-10-12


7

screenshots


01 / 7 Retrieved chunks C1–C5 for query Q

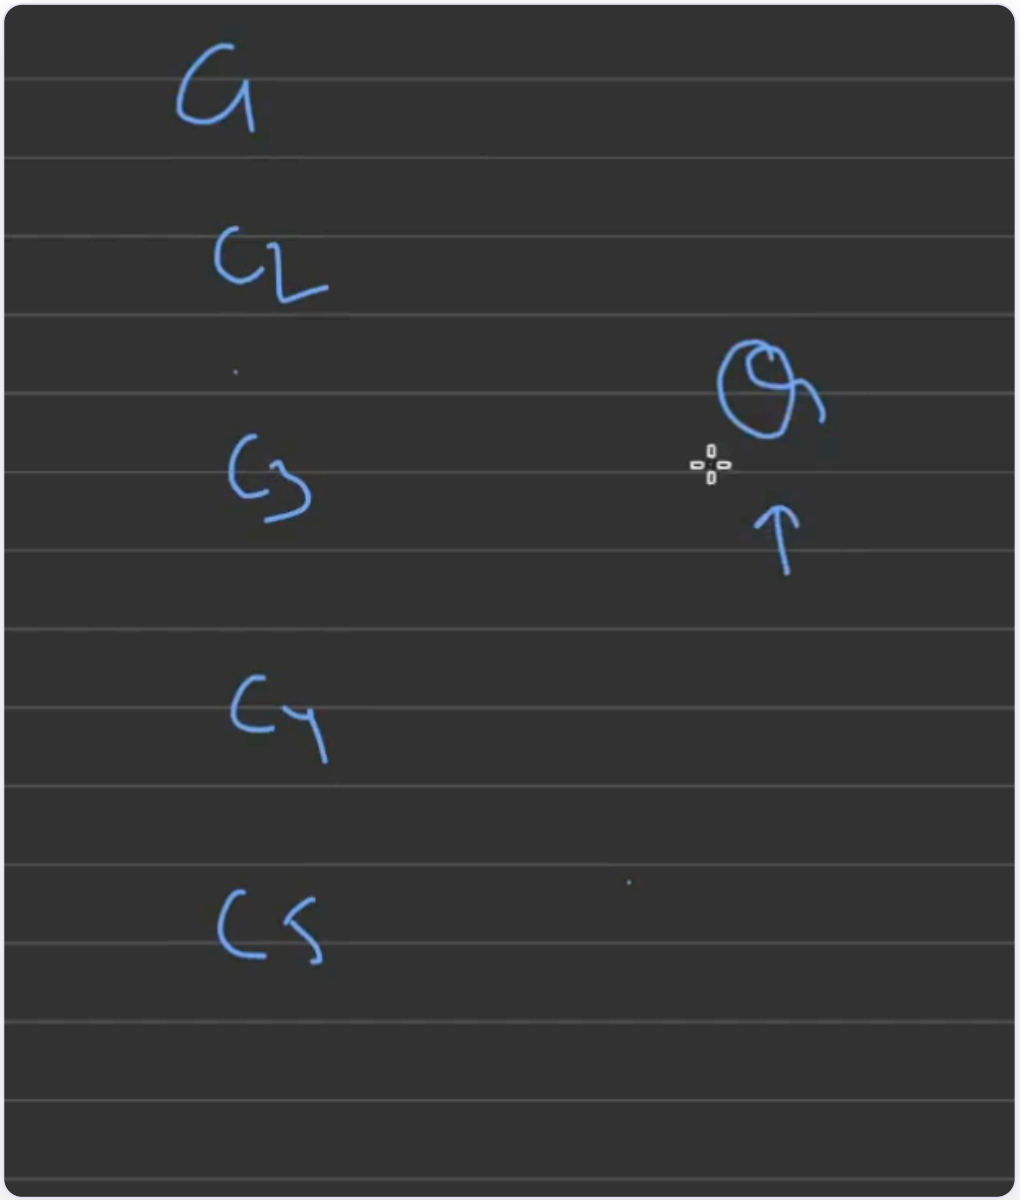


We only want the top 3 to go to the LLM

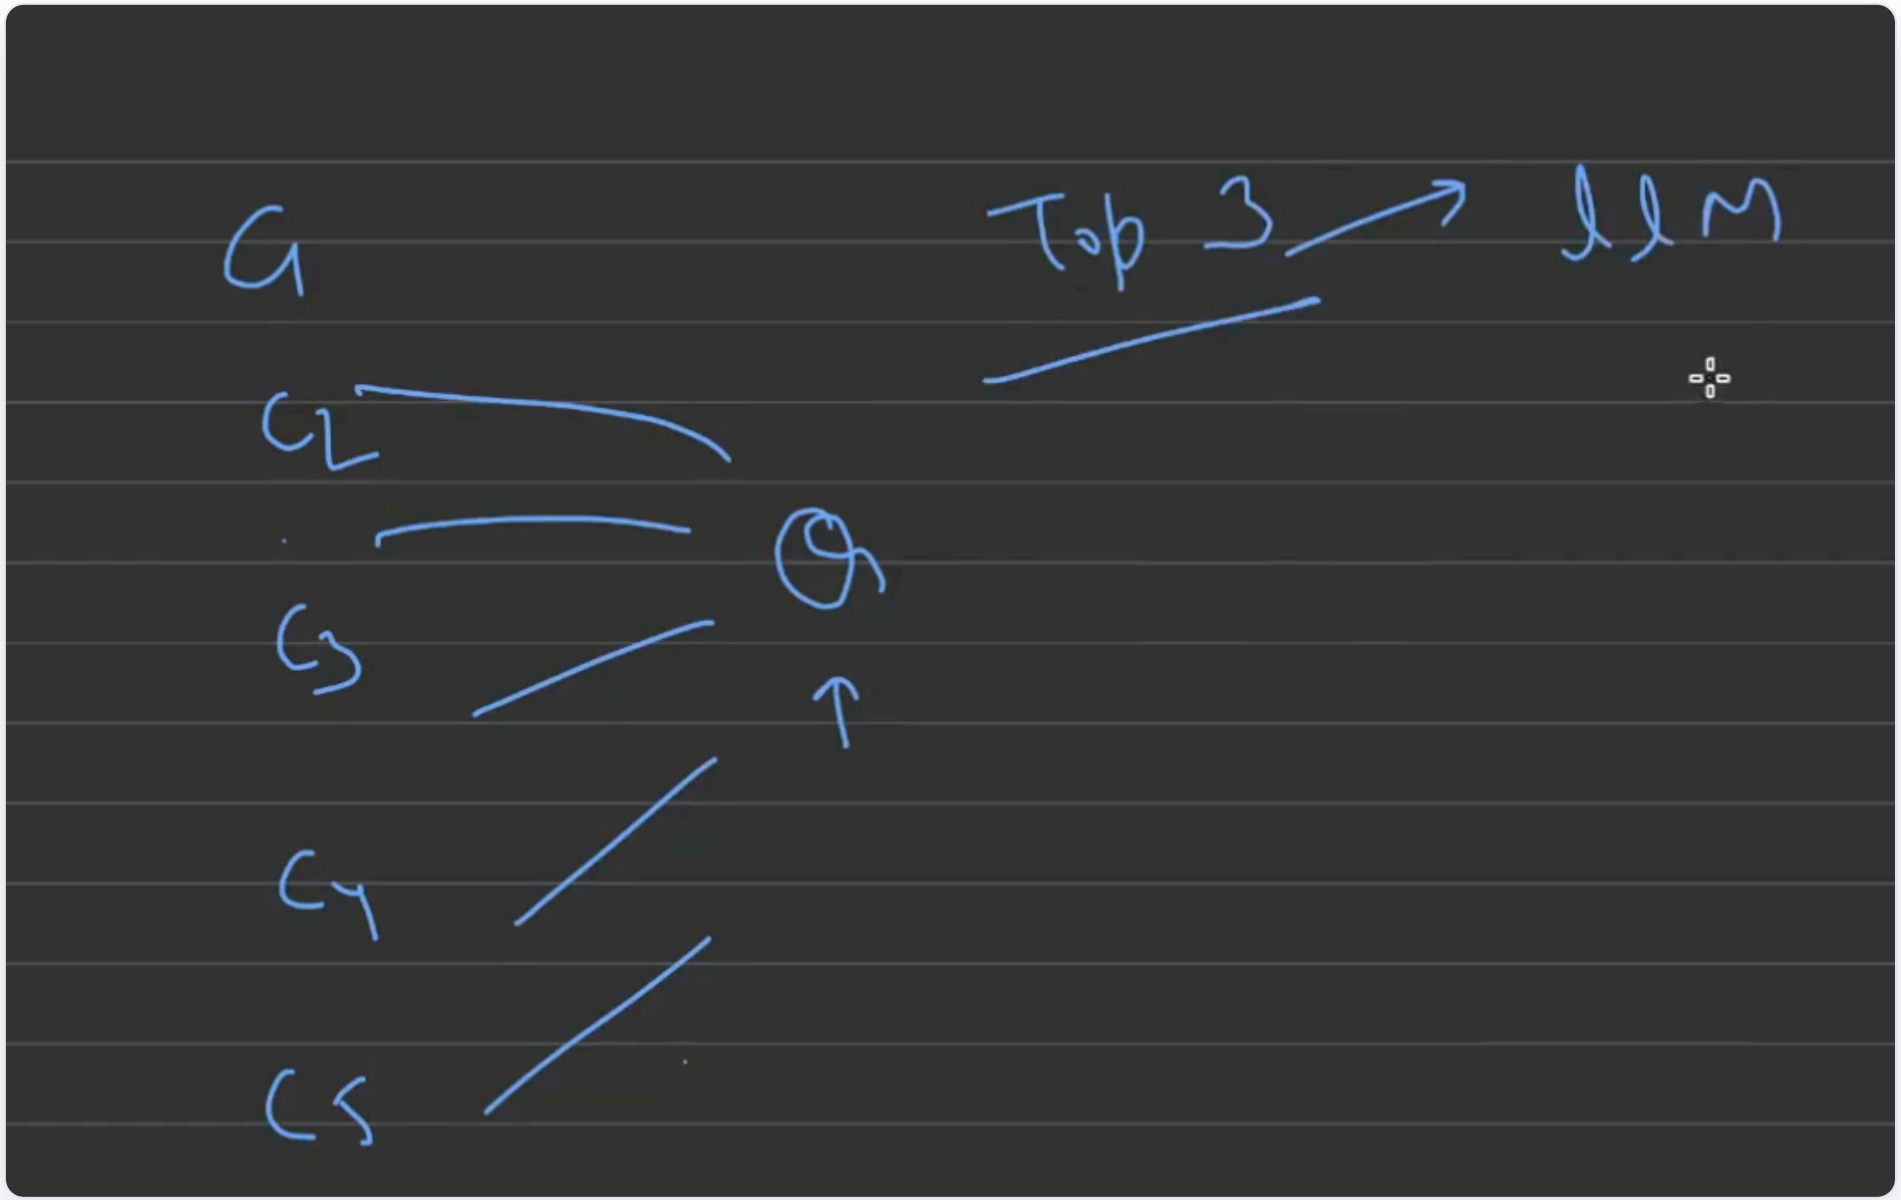


03 / 7 The reranker sits between retrieval and the LLM

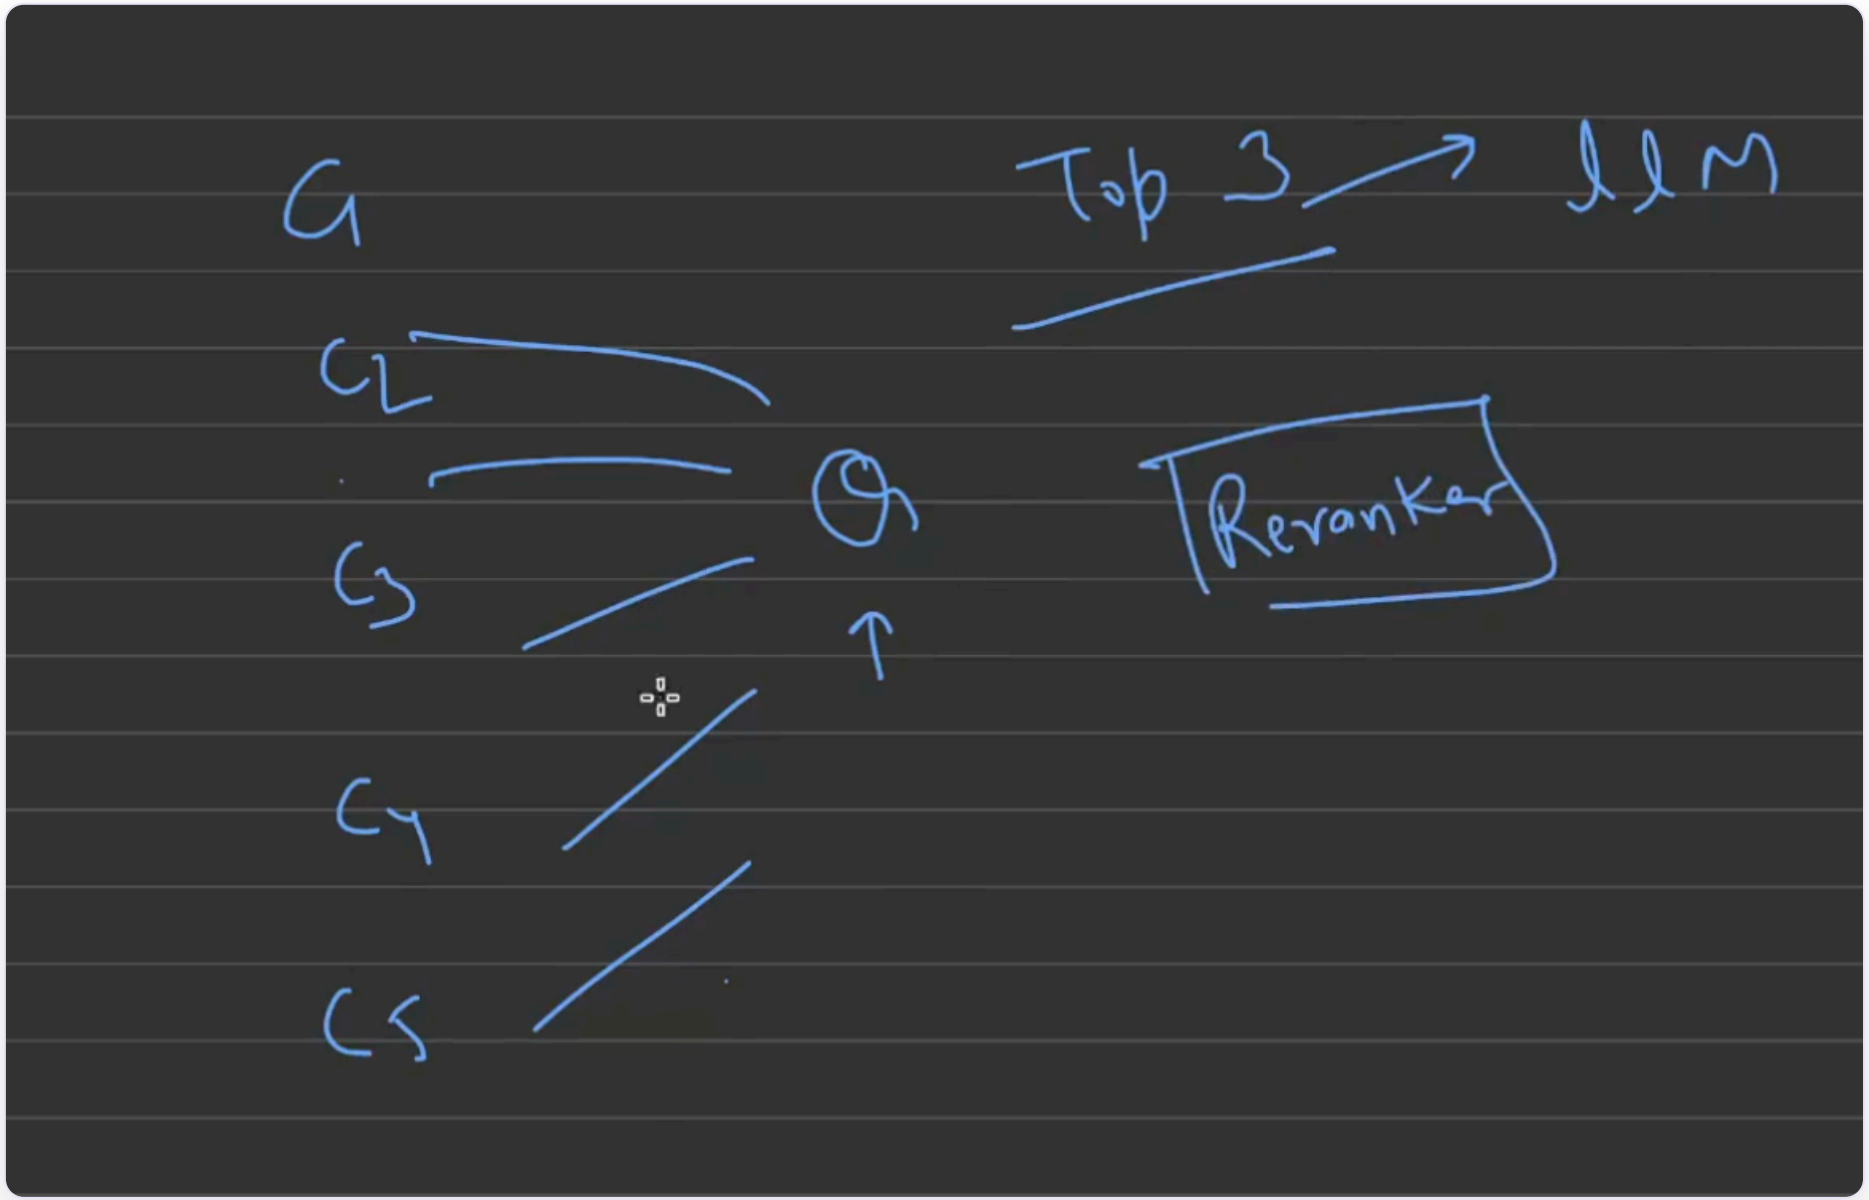



04 / 7 One API call — the reranker pairs each chunk with the query

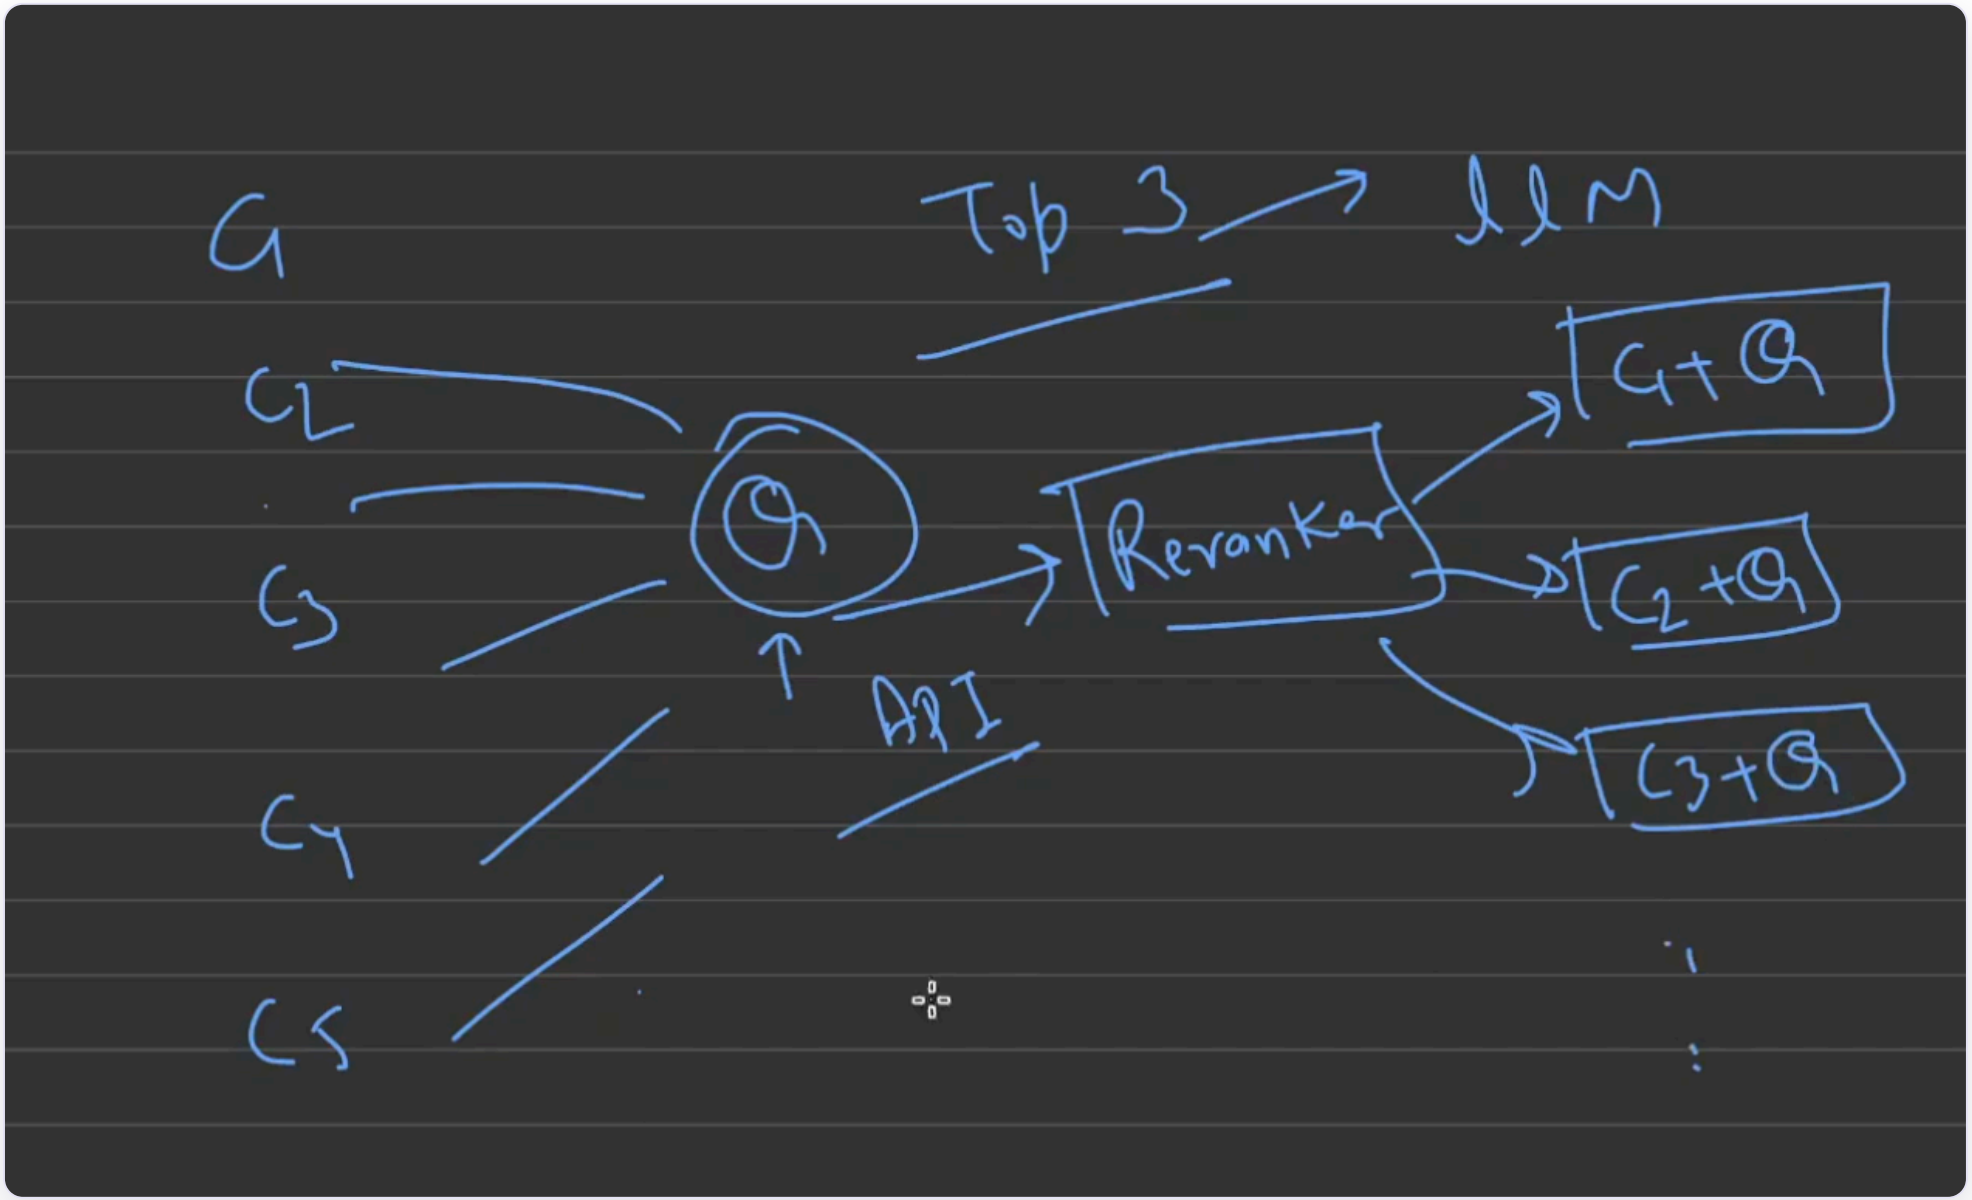

05 / 7 Each pair gets a relevance score — 0.9, 0.1, 0.7 ...

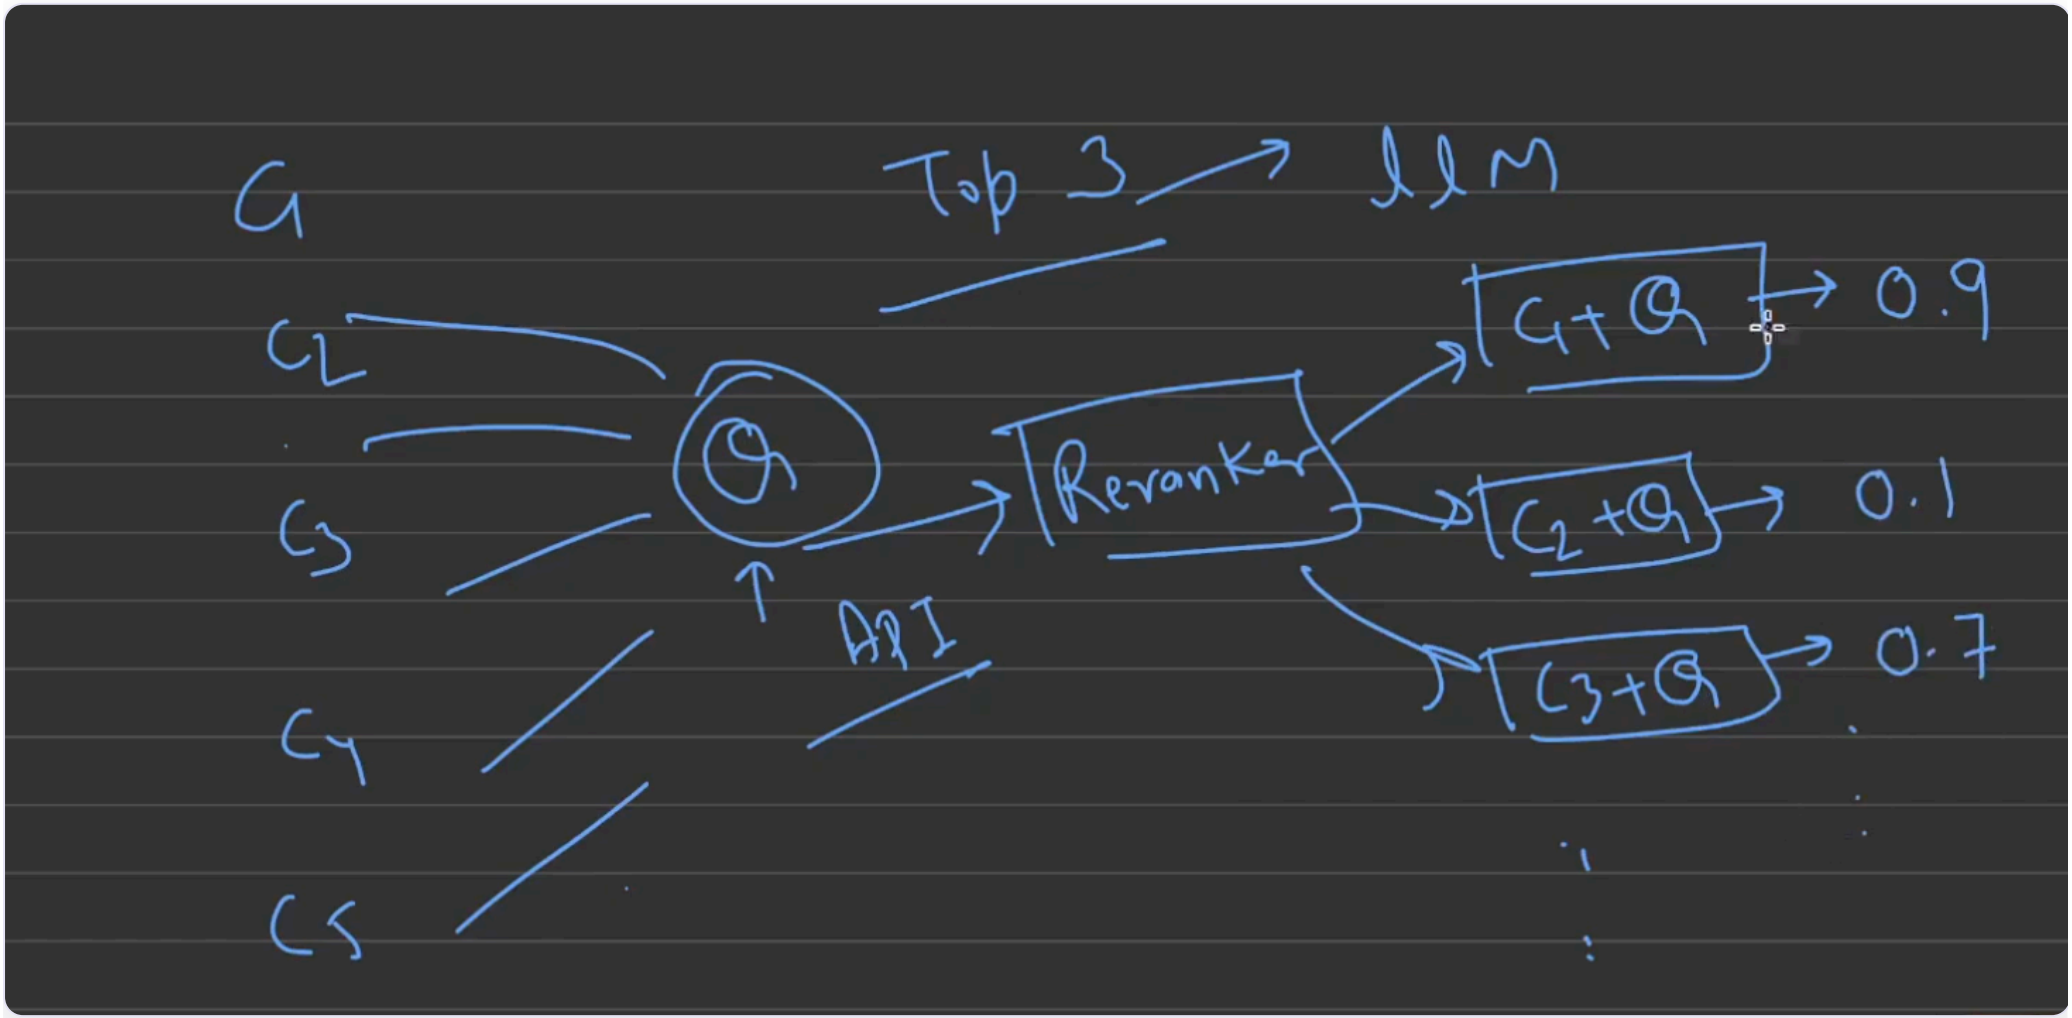

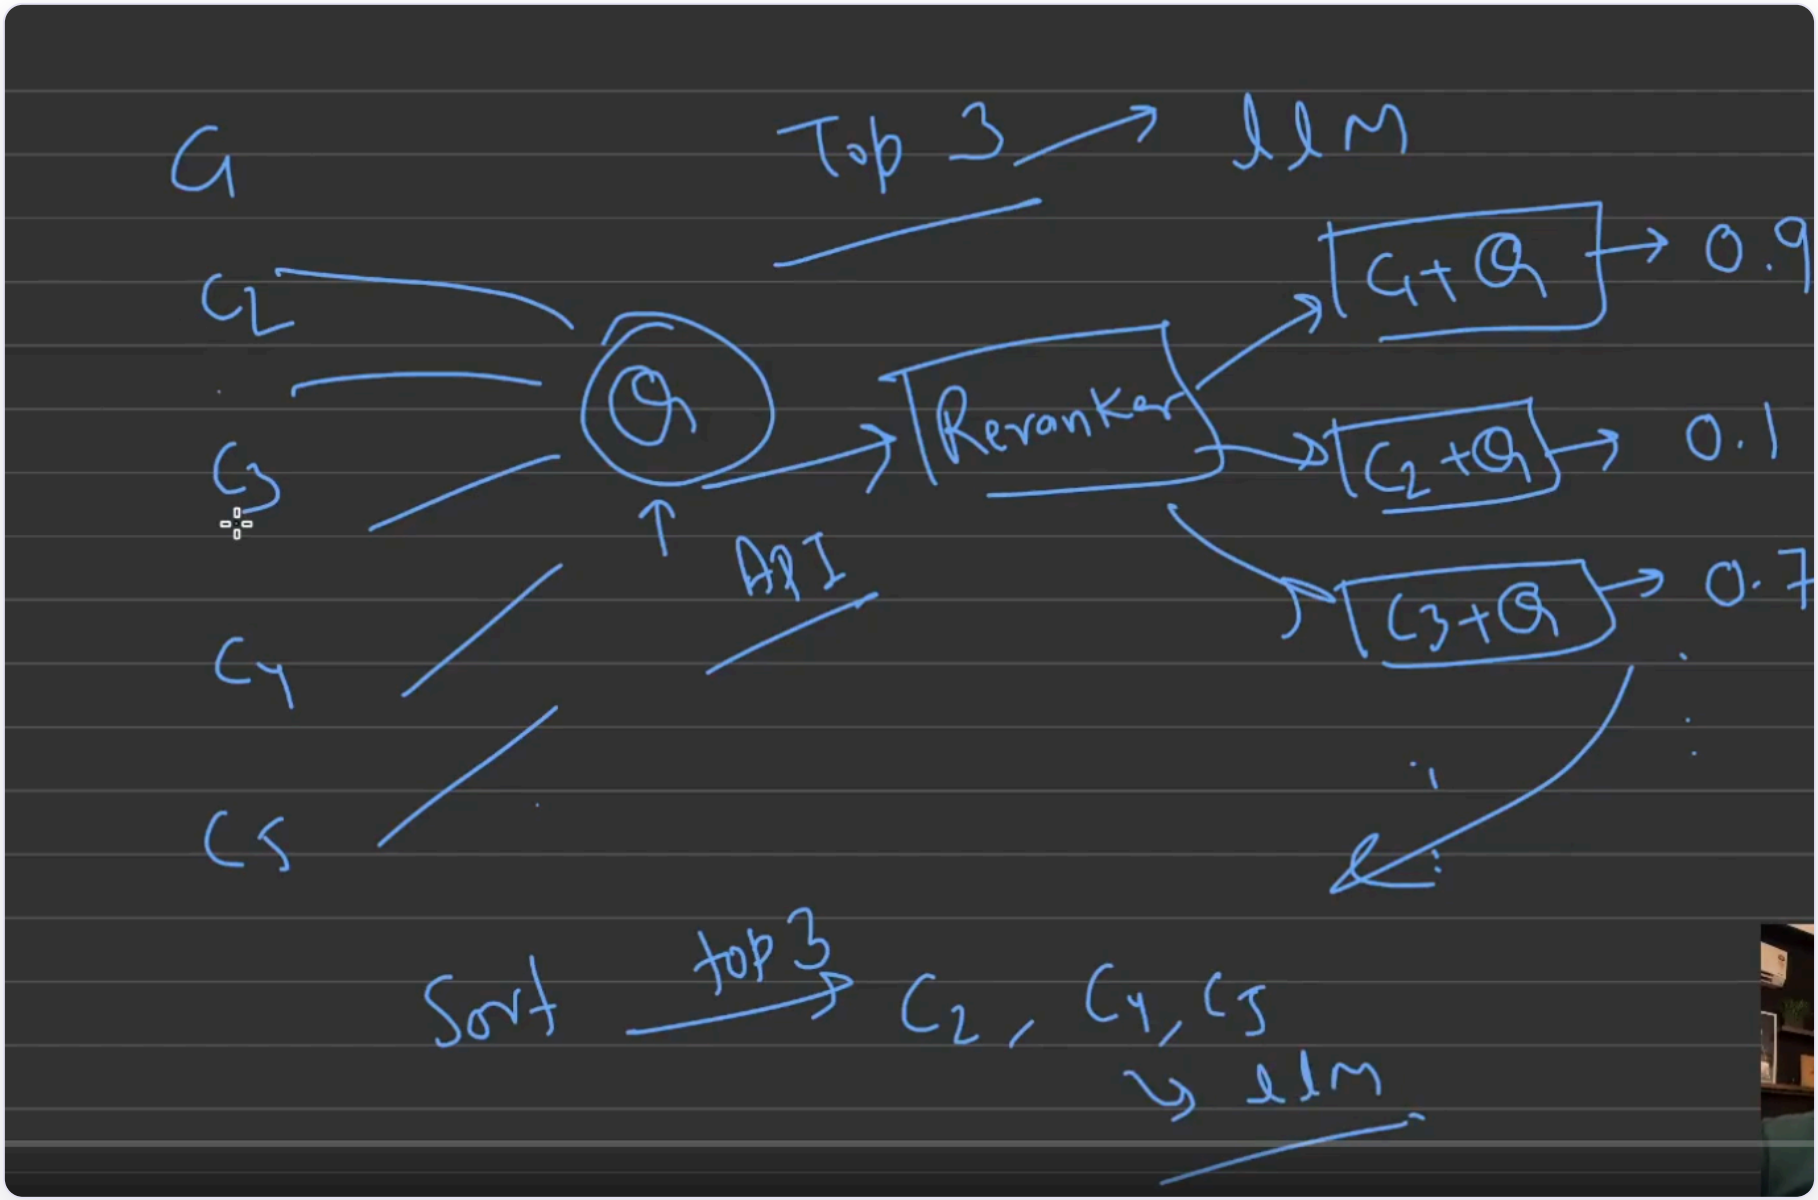
Top 3
llm
Reranker
0.9
0.1
0.7
API
Sort
top 3
llm

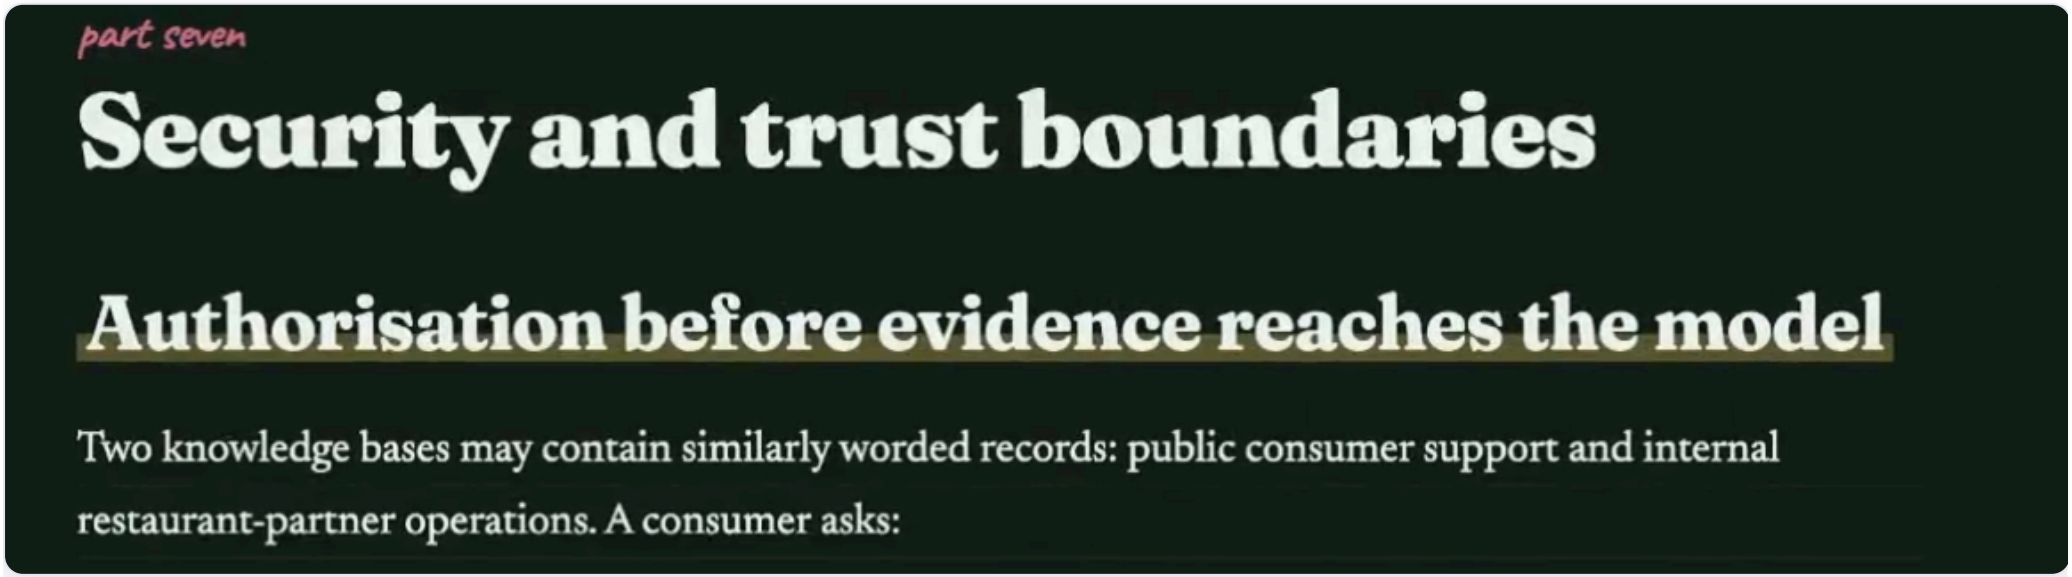
part seven
Security and trust boundaries
Authorisation before evidence reaches the model
Two knowledge bases may contain similarly worded records: public consumer support and internal restaurant-partner operations. A consumer asks: