

CSS Framework(Tailwind)

rem -> root element	.w{	tbody{
1 rem -> 16 px	width:100px	}
1 -> 4 px	}	tr{
2 -> 8px	.border{	}
3 -> 12	border:solid	
4 -> 16px	}	th{
1rem -> 4		}
100px ->	<div class="w"></div>	
1px -> 1		

html page -> dashboard

```
html
style
  trans
/style

div class = "w-20 h-20"
p class "text-md"
img
video

/html
```

```
@media screen and (min-width: 500px){

}
```

Breakpoint prefix	Minimum width	CSS
`sm`	40rem (640px)	`@media (width >= 40rem) { ... }`
`md`	48rem (768px)	`@media (width >= 48rem) { ... }`
`lg`	64rem (1024px)	`@media (width >= 64rem) { ... }`
`xl`	80rem (1280px)	`@media (width >= 80rem) { ... }`
`2xl`	96rem (1536px)	`@media (width >= 96rem) { ... }`

<p class="lg:text-2xl " >This is a para</p>	0px to 639px	default
	640px till 767px	sm
	768px till 1024px	md

At-rules @ ->Directives, @import, @layer , @apply

HTML
CSS
Tailwind
JS

}

static pages

Interpreted
- os code is generate
on the fly

CPP
Compiled
- it creates an
executable

Javascript

- can be added in 2 ways

1. Internal JS

- use the script tag
- can be used in head as well as body

2. Exteernal JS


Variable

- datatype + identifier


double n1

n1 = 10

n1= 11.22

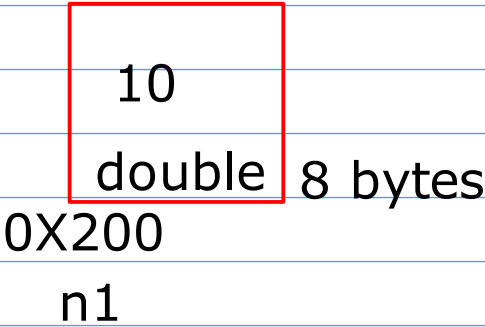

int arr[5];

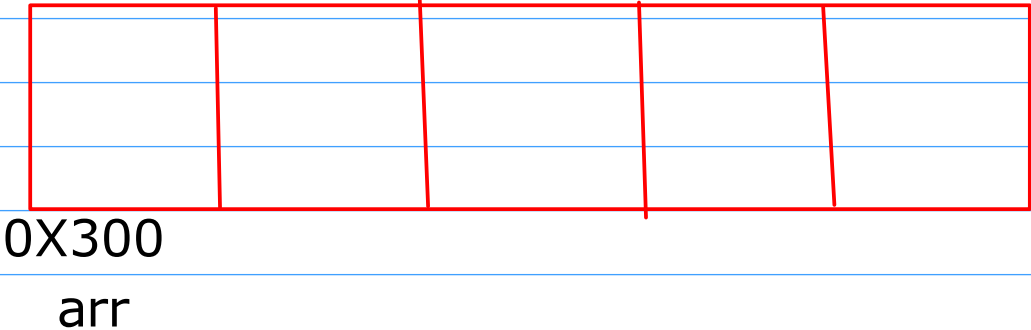

int* ptr; // variable

Date d1; // variable -> Object

Datatypes in JS	special values
1. number	1. null
2. string	2. undefined
3. boolean	3. NaN
4. object	4. Infinity
5. undefined	