
Ex 8a) Nmap Live Host Discovery using ARP ICMP, TCP and UDP

Aim:
To discover live hosts using Nmap scans such as ARP, ICMP, TCP and UDP on the TryHackMe platform.

Algorithm:

1. Open the TryHackMe platform and access the Nmap Live Host Discovery room.
2. Study the concept of live host discovery before performing network scanning.
3. Start with an ARP scan to identify live hosts in the local network
4. Observe the ARP requests.
5. perform an ICMP scan to check whether the target system respond to ICMP requests.
6. perform an TCP Ack ping scan
7. Perform an UDP ping scan to determine the system is reachable.
8. Compare the results obtained from ARP, ICMP, TCP, UDP host-discovery methods.
9. Record the results.

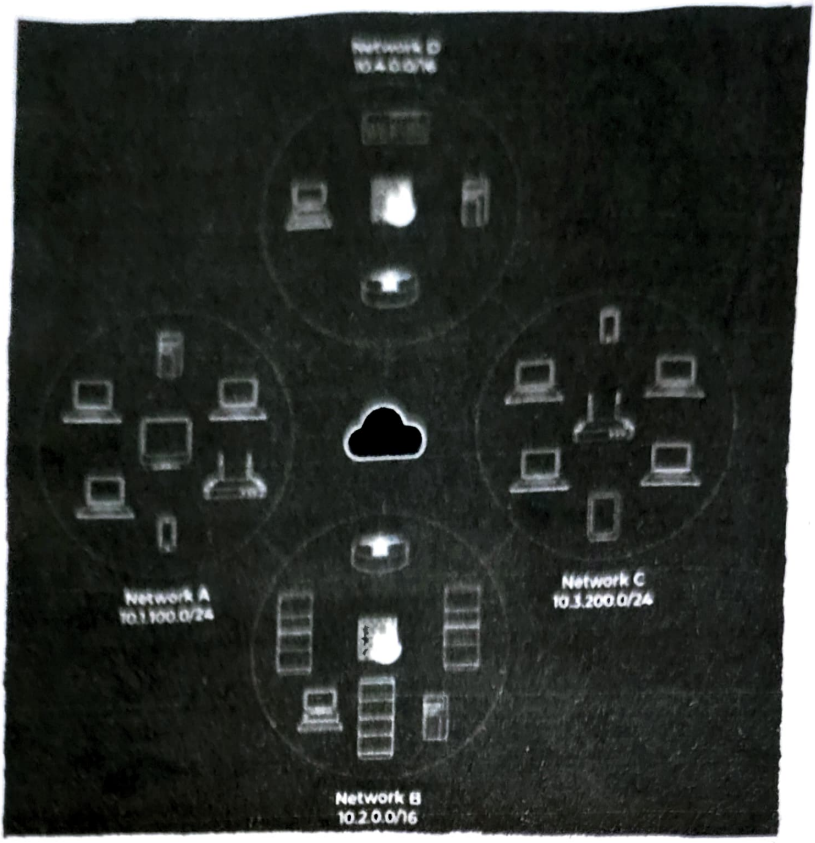

Send Packet

From:

computer1

To:

computer1


Packet Type:

arp_request

Data:

computer6

Send Packet

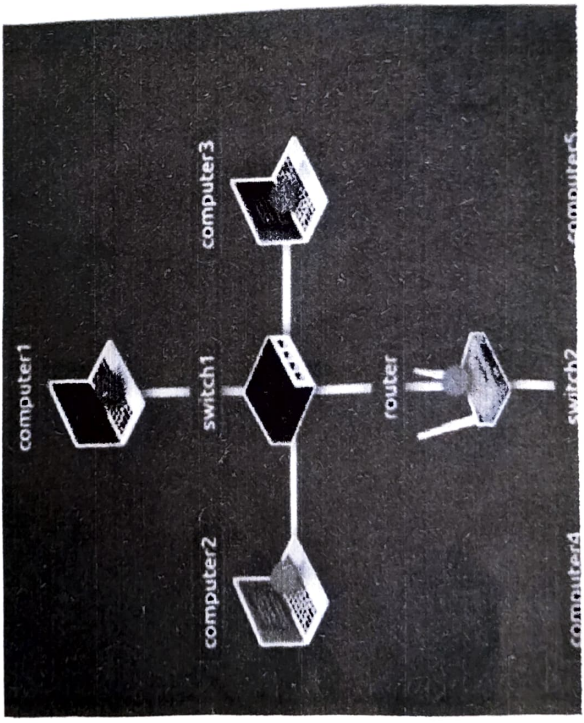

Result:

The live hosts using Nmap Scans are discovered.