
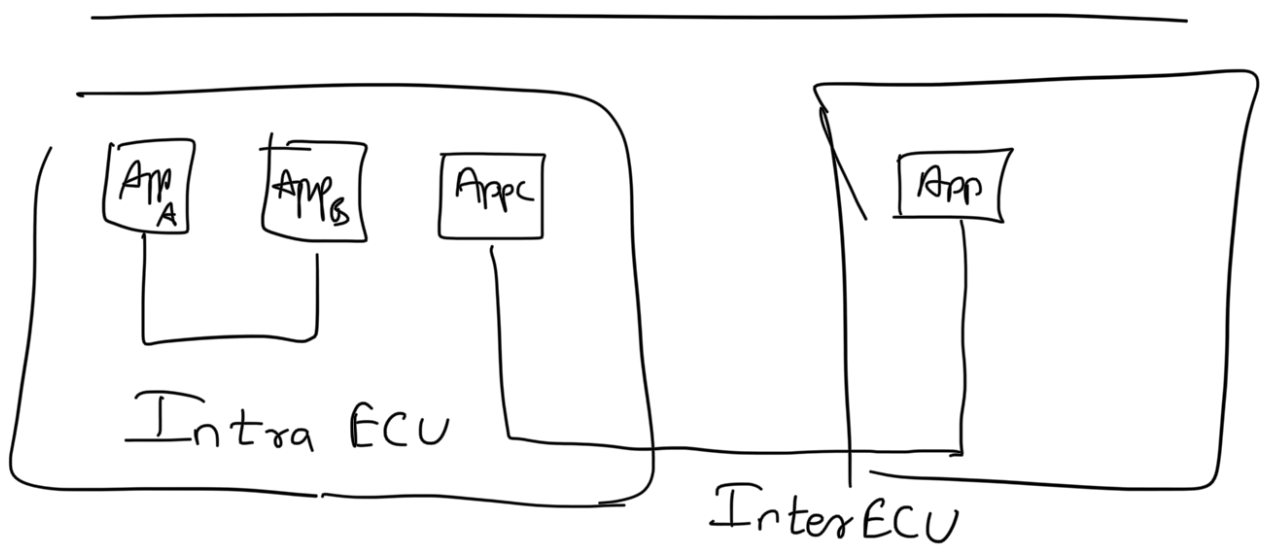


Communication Management.

Architecture


Methods
Events
Fields }

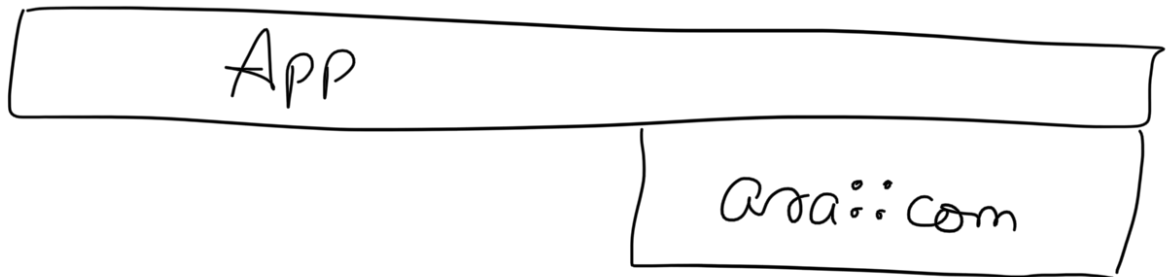

API (com)


Location
transparent

Overview (ara::com)

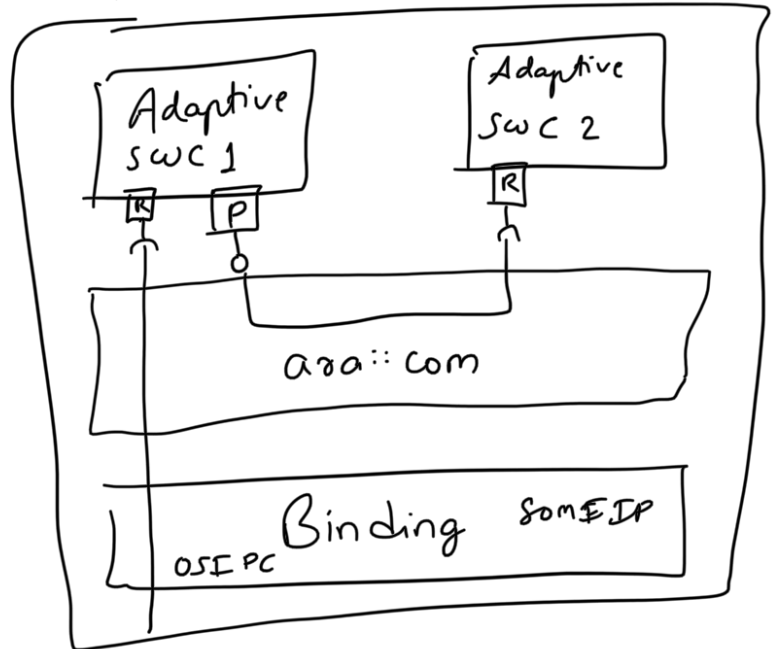


SOC (Inter ECU)

Client

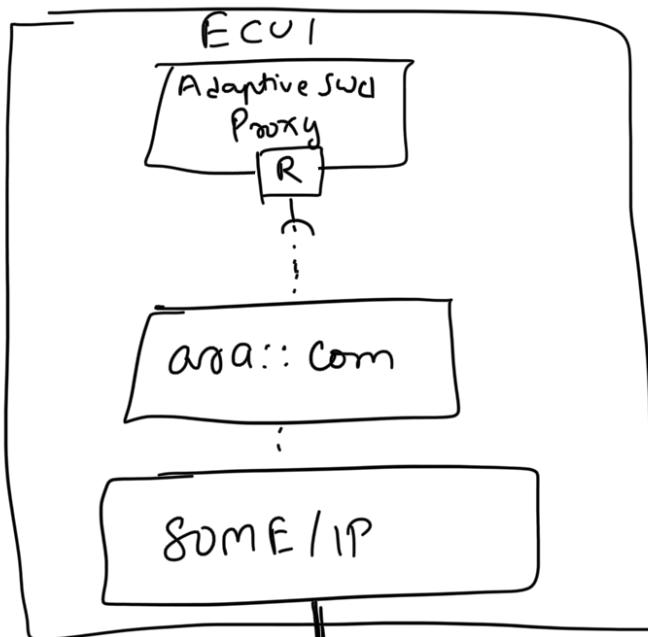



Server

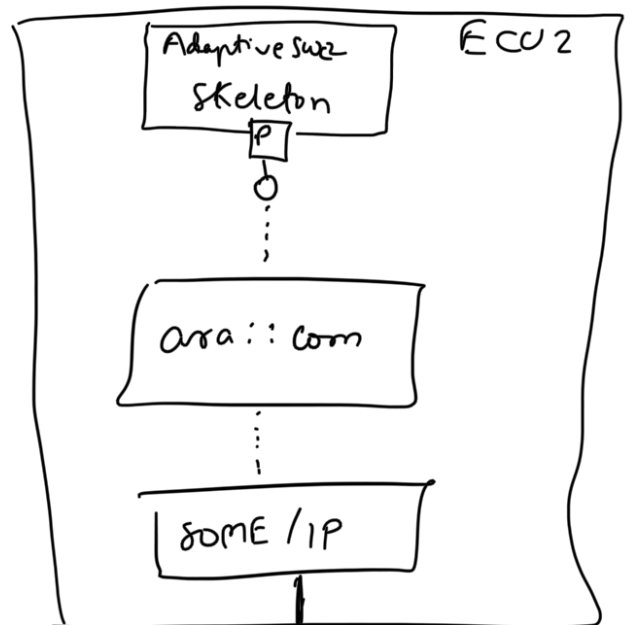

Inter ECU Communication [Ethernet]

Service Communication (Inter-Process) Intra ECU

IPC

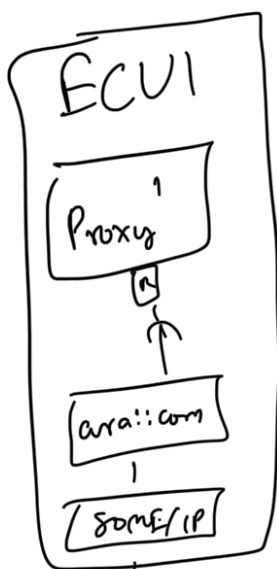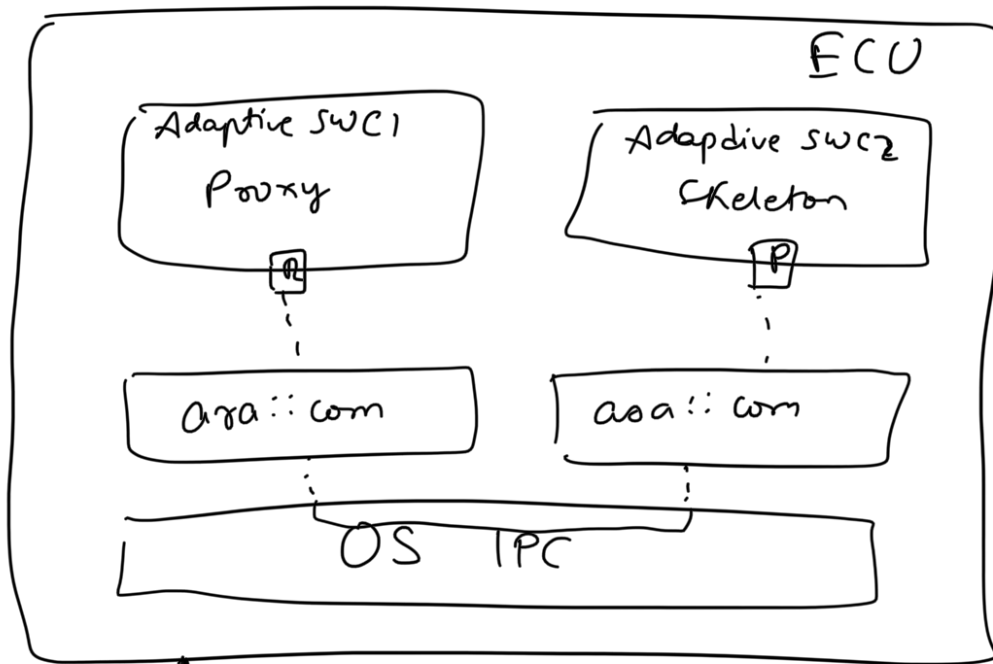

1) $f = \text{Proxy}.\text{method}(\text{args}, \dots)$

5) Call result can be obtained using $f.\text{get}()$

3) Return type is
 $\text{skeleton}::\text{Method}(\text{args})$
 $\{$
 $\text{return value};$
 $\}$




2) Method call transmitted.

4) Call result transmitted.

Event

1:N communication

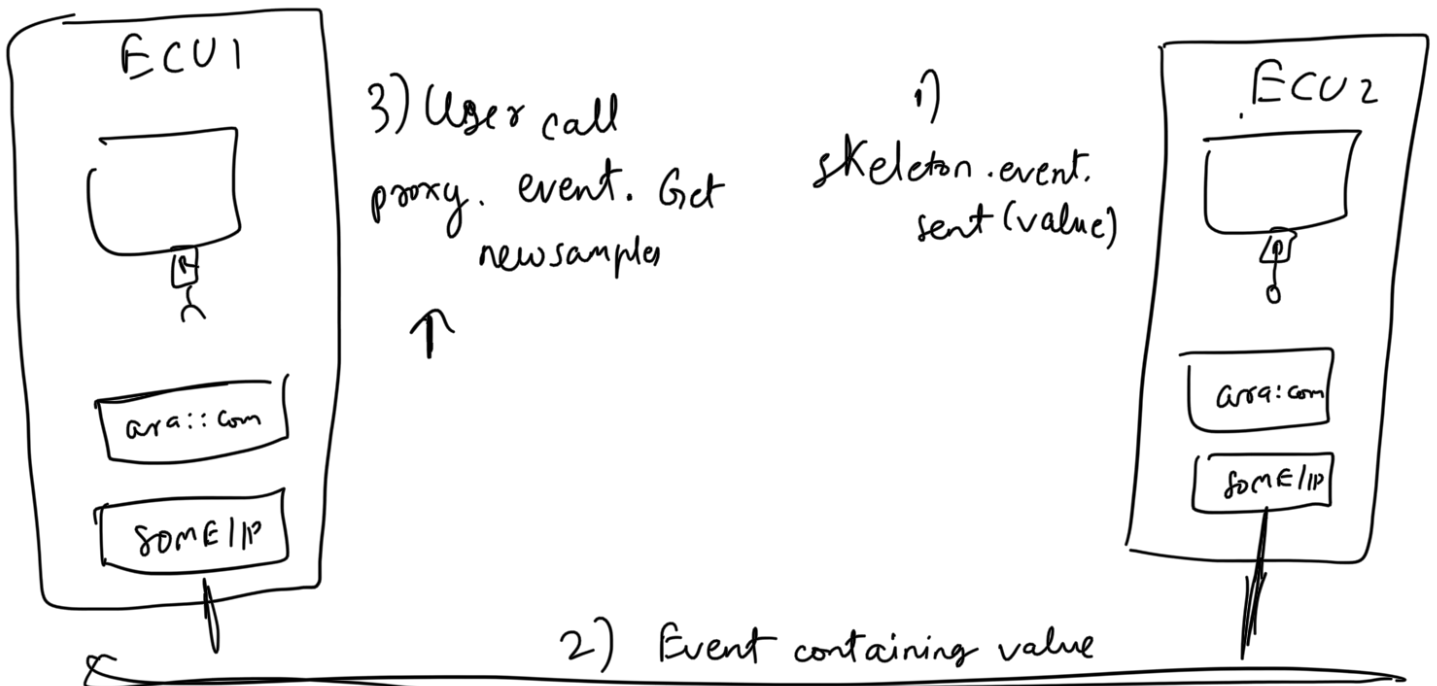

Fields

- 1) Notifier (Event)
- 2) Getter (Method)
- 3) Setter (Method)

