

Lab notebook Week 2

Submitted by: Vishrut Sharma (OdinID: vishrut)

Table of Contents

02.1: TCP, HTTP.....	2
1. TCP #1 (netstat, lsof, nc).....	2
3. Throughput tests	6
5. Developer tools	7
6. Asynchronous HTTP requests.....	10
02.2: DNS, Recap.....	12
1. DNS #1 (dig)	12
2. Reverse DNS lookups.....	16
3. Host enumeration.....	17
4. DNS #2 (Geographic DNS).....	17
5. Network Recap Lab #3.....	20
6. Collect and analyze the network trace of a connection.....	21

02.1: TCP, HTTP

1. TCP #1 (netstat, lsof, nc)

1) Screenshot below contains the result from the command sudo netstat -lpt4


```
vboxuser@vishrut:~$ sudo netstat -lpt4
[sudo] password for vboxuser:
Active Internet connections (only servers)
Proto Recv-Q Send-Q Local Address          Foreign Address        State      PID/Program name
tcp      0      0 localhost:domain        0.0.0.0:*
tcp      0      0 localhost:ipp          0.0.0.0:*
tcp      0      0 localhost:40147        0.0.0.0:*
vboxuser@vishrut:~$
```

2) The screenshot below contains the port numbers after examining /etc/services


```
vboxuser@vishrut:~$ sudo netstat -lpt4
[sudo] password for vboxuser:
Active Internet connections (only servers)
Proto Recv-Q Send-Q Local Address          Foreign Address        State      PID/Program name
tcp      0      0 localhost:domain        0.0.0.0:*
tcp      0      0 localhost:ipp          0.0.0.0:*
tcp      0      0 localhost:40147        0.0.0.0:*
vboxuser@vishrut:~$ grep domain /etc/services
domain      53/tcp                      # Domain Name Server
domain      53/udp
domain-s    853/tcp                     # DNS over TLS [RFC7858]
domain-s    853/udp                     # DNS over DTLS [RFC8094]
vboxuser@vishrut:~$ grep ipp /etc/services
ipp        631/tcp                      # Internet Printing Protocol
vboxuser@vishrut:~$
```

The port that only has a number is running 716/containererd program. It is a daemon that manages the lifecycle of containers in a container runtime environment.

- 4) The screenshot below contains the result from running the netstat command on linux.cs.pdx.edu.

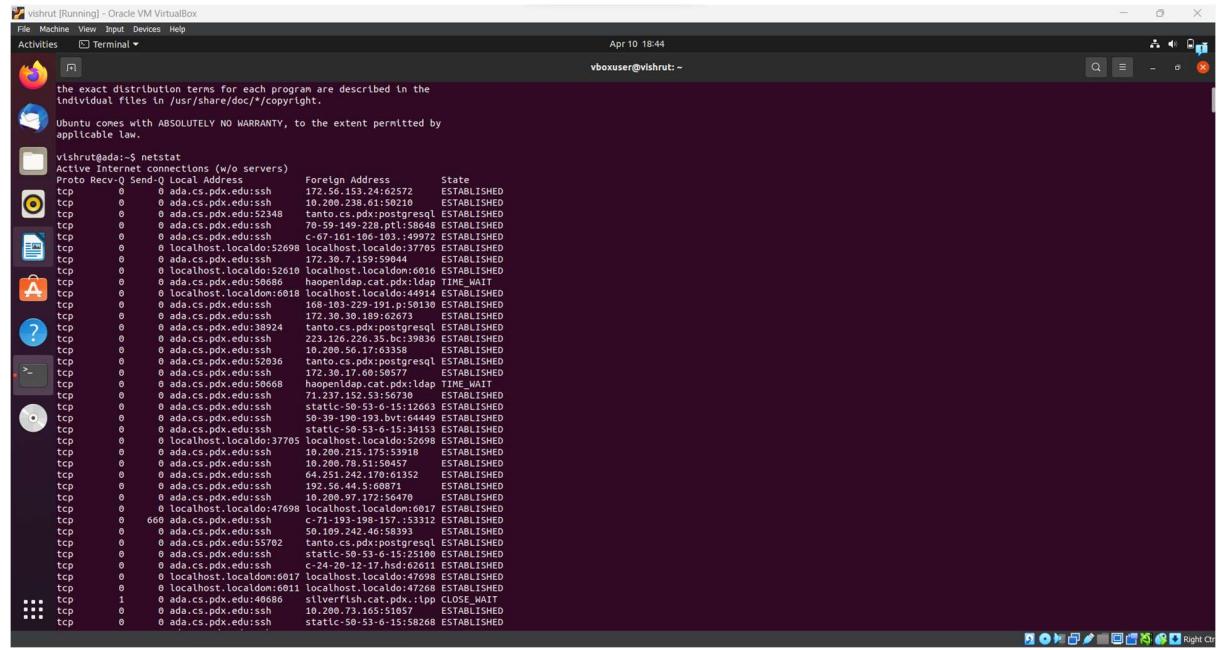

```
vishrut@ada:~$ netstat
Active Internet connections (only servers)
Proto Recv-Q Send-Q Local Address          Foreign Address        State
tcp   0      0      ada.cs.pdx.edu:ssh    172.56.153.24:2572  ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    10.200.238.61:50210 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:52340   tanto.cs.pdx:postgresql ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    70.200.238.61:50210 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    C-07-161-106-163-49972 ESTABLISHED
tcp   0      0      localhost.localdo:52699  localhost.localdo:37705 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    172.30.7.159:59044 ESTABLISHED
tcp   0      0      localhost.localdo:52610  localhost.localdo:00106 ESTABLISHED
tcp   0      0      localhost.localdo:50618  localhost.localdo:44914 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    108-103-229-191.p:50130 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:38924   tanto.cs.pdx:postgresql ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    223.251.128.100.bc:19936 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    10.200.56.174:3306 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:52036   tanto.cs.pdx:postgresql ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    172.30.17.60:56577 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:59666  haipeldap.cat.pdx:ldap TIME_WAIT
tcp   0      0      ada.cs.pdx.edu:ssh    static-50-53-6-15:12063 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    50-39-198-191.bvt:64440 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    static-50-53-6-15:34153 ESTABLISHED
tcp   0      0      localhost.localdo:37708  localhost.localdo:52698 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    10.200.215.175:53918 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    10.200.215.175:53919 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    64.251.242.170:61352 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    192.56.44.51:6087 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    10.200.97.172:56470 ESTABLISHED
tcp   0      0      localhost.localdo:47699  localhost.localdo:00107 ESTABLISHED
tcp   0      0      69.160.100.139:51912  10.200.215.175:53919 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    50.109.242.46:58933 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:55702   tanto.cs.pdx:postgresql ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    static-50-53-6-15:25100 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    c-24-20-12-10.hsd:62011 ESTABLISHED
tcp   0      0      localhost.localdo:6011  localhost.localdo:47698 ESTABLISHED
tcp   0      1      ada.cs.pdx.edu:40680  silverfish.cat.pdx:100 CLOSING_WAIT
tcp   0      0      ada.cs.pdx.edu:ssh    10.200.73.165:1057 ESTABLISHED
tcp   0      0      ada.cs.pdx.edu:ssh    static-50-53-6-15:58268 ESTABLISHED
vishrut@ada:~$
```



```
Last login: Wed Apr 12 17:31:58 2023 from c-71-193-198-157.hsd1.or.comcast.net
vishrut@ada:~$ netstat -tlnp
(Not all processes could be identified, non-owned process info
 will not be shown, you would have to be root to see it all.)
Active Internet connections (only servers)
Proto Recv-Q Send-Q Local Address          Foreign Address        State      PID/Program name
tcp   0      0      0.0.0.0:49311       0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:25        0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:631       0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:6013      0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:6012      0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:6015      0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:6011      0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:6010      0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.1:42711     0.0.0.0:*           LISTEN     -
tcp   0      0      0.0.0.0:22         0.0.0.0:*           LISTEN     -
tcp   0      0      0.0.0.0:111        0.0.0.0:*           LISTEN     -
tcp   0      0      127.0.0.53:53      0.0.0.0.*          LISTEN     -
tcp6  0      :::51701             ::/*                LISTEN     -
tcp6  0      ::::22              ::/*                LISTEN     -
tcp6  0      ::::113             ::/*                LISTEN     -
tcp6  0      ::::111             ::/*                LISTEN     -
tcp6  0      ::::1:6010          ::/*                LISTEN     -
tcp6  0      ::::1:6011          ::/*                LISTEN     -
tcp6  0      ::::1:6012          ::/*                LISTEN     -
tcp6  0      ::::1:6013          ::/*                LISTEN     -
tcp6  0      ::::1:6015          ::/*                LISTEN     -
tcp6  0      ::::1:631            ::/*                LISTEN     -
tcp6  0      ::::1:25             ::/*                LISTEN     -
vishrut@ada:~$
```

5) The screenshot below shows all the services the machine provides for external access.

```
vboxuser@vishrut: ~
```

```
Last login: Sun Apr 16 14:59:39 2023 from c-71-193-198-157.hsd1.or.comcast.net
vishruti@ada1:~$ service --status-all
[ + ]  acpid
[ + ]  alsa-utils
[ - ]  anacron
[ + ]  apparmor
[ + ]  aptdaemon
[ + ]  autofs
[ - ]  avahi-daemon
[ + ]  bluetooth
[ - ]  console-setup.sh
[ + ]  cron
[ + ]  cups
[ + ]  cups-browsed
[ + ]  dbus
[ + ]  fallzban
[ - ]  fio
[ - ]  gdm3
[ - ]  grub-common
[ - ]  hdlock.sh
[ + ]  irqbalance
[ + ]  kerneloops
[ - ]  keyboard-setup.sh
[ + ]  knod
[ - ]  lightdm
[ - ]  ligh
[ + ]  netfilter-persistent
[ + ]  networking
[ - ]  nfs-common
[ - ]  ntp
[ - ]  oidentd
[ - ]  openssh-inetd
[ - ]  openvswitch
[ - ]  plymouth
[ + ]  plymouth-log
[ + ]  postfix
[ + ]  procps
[ - ]  pulseaudio-enable-autospawn
[ + ]  rpd
[ - ]  rsync
[ - ]  saned
[ - ]  screen-cleanup
[ - ]  smartmontools
[ - ]  speech-dispatcher
[ - ]  spice-vdagent
[ + ]  ssh
```



```
Odin ID vishruti
```

```
File Edit View
```

```
Odin ID: vishruti
```

```
Ln 1, Col 17 | 100% | Windows (CRLF) | UTF-8
```

6) The screenshot below contains the result from running the lsof command on the Ubuntu VM. The number of open descriptors were 31045.

```
vishrut@vishrut:~$ netstat -an | grep :25
tcp6       0      0 127.0.0.1:25          0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:33          0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:5813        0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:69812       0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:69815       0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:69816       0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:69819       0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:69820       0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:69825       0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:69826       0.0.0.0:*          LISTEN
tcp6       0      0 127.0.0.1:37705      0.0.0.0.*          LISTEN
tcp6       0      0 0.0.0.0:22           0.0.0.0.*          LISTEN
tcp6       0      0 0.0.0.0:111          0.0.0.0.*          LISTEN
tcp6       0      0 0.0.0.0:53/53       0.0.0.0.*          LISTEN
tcp6       0  ::1:51701 ::*:              LISTEN
tcp6       0  ::1::22   ::*:              LISTEN
tcp6       0  ::1::113  ::*:              LISTEN
tcp6       0  ::1::116  ::*:              LISTEN
tcp6       0  ::1::6016  ::*:             LISTEN
tcp6       0  ::1::6017  ::*:             LISTEN
tcp6       0  ::1::6018  ::*:             LISTEN
tcp6       0  ::1::6019  ::*:             LISTEN
tcp6       0  ::1::6023  ::*:             LISTEN
tcp6       0  ::1::6025  ::*:             LISTEN
tcp6       0  ::1::6026  ::*:             LISTEN
tcp6       0  ::1::6010  ::*:             LISTEN
tcp6       0  ::1::6011  ::*:             LISTEN
tcp6       0  ::1::6012  ::*:             LISTEN
tcp6       0  ::1::6013  ::*:             LISTEN
tcp6       0  ::1::6014  ::*:             LISTEN
tcp6       0  ::1::6015  ::*:             LISTEN
tcp6       0  ::1::6031  ::*:             LISTEN
tcp6       0  ::1::25   ::*:             LISTEN
vishrut@vishrut:~$ ext
logout
Connection to linux.cs.pdx.edu closed.
vboxuser@vishrut:~$ sudo lsdf | wc -l
[sudo] password for vboxuser:
lsdf: WARNING: can't stat() fuse.gvfsd-fuse file system /run/user/1000/gvfs
        Output information may be incomplete.
31045
vboxuser@vishrut:~$ c
vboxuser@v: Start :-$
```

The screenshot below contains the result from running the lsof command but with the -i and the -s flag included. The result was 12.

```
vishrut [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
Activities Terminal Apr 10 18:49
vboxuser@vishrut:~
```

tcp 0 0 127.0.0.1:37705 0.0.0.0:* LISTEN -
tcp 0 0 0.0.0.0:22 0.0.0.0:* LISTEN -
tcp 0 0 127.0.0.1:111 0.0.0.0:* LISTEN -
tcp 0 0 127.0.0.53:53 0.0.0.0:* LISTEN -
tcp6 0 ::1:51701 ::*: LISTEN -
tcp6 0 0 ::1:22 ::*: LISTEN -
tcp6 0 0 ::1:113 ::*: LISTEN -
tcp6 0 0 ::1:111 ::*: LISTEN -
tcp6 0 0 ::1:6016 ::*: LISTEN -
tcp6 0 0 ::1:6017 ::*: LISTEN -
tcp6 0 0 ::1:6018 ::*: LISTEN -
tcp6 0 0 ::1:6019 ::*: LISTEN -
tcp6 0 0 ::1:6020 ::*: LISTEN -
tcp6 0 0 ::1:6025 ::*: LISTEN -
tcp6 0 0 ::1:6026 ::*: LISTEN -
tcp6 0 0 ::1:6010 ::*: LISTEN -
tcp6 0 0 ::1:6011 ::*: LISTEN -
tcp6 0 0 ::1:6012 ::*: LISTEN -
tcp6 0 0 ::1:6013 ::*: LISTEN -
tcp6 0 0 ::1:6014 ::*: LISTEN -
tcp6 0 0 ::1:6015 ::*: LISTEN -
tcp6 0 0 ::1:6016 ::*: LISTEN -
tcp6 0 0 ::1:25 ::*: LISTEN -

```
vishrut@vishrut:~$ exit
logout
Connection to linux.cs.pdx.edu closed.
vboxuser@vishrut:~$ sudo lsof | wc -l
[sudo] password for vboxuser:
lsof: WARNING: can't stat() fuse.gvfsd-fuse file system /run/user/1000/gvfs
        Output information may be incomplete.
31045
vboxuser@vishrut:~$ c
vboxuser@vishrut:~$ sudo lsof -l -s
COMMAND PID USER FD TYPE DEVICE SIZE NODE NAME
systemd-r 120 system-resolve 12u IPv4 21677 UDP localhost:domain
systemd-r 331 systemd-resolve 13u IPv4 21978 TCP localhost:domain (LISTEN)
avahi-dae 574 avahi 12u IPv4 23451 UDP +:mdns
avahi-dae 574 avahi 13u IPv6 23452 UDP +:mdns
avahi-dae 574 avahi 14u IPv6 23453 UDP +:159709
avahi-dae 574 avahi 15u IPv6 23454 UDP +:mdns
cupsd 576 root 6u IPv6 44657 TCP [::]:localhost:ipp (LISTEN)
cupsd 576 root 7u IPv4 24658 TCP localhost:ipp (LISTEN)
NetworkManager 578 root 23u IPv4 55592 UDP vishrut:bootpc->_gateway:bootps
cups-browsd 666 root 7u IPv4 24085 UDP *:631
container 783 root 14u IPv4 28294 TCP localhost:44255 (LISTEN)
```

12
vboxuser@vishrut:~\$

7) The 2 screenshots below contains the result from netcat command. The first screenshot shows us which port is being used to connect to `linux.cs.pdx.edu`.

The 2nd screenshot shows the SSH version being used to connect to `linux.cs.pdx.edu`.

```
File Machine View Input Devices Help
Activities Terminal ▾
vboxuser@vishrut: ~
debug: kex: server<-client cipher: chacha20-poly1305@openssh.com MAC: <implicit> compression: none
debug: kex: client->server cipher: chacha20-poly1305@openssh.com MAC: <implicit> compression: none
debug: expecting SSH2_MSG_KEX_ECDH_REPLY
debug: Server host key: ecdsa-sha2-nistp521 SHA256:J0NbTFu9BnBCnssrxZ8bEcp1Qp+cvFBEBh10hAeVaM
debug: Host 'linux.cs.pdx.edu' is known and matches the ECDSA host key.
debug: Found key in /home/vboxuser/.ssh/known_hosts:3
debug: rekey out after 34217728 blocks
debug: expecting SSH2_MSG_NEWKEYS
debug: SSH2_MSG_NEWKEYS received
debug: rekey in after 134217728 blocks
debug: Will attempt key: /home/vboxuser/.ssh/id_rsa RSA SHA256:ONj6PT35Bu+0aa1qqwTcf56zeagd3XAwWxsVBWFGBlg agent
debug: Will attempt key: /home/vboxuser/.ssh/id_dsa
debug: Will attempt key: /home/vboxuser/.ssh/id_ecdsa
debug: Will attempt key: /home/vboxuser/.ssh/id_ecdsas_sk
debug: Will attempt key: /home/vboxuser/.ssh/id_ed25519
debug: Will attempt key: /home/vboxuser/.ssh/id_ed25519_sk
debug: Will attempt key: /home/vboxuser/.ssh/id_xmss
debug: Will attempt key: /home/vboxuser/.ssh/id_xmss
debug: Key exchange successful
debug: kex_input_ext_info=<ssh-ed25519_sk-sk-sha2-ed25519@openssh.com,ssh-rsa,rsa-sha2-256,rsa-sha2-512,ssh-dss,ecdsa-sha2-nistp256,ecdsa-sha2-nistp384,ecdsa-sha2-nistp521,sk-ecdsa-sha2-nistp256@openssh.com,webauthn-sk-ecdsa-sha2-nistp256@openssh.com>
debug: kex_input_ext_info: publickey:hostbased@openssh.com (unrecognized)
debug: SSH2_MSG_SERVICE_ACCEPT received
debug: Authentication method accepted: publickey,gssapi-with-mic,password,hostbased
debug: Next authentication method required: password
debug: Unspecified GSS failure. Minor code may provide more information
No Kerberos credentials available (default cache: FILE:/tmp/krb5cc_1000)

debug: Unspecified GSS failure. Minor code may provide more information
No Kerberos credentials available (default cache: FILE:/tmp/krb5cc_1000)

debug: Next authentication method: publickey
debug: Offering public key: /home/vboxuser/.ssh/id_rsa RSA SHA256:ONj6PT35Bu+0aa1qqwTcf56zeagd3XAwWxsVBWFGBlg agent
debug: Offering private key: /home/vboxuser/.ssh/id_dsa
debug: Offering private key: /home/vboxuser/.ssh/id_ecdsa
debug: Offering private key: /home/vboxuser/.ssh/id_ecdsas_sk
debug: Offering private key: /home/vboxuser/.ssh/id_ed25519
debug: Offering private key: /home/vboxuser/.ssh/id_ed25519_sk
debug: Offering private key: /home/vboxuser/.ssh/id_xmss
debug: Offering private key: /home/vboxuser/.ssh/id_xmss
debug: Next authentication method: password
vishrut@linux.cs.pdx.edu's password:

vboxuser@vishrut: ~
```

3. Throughput tests

- 1) The screenshot below shows the measured bandwidth available between us-west1-b (right image) and australia-southeast1-b (left image).



The screenshot shows two terminal windows side-by-side. Both windows have a title bar 'Odin ID v1' and a header bar with 'File', 'Edit', 'View', and a gear icon.

Left Terminal:

- Title: Odin ID v1
- Content:
 - SSH-in-browser
 - SSH-in-browser
 - 51 updates can be applied immediately.
 - 34 of these updates are standard security updates.
 - To see these additional updates run: apt list --upgradable
 - Enable ESM Apps to receive additional future security updates.
See <https://ubuntu.com/esm> or run: sudo pro status
 - Last login: Tue Apr 11 02:02:00 2023 from 35.235.241.96
 - vishruth@us-**australia-southeast1:b**:~\$ sudo iperf -s -p 80
 - Server listening on TCP port 80
 - TCP window size: 128 KByte (default)
 - [4] local 10.152.0.2 port 80 connected with 35.203.129.238 port 45556
 - [1D] Interval Transfer Bandwidth
 - [4] 0.0-10.1 sec 170 MBytes 141 Mbit/sec

Right Terminal:

- Title: Odin ID v1
- Content:
 - SSH-in-browser
 - SSH-in-browser
 - 51 updates can be applied immediately.
 - 34 of these updates are standard security updates.
 - To see these additional updates run: apt list --upgradable
 - Enable ESM Apps to receive additional future security updates.
See <https://ubuntu.com/esm> or run: sudo pro status
 - Last login: Tue Apr 11 02:05:41 2023 from 35.235.241.66
 - vishruth@us-**west1-b**:~\$ iperf -c 35.189.43.237 -p 80
 - Client connecting to 35.189.43.237, TCP port 80
 - TCP window size: 85.0 KByte (default)
 - [3] local 10.138.0.6 port 45556 connected with 35.189.43.237 port 80
 - [1D] Interval Transfer Bandwidth
 - [3] 0.0-10.1 sec 170 MBytes 141 Mbit/sec

- 2) The screenshot below shows the measured bandwidth available between us-west1-b (right image) and europe-west1-d (left image).



The screenshot shows two separate terminal windows, each titled "SSH-in-browser". Both windows display a command-line interface for an SSH session. The left window shows the user "vishruth" on a host with IP 35.199.43.237. The right window shows the user "vishruth" on a host with IP 35.235.241.66. Both windows include standard terminal features like file upload/download, copy/paste, and a status bar at the bottom.

```
https://ssh.cloud.google.com/v2/ssh/projects/cloud-sharma-vishruth/zones/us-west1-a/instances/vm-us-west1-a
Added security | https://ssh.cloud.google.com/v2/ssh/projects/cloud-sharma-vishruth/zones/us-west1-a/instances/vm-us-west1-a

SSH-in-browser
SSH-in-browser

51 updates can be applied immediately.
34 of these updates are standard security updates.
To see these additional updates run: apt list --upgrade

Enable ESM Apps to receive additional future security updates
See https://ubuntu.com/esm or run: sudo pro status

Last login: Tue Apr 11 02:05:41 2023 from 35.235.243.224
vishruth@vm-europe-west1-a:~$ sudo iperf -s -p 80
[...]
Server listening on TCP port 80
TCP window size: 128 KByte (default)
[...]
[ 4 ] local 10.132.0.2 port 80 connected with 35.203.129.238 port 59108
[ 1D ] Interval Transfer Bandwidth
[ 4 ] 0.0-10.1 sec 150 MBytes 158 Mbit/sec
[ 4 ] local 10.138.0.2 port 45556 connected with 35.189.43.237 port 80
[ 1D ] Interval Transfer Bandwidth
[ 4 ] 0.0-10.1 sec 170 MBytes 141 Mbit/sec
vishruth@vm-europe-west1-a:~$ iperf -c 35.189.43.237 -p 80
[...]
Client connecting to 35.189.43.237, TCP port 80
TCP window size: 85.0 KByte (default)
[ 3 ] local 10.138.0.6 port 45556 connected with 35.189.43.237 port 80
[ 1D ] Interval Transfer Bandwidth
[ 3 ] 0.0-10.1 sec 170 MBytes 141 Mbit/sec
vishruth@vm-europe-west1-a:~$ iperf -c 34.78.94.195 -p 80
[...]
Client connecting to 34.78.94.195, TCP port 80
TCP window size: 85.0 KByte (default)
[ 3 ] local 10.138.0.6 port 59108 connected with 34.78.94.195 port 80
[ 1D ] Interval Transfer Bandwidth
[ 3 ] 0.0-10.1 sec 150 MBytes 158 Mbit/sec
vishruth@vm-europe-west1-a:~$ 
```

- 3) The screenshot below shows the measured bandwidth available between us-west1-b (right image) and us-east1-b (left image).


The screenshot displays two terminal windows side-by-side. The left window, titled 'SSH-in-browser', shows iperf test results from a VM in us-east1-b to a VM in us-west1-b. The right window, also titled 'SSH-in-browser', shows iperf test results from a VM in us-west1-b to a VM in us-east1-b. Both tests used port 80 and TCP. The bandwidth values are as follows:

Test Direction	Client IP	Server IP	Bandwidth (Mbps)
us-east1-b to us-west1-b	34.148.238.90	34.78.94.195	141 Mbit/sec
us-west1-b to us-east1-b	34.78.94.195	34.148.238.90	158 Mbit/sec
us-west1-b to us-west1-b	34.148.238.90	34.148.238.90	93.5 Mbit/sec
us-east1-b to us-east1-b	35.203.129.238	35.235.243.208	112 Mbit/sec

There is a relative difference between the bandwidths between us-west1-b and all the other VMs. Surprisingly the lowest bandwidth (93.5 Mbit/sec) was between us-west1-b and us-east1-b. This might be because of internet traffic and network congestion. The bandwidth between us-west1-b and australia-southeast1-b was 141 Mbit/sec and the highest bandwidth was between us-west1-b and europe-west1-d (158 Mbit/sec).

5. Developer tools

- 1) URL being requested is <http://google.com/>
- 2) The Status code is 307: ‘HTTP 307 Temporary Redirect’ response code indicates that the resource requested has been temporarily moved to the URL given by the Location headers.
- 3) The screenshot below shows the HTTP response header.

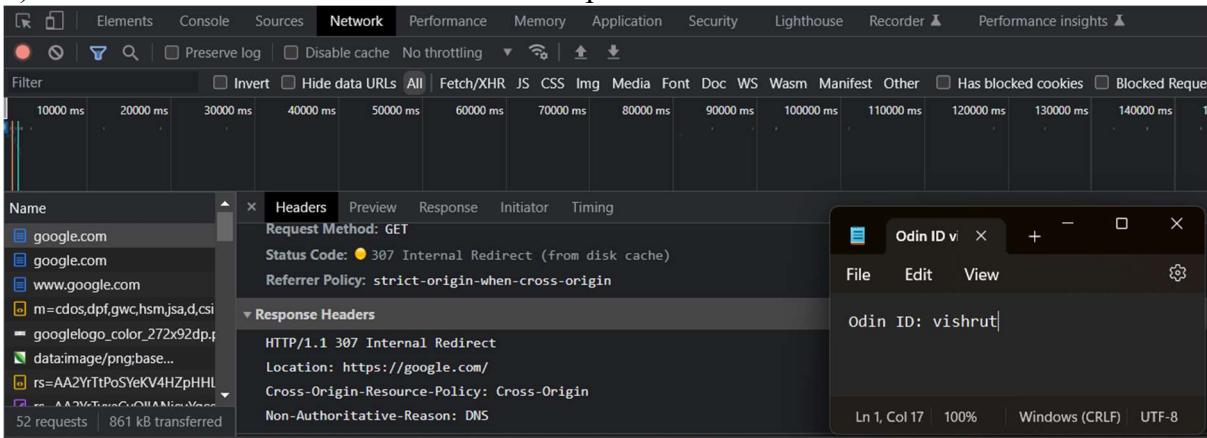

- 4) URL being requested is <https://google.com/>. It uses HTTPS.

5) The 2 screenshots below show the authority header and the user-agent field.

The image contains two vertically stacked screenshots of the Chrome DevTools Network tab. Both screenshots show a list of requests for 'google.com' and its sub-resources. A context menu is open over one of the requests, specifically for the 'google.com' entry in the list. The menu is titled 'Odin ID vi:' and contains options for 'File', 'Edit', and 'View'. In the first screenshot, the 'View' option is selected, displaying the value 'Odin ID: vishrut'. In the second screenshot, the 'Edit' option is selected, showing the same value. Below the menu, the Network tab shows various request details like timing, headers, and response sizes.

6) The Status code is 301: ‘HTTP status code 301’ indicates a permanent redirect, meaning that the requested resource has moved permanently to a new URL. And ‘HTTP 307 Temporary Redirect’ response code indicates that the resource requested has been temporarily moved to the URL given by the Location headers.

7) The screenshot below shows the associated HTTP response header that is sent in conjunction with this status code for the request.

The screenshot shows the Network tab in the Chrome DevTools. A request to `https://google.com/` is selected. The Headers section shows the following response headers:

```
Request URL: https://google.com/
Request Method: GET
Status Code: 301
Remote Address: [2607:f8b0:400a:80e::200e]:443
Referer Policy: strict-origin-when-cross-origin

Response Headers
alt-svc: h3=":443"; ma=2592000,h3-29=":443"; ma=2592000
cache-control: public, max-age=2592000
content-length: 220
content-security-policy-report-only: object-src 'none';base-uri 'self';script-src 'nonce-TNlqXlltHffyAuxGhMAQ' 'strict-dynamic' 'report-sample' 'unsafe-eval' 'unsafe-inline' https: http;;report-uri https://csp.withgoogle.com/csp/gws/other-hp
content-type: text/html; charset=UTF-8
cross-origin-opener-policy: same-origin-allow-popups; report-to="gws"
date: Mon, 17 Apr 2023 23:24:06 GMT
expires: Wed, 17 May 2023 23:24:06 GMT
location: https://www.google.com/
origin-trial: Ap+qInLzIDK5mEHjM51la98Gueh1lqGb6ezME51khe1j2BqVzfV06zPwQ3lodoueu3ZuphAo1rnhnPAw4AIAAA8feyJvcmlna41011odRwczovL3d3dy5nb29nbGluY29tDjQ9MyIsImZ1YX81cmI1O1JQ/XtaXnzab9uc1BvbG1jeVvub...
```

8) URL being requested is <https://www.google.com/>. It is using HTTPS.

9) The status code is 200.

10) The screenshot below shows the alt-svc section in the response header. The client can use HTTP3/QUIC based on the h3-29 tag in alt-svc.

The screenshot shows the Network tab in the Chrome DevTools. A request to `https://google.com/` is selected. The Headers section shows the following response headers:

```
Request URL: https://google.com/
Request Method: GET
Status Code: 200
Remote Address: [2607:f8b0:400a:80e::200e]:443
Referer Policy: strict-origin-when-cross-origin

Response Headers
accept-ch: Sec-CH-UA-Platform
accept-ch: Sec-CH-UA-Platform-Version
accept-ch: Sec-CH-UA-Full-Version
accept-ch: Sec-CH-UA-Arch
accept-ch: Sec-CH-UA-Model
accept-ch: Sec-CH-UA-Bitness
accept-ch: Sec-CH-UA-Full-Version-List
accept-ch: Sec-CH-UA-WoW64
alt-svc: h3=":443"; ma=2592000,h3-29=":443"; ma=2592000
cache-control: private, max-age=0
content-encoding: br
content-length: 44773
content-security-policy-report-only: object-src 'none';base-uri 'self';script-src 'nonce-way5iyDn5uHovPmKv0A' 'strict-dynamic' 'report-sample' 'unsafe-eval' 'unsafe-inline' https: http;;report-uri https://csp.withgoogle.com/csp/gws/other-hp
content-type: text/html; charset=UTF-8
cross-origin-opener-policy: same-origin-allow-popups; report-to="gws"
date: Mon, 17 Apr 2023 23:24:06 GMT
expires: Wed, 17 May 2023 23:24:06 GMT
location: https://www.google.com/
origin-trial: Ap+qInLzIDK5mEHjM51la98Gueh1lqGb6ezME51khe1j2BqVzfV06zPwQ3lodoueu3ZuphAo1rnhnPAw4AIAAA8feyJvcmlna41011odRwczovL3d3dy5nb29nbGluY29tDjQ9MyIsImZ1YX81cmI1O1JQ/XtaXnzab9uc1BvbG1jeVvub...
```

11) The setting of SameSite=None indicates that the cookie can be sent with cross-site requests, including requests from third-party sites.

SameSite=Lax indicates that the cookie can only be sent along with "safe" HTTP methods such as GET. This provides a level of protection against cross-site request forgery (CSRF) attacks, where an attacker could potentially use a user's cookies to perform actions on a different website without the user's consent.

Name	Value
Set-Cookie	name=Vishrut; value=vishrut; domain=.google.com; path=/; SameSite=None; Secure
Set-Cookie	name=Vishrut; value=vishrut; domain=.google.com; path=/; SameSite=Lax; Secure

6. Asynchronous HTTP requests

1) The 2 screenshots below show the request and response headers.

Name	Value
Request URL	https://www.google.com/complete/search?
Request Method	GET
Status Code	200
Remote Address	[2607:f8b0:400a:80a::2004]:443
Referrer Policy	origin

The screenshot shows the Network tab of the Google Chrome developer tools. A request to `google.com` is selected. In the Headers section, a custom header `Odin ID: vishrut` is visible. The Response tab shows the JSON payload returned by Google.

```
Odin ID: vishrut
[{"q": "Portland State", "r": "1"}]
```

The screenshot below shows that the payload has returned the data that is then rendered on the search page.


The screenshot shows the Network tab of the Google Chrome developer tools. A request to `google.com` is selected. In the Headers section, a custom header `Odin ID: vishrut` is visible. The Response tab shows the JSON payload returned by Google, which is then rendered as search results on the search page.

```
Odin ID: vishrut
[{"q": "Portland State", "r": "1"}]
```

02.2: DNS, Recap

1. DNS #1 (dig)

- 1) The ANSWER section of the A record for www.pdx.edu indicates the IP address where PSU's web services are hosted. The ANSWER section of the MX record for pdx.edu indicates the hostnames of the mail servers where PSU's email services are hosted.

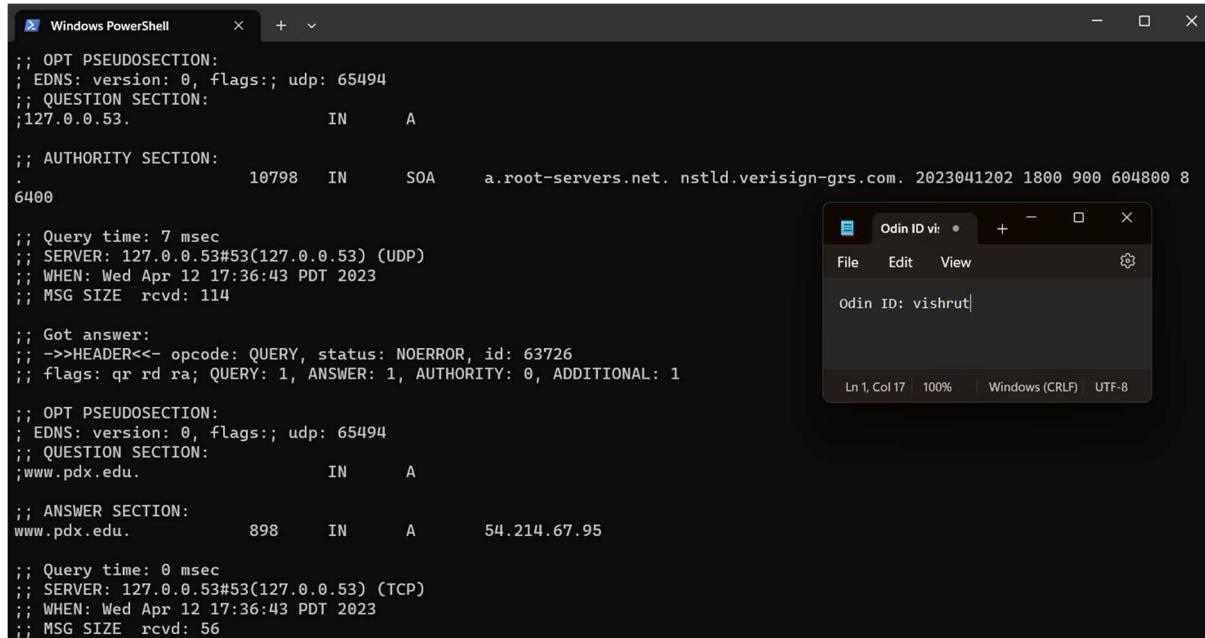

```
Windows PowerShell

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 65494
;; QUESTION SECTION:
;127.0.0.53.          IN      A

;; AUTHORITY SECTION:
.          10798   IN      SOA     a.root-servers.net. nstld.verisign-grs.com. 2023041202 1800 900 604800 8
6400


;; Query time: 7 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (UDP)
;; WHEN: Wed Apr 12 17:36:43 PDT 2023
;; MSG SIZE  rcvd: 114

;; Got answer:
-->>>HEADER<<- opcode: QUERY, status: NOERROR, id: 63726
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 65494
;; QUESTION SECTION:
;www.pdx.edu.          IN      A

;; ANSWER SECTION:
www.pdx.edu.      898     IN      A      54.214.67.95

;; Query time: 0 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (TCP)
;; WHEN: Wed Apr 12 17:36:43 PDT 2023
;; MSG SIZE  rcvd: 56
```

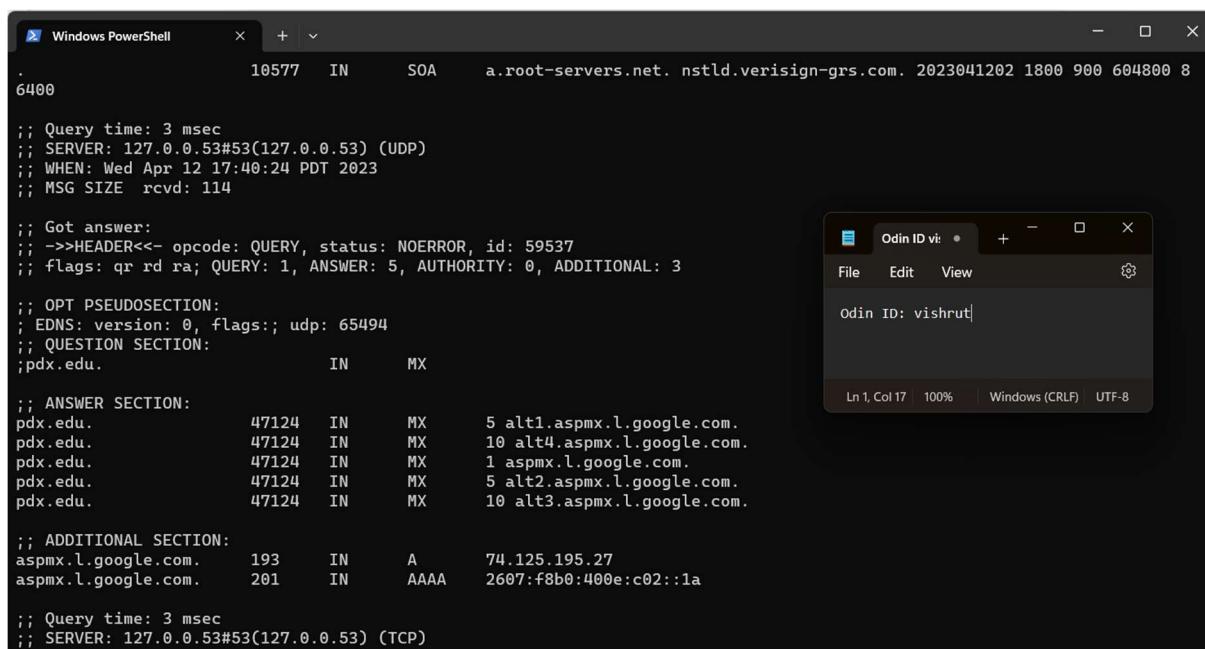

```
Windows PowerShell

.          10577   IN      SOA     a.root-servers.net. nstld.verisign-grs.com. 2023041202 1800 900 604800 8
6400

;; Query time: 3 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (UDP)
;; WHEN: Wed Apr 12 17:40:24 PDT 2023
;; MSG SIZE  rcvd: 114

;; Got answer:
-->>>HEADER<<- opcode: QUERY, status: NOERROR, id: 59537
;; flags: qr rd ra; QUERY: 1, ANSWER: 5, AUTHORITY: 0, ADDITIONAL: 3


;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 65494
;; QUESTION SECTION:
;pdx.edu.          IN      MX

;; ANSWER SECTION:
pdx.edu.        47124   IN      MX      5 alt1.aspmx.l.google.com.
pdx.edu.        47124   IN      MX      10 alt4.aspmx.l.google.com.
pdx.edu.        47124   IN      MX      1 aspmx.l.google.com.
pdx.edu.        47124   IN      MX      5 alt2.aspmx.l.google.com.
pdx.edu.        47124   IN      MX      10 alt3.aspmx.l.google.com.

;; ADDITIONAL SECTION:
aspmx.l.google.com. 193     IN      A      74.125.195.27
aspmx.l.google.com. 201     IN      AAAA    2607:f8b0:400e:c02::1a

;; Query time: 3 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (TCP)
```

- 2) The screenshot below shows the authoritative server of mashimaro.cs.pdx.edu and also the result after querying walt.ee.pdx.edu for the A record of mashimaro.cs.pdx.edu.

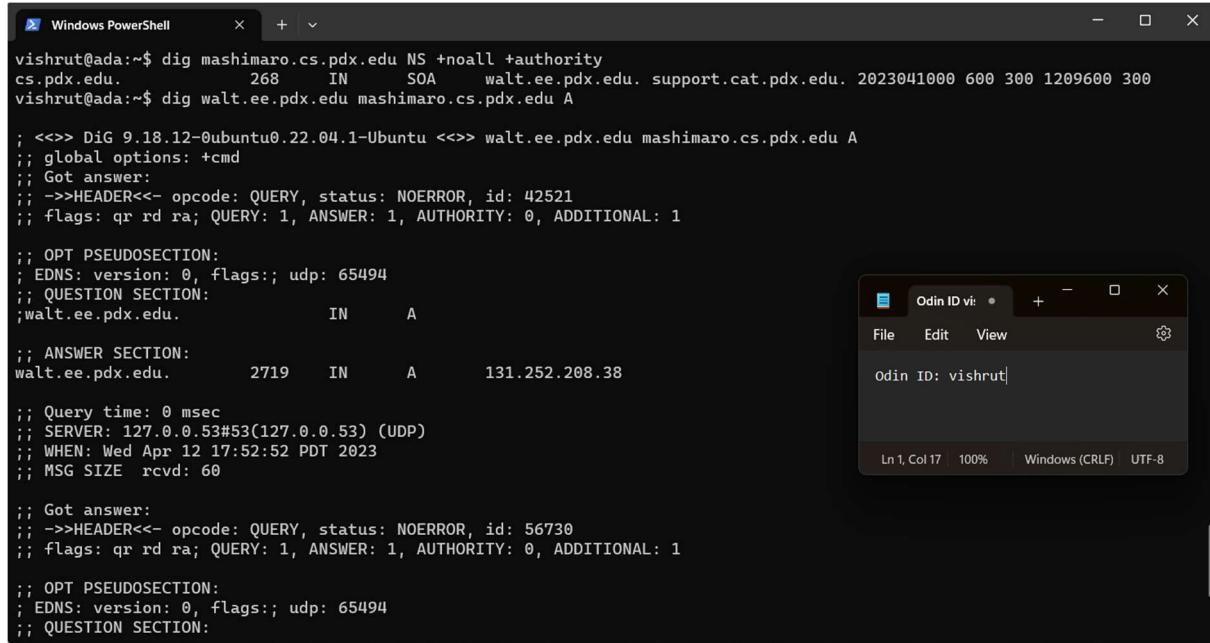

```
vishrut@ada:~$ dig mashimaro.cs.pdx.edu NS +noall +authority
mashimaro.cs.pdx.edu. 268 IN SOA walt.ee.pdx.edu. support.cat.pdx.edu. 2023041000 600 300 1209600 300
vishrut@ada:~$ dig walt.ee.pdx.edu mashimaro.cs.pdx.edu A
; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> walt.ee.pdx.edu mashimaro.cs.pdx.edu A
;; global options: +cmd
;; Got answer:
;; ->>HEADER<- opcode: QUERY, status: NOERROR, id: 42521
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1


;; OPT PSEUDOSECTION:
;; EDNS: version: 0, flags:; udp: 65494
;; QUESTION SECTION:
;walt.ee.pdx.edu. IN A
;; ANSWER SECTION:
walt.ee.pdx.edu. 2719 IN A 131.252.208.38

;; Query time: 0 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (UDP)
;; WHEN: Wed Apr 12 17:52:52 PDT 2023
;; MSG SIZE rcvd: 60

;; Got answer:
;; ->>HEADER<- opcode: QUERY, status: NOERROR, id: 56730
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
;; EDNS: version: 0, flags:; udp: 65494
;; QUESTION SECTION:
```

- 3) The screenshots below show the authoritative server for thefengs.com and the result after querying that server for the A record of thefengs.com.

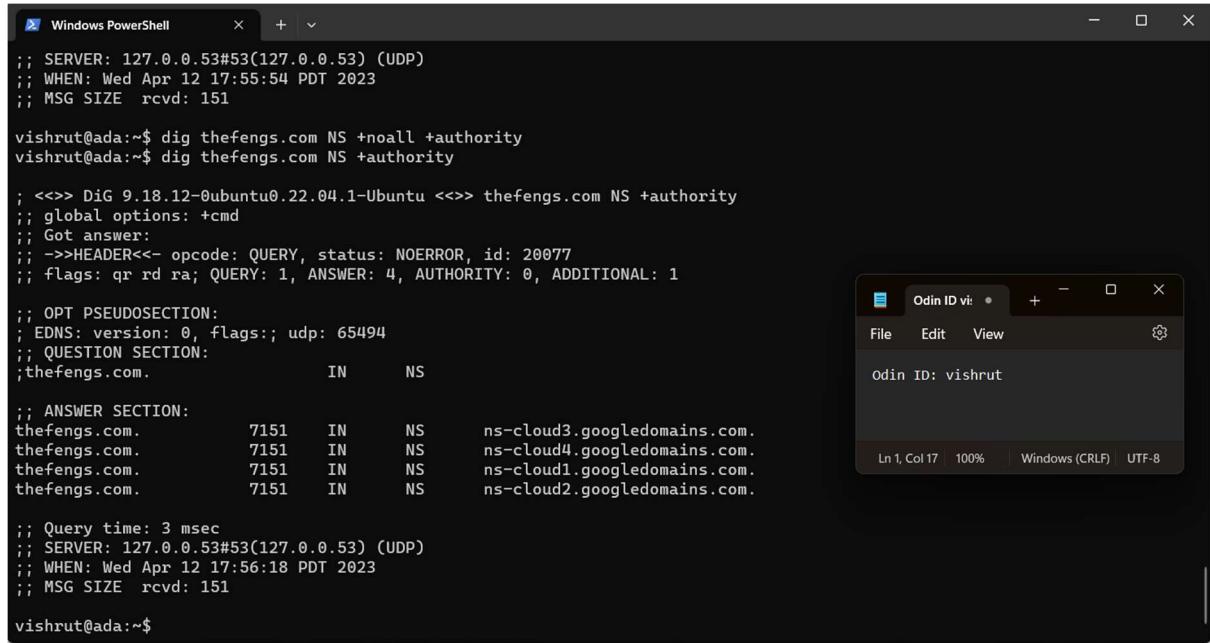


```
vishrut@ada:~$ dig thefengs.com NS +noall +authority
vishrut@ada:~$ dig thefengs.com NS +authority

; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> thefengs.com NS +authority
;; global options: +cmd
;; Got answer:
;; ->>HEADER<- opcode: QUERY, status: NOERROR, id: 20077
;; flags: qr rd ra; QUERY: 1, ANSWER: 4, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
;; EDNS: version: 0, flags:; udp: 65494
;; QUESTION SECTION:
;thefengs.com. IN NS
;; ANSWER SECTION:
thefengs.com. 7151 IN NS ns-cloud3.googledomains.com.
thefengs.com. 7151 IN NS ns-cloud4.googledomains.com.
thefengs.com. 7151 IN NS ns-cloud1.googledomains.com.
thefengs.com. 7151 IN NS ns-cloud2.googledomains.com.

;; Query time: 3 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (UDP)
;; WHEN: Wed Apr 12 17:56:18 PDT 2023
;; MSG SIZE rcvd: 151

vishrut@ada:~$
```

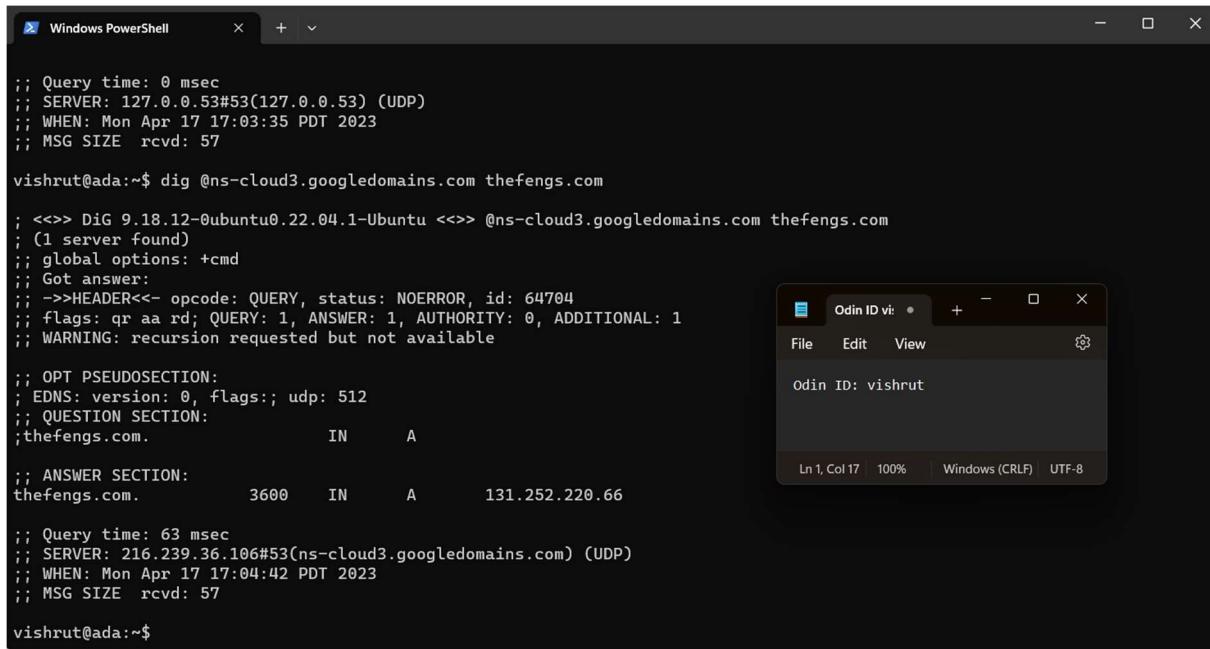

```

; Query time: 0 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (UDP)
;; WHEN: Mon Apr 17 17:03:35 PDT 2023
;; MSG SIZE rcvd: 57

vishrut@ada:~$ dig @ns-cloud3.googledomains.com thefengs.com

; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> @ns-cloud3.googledomains.com thefengs.com
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<- opcode: QUERY, status: NOERROR, id: 64704
;; flags: qr aa rd; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1
;; WARNING: recursion requested but not available

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 512
;; QUESTION SECTION:
;thefengs.com.           IN      A


;; ANSWER SECTION:
thefengs.com.      3600    IN      A       131.252.220.66

; Query time: 63 msec
;; SERVER: 216.239.36.106#53(ns-cloud3.googledomains.com) (UDP)
;; WHEN: Mon Apr 17 17:04:42 PDT 2023
;; MSG SIZE rcvd: 57

vishrut@ada:~$
```

4) When a web request hits port 80 of 131.252.220.66, the server uses the HTTP protocol to determine which site to serve from. Specifically, the HTTP protocol uses the ‘Host’ header in the HTTP request to determine which site to serve.

5) The screenshots below show the result of the DNS iterative lookup of www.amazon.co.uk

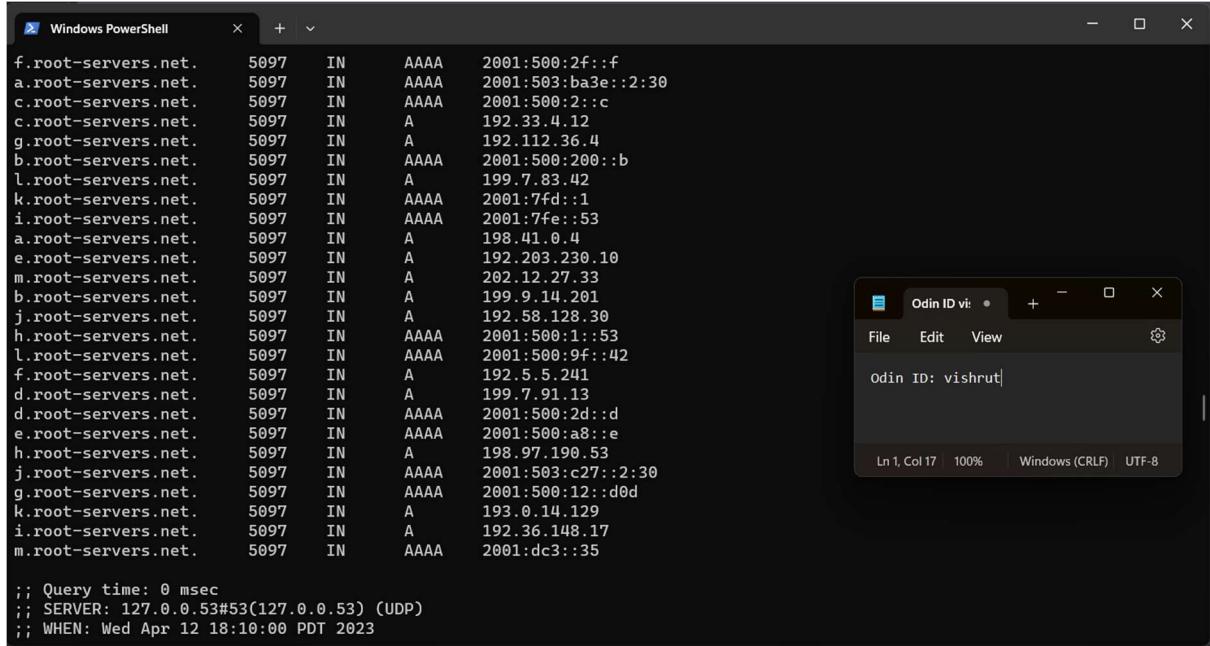

```

Windows PowerShell - f.root-servers.net.      5097   IN      AAAA    2001:500:2f::f
Windows PowerShell - a.root-servers.net.      5097   IN      AAAA    2001:503:ba3e::2:30
Windows PowerShell - c.root-servers.net.      5097   IN      AAAA    2001:500:2::c
Windows PowerShell - c.root-servers.net.      5097   IN      A      192.33.4.12
Windows PowerShell - g.root-servers.net.      5097   IN      A      192.112.36.4
Windows PowerShell - b.root-servers.net.      5097   IN      AAAA    2001:500:200::b
Windows PowerShell - l.root-servers.net.      5097   IN      A      199.7.83.42
Windows PowerShell - k.root-servers.net.      5097   IN      AAAA    2001:7fd::1
Windows PowerShell - i.root-servers.net.      5097   IN      AAAA    2001:7fe::53
Windows PowerShell - a.root-servers.net.      5097   IN      A      198.41.0.4
Windows PowerShell - e.root-servers.net.      5097   IN      A      192.203.230.10
Windows PowerShell - m.root-servers.net.      5097   IN      A      202.12.27.33
Windows PowerShell - b.root-servers.net.      5097   IN      A      199.9.14.201
Windows PowerShell - j.root-servers.net.      5097   IN      A      192.58.128.30
Windows PowerShell - h.root-servers.net.      5097   IN      AAAA    2001:500:1::53
Windows PowerShell - l.root-servers.net.      5097   IN      AAAA    2001:500:9f::42
Windows PowerShell - f.root-servers.net.      5097   IN      A      192.5.5.241
Windows PowerShell - d.root-servers.net.      5097   IN      A      199.7.91.13
Windows PowerShell - d.root-servers.net.      5097   IN      AAAA    2001:500:2d::d
Windows PowerShell - e.root-servers.net.      5097   IN      AAAA    2001:500:a8::e
Windows PowerShell - h.root-servers.net.      5097   IN      A      198.97.190.53
Windows PowerShell - j.root-servers.net.      5097   IN      AAAA    2001:503:c27::2:30
Windows PowerShell - g.root-servers.net.      5097   IN      AAAA    2001:500:12::d0d
Windows PowerShell - k.root-servers.net.      5097   IN      A      193.0.14.129
Windows PowerShell - i.root-servers.net.      5097   IN      A      192.36.148.17
Windows PowerShell - m.root-servers.net.      5097   IN      AAAA    2001:dc3::35

; Query time: 0 msec
;; SERVER: 127.0.0.53#53(127.0.0.53) (UDP)
;; WHEN: Wed Apr 12 18:10:00 PDT 2023
```


Windows PowerShell

```
vishruti@ada:~$ dig @192.5.5.241 +norecurse www.amazon.co.uk. NS +tcp
; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> @192.5.5.241 +norecurse www.amazon.co.uk. NS +tcp
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 58035
;; flags: qr; QUERY: 1, ANSWER: 0, AUTHORITY: 8, ADDITIONAL: 17

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 65535
;; QUESTION SECTION:
;www.amazon.co.uk.      IN      NS

;; AUTHORITY SECTION:
uk.          172800  IN      NS      nsa.nic.uk.
uk.          172800  IN      NS      nsb.nic.uk.
uk.          172800  IN      NS      nsc.nic.uk.
uk.          172800  IN      NS      nsd.nic.uk.
uk.          172800  IN      NS      dns1.nic.uk.
uk.          172800  IN      NS      dns2.nic.uk.
uk.          172800  IN      NS      dns3.nic.uk.
uk.          172800  IN      NS      dns4.nic.uk.

;; ADDITIONAL SECTION:
nsa.nic.uk.    172800  IN      A       156.154.100.3
nsa.nic.uk.    172800  IN      AAAA   2001:502:ad09::3
nsb.nic.uk.    172800  IN      A       156.154.101.3
nsb.nic.uk.    172800  IN      AAAA   2001:502:2eda::3
nsc.nic.uk.    172800  IN      A       156.154.102.3
```

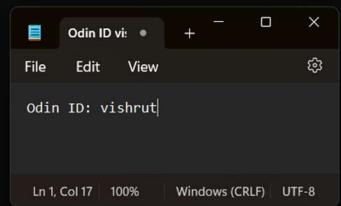


Windows PowerShell

```
vishruti@ada:~$ dig @nsa.nic.uk. +norecurse www.amazon.co.uk. NS +tcp
; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> @nsa.nic.uk. +norecurse www.amazon.co.uk. NS +tcp
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 32703
;; flags: qr; QUERY: 1, ANSWER: 0, AUTHORITY: 10, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 1232
; COOKIE: 556592ea96d8c730100000064375b97ad5d742b03aee5be (good)
;; QUESTION SECTION:
;www.amazon.co.uk.      IN      NS

;; AUTHORITY SECTION:
amazon.co.uk.    172800  IN      NS      pdns4.ultradrns.org.
amazon.co.uk.    172800  IN      NS      pdns5.ultradrns.info.
amazon.co.uk.    172800  IN      NS      ns1.p31.dynect.net.
amazon.co.uk.    172800  IN      NS      pdns3.ultradrns.org.
amazon.co.uk.    172800  IN      NS      pdns2.ultradrns.net.
amazon.co.uk.    172800  IN      NS      ns3.p31.dynect.net.
amazon.co.uk.    172800  IN      NS      pdns1.ultradrns.net.
amazon.co.uk.    172800  IN      NS      ns2.p31.dynect.net.
amazon.co.uk.    172800  IN      NS      pdns6.ultradrns.co.uk.
amazon.co.uk.    172800  IN      NS      ns4.p31.dynect.net.

;; Query time: 19 msec
;; SERVER: 156.154.100.3#53(nsa.nic.uk.) (TCP)
;; WHEN: Wed Apr 12 18:32:07 PDT 2023
```

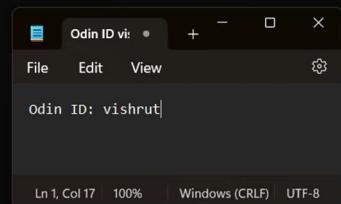

```

Windows PowerShell

vishrut@ada:~$ dig @ns1.p31.dynect.net. +norecurse www.amazon.co.uk. NS +tcp

; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> @ns1.p31.dynect.net. +norecurse www.amazon.co.uk. NS +tcp
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 8629
;; flags: qr aa; QUERY: 1, ANSWER: 1, AUTHORITY: 4, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 1232
; COOKIE: b8fb69a0fc48a65b0832676664375c12d26a4b791f6fe041 (good)
; QUESTION SECTION:
;www.amazon.co.uk.           IN      NS

;; ANSWER SECTION:
www.amazon.co.uk.     1800    IN      CNAME   tp.bfbdc3ca1-frontier.amazon.co.uk.

;; AUTHORITY SECTION:
bfbdc3ca1-frontier.amazon.co.uk. 900 IN NS      ns-1078.awsdns-06.org.
bfbdc3ca1-frontier.amazon.co.uk. 900 IN NS      ns-248.awsdns-31.com.
bfbdc3ca1-frontier.amazon.co.uk. 900 IN NS      ns-853.awsdns-42.net.
bfbdc3ca1-frontier.amazon.co.uk. 900 IN NS      ns-1624.awsdns-11.co.uk.

;; Query time: 15 msec
;; SERVER: 108.59.161.31#53(ns1.p31.dynect.net.) (TCP)
;; WHEN: Wed Apr 12 18:34:10 PDT 2023
;; MSG SIZE rcvd: 261

vishrut@ada:~$ |

```

2. Reverse DNS lookups

The screenshot below shows the result of running a single command line with commands dig, egrep, and awk, to list all IPv4 addresses that espn.go.com points to.

And also the result of looping over the IPv4 addresses and performing reverse lookups to get the DNS server names.

```

Windows PowerShell

/vishrut@ada:~$ dig +short espn.go.com | egrep '^[[0-9]+\.[0-9]+\.[0-9]+\.[0-9]+$' | awk '{ print $1 }'
18.161.6.89
18.161.6.94
18.161.6.38
18.161.6.80
vishrut@ada:~$ X='dig +short espn.go.com | egrep '^[[0-9]+\.[0-9]+\.[0-9]+\.[0-9]+$' | awk '{ print $1 }'
vishrut@ada:~$ for ip in X; do
    host $ip
done
Host X not found: 2(SERVFAIL)
vishrut@ada:~$ for ip in `echo $X`; do
    host $ip;
done
17.66.84.99.in-addr.arpa domain name pointer server-99-84-66-17.hio50.r.cloudfront.net.
98.66.84.99.in-addr.arpa domain name pointer server-99-84-66-98.hio50.r.cloudfront.net.
55.66.84.99.in-addr.arpa domain name pointer server-99-84-66-55.hio50.r.cloudfront.net.
108.66.84.99.in-addr.arpa domain name pointer server-99-84-66-108.hio50.r.cloudfront.net.
vishrut@ada:~$ for ip in `echo $X`; do
    host $ip;
done | egrep -v 'not found' | awk '{ print $NF }'
server-99-84-66-17.hio50.r.cloudfront.net.
server-99-84-66-98.hio50.r.cloudfront.net.
server-99-84-66-55.hio50.r.cloudfront.net.
server-99-84-66-108.hio50.r.cloudfront.net.
vishrut@ada:~$ |

```

3. Host enumeration

The screenshot below shows the set of car manufacturers names.

Windows PowerShell

```
vw.cs.pdx.edu.
vishrut@ada:~$ cat 220hosts.txt | head -185 | tail -30
acura.cs.pdx.edu.
astonmartin.cs.pdx.edu.
audi.cs.pdx.edu.
bentley.cs.pdx.edu.
bmw.cs.pdx.edu.
cadillac.cs.pdx.edu.
ferrari.cs.pdx.edu.
fiat.cs.pdx.edu.
ford.cs.pdx.edu.
honda.cs.pdx.edu.
hummer.cs.pdx.edu.
jaguar.cs.pdx.edu.
jeep.cs.pdx.edu.
lamborghini.cs.pdx.edu.
landrover.cs.pdx.edu.
lexus.cs.pdx.edu.
lotus.cs.pdx.edu.
maserati.cs.pdx.edu.
mazda.cs.pdx.edu.
mclaren.cs.pdx.edu.
mercedes.cs.pdx.edu.
nissan.cs.pdx.edu.
panoz.cs.pdx.edu.
porsche.cs.pdx.edu.
subaru.cs.pdx.edu.
toyota.cs.pdx.edu.
tvr.cs.pdx.edu.
ultima.cs.pdx.edu.
volvo.cs.pdx.edu.
vw.cs.pdx.edu.
vishrut@ada:~$ |
```

Odin ID vi

```
Odin ID: vishrut
```

Ln 1, Col 17 100% Windows (CRLF) UTF-8

4. DNS #2 (Geographic DNS)

1) Result of ipinfo.io and DB-IP

CITY: Portland LONGITUDE: -122.6859

Geolocation data from [ipinfo.io](#) (Product: API, real-time)

IP ADDRESS: 131.252.208.53	ISP: Portland State University
COUNTRY: United States	ORGANIZATION: Portland State University (pdx.edu)
REGION: Oregon	LATITUDE: 45.5234
CITY: Portland	LONGITUDE: -122.6762

Geolocation data from [DB-IP](#) (Product: API, real-time)

IP ADDRESS: 131.252.208.53	ISP: Portland State University
COUNTRY: United States	ORGANIZATION: Portland State University
REGION: Oregon	LATITUDE: 45.584
CITY: Portland (North Portland)	LONGITUDE: -122.728

Geolocation data from [IPRegistry.co](#) (Product: API, real-time)

IP ADDRESS: 131.252.208.53	ISP: Portland State University
COUNTRY: United States	ORGANIZATION: Portland State University (pdx.edu)

Odin ID vi

```
Odin ID: vishrut|
```

DNS Lookup

- Who is Hosting a Website
- Domain Age Checker
- Is my website down?
- Subnet Calculator

POPULAR ARTICLES

- Find IP address of a network printer?
- Find IP addresses of a private network
- How to wire a RJ-45 cable?
- What is the difference between public and private IP address?
- What is static and dynamic IP addresses?
- What is an IP Address?

Geolocation data from ipinfo.io (Product: API, real-time)

- IP ADDRESS:** 198.82.247.66
- COUNTRY:** United States
- REGION:** Virginia
- CITY:** Blacksburg
- ISP:** Virginia Polytechnic Institute and State Univ.
- ORGANIZATION:** Virginia Polytechnic Institute and State Univ. (vt.edu)
- LATITUDE:** 37.2296
- LONGITUDE:** -80.4139

Geolocation data from DB-IP (Product: API, real-time)

- IP ADDRESS:** 198.82.247.66
- COUNTRY:** United States
- REGION:** Virginia
- CITY:** Blacksburg (Farmview - Ramble)
- ISP:** Virginia Polytechnic Institute and State Univ.
- ORGANIZATION:** Virginia Polytechnic Institute and State Univ.
- LATITUDE:** 37.2037
- LONGITUDE:** -80.4143

Geolocation data from IPRegistry.co (Product: API, real-time)

Subnet Calculator window:

- Odin ID: vishrut
- What is static and dynamic IP addresses?
- What is an IP Address?
- What is a Proxy Server?
- My IP address is hacked. What do I do?

ADVERTISEMENT: COMCAST BUSINESS Get products that grow as you grow. GET IT NOW! (855) 335-7919

2)

```
porsche.cs.pdx.edu.
subaru.cs.pdx.edu.
toyota.cs.pdx.edu.
tvr.cs.pdx.edu.
ultima.cs.pdx.edu.
volvo.cs.pdx.edu.
vw.cs.pdx.edu.
vishrut@ada:~$ dig www.google.com @131.252.208.53

; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> www.google.com @131.252.208.53
;; global options: +cmd
;; Got answer:
;; ->>HEADER<- opcode: QUERY, status: NOERROR, id: 16614
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
; COOKIE: e32fb2d1b5b4512901000000643766bbea199aacc16b9ed9 (good)
; QUESTION SECTION:
;www.google.com.           IN      A

;; ANSWER SECTION:
www.google.com.        153     IN      A      142.251.33.100

;; Query time: 0 msec
;; SERVER: 131.252.208.53#53(131.252.208.53) (UDP)
;; WHEN: Wed Apr 12 19:19:39 PDT 2023
;; MSG SIZE  rcvd: 87

vishrut@ada:~$
```

Subnet Calculator window:

- Odin ID: vishrut

```

Windows PowerShell
vishrut@ada:~$ dig www.google.com @198.82.247.66

; <>> DiG 9.18.12-0ubuntu0.22.04.1-Ubuntu <>> www.google.com @198.82.247.66
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 21655
;; flags: qr rd ra; QUERY: 1, ANSWER: 6, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 1232
; COOKIE: a01f77242e87f5c44adeb1d36437674e1d032adda9efb7a5 (good)
; QUESTION SECTION:
;www.google.com.           IN      A

;; ANSWER SECTION:
www.google.com.    166    IN      A      172.253.62.105
www.google.com.    166    IN      A      172.253.62.147
www.google.com.    166    IN      A      172.253.62.103
www.google.com.    166    IN      A      172.253.62.106
www.google.com.    166    IN      A      172.253.62.104
www.google.com.    166    IN      A      172.253.62.99

;; Query time: 67 msec
;; SERVER: 198.82.247.66#53(198.82.247.66) (UDP)
;; WHEN: Wed Apr 12 19:22:06 PDT 2023
;; MSG SIZE rcvd: 167

vishrut@ada:~$
```

3) Below are the distances between each DNS server and the IP address

142.251.33.100 to 172.253.62.105 -> 2016 n mi, 3734 km

142.251.33.100 to 172.253.62.103 -> 2016 n mi, 3734 km

142.251.33.100 to 172.253.62.147 -> 611 n mi, 1132 km

142.251.33.100 to 172.253.62.104 -> 2016 n mi, 3734 km


142.251.33.100 to 172.253.62.106 -> 2016 n mi, 3734 km

142.251.33.100 to 172.253.62.99 -> 2016 n mi, 3734 km

4) No, there is no clear indication of the geographic location of the servers in the traceroute.


5. Network Recap Lab #3

The screenshot below shows the results of ifconfig and the netstat commands.

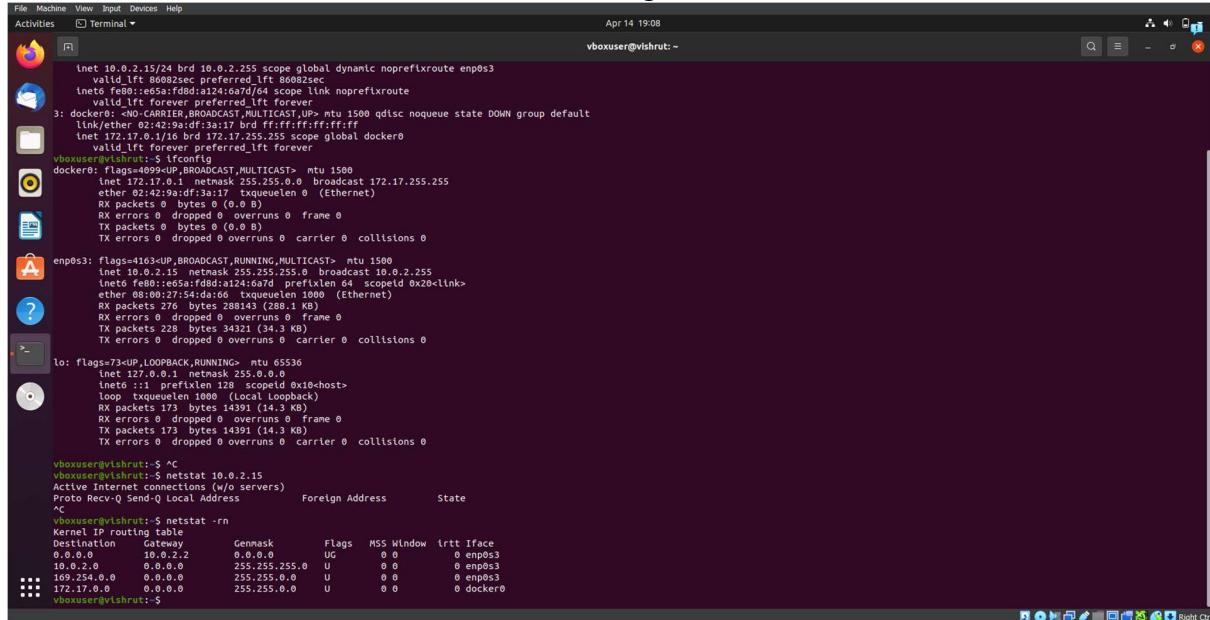


```
File Machine View Input Devices Help
Activities Terminal Apr 14 19:08
vboxuser@vishrut: ~
ifconfig
inet 10.0.2.15 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3
    valid_lft 86082sec preferred_lft 86082sec
    inet6 fe80::e65af:fd8d:a124:6a7d/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
3: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc noqueue state DOWN group default
    link/ether 02:42:9a:df:3a:17 brd ff:ff:ff:ff:ff:ff
    txqueuelen 0 (Ethernet)
        valid_lft forever preferred_lft forever
vboxuser@vishrut: ~$ ifconfig
docker0: flags=4099UP,BROADCAST,MULTICAST mtu 1500
    inet 172.17.0.1 brd 172.17.0.255 broadcast 172.17.255.255
        netmask 255.255.255.0
        ether 02:42:9a:df:3a:17 txqueuelen 1000 (Ethernet)
        RX packets 0 bytes 0 (0.0 B)
        RX errors 0 dropped 0 overruns 0 frame 0
        TX packets 0 bytes 0 (0.0 B)
        TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
enp0s3: flags=4163UP,BROADCAST,RUNNING,MULTICAST mtu 1500
    inet 10.0.2.15 brd 255.255.255.0 broadcast 255.255.255.255
        netmask 255.255.255.0
        ether fe80::e65af:fd8d:a124:6a7d txqueuelen 1000 (Ethernet)
        RX packets 173 bytes 14391 (14.3 KB)
        RX errors 0 dropped 0 overruns 0 frame 0
        TX packets 228 bytes 34321 (34.3 KB)
        TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
lo: flags=73UP,LOOPBACK,RUNNING mtu 65536
    inet 127.0.0.1 brd 127.0.0.1 netmask 255.0.0.0
        loop txqueuelen 1000 (Local Loopback)
        RX packets 173 bytes 14391 (14.3 KB)
        RX errors 0 dropped 0 overruns 0 frame 0
        TX packets 173 bytes 14391 (14.3 KB)
        TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
vboxuser@vishrut: ~$ ^C
vboxuser@vishrut: ~$ netstat -an
Active Internet connections (w/o servers)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
...
Kernel IP routing table
Destination     Gateway      Genmask      Flags   MSS Window  Irtt Iface
0.0.0.0         10.0.2.2    0.0.0.0     UG        0 0          0 enp0s3
10.0.2.0        0.0.0.0     255.255.255.0 U          0 0          0 enp0s3
169.254.0.0     0.0.0.0     255.255.0.0  U          0 0          0 enp0s3
172.17.0.0      0.0.0.0     255.255.0.0  U          0 0          0 docker0
vboxuser@vishrut: ~$ netstat -rn
```

The screenshot below shows the result of the reverse DNS lookup on the DNS server.

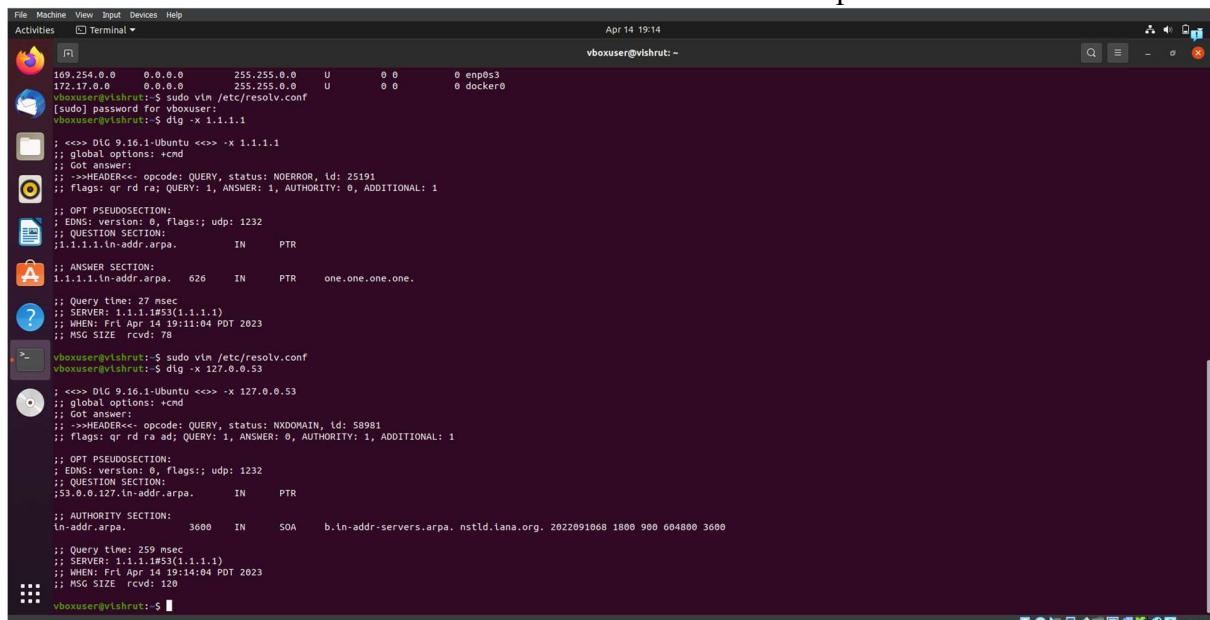

```
File Machine View Input Devices Help
Activities Terminal Apr 14 19:14
vboxuser@vishrut: ~
dig +short 1.1.1.1
; <>> DIG 9.16.1-Ubuntu <>> -x 1.1.1.1
;; global options: +cmd
;; Got answer:
;; ->HEADER<- opcode: QUERY, status: NOERROR, id: 25191
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1
;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags: udp: 1232
;; QUESTION SECTION:
;1.1.1.1.in-addr.arpa. IN PTR
;; ANSWER SECTION:
1.1.1.1.in-addr.arpa. 626 IN PTR one.one.one.one.
;; Query time: 27 msec
;; SERVER: 1.1.1.1#53(1.1.1.1)
;; WHEN: Fri Apr 14 19:14:04 PDT 2023
;; MSG SIZE rcvd: 78
vboxuser@vishrut: ~$ sudo vim /etc/resolv.conf
[vudo] password for vboxuser:
vboxuser@vishrut: ~$ dig +short 127.0.0.53
; <>> DIG 9.16.1-Ubuntu <>> -x 127.0.0.53
;; global options: +cmd
;; Got answer:
;; ->HEADER<- opcode: QUERY, status: NXDOMAIN, id: 58981
;; flags: qr rd ra ad; QUERY: 1, ANSWER: 0, AUTHORITY: 1, ADDITIONAL: 1
;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags: udp: 1232
;; QUESTION SECTION:
;53.0.0.127.in-addr.arpa. IN PTR
;; AUTHORITY SECTION:
in-addr.arpa. 3600 IN SOA b.in-addr-servers.arpa. nstld.iana.org. 2022091068 1800 900 604800 3600
;; Query time: 259 msec
;; SERVER: 1.1.1.1#53(1.1.1.1)
;; WHEN: Fri Apr 14 19:14:04 PDT 2023
;; MSG SIZE rcvd: 120
vboxuser@vishrut: ~$
```

6. Collect and analyze the network trace of a connection

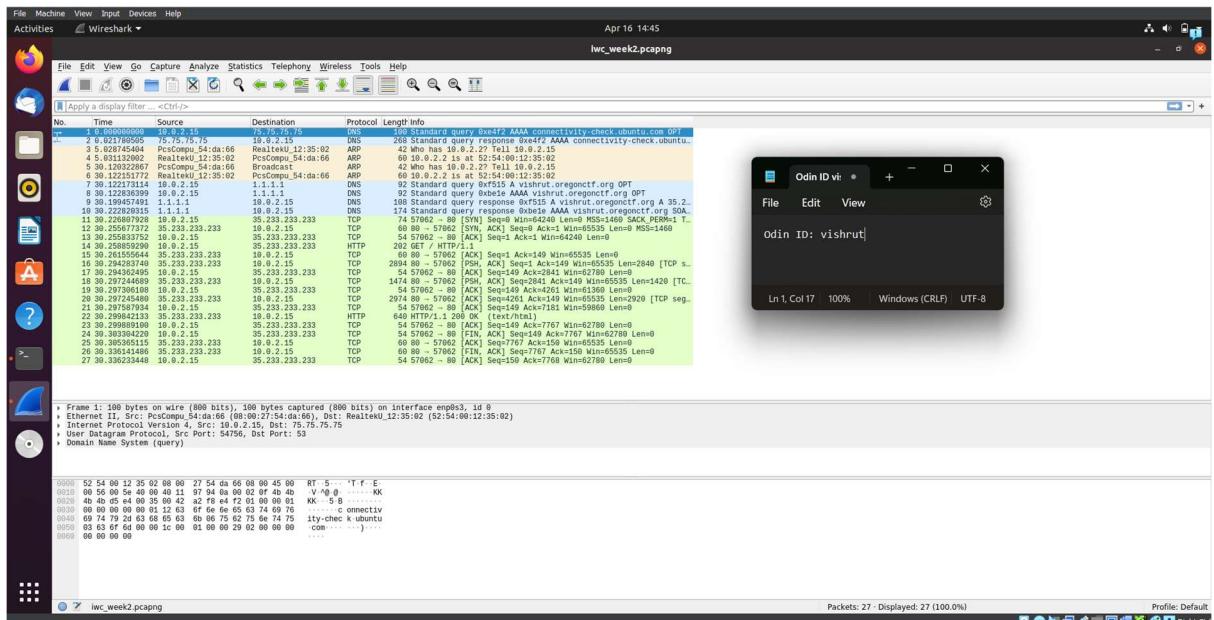

- 1) There are 3 DNS requests
- 2) There are 7 TCP connections initiated by the browser simultaneously to the site.
- 3) There is 1 HTTP GET request for the embedded object.