DOM Mini Project

DOM In JS

What is DOM?
↳ Document object model

⇒ A Tree Representation of HTML Documentation

⇒ Provide Interface access, manipulate (editing, updating, deleting)

* window is an global object of browser

* document (document)

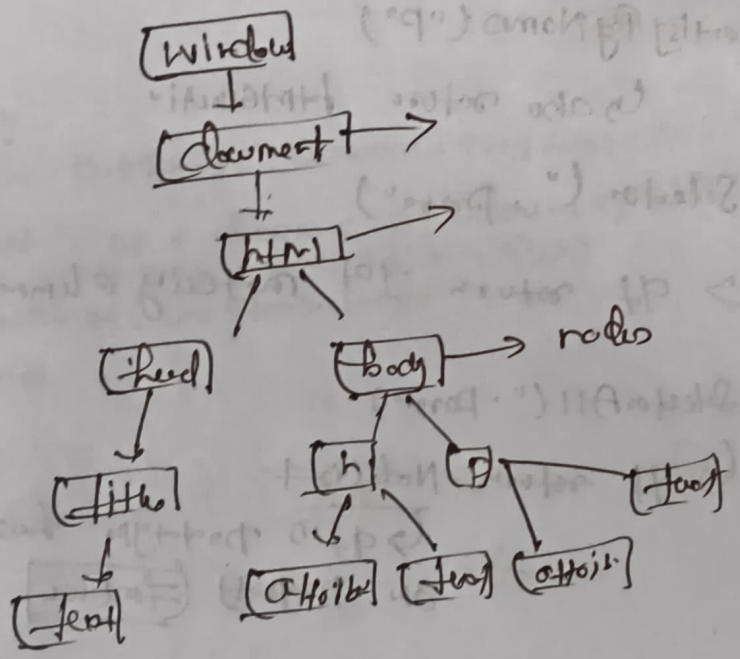

nodes — nodeTYPE

1. elementNode : 1
2. textNode : 3
3. CommentNode : 8
4. attributeNode : 2
5. documentNode : 9

* document.nodeType
9

* document.getElementById("heading").nodeType
1

elements : 1
attribute : 2

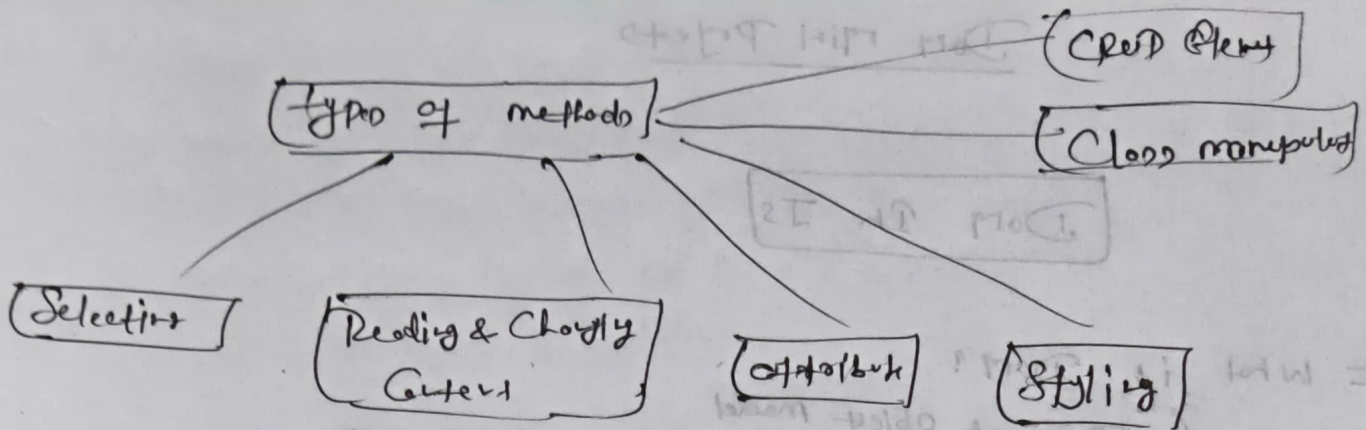

Selecting

document.getElementById("heading")

document.getElementsByClassName('Para')
↳ this return HTMLCollection

document.getElementsByTagNames("p")
↳ also return HTMLCollection

document.querySelector(".para")
↳ It return 1st matching element

document.querySelectorAll(".para")
↳ It return NodeList
↳ It's prototype has
on property forEach

NodeList
↳ Collection of DOM Nodes
- querySelectorAll
- It's certain forEach
↳ element add karna hai
Ab agar ice cream Header
उस तरह नहीं, [illegible]

HTMLCollection
↳ Collection of HTML element node only
- getElementByClassName()
- getElementsByTagName()
- forEach X

NodeList

Live : mostly Static

> document.getElementsByTagName("p").length;
<- 4

> document.body.innerHTML += " new para "

after that clear by just run again length of tagname that will be 5. this called live

> document.querySelectorAll("p").length
> 4

↳ even though add element got 4 always

<script>
const listItems = document.querySelectorAll("#list-container li");
const ul = document.getElementById("list-container");
ul.innerHTML += "<li>item 4</li>";
console.log(listItems.length);
</script>

Note Recommend Static not live but it depend on you. Live ↳ repaint browser

Assignment

Write program using nodelist & HTML Collection
↳ which method prefer

Reading & Changing

> document.getElementById("heading1")

<. <h1 id="heading1">Hello world</h1>

> document.getElementById("heading1").innerHtml

> . ~~textContent~~

> - - - - - - innerHTML

InnerHTML

↳ It return the inner HTML of particular element Tri

Text Content

↳ It print all visible or not

innerText

↳ It print only visible text

document.getElementById("image").getAttribute("src")

↳ this return attribute [src] value

[G.prg]

document.getElementById("image").setAttribute("src","dog.prg");

document.getElementById("image").removeAttribute("

Const heading = document.getElementById("hello")

heading.style.color = "pink"

~~Const heading = doc~~

Const heading = document.getElementById("heading");

heading.classList.add("red")

heading.classList.remove("red")

heading.classList.toggle("dark")

> document.body.classList.toggle("dark")

c: true

> document.body.classList.toggle("dark")

c: false

index.html

```
<body>
    <div class="container">
        <h> Dark Mode Toggle</h>
```

Assign

If in dark mode → button → Toggle to white mo

If in white mo → button → Toggle to dark mo

```
Const input = document.getElementById("Input");
Const addBtn = doc ———— . ("addBtn");
Const list = doc ———— ("list")

addBtn.addEventListner("click", ()=>{
        if (input.value == "") {
            alert("Not Leave Lata!")
        }
        return;
    }
    Const li = document.CreateElement("li")
    Const delBtn = document.CreateElement("button")
    ~~li.textContent = input.value~~;
    delBtn.textContent = "Delete";
    delBtn.ClassList.add("delete")
    li.textContent = input.value
    li.appendChild(delBtn)
    list.appendChild(li);
    input.value = ""
}
```

delBtn.

Ans: 9

add Edit button with delete, Click delete

On text that text are editable