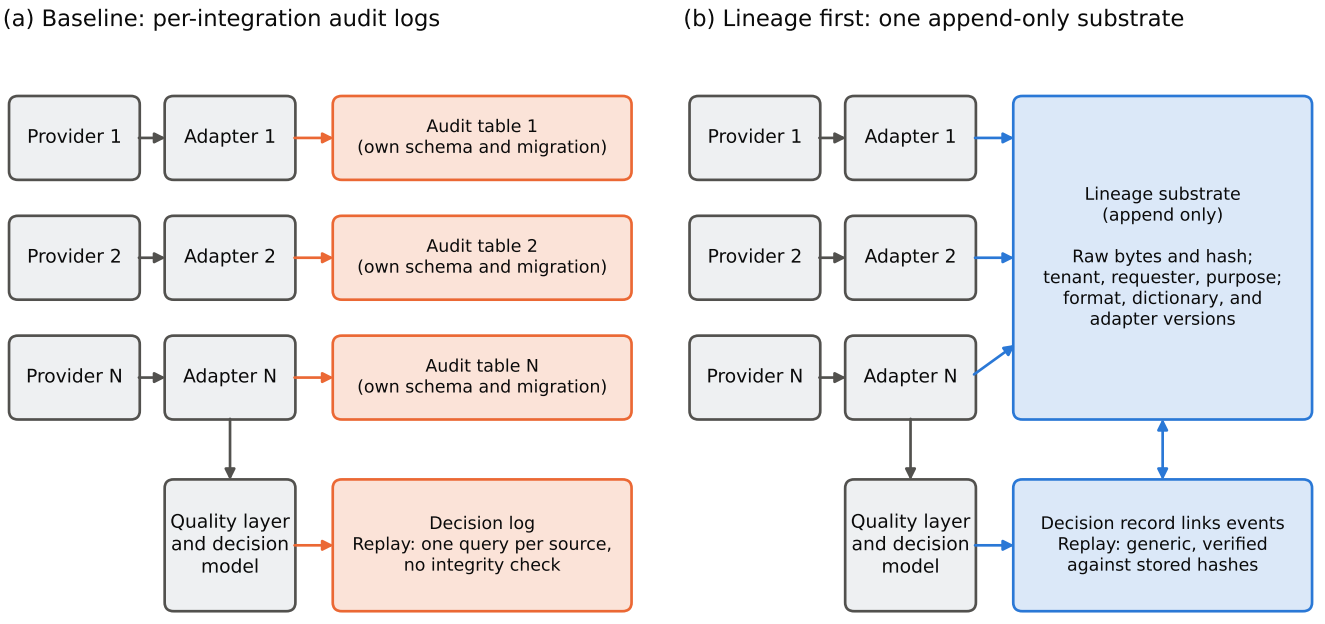
(a) Baseline: per-integration audit logs
Provider 1
Adapter 1
Audit table 1
(own schema and migration)
Provider 2
Adapter 2
Audit table 2
(own schema and migration)
Provider N
Adapter N
Audit table N
(own schema and migration)
Quality layer and decision model
Decision log
Replay: one query per source, no integrity check
(b) Lineage first: one append-only substrate
Provider 1
Adapter 1
Provider 2
Adapter 2
Provider N
Adapter N
Lineage substrate
(append only)
Raw bytes and hash; tenant, requester, purpose; format, dictionary, and adapter versions
Quality layer and decision model
Decision record links events
Replay: generic, verified against stored hashes