RAJALAKSHMI ENGINEERING COLLEGE

RAJALAKSHMI NAGAR, THANDALAM – 602 105

PYTHON PROGRAMMING FOR DESIGN

Laboratory Record

Name : VISHWA T

Year / Branch / Section : II / Computer Science and Design / A

Register No. : 251701062

Semester : III

Academic Year : 2025-2029

RAJALAKSHMI ENGINEERING COLLEGE

THANDALAM – 602 105.

BONAFIDE CERTIFICATE

NAME VISHWA T

ACADEMIC YEAR 2025-2029 **SEMESTER** III **BRANCH** Computer Science and Design

UNIVERSITY REGISTER NO. 2116251701062

Certified that this is the bonafide work done by the above student in the Python Programming for Design **Laboratory during the year 2026 – 2027.**

Signature of Faculty – in – Charge

Submitted for the Practical Examination held on .....

Internal Examiner **External Examiner**

INDEX

Reg. No. : 251701062 **Name :** VISHWA T

Year : II **Branch :** Computer Science and Design **Sec :** A

S. No.	Date	Title	Page No.	Teacher's Signature / Remarks
1	24-07-2026	Week-01 Coding: Variables, Datatypes and Operators	6	
2	31-07-2026	Week-01 Coding (Extra): Variables, Datatypes and Operators	32	
3	31-07-2026	Week-01 MCQ: Variables, Datatypes and Operators	59	
4	06-08-2026	Week-02 Coding: Selection Control	76	
5	06-08-2026	Week-02 Coding (Extra): Selection Control	108	
6	04-08-2026	Week-02 MCQ: Selection Control	124	
7	08-08-2026	Week-03 Coding: Iteration Control	142	
8	08-08-2026	Week-03 Coding (Extra): Iteration Control	170	
9	08-08-2026	Week-03 MCQ: Iteration Control	199	
10	21-08-2026	Week-04 Coding: Functions-Recursion	216	
11	20-08-2026	Week-04 Coding: Functions-User-defined	230	
12	20-08-2026	Week-04 MCQ: Functions-Built-in, User-defined, Recursion	244	
13	31-08-2026	Week-05 Coding: Strings	253	
14	26-08-2026	Week-05 MCQ: Strings	280	
15	30-09-2026	Week-06 Coding: Lists	293	

INDEX

Reg. No. : 251701062 **Name :** VISHWA T

Year : II **Branch :** Computer Science and Design **Sec :** A

S. No.	Date	Title	Page No.	Teacher's Signature / Remarks
16	30-09-2026	Week-06 MCQ: Lists	330	
17	03-10-2026	Week-07 Coding: Tuples and Sets	337	
18	07-10-2026	Week-07 Coding (Extra): Tuples and Sets	368	
19	03-10-2026	Week-07 MCQ: Tuples and Sets	385	
20	12-10-2026	Week-08 Coding: Dictionary	399	
21	10-10-2026	Week-08 Coding (Home): Dictionary	432	
22	09-10-2026	Week-08 MCQ: Dictionary	467	
23	12-10-2026	Week-09 Coding: Files	479	
24	10-10-2026	Week-09 MCQ: Files	508	

INDEX

Reg. No. : 251701062 **Name :** VISHWA T

Year : II **Branch :** Computer Science and Design **Sec :** A

S. No.	Date	Title	Page No.	Teacher's Signature / Remarks

Started on	Thursday, 23 July 2026, 4:01 PM
State	Finished
Completed on	Friday, 24 July 2026, 2:29 PM
Time taken	22 hours 27 mins
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 10.00 out of 10.00

Rohit wants to add the last digits of two given numbers.

For example,

If the given numbers are 267 and 154, the output should be 11.

Below is the explanation:

Last digit of the 267 is 7

Last digit of the 154 is 4

Sum of 7 and 4 = 11

Write a program to help Rohit achieve this for any given two numbers.

Note: Tile sign of the input numbers should be ignored.

i.e.

if the input numbers are 267 and 154, the sum of last two digits should be 11

if the input numbers are 267 and -154, the slim of last two digits should be 11

if the input numbers are -267 and 154, the sum of last two digits should be 11

if the input numbers are -267 and -154, the sum of last two digits should be 11

For example:

Input	Result
267 154	11

Input	Result
267 -154	11

Answer: (penalty regime: 0 %)

```
n1=int(input())
n2=int(input())
d1= abs(n1)%10
d3=abs (n2)%10
print(d1+d3)
```

	Input	Expected	Got	
✔	267 154	11	11	✔
✔	267 -154	11	11	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 2 | Correct Mark 10.00 out of 10.00

Note:

Dont use if-else. Operators alone must be used .

A team from the Rotract club had planned to conduct a rally to create awareness among the Coimbatore people to donate blood. They conducted the rally successfully. Many of the Coimbatore people realized it and came forward to donate their blood to nearby blood banks. The eligibility criteria for donating blood are people should be above or equal to 18 and his/ her weight should be above 40. There was a huge crowd and staff in the blood bank found it difficult to manage the crowd. So they decided to keep a system and ask the people to enter their age and weight in the system. If a person is eligible he/she will be allowed inside.

Write a program and feed it to the system to find whether a person is eligible or not.

Input Format:

Input consists of two integers that correspond to the age and weight of a person respectively.

Output Format:

Display True(IF ELIGIBLE)

Display False (if not eligible)

Sample Input

19

45

Sample Output

True

For example:

Input	Result
18 40	False

Answer: (penalty regime: 0 %)

```
age=int(input())
wei=int(input())
c= age>=18 and wei>40
print(c)
```

	Input	Expected	Got	
✔	19 45	True	True	✔
✔	18 40	False	False	✔
✔	18 42	True	True	✔
✔	16 45	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 3 | Correct Mark 10.00 out of 10.00

You went on a tour to Ooty with your friends. As a part of the tour, you went boating with them. For the boat to remain stable, the number of people on one boat is restricted based on the weight of the people. You find that the boatman who is sailing your boat is so much greedy of money. For earning more, he takes too many people to travel in the boat at a time. So you want to check how many people can travel in the boat at a time so that the boat will not drown. Calculate the weight by considering the number of adults and number of children. Assume that an adult weighs 75 kg and children weigh 30 kg each. If the weight is normal, display Boat is stable, else display Boat will drown.

INPUT & OUTPUT FORMAT:

Input consists of 3 integers.

First input corresponds to the weight that the boat can handle.

Second input corresponds to the number of adults.

Third input corresponds to the number of children.

For example:

Input	Result
340 2 3	Boat is stable
600 7 4	Boat will drow

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
c=int(input())
```

```
x = (a >= b*75 + c*30 and "Boat is stable") or "Boat will drow"
print(x)

```

	Input	Expected	Got	
✔	340 2 3	Boat is stable	Boat is stable	✔
✔	600 7 4	Boat will drow	Boat will drow	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 4 | Correct Mark 10.00 out of 10.00

In the 1800s, the battle of Troy was led by Hercules. He was a superstitious person. He believed that his crew can win the battle only if the total count of the weapons in hand is in multiple of 3 and the soldiers are in an even number of count. Given the total number of weapons and the soldier's count, Find whether the battle can be won or not according to Hercules's belief. If the battle can be won print True otherwise print False.

Input format:

Line 1 has the total number of weapons

Line 2 has the total number of Soldiers.

Output Format:

If the battle can be won print True otherwise print False.

Sample Input:

32

43

Sample Output:'

False

For example:

Input	Result
32 43	False

Answer: (penalty regime: 0 %)

```
a = int(input())
b = int(input())
con = a%3==0 and b%2==0
print(con
)
```

	Input	Expected	Got	
✔	32 43	False	False	✔
✔	273 7890	True	True	✔

	Input	Expected	Got	
✔	800 4590	False	False	✔
✔	6789 32996	True	True	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 5 | Correct Mark 10.00 out of 10.00

An online retailer sells two products: widgets and gizmos. Each widget weighs 75 grams. Each gizmo weighs 112 grams. Write a program that reads the number of widgets and the number of gizmos from the user. Then your program should compute and display the total weight of the parts.

Sample Input:

10

20

Sample Output:

The total weight of all these widgets and gizmos is 2990 grams.

Answer: (penalty regime: 0 %)

```
a = int(input())
b = int(input())
n1 = 75*a
n2 = 112*b
print("The total weight of all these widgets and gizmos is", (n1 + n2),"grams.")

```

	Input	Expected	Got	
✔	10 20	The total weight of all these widgets and gizmos is 2990 grams.	The total weight of all these widgets and gizmos is 2990 grams.	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 6 | Correct Mark 10.00 out of 10.00

Complete the program to convert days into years, month and days. (Ignoring leap year and considering 1 month is 30 days)

Sample Test Cases

Test Case 1

Input

375

Output

YEARS: 1 MONTH: 0 DAYS: 10

Test Case 2

Input

200

Output

YEARS: 0 MONTH: 6 DAYS: 20

Answer: (penalty regime: 0 %)

```
a = int(input())
x = a // 365
y = ( a - 365*x) // 30
z = (a - 30*y - 365*x)
print("YEARS:",x,"MONTH:",y,"DAYS:",z)
```

	Input	Expected	Got	
✔	375	YEARS: 1 MONTH: 0 DAYS: 10	YEARS: 1 MONTH: 0 DAYS: 10	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 7 | Correct Mark 10.00 out of 10.00

Write a simple python program to find the square root of a given floating point number. The output should be displayed with 3 decimal places.

Sample Input:

8.00

Sample Output:

2.828

For example:

Input	Result
8.00	2.828
14.00	3.742

Answer: (penalty regime: 0 %)

```
a = float(input())
b = a**(1/2)
print("%.3f"%b)
```

	Input	Expected	Got	
✔	8.00	2.828	2.828	✔
✔	14.00	3.742	3.742	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 8 | Correct Mark 10.00 out of 10.00

Mr.Ram has been given a problem kindly help him to solve it. The input of the program is either 0 or 1. IF 0 is the input he should display "C" if 1 is the input it should display "D".There is a constraint that Mr. Ram should use either logical operators or arithmetic operators to solve the problem, not anything else.

Hint:

Use ASCII values of C and D.

Input Format:

An integer x, 0<=x<=1. .

Output Format:

output a single character "C" or "D"depending on the value of x.

```
Input 1:
0
Output 1:
C
```

```
Input 2:
1

Output 1:
D
```

For example:

Input	Result
0	C

Answer: (penalty regime: 0 %)

```
a = int(input())
x =(a and "D") or "C"
print(x)
```

	Input	Expected	Got	
✔	0	C	C	✔
✔	1	D	D	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 9 | Correct Mark 10.00 out of 10.00

Ramesh's basic salary is input through the keyboard. His dearness allowance is 40% of his basic salary, and his house rent allowance is 20% of his basic salary. Write a program to calculate his gross salary.

Sample Input:

10000

Sample Output:

16000

For example:

Input	Result
10000	16000

Answer: (penalty regime: 0 %)

```
a = int(input())
print( a + int(a*0.4) + int(a*0.2))
```

	Input	Expected	Got	
✔	10000	16000	16000	✔
✔	20000	32000	32000	✔
✔	28000	44800	44800	✔
✔	5000	8000	8000	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 10 | Correct Mark 10.00 out of 10.00

Write a python program that takes a integer between 0 and 15 as input and displays the number of '1' s in its binary form.(Hint:use python bitwise operator.

Sample Input

3

Sample Output:

2

Explanation:

The binary representation of 3 is 011, hence there are 2 ones in it. so the output is 2.

For example:

Input	Result
3	2

Answer: (penalty regime: 0 %)

```
n = int(input())
c = 0
c += n%2
n = n//2
c += n%2
n = n//2
c += n%2
n = n//2
c += n%2
print(c)
```

	Input	Expected	Got	
✔	3	2	2	✔
✔	5	2	2	✔
✔	15	4	4	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Started on	Friday, 24 July 2026, 2:30 PM
State	Finished
Completed on	Friday, 31 July 2026, 2:47 PM
Time taken	7 days
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

In many jurisdictions, a small deposit is added to drink containers to encourage people to recycle them. In one particular jurisdiction, drink containers holding one liter or less have a $0.10 deposit and drink containers holding more than one liter have a $0.25 deposit. Write a program that reads the number of containers of each size(less and more) from the user. Your program should continue by computing and displaying the refund that will be received for returning those containers. Format the output so that it includes a dollar sign and always displays exactly two decimal places.

Sample Input

10

20

Sample Output

Your total refund will be $6.00.

For example:

Input	Result
20 20	Your total refund will be $7.00.

Answer: (penalty regime: 0 %)

```
n1 = int(input())
n2 = int(input())
sum1 = n1*0.10 + n2*0.25
print("Your total refund will be $%.2f."%sum1)
```

	Input	Expected	Got	
✔	20 20	Your total refund will be $7.00.	Your total refund will be $7.00.	✔
✔	11 22	Your total refund will be $6.60.	Your total refund will be $6.60.	✔
✔	123 200	Your total refund will be $62.30.	Your total refund will be $62.30.	✔
✔	76 38	Your total refund will be $17.10.	Your total refund will be $17.10.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Write a program that returns the second last digit of the given number. Second last digit is being referred 10the digit in the tens place in the given number.

For example, if the given number is 197, the second last digit is 9.

Note1 - The second last digit should be returned as a positive number. i.e. if the given number is -197, the second last digit is 9.

Note2 - If the given number is a single digit number, then the second last digit does not exist. In such cases, the program should return -1. i.e. if the given number is 5, the second last digit should be returned as -1

For example:

Input	Result
197	9
-197	9
5	-1

Answer: (penalty regime: 0 %)

```
n = abs(int(input()))
n = n//10
s = (1 and n%10) or -1
print(s)
```

	Input	Expected	Got	
✔	197	9	9	✔
✔	-197	9	9	✔
✔	5	-1	-1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

In a Logistic the Parcels to be delivered in 4 locations (1st locaion 20%, 2nd location 40%, 3rd location 30% and 4th location 10%). write a python code to find the total no. of parcels after the delivery in 2 locations . use a format() to print the no of parcels delivered in in each location

Input:

250

output:

Total Parcels is 250

1st Location 50 parcels

2nd Location 100 parcels

3rd Location 75 parcels

4th Location 25 parcels

For example:

Input	Result
250	Total Parcels is 250 1st Location 50 parcels 2nd Location 100 parcels 3rd Location 75 parcels 4th Location 25 parcels

Input	Result
400	Total Parcels is 400 1st Location 80 parcels 2nd Location 160 parcels 3rd Location 120 parcels 4th Location 40 parcels

Answer: (penalty regime: 0 %)

```
n = int(input())
print("Total Parcels is {}".format(n))
print("1st Location {} parcels".format(int(n*0.2)))
print("2nd Location {} parcels".format(int(n*0.4)))
print("3rd Location {} parcels".format(int(n*0.3)))
print("4th Location {} parcels".format(int(n*0.1)))
```

	Input	Expected	Got	
✔	250	Total Parcels is 250 1st Location 50 parcels 2nd Location 100 parcels 3rd Location 75 parcels 4th Location 25 parcels	Total Parcels is 250 1st Location 50 parcels 2nd Location 100 parcels 3rd Location 75 parcels 4th Location 25 parcels	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Alfred buys an old scooter for Rs. X and spends Rs. Y on its repairs. If he sells the scooter for Rs. Z (Z>X+Y). Write a program to help Alfred to find his gain percent. Get all the above-mentioned values through the keyboard and find the gain percent.

Input Format:

The first line contains the Rs X

The second line contains Rs Y

The third line contains Rs Z

Sample Input:

10000

250

15000

Sample Output:

46.34 is the gain percent.

For example:

Input	Result
45500 500 60000	30.43 is the gain percent.

Answer: (penalty regime: 0 %)

```
n1 = int(input())
n2 = int(input())
n3 = int(input())
per = ((n3-(n1+n2))/(n1+n2))*100
print("%.2f is the gain percent."%per)
```

	Input	Expected	Got	
✔	10000 250 15000	46.34 is the gain percent.	46.34 is the gain percent.	✔

	Input	Expected	Got	
✔	45500 500 60000	30.43 is the gain percent.	30.43 is the gain percent.	✔
✔	5000 0 7000	40.00 is the gain percent.	40.00 is the gain percent.	✔
✔	12500 5000 18000	2.86 is the gain percent.	2.86 is the gain percent.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Write a program to find whether the given input number is Even.

If the given number is even, the function should return 2 else it should return 1.

Note: The number passed to the program can either be negative, positive or zero. Zero should be treated as Even.

For example:

Input	Result
100	2
1001	1

Answer: (penalty regime: 0 %)

```
n = int(input())
res = (n%2==0 and 2) or 1
print(res)
```

	Input	Expected	Got	
✔	100	2	2	✔
✔	1001	1	1	✔
✔	0	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

In a Lab 36% are Dell and 34% Lennovo and 28% are Acer and 2% are Samsung. write a python code to print total systems and brand wise count in the specific format using sep operator.

input: 150

output: Total System:150

Dell:54

Lennovo:51

Acer:42

Samsung:3

For example:

Input	Result
150	Total System:150 Dell:54 Lennovo:51 Acer:42 Samsung:3
250	Total System:250 Dell:90 Lennovo:85 Acer:70 Samsung:5

Answer: (penalty regime: 0 %)

```python
s = int(input())
t = f"Total System:{s} "
d = f"Dell:{int(s*0.36)} "
l = f"Lennovo:{int(s*0.34)} "
a = f"Acer:{int(s*0.28)} "
sa = f"Samsung:{int(s*0.02)} "
print(t, d, l, a, sa, sep="\n")

```

	Input	Expected	Got	
✔	150	Total System:150 Dell:54 Lennovo:51 Acer:42 Samsung:3	Total System:150 Dell:54 Lennovo:51 Acer:42 Samsung:3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Justin is a carpenter who works on an hourly basis. He works in a company where he is paid Rs 50 for an hour on weekdays and Rs 80 for an hour on weekends. He works 10 hrs more on weekdays than weekends. If the salary paid for him is given, write a program to find the number of hours he has worked on weekdays and weekends.

Hint:

If the final result(hrs) are in -ve convert that to +ve using abs() function

The `abs()` function returns the absolute value of the given number.

```
number = -20
absolute_number = abs(number)
print(absolute_number)
# Output: 20
```

Sample Input:

450

Sample Output:

weekdays 10.38

weekend 0.38

For example:

Input	Result
450	weekdays 10.38 weekend 0.38

Answer: (penalty regime: 0 %)

```
a=int(input())
x=abs((a-500)/130)
y=(x+10)
print("weekdays %.2f"%y)
print("weekend %.2f"%x)
```

	Input	Expected	Got	
✔	450	weekdays 10.38 weekend 0.38	weekdays 10.38 weekend 0.38	✔
✔	500	weekdays 10.00 weekend 0.00	weekdays 10.00 weekend 0.00	✔
✔	10000	weekdays 83.08 weekend 73.08	weekdays 83.08 weekend 73.08	✔
✔	6789	weekdays 58.38 weekend 48.38	weekdays 58.38 weekend 48.38	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Write a program that returns the last digit of the given number. Last digit is being referred to the least significant digit i.e. the digit in the ones (units) place in the given number.

The last digit should be returned as a positive number.

For example,

if the given number is 197, the last digit is 7

if the given number is -197, the last digit is 7

For example:

Input	Result
197	7
-197	7

Answer: (penalty regime: 0 %)

```
a = int(input())
n = abs(a)%10
print(n)
```

	Input	Expected	Got	
✔	197	7	7	✔
✔	-197	7	7	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

In department 54% are boys and 46% are girls and 8% are hostel (boys/girls). write a python code to print total no of boys, girls and hostel students in the specific format using modulo operator.

input: 1500

output: Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120

For example:

Input	Result
1500	Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120
1200	Total Students : 1200, Boys : 648, Girls : 552, Hostel : 96

Answer: (penalty regime: 0 %)

```
a = int(input())
print(f"Total Students : {a}, Boys : {int(a*0.54)}, Girls : {int(a*0.46)}, Hostel : {int(a*0.08)}")
```

	Input	Expected	Got	
✔	1500	Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120	Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10

Correct Mark 1.00 out of 1.00

Write a program to convert strings to an integer and float and display its type.

Sample Input:

10

10.9

Sample Output:

10,<class 'int'>

10.9,<class 'float'>

For example:

Input	Result
10 10.9	10,<class 'int'> 10.9,<class 'float'>

Answer: (penalty regime: 0 %)

```
n1 = int(input())
n2 = float(input ())
print(n1, type(n1), sep=',')
print("%.1f"%n2, type(n2), sep=',')
```

	Input	Expected	Got	
✔	10 10.9	10,<class 'int'> 10.9,<class 'float'>	10,<class 'int'> 10.9,<class 'float'>	✔
✔	12 12.5	12,<class 'int'> 12.5,<class 'float'>	12,<class 'int'> 12.5,<class 'float'>	✔
✔	89 7.56	89,<class 'int'> 7.6,<class 'float'>	89,<class 'int'> 7.6,<class 'float'>	✔
✔	55000 56.2	55000,<class 'int'> 56.2,<class 'float'>	55000,<class 'int'> 56.2,<class 'float'>	✔
✔	2541 2541.679	2541,<class 'int'> 2541.7,<class 'float'>	2541,<class 'int'> 2541.7,<class 'float'>	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Friday, 31 July 2026, 1:45 PM
State	Finished
Completed on	Friday, 31 July 2026, 1:53 PM
Time taken	8 mins 17 secs
Marks	13.00/15.00
Grade	**86.67** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Which of the following is NOT a valid identifier in Python?

a. a_

b. 1a ✔

c. a1

d. _

Your answer is correct.

The correct answer is: 1a

Question 2 | Correct Mark 1.00 out of 1.00

What will be the output of type("hello")?

a. <class 'bool'>

b. <class 'float'>

c. <class 'str'> ✔

d. <class 'int'>

Your answer is correct.

The correct answer is: <class 'str'>

Question 3 | Incorrect Mark 0.00 out of 1.00

What is the output of the following code

```
x = ["apple", "banana"]
y = ["apple", "banana"]
z = x
 print(x is z)
print(x is y)
print(x == y)
```

a. **True** ✖
True
True
True

b. **True**
False
True

c. **True**
False
False

d. **False**
False
True

Your answer is incorrect.

The correct answer is:

True
False
True

Question 4 | Correct Mark 1.00 out of 1.00

What will be the output of the following code snippet?

```
a = 3
b = 1
print(a, b)
a, b = b, a
 print(a, b)
```

a. No output

b. 3 1 ✔
1 3

c. 3 1
3 1

d. 1 3
3 1

Your answer is correct.

The correct answer is:

3 1

1 3

Question 5 | Correct Mark 1.00 out of 1.00

Who developed the Python language?

a. Dennis Ritchie
b. Bill Gates
c. Guido Van Rossum ✔
d. Von Neumann

Your answer is correct.

The correct answer is:
Guido Van Rossum

Question 6 | Incorrect Mark 0.00 out of 1.00

What will be the output of statement 22**2**2**

a. 16

b. 65536

c. 256

d. 32768 ✖

Your answer is incorrect.

The correct answer is:

65536

Question 7 | Correct Mark 1.00 out of 1.00

What will be the output of the following Python code?

```
name = "vijay"
age = 31
print("My name is {} and I am {} years old.".format(name, age))
```

a. My name is Vijay and I am 31 years old. ✔

b. My name is "Vijay" and I am "31" years old.

c. My name is {} and I am {} years old.

d. My name is name and I am age years old.

Your answer is correct.

The correct answer is: My name is Vijay and I am 31 years old.

Question 8 | Correct Mark 1.00 out of 1.00

Which of the following type of Python operator will only print True or False in output when we use it in our program?

a. Comparison Operator

b. Arithmetic Operator

c. Assignment Operator

d. Membership Operator ✔

Your answer is correct.

The correct answers are:

Membership Operator,

Comparison Operator

Question 9 | Correct Mark 1.00 out of 1.00

What is the value of the expression

```
print(100 / 25)

print(100//25)
```

a. 4.0 ✔

4

b. 4

4

c. 4.0

4.0

d. 4.0

4.00

Your answer is correct.

The correct answer is:

4.0

4

Question 10 | Correct Mark 1.00 out of 1.00

What will be the value of x in the following Python expression, if the result of that expression is 2?

x>>2

a. 2

b. 1

c. 4

d. 8 ✔

Your answer is correct.

The correct answer is:

8

Question 11 | Correct Mark 1.00 out of 1.00

Which is the following is an Arithmetic operator in Python?

1. // (floor division) operator
2. & (binary and) operator
3. ~ (navigation) operator
4. >> (right shift) operator

a. 1 ✔

b. 2

c. 4

d. 3

Your answer is correct.

The correct answer is:

1

Question 12 | Correct Mark 1.00 out of 1.00

What will be the output of the following statement?

print(15 + 20 / 5 + 3 * 2 - 1)

- a. 24.0 ✔
- b. 19
- c. 12
- d. 19.0

Your answer is correct.

The correct answer is:
24.0

Question 13 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
print(bool(0), bool(3.14159), bool(-3), bool(1.0+1j))
```

a. • True True False True

b. • False True False True

c. • False True True True ✔

d. • True True False False

Your answer is correct.

The correct answer is:

- False True True True

Question 14 | Correct Mark 1.00 out of 1.00

What is the return type of the input() function?

a. Integer

b. Float

c. Boolean

d. String ✔

Your answer is correct.

The correct answer is: String

Question 15 | Correct Mark 1.00 out of 1.00

Which one of the following is the correct extension of the Python file?

a. .p

b. .cpp

c. .py ✔

d. .python

Your answer is correct.

The correct answer is:

.py

Started on	Tuesday, 4 August 2026, 12:16 PM
State	Finished
Completed on	Thursday, 6 August 2026, 4:11 PM
Time taken	2 days 3 hours
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Write a program to determine the type of berth when the seat / berth number in the train is given.

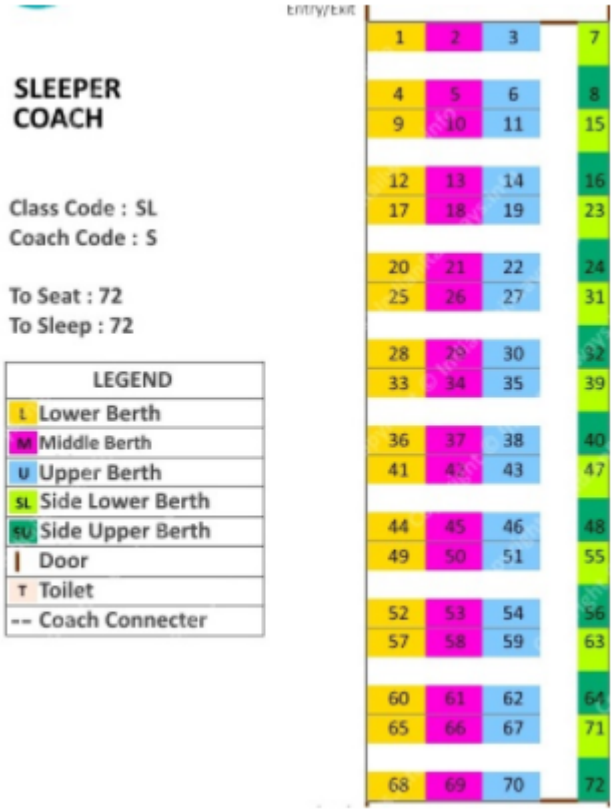

Input Format:

Input consists of a single integer. Assume that the range of input is between 1 and 72.

Output Format:

Output consists of a single string. [Upper or Middle or Lower or Side Lower or Side Upper]

Sample Input 1:

9

Sample Output 1:

Lower Berth

Answer: (penalty regime: 0 %)

```
a=int(input())
b=a%8
if(b==1 or b==4):
    print("Lower Berth")
elif(b==2 or b==5):
    print("Middle Berth")
elif(b==3 or b==6):
    print("Upper Berth")
elif(b==7):
    print("Side Lower Berth")
else:
    print("Side Upper Berth")
```

	Input	Expected	Got	
✔	9	Lower Berth	Lower Berth	✔
✔	72	Side Upper Berth	Side Upper Berth	✔
✔	20	Lower Berth	Lower Berth	✔
✔	34	Middle Berth	Middle Berth	✔
✔	39	Side Lower Berth	Side Lower Berth	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

A triangle can be classified based on the lengths of its sides as equilateral, isosceles or scalene. All three sides of an equilateral triangle have the same length. An isosceles triangle has two sides that are the same length, and a third side that is a different length. If all of the sides have different lengths then the triangle is scalene.

Write a program that reads the lengths of the three sides of a triangle from the user. Then display a message that states the triangle's type.

Sample Input 1

60

60

60

Sample Output 1

That's a equilateral triangle

Sample Input 2

40

40

80

Sample Output 2

That's a isosceles triangle

Sample Input 3

50

60

70

Sample Output 3

That's a scalene triangle

For example:

Input	Result
60 60 60	That's a equilateral triangle
40 40 80	That's a isosceles triangle

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
c=int(input())
if(a==b and b==c and a==c):
    print("That's a equilateral triangle")
elif(a==b or b==c or a==c):
    print("That's a isosceles triangle")
else:
    print("That's a scalene triangle")
```

	Input	Expected	Got	
✔	60 60 60	That's a equilateral triangle	That's a equilateral triangle	✔
✔	40 40 80	That's a isosceles triangle	That's a isosceles triangle	✔
✔	50 60 70	That's a scalene triangle	That's a scalene triangle	✔
✔	50 50 80	That's a isosceles triangle	That's a isosceles triangle	✔
✔	10 10 10	That's a equilateral triangle	That's a equilateral triangle	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

A certain type of steel is used to test and give grade according to the following conditions.

1. Hardness of the steel must be greater than 50
2. Carbon content of the steel must be less than 0.7
3. Tensile strength must be greater than 5600

The grades awarded are as follows:

- Grade is 10 if all three conditions are met
- Grade is 9 if conditions (1) and (2) are met
- Grade is 8 if conditions (2) and (3) are met
- Grade is 7 if conditions (1) and (3) are met
- Grade is 6 if only one condition is met
- Grade is 5 if none of the three conditions are met

Write a program to display the grade of the steel, based on the values of hardness, carbon content and tensile strength of the steel, given by the user.

Input

53

0.6

5602

Output:

10

Answer: (penalty regime: 0 %)

```
a=int(input())
b=float(input())
c=int(input())
d=a>50
e=b<0.7
f=c>5600
if(d and e and f):
    print(10)
elif(d and e):
    print(9)
elif(e and f):
    print(8)
elif(d and f):
    print(7)
elif(d or e or f):
    print(6)
else:
    print(5)
```

	Input	Expected	Got	
✔	53 0.6 5602	10	10	✔
✔	45 0 4500	6	6	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

IN / OUT

Ms. Sita, the faculty handling programming lab for you is very strict. Your seniors have told you that she will not allow you to enter the week's lab if you have not completed atleast half the number of problems given last week. Many of you didn't understand this statement and so they requested the good programmers from your batch to write a program to find whether a student will be allowed into a week's lab given the number of problems given last week and the number of problems solved by the student in that week.

Input Format:

Input consists of 2 integers.

The first integer corresponds to the number of problems given and the second integer corresponds to the number of problems solved.

Output Format:

Output consists of the string “IN” or “OUT”.

Sample Input and Output:

Input

8

3

Output

OUT

For example:

Input	Result
8 3	OUT

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
if(b>=a/2):
    print("IN")
else:
    print("OUT")

```

	Input	Expected	Got	
✔	8 3	OUT	OUT	✔
✔	8 5	IN	IN	✔
✔	20 9	OUT	OUT	✔
✔	50 31	IN	IN	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Write a program that accepts 5 inputs and returns the count of how many of those 5 are odd.

For example,

If the five inputs are 12, 17, 19, 14, and 115, there are three odd numbers 17, 19 and 115. So, the program must return 3.

Similarly,

If the five inputs are 15, 0, -12, 19, and 28, there are two odd numbers 15 and 19. So, the program must return 2.

Observe that zero is considered an even number.

For example:

Input	Result
12 17 19 14 115	3
15 0 -12 19 28	2

Answer: (penalty regime: 0 %)

```
a=int(input())
```

```
a=int(input())
b=int(input())
c=int(input())
d=int(input())
e=int(input())
count=0
if(a%2!=0):
    count+=1
if(b%2!=0):
    count+=1
if(c%2!=0):
    count+=1
if(d%2!=0):
    count+=1
if(e%2!=0):
    count+=1
print(count)

```

	Input	Expected	Got	
✔	12 17 19 14 115	3	3	✔

	Input	Expected	Got	
✔	15 0 -12 19 28	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Given an integer N, check whether N the given number can be made a perfect square after adding 1 to it.

Input Format:

Single integer input.

Output Format:

Yes or No.

Example Input:

24

Output:

Yes

Example Input:

26

Output:

No

For example:

Input	Result
24	Yes

Answer: (penalty regime: 0 %)

```
a=int(input())
b=(a+1)**0.5
if(b%1==0):
```

```
    print("Yes")
else:
    print("No")
```

	Input	Expected	Got	
✔	24	Yes	Yes	✔
✔	26	No	No	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Write a Python program that accepts three parameters. The first parameter is an integer. The second is one of the following mathematical operators: +, -, /, or *. The third parameter will also be an integer.

The function should perform a calculation and return the results. For example, if the function is passed 6 and 4, it should return 24.

Sample Input Format:

11

+

14

Sample Output Format:

25

Answer: (penalty regime: 0 %)

```
a=int(input())
b=input()
c=int(input())
if(b=='+'):
    print(a+c)
elif(b=='-'):
    print(a-c)
elif(b=='*'):
    print(a*c)
else:
    print(a/c)
```

	Input	Expected	Got	
✔	11 + 14	25	25	✔
✔	45 - 50	-5	-5	✔
✔	12 * 100	1200	1200	✔
✔	18 / 2	9.0	9.0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

The Chinese zodiac assigns animals to years in a 12 year cycle. One 12 year cycle is shown in the table below. The pattern repeats from there, with 2012 being another year of the dragon, and 1999 being another year of the hare.

Year Animal

2000 Dragon

2001 Snake

2002 Horse

2003 Sheep

2004 Monkey

2005 Rooster

2006 Dog

2007 Pig

2008 Rat

2009 Ox

2010 Tiger

2011 Hare

Write a program that reads a year from the user and displays the animal associated with that year. Your program should work correctly for any year greater than or equal to zero, not just the ones listed in the table.

Sample Input 1

2010

Sample Output 1

2010 is the year of the Tiger.

Sample Input 2

2020

Sample Output 2

2020 is the year of the Rat.

Answer: (penalty regime: 0 %)

```
a=int(input())
y=a%12
if(y==8):
    animal="Dragon"
elif(y==9):
    animal="Snake"
elif(y==10):
    animal="Horse"
elif(y==11):
    animal="Sheep"
elif(y==0):
    animal="Monkey"
elif(y==1):
    animal="Rooster"
elif(y==2):
    animal="Dog"
elif(y==3):
    animal="Pig"
elif(y==4):
    animal="Rat"
elif(y==5):
    animal="Ox"
elif(y==6):
    animal="Tiger"
else:
    animal="Hare"
print(f"{a} is the year of the {animal}.")
```

	Input	Expected	Got	
✔	2010	2010 is the year of the Tiger.	2010 is the year of the Tiger.	✔
✔	2020	2020 is the year of the Rat.	2020 is the year of the Rat.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Most years have 365 days. However, the time required for the Earth to orbit the Sun is actually slightly more than that. As a result, an extra day, February 29, is included in some years to correct for this difference. Such years are referred to as leap years. The rules for determining whether or not a year is a leap year follow:

• Any year that is divisible by 400 is a leap year.

• Of the remaining years, any year that is divisible by 100 is not a leap year.

• Of the remaining years, any year that is divisible by 4 is a leap year.

• All other years are not leap years.

Write a program that reads a year from the user and displays a message indicating whether or not it is a leap year.

Sample Input 1

1900

Sample Output 1

1900 is not a leap year.

Sample Input 2

2000

Sample Output 2

2000 is a leap year.

Answer: (penalty regime: 0 %)

```
a=int(input())
if((a%4==0 and a%100!=0) or (a%400==0)):
    print(f"{a} is a leap year.")
else:
    print(f"{a} is not a leap year.")
```

	Input	Expected	Got	
✔	1900	1900 is not a leap year.	1900 is not a leap year.	✔
✔	2000	2000 is a leap year.	2000 is a leap year.	✔
✔	2100	2100 is not a leap year.	2100 is not a leap year.	✔
✔	2020	2020 is a leap year.	2020 is a leap year.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Write a program to calculate and print the Electricity bill where the unit consumed by the user is given from test case. It prints the total amount the customer has to pay. The charge are as follows:

Unit	Charge / Unit
Upto 199	@1.20
200 and above but less than 400	@1.50
400 and above but less than 600	@1.80
600 and above	@2.00

If bill exceeds Rs.400 then a surcharge of 15% will be charged and the minimum bill should be of Rs.100/-

Sample Test Cases

Test Case 1

Input

50

Output

100.00

Test Case 2

Input

300

Output

517.50

For example:

Input	Result
100.00	120.00
500	1035.00

Answer: (penalty regime: 0 %)

```
u=float(input())
if u<200:
    b=u*1.20
elif u<400:
    b=u*1.50
elif u<600:
    b=u*1.80
else:
    b=u*2.00
if b>400:
    b+=b*0.15
if b<100:
    b=100.00
print(f"{b:.2f}")

```

	Input	Expected	Got	
✔	50	100.00	100.00	✔
✔	100.00	120.00	120.00	✔
✔	500	1035.00	1035.00	✔
✔	700	1610.00	1610.00	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Thursday, 6 August 2026, 10:12 PM
State	Finished
Completed on	Thursday, 6 August 2026, 11:11 PM
Time taken	59 mins 14 secs
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1

Correct Mark 1.00 out of 1.00

Ravi wants to estimate the total utility bill for a household based on the consumption of electricity, water, and gas.

Write a program to calculate the total bill using the following criteria:

1. The cost per unit for electricity is 0.12, for water is 0.05, and for gas is 0.08.
2. A discount is applied to the total cost based on the following conditions:
3. If the total cost is 100 or more, a 10% discount is applied.
4. If the total cost is between 50 and 99.99, a 5% discount is applied.
5. No discount is applied if the total cost is less than 50.

The program should output the total bill after applying the discount with two decimal places.

Input Format :

The input consists of three double values, representing the number of units consumed for electricity, water, and gas respectively.

Output Format :

The output prints a double value, representing the total bill after applying the discount, formatted to two decimal places.

For example:

Input	Result
1000.0 200.0 100.0	124.20

Input	Result
500.0 30.0 20.0	59.95
120.0 70.0 45.0	21.50

Answer: (penalty regime: 0 %)

```
electricity_units = float(input())
water_units = float(input())
gas_units = float(input())
total_cost = (electricity_units * 0.12) + (water_units * 0.05) + (gas_units * 0.08)
if total_cost >= 100:
    final_bill = total_cost * 0.90
elif total_cost >= 50:
    final_bill = total_cost * 0.95
else:
    final_bill = total_cost
print(f"{final_bill:.2f}")
```

	Input	Expected	Got	
✔	1000.0 200.0 100.0	124.20	124.20	✔
✔	500.0 30.0 20.0	59.95	59.95	✔
✔	120.0 70.0 45.0	21.50	21.50	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Akash is tasked with developing a program that calculates and categorizes blood pressure based on the given systolic and diastolic readings.

The program should use the following classifications:

1. Low Blood Pressure: Systolic < 90 mm Hg or Diastolic < 60 mm Hg
2. Normal Blood Pressure: Systolic ≤ 120 mm Hg and Diastolic ≤ 80 mm Hg
3. Prehypertension: Systolic ≤ 140 mm Hg and Diastolic ≤ 90 mm Hg
4. Stage 1 Hypertension: Systolic ≤ 160 mm Hg and Diastolic ≤ 100 mm Hg
5. Stage 2 Hypertension: Otherwise

Write a program to assist Akash in computing and classifying blood pressure levels based on input readings.

Input Format :

The input consists of two space-separated integers, representing the systolic blood pressure value **S** and diastolic blood pressure value **D,** respectively.

Output Format :

The output displays "Blood Pressure Category: " followed by the blood pressure category based on the provided input.

Refer to the sample output for the exact text and format.

For example:

Input	Result
50 85	Blood Pressure Category: Low Blood Pressure
112 70	Blood Pressure Category: Normal Blood Pressure

Answer: (penalty regime: 0 %)

```
s = int(input())
d = int(input())
if s < 90 or d < 60:
    print("Blood Pressure Category: Low Blood Pressure")
elif s <= 120 and d <= 80:
    print("Blood Pressure Category: Normal Blood Pressure")
elif s <= 140 and d <= 90:
    print("Blood Pressure Category: Prehypertension")
elif s <= 160 and d <= 100:
    print("Blood Pressure Category: Stage 1 Hypertension")
else:
    print("Blood Pressure Category: Stage 2 Hypertension")
```

	Input	Expected	Got	
✔	50 85	Blood Pressure Category: Low Blood Pressure	Blood Pressure Category: Low Blood Pressure	✔
✔	112 70	Blood Pressure Category: Normal Blood Pressure	Blood Pressure Category: Normal Blood Pressure	✔
✔	135 86	Blood Pressure Category: Prehypertension	Blood Pressure Category: Prehypertension	✔
✔	145 98	Blood Pressure Category: Stage 1 Hypertension	Blood Pressure Category: Stage 1 Hypertension	✔
✔	170 110	Blood Pressure Category: Stage 2 Hypertension	Blood Pressure Category: Stage 2 Hypertension	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Arun is working on a project to automate the process of determining whether a student has passed or failed based on their subject marks.

He aims to create a simple program that takes positive integers as marks for five subjects from the user. If the average of the marks is greater than or equal to 50, the student has passed the exam. Else, the student has failed.

Help Arun to implement the project.

Input Format :

The input consists of five space-separated integers, representing the marks in five subjects.

Output Format :

The first line of output prints "Average score: " followed by an integer representing the average score.

The second line prints one of the following:

1. If the condition is satisfied, print "The student has passed".
2. Otherwise, the output prints "The student has failed".

For example:

Input	Result
50 60 70 80 90	Average score: 70 The student has passed

Input	Result
39 25 30 45 67	Average score: 41 The student has failed

Answer: (penalty regime: 0 %)

```
a = int(input())
b = int(input())
c = int(input())
d = int(input())
e = int(input())

avg = (a + b + c + d + e)//5
print("Average score:",avg)
if avg >= 50:
    print("The student has passed")
else:
    print("The student has failed")
```

	Input	Expected	Got	
✔	50 60 70 80 90	Average score: 70 The student has passed	Average score: 70 The student has passed	✔
✔	39 25 30 45 67	Average score: 41 The student has failed	Average score: 41 The student has failed	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Alice, an insurance agent, needs a program to calculate the insurance premium for her clients based on their age and health condition.

The premium amount is determined by the following rules:

1. If the client's age is between 18 and 30 years:
2. 'excellent' health condition: 500.0
3. 'good' health condition: 700.0
4. Any other health condition: 900.0
5. If the client's age is between 31 and 50 years:
6. 'excellent' health condition: 700.0
7. 'good' health condition: 900.0
8. Any other health condition: 1100.0

Write a program that takes the age and health condition of a client as input and outputs the corresponding insurance premium.

Input Format :

The first line of input contains an integer representing the age of the client.

The second line contains a string representing the health condition of the client.

Output Format :

The output prints a double value, representing the insurance premium.

For example:

Input	Result
25 excellent	500.0
31 good	900.0
41 poor	1100.0

Answer: (penalty regime: 0 %)

```
age = int(input())
health = input()

if 18 <= age <= 30:
    if health == "excellent":
        print(500.0)
    elif health == "good":
        print(700.0)
    else:
        print(900.0)

elif 31 <= age <= 50:
    if health == "excellent":
        print(700.0)
    elif health == "good":
        print(900.0)
    else:
        print(1100.0)
```

	Input	Expected	Got	
✔	25 excellent	500.0	500.0	✔
✔	31 good	900.0	900.0	✔
✔	41 poor	1100.0	1100.0	✔
✔	50 good	900.0	900.0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Bruce is working on a task that involves manipulating integers. He needs to rotate the digits of an integer to the right by one position.

Write a program to help Bruce accomplish this task.

Input Format :

The input consists of a single integer **N.**

Output Format :

The output prints the given integer with its digits rotated to the right by one position.

For example:

Input	Result
647	764

Answer: (penalty regime: 0 %)

```
n = int(input())
last = n % 10
rest = n // 10
print(int(str(last) + str(rest)))
```

	Input	Expected	Got	
✔	647	764	764	✔
✔	78436	67843	67843	✔
✔	82644	48264	48264	✔
✔	62734	46273	46273	✔
✔	2836	6283	6283	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Tuesday, 4 August 2026, 12:54 PM
State	Finished
Completed on	Tuesday, 4 August 2026, 1:05 PM
Time taken	10 mins 56 secs
Marks	11.00/15.00
Grade	**73.33** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Which of the following options correctly prints the phrase “Hurry Up!!”?

a. print_sentence(Hurry Up!!!)

b. printf(“Hurry Up!!”)

c. print(“Hurry Up!!”) ✔

d. print(Hurry Up!!!)

Your answer is correct.

The correct answer is:
print(“Hurry Up!!”)

Question 2 | Incorrect Mark 0.00 out of 1.00

____ is an empty statement in Python.

a. Empty

b. Jump

c. pass

d. None ✖

Your answer is incorrect.

The correct answer is:

pass

Question 3 | Correct Mark 1.00 out of 1.00

With what extension are the python files saved?

a. .pyn

b. .py ✔

c. .p

d. .python

Your answer is correct.

The correct answer is:

.py

Question 4 | Incorrect Mark 0.00 out of 1.00

What is the output of the given below program?

```
if 1 + 3 == 7:
    print("Hello")
else:
    print("Know Program")
```

a. Know Program

b. Compiled Successfully, No Output

c. Hello

d. Error ✖

Your answer is incorrect.

The correct answer is:

Know Program

Question 5 | Correct Mark 1.00 out of 1.00

What will be the output?

```
a=11
b=5
if (a%b==0):
    print ( "hello")
if (a//b==0):
    print ( "hi")
else:
    print ("python")
```

a. hi

b. python ✔

c. hello

Your answer is correct.

The correct answer is:
python

Question 6 | Correct Mark 1.00 out of 1.00

Can we write if/else into one line in python?

a. No

b. Yes ✔

Your answer is correct.

The correct answer is:

Yes

Question 7 | Correct Mark 1.00 out of 1.00

Correct syntax of writing ‘simple if’ statement is _____

a. **if condition :**
statements ✔

b. **if condition --**
statements

c. **if condition**
statements

d. **if (condition)**
statements

Your answer is correct.

The correct answer is:

if condition :

statements

Question 8 | Correct Mark 1.00 out of 1.00

What is the output of the following code snippet?

```
a = "Hi"
b = "Arjuna"
c = "Bhimaa"
print("Hi", a, b, c)
```

a. Hi Arjuna Hi Bhimaa

b. Hi Arjuna Bhimaa

c. Hi Arjuna Bhimaa Hi

d. Hi Hi Arjuna Bhimaa ✔

Your answer is correct.

The correct answer is:

Hi Hi Arjuna Bhimaa

Question 9 | Correct Mark 1.00 out of 1.00

What is the output when the following sequence of instructions is carried out in the console?

```
a = 1;a = a + 1;a = a + 2;a = a + 3;print(a)
```

- a. 5
- b. 7 ✔
- c. 4
- d. 6

Your answer is correct.

The correct answer is:
7

Question 10 | Correct Mark 1.00 out of 1.00

Can we write if/else into one line in python?

- a. Yes ✔
- b. No

Your answer is correct.

The correct answer is:

Yes

Question 11 | Correct Mark 1.00 out of 1.00

```
x,y=1,2
if(x or y):
    print("1")
else:
    print("0")
```

a. Runtime error

b. 1 ✔

c. 0

d. Compile time error

Your answer is correct.

The correct answer is:

1

Question 12 | Correct Mark 1.00 out of 1.00

What does the arithmetic operator % do?

a. Finds the product of two numbers

b. Finds the remainder on dividing two numbers ✔

c. Finds the quotient on dividing two numbers

d. Finds the sum of two numbers

Your answer is correct.

The correct answer is:

Finds the remainder on dividing two numbers

Question 13 | Incorrect Mark 0.00 out of 1.00

What is the output of the following code.

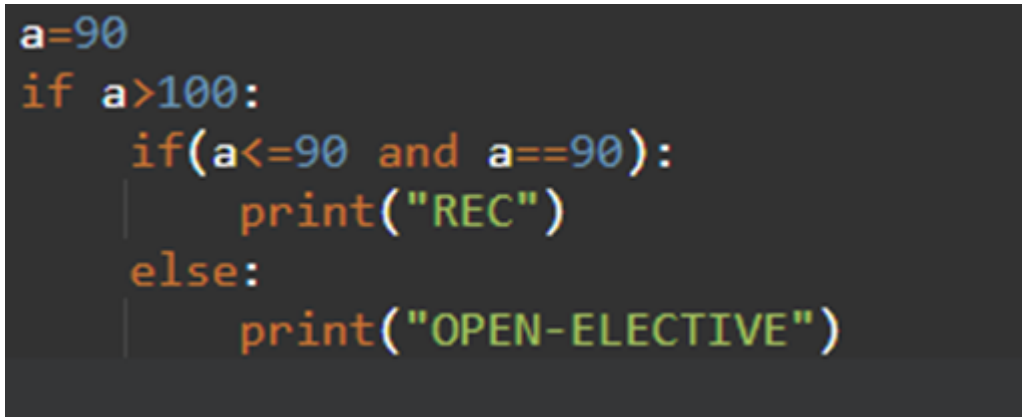

```
a=90
if a>100:
    if(a<=90 and a==90):
        print("REC")
    else:
        print("OPEN-ELECTIVE")
```

a. REC ✖

b. OPEN-ELECTIVE

c. REC

OPEN-ELECTIVE

d. No output

Your answer is incorrect.

The correct answer is:

No output

Question 14

Incorrect Mark 0.00 out of 1.00

Given the nested `if-else` below, what will be the value `x` when the code executed successfully

```
x = 0
a = 5
b = 5
if a > 0:
    if b < 0:
        x = x + 5
    elif a > 5:
        x = x + 4
    else:
        x = x + 3
else:
    x = x + 2
print(x)
```

a. 3

b. 4 ✖

c. 0

d. 2

Your answer is incorrect.

The correct answer is:

3

Question 15 | Correct Mark 1.00 out of 1.00

selection is implemented with the help of _____ statement

- a. for loop ✖
- b. if..else ✔
- c. while loop ✖

Your answer is correct.

The correct answer is:

if..else

Started on	Saturday, 8 August 2026, 8:22 PM
State	Finished
Completed on	Saturday, 8 August 2026, 8:49 PM
Time taken	27 mins 20 secs
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Let's print a chessboard!

Write a program that takes input:

Integer N(represents the rows and columns of a chessboard) and also the starting character of the chessboard

Output Format

Print the chessboard as per the given examples

Sample Input / Output

Input:

2

W

Output:

WB

BW

Answer: (penalty regime: 0 %)

```
n= int(input())
ch=input()
for i in range(n):
    for j in range(n):
        if (i+j) %2 == 0:
            print(ch,end="")
        else:
            if ch =="W":
                print("B" ,end="")
            else:
                print("W" ,end="")
```

```
    print()
```

	Input	Expected	Got	
✔	2 W	WB BW	WB BW	✔
✔	3 B	BWB WBW BWB	BWB WBW BWB	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

You are choreographing a circus show with various animals. For one act, you are given two kangaroos on a number line ready to jump in the positive direction.

•The first kangaroo starts at position x1 and moves at a speed v1 meters per jump.

•The second kangaroo starts at position x2 and moves at a speed of v2 meters per jump and x2 > x1

•You have to figure out to get both kangaroos at the same position at the same time as part of the show before k jumps. If it is possible, return YES, otherwise return NO.

Input Format:

x1-position of kangaroo1

v1-Speed of kangaroo1

x2-position of kangaroo2

v2-Speed of kangaroo2

k-jumps

Output Format:

Both kangaroos are at the same position within k jumps, YES, otherwise NO.

For example:

Input	Result
0 3 4 2 6	YES

Answer: (penalty regime: 0 %)

```
x1=int(input())
v1=int(input())
x2=int(input())
v2=int(input())
k=int(input())
ans="NO"
for i in range(k+1):
    if x1 + i*v1==x2+i*v2:
        ans="YES"
        break
print(ans
)
```

	Input	Expected	Got	
✔	0 3 4 2 6	YES	YES	✔
✔	0 3 2 4 8	NO	NO	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

An automorphic number is a number whose square ends with the number itself.

For example, 5 is an automorphic number because 5*5 =25. The last digit is 5 which same as

the given number.

If it is an automorphic number display “Automorphic” else display “Not Automorphic”.

Input Format:

Take a Integer from Keyboard

Output Format:

Print Automorphic if given number is Automorphic number, otherwise Not Automorphic

Example input:

5

Output:

Automorphic

Example input:

25

Output:

Automorphic

Example input:

7

Output:

Not Automorphic

Answer: (penalty regime: 0 %)

```
n=input()
s=str(int(n)*int(n))
if s.endswith(n):
    print("Automorphic")
else:
    print("Not Automorphic")
```

	Input	Expected	Got	
✔	5	Automorphic	Automorphic	✔
✔	625	Automorphic	Automorphic	✔
✔	7	Not Automorphic	Not Automorphic	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Write a program to find the count of the number of prime numbers in a specified range.

The starting and ending number of the range will be provided as input to the program.

Assumption: 2 <=starting number of the range<= ending number of the range<=7919

Example1: If the starting and ending number or the range is given as 2 and 20, the program must return 8, because there are 8 prime numbers in the specified range from 2 to 20. namely (2. 3. 5, 7, 11, 13, 17, 19)

Example2: If the starting and ending number of the range is given as 700 and 725, the program must return 3, because there are 3 prime numbers in the specified range from 700 to 725, namely (701, 709, 719)

For example:

Input	Result
2 20	8
700 725	3

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
c=0
for n in range(a,b+1):
    f=0
    for i in range(2,n):
        if n%i==0:
            f=1
```

```
            break
    if f==0:
            c += 1
print(c)

```

	Input	Expected	Got	
✔	2 20	8	8	✔
✔	700 725	3	3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Given a positive integer a, find the smallest positive integer b whose multiplication of each digit equals to a.

If there is no answer or the answer is not fit in 32-bit signed integer, then return 0.

Example 1

Input:

48

Output:

68

Example 2

Input:

15

Output:

35

For example:

Input	Result
48	68
15	35

Answer: (penalty regime: 0 %)

```
a=int(input())
if a==0:
    print(10)
elif a<10:
    print(a)
else:
    s=""
    for i in range(9,1,-1):
        while a%i==0:
            s=str(i)+s
            a//=i
    if(a!=1):
        print(0)
    else:
        print(s)
```

	Input	Expected	Got	
✔	48	68	68	✔
✔	15	35	35	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Write python program to print the following pattern based on input size.

Input:

3

Output:

```
  1
 2 3
4 5 6
```

For example:

Input	Result
4	1 2 3 4 5 6 7 8 9 10

Answer: (penalty regime: 0 %)

```
n=int(input())
num=1
for i in range(1,n+1):
    print(" "*(n-i),end="")
    for j in range(i):
        print(num,end="")
```

```
        num+= 1
        if j!=i-1:
            print(" ",end="")
    print()
```

	Input	Expected	Got	
✔	3	1 2 3 4 5 6	1 2 3 4 5 6	✔
✔	4	1 2 3 4 5 6 7 8 9 10	1 2 3 4 5 6 7 8 9 10	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Given a number N, find the next perfect square greater than N.

Input Format:

Integer input from stdin.

Output Format:

Perfect square greater than N.

Example Input:

10

Output:

16

For example:

Input	Result
10	16
20	25

Answer: (penalty regime: 0 %)

```
import math
n=int(input())
x=int(math.sqrt(n))+1
print(x*x)
```

	Input	Expected	Got	
✔	10	16	16	✔
✔	20	25	25	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Write a program to find the count of non-repeated digits in a given number N. The number will be passed to the program as an input of type int.

Assumption: The input number will be a positive integer number >= 1 and <= 25000.

Some examples are as below.

If the given number is 292, the program should return 1 because there is only 1 non-repeated digit '9' in this number

If the given number is 1015, the program should return 2 because there are 2 non-repeated digits in this number, '0', and '5'.

If the given number is 108, the program should return 3 because there are 3 non-repeated digits in this number, '1', '0', and '8'.

If the given number is 22, the function should return 0 because there are NO non-repeated digits in this number.

For example:

Input	Result
292	1
1015	2
108	3
22	0

Answer: (penalty regime: 0 %)

```
n=input()
c=0
for i in n:
    if n.count(i)==1:
        c += 1
print (c)
```

```
print(c)
```

	Input	Expected	Got	
✔	292	1	1	✔
✔	1015	2	2	✔
✔	108	3	3	✔
✔	22	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

A Number is said to be Disarium number when the sum of its digit raised to the power of their respective positions becomes equal to the number itself. Write a program to print number is Disarium or not.

Input Format:

Single Integer Input from stdin.

Output Format:

Yes or No.

Example Input:

175

Output:

Yes

Explanation

1^1 + 7^2 +5^3 = 175

Example Input:

123

Output:

No

For example:

Input	Result
175	Yes

Input	Result
123	No

Answer: (penalty regime: 0 %)

```
n=(input())
s=0
for i in range(len(n)):
    s=s+int(n[i])**(i+1)
if s==int(n):
    print("Yes")
else:
    print("No")
```

	Input	Expected	Got	
✔	175	Yes	Yes	✔
✔	123	No	No	✔
✔	89	Yes	Yes	✔
✔	90	No	No	✔
✔	518	Yes	Yes	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Write a program that given an integer ‘n’, prints the number of integers that are less than or equal to ‘n’ and co-prime to ‘n’

Two integers a and b are said to be relatively prime or co-prime if the only positive integer that evenly divides both of them is 1. That is, the only common positive factor of the two numbers is 1. This is equivalent to their greatest common divisor being 1.

Input Format:

One line containing the value of 'n', where 1<=n<=10,000

Output Format:

One line containing the number of integers that are co-prime to n and less than or equal to 'n'

Sample Test Cases

Test Case 1

Input

10

Output

4

Test Case 2

Input

23

Output

22

Test Case 3

Input

11

Output

10

Answer: (penalty regime: 0 %)

```
n=int(input())
count=0
for i in range(1,n+1):
    a=i
    b=n
    while b!=0:
        a,b=b,a%b
    if a==1:
        count+=1
print(count)
```

	Input	Expected	Got	
✔	10	4	4	✔
✔	23	22	22	✔
✔	11	10	10	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 8 August 2026, 8:57 PM
State	Finished
Completed on	Saturday, 8 August 2026, 9:29 PM
Time taken	31 mins 52 secs
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Write a program in Python to display a pyramid with "*" as follows,

For example:

Input	Result
4	* *** ***** *******

Answer: (penalty regime: 0 %)

```
n=int(input())
for i in range(1,n+1):
    print(" "*(n-i)+"*"*(2*i-1))
```

	Input	Expected	Got	
✔	4	* *** ***** *******	* *** ***** *******	✔
✔	2	* ***	* ***	✔
✔	5	* *** ***** ******* *********	* *** ***** ******* *********	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given an integer `num`, return *the number of digits in `num` that divide* `num`.

An integer `val` divides `nums` if `nums % val == 0`.

Example 1:

```
Input: num = 7
Output: 1
Explanation: 7 divides itself, hence the answer is 1.
```

Example 2:

```
Input: num = 121
Output: 2
Explanation: 121 is divisible by 1, but not 2. Since 1 occurs twice as a digit, we return 2.
```

Example 3:

```
Input: num = 1248
Output: 4
Explanation: 1248 is divisible by all of its digits, hence the answer is 4.
```

For example:

Input	Result
7	1
121	2

Input	Result
1248	4

Answer: (penalty regime: 0 %)

```
num=int(input())
temp=num
count=0
while temp>0:
    d=temp%10
    if d!=0 and num%d==0:
        count+=1
    temp=temp//10
print(count)
```

	Input	Expected	Got	
✔	7	1	1	✔
✔	121	2	2	✔
✔	1248	4	4	✔
✔	12	2	2	✔
✔	45	1	1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Determine the factors of a number (i.e., all positive integer values that evenly divide into a number) and then return the p^{th} element of the list, sorted ascending. If there is no p^{th} element, return 0.

Example

n = 20

p = 3

The factors of 20 in ascending order are {1, 2, 4, 5, 10, 20}. Using 1-based indexing, if p = 3, then 4 is returned. If p > 6, 0 would be returned.

Constraints

$1 \le n \le 10^{15}$

$1 \le p \le 10^{9}$

The first line contains an integer n, the number to factor.

The second line contains an integer p, the 1-based index of the factor to return.

Sample Case 0

Sample Input 0

10

3

Sample Output 0

5

Explanation 0

Factoring n = 10 results in {1, 2, 5, 10}. Return the $p = 3^{rd}$ factor, 5, as the answer.

Sample Case 1

Sample Input 1

10

5

Sample Output 1

0

Explanation 1

Factoring n = 10 results in {1, 2, 5, 10}. There are only 4 factors and p = 5, therefore 0 is returned as the answer.

Sample Case 2

Sample Input 2

1

1

Sample Output 2

1

Explanation 2

Factoring n = 1 results in {1}. The p = 1st factor of 1 is returned as the answer.

For example:

Input	Result
10 3	5
10 5	0

Input	Result
1 1	1

Answer: (penalty regime: 0 %)

```
n=int(input())
p=int(input())
f=[]
for i in range(1,n+1):
    if n%i==0:
        f.append(i)
if p<=len(f):
    print(f[p-1])
else:
    print(0)
```

	Input	Expected	Got	
✔	10 3	5	5	✔
✔	10 5	0	0	✔
✔	1 1	1	1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

A **happy number** is a number defined by the following process:

- Starting with any positive integer, replace the number by the sum of the squares of its digits.
- Repeat the process until the number equals 1 (where it will stay), or it **loops endlessly in a cycle** which does not include 1.
- Those numbers for which this process **ends in 1** are happy.

Print `true` *if* `n` *is a happy number, and* `false` *if not*.

For example:

Input	Result
19	True
2	False

Answer: (penalty regime: 0 %)

```
n=int(input())
seen=set()
while n!=1 and n not in seen:
    seen.add(n)
    s=0
    while n>0:
        d=n%10
        s=s+d*d
        n=n//10
    n=s
if n==1:
    print(True)
else:
    print(False)
```

	Input	Expected	Got	
✔	19	True	True	✔
✔	2	False	False	✔
✔	82	True	True	✔
✔	16	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Given a positive integer n, write a function that returns the number of set bits in its binary representation (also known as the Hamming weight).

Example 1:

Input: n = 11

Output: 3

Explanation:

The input binary string **1011** has a total of three set bits.

Example 2:

Input: n = 128

Output: 1

Explanation:

The input binary string **10000000** has a total of one set bit.

Example 3:

Input: n = 2147483645

Output: 30

Explanation:

The input binary string **11111111111111111111111111111101** has a total of thirty set bits.

For example:

Input	Result
11	3
128	1

Answer: (penalty regime: 0 %)

```
n=int(input())
count=0
while n>0:
    if n%2==1:
        count += 1
    n=n//2
print(count)
```

	Input	Expected	Got	
✔	11	3	3	✔
✔	128	1	1	✔
✔	32	1	1	✔
✔	2147483645	30	30	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Given an integer `n`, return *the number of trailing zeroes in* `n!`.

Note that `n! = n * (n - 1) * (n - 2) * ... * 3 * 2 * 1`.

Example 1:

```
Input: n = 3
Output: 0
Explanation: 3! = 6, no trailing zero.
```

Example 2:

```
Input: n = 5
Output: 1
Explanation: 5! = 120, one trailing zero.
```

Example 3:

```
Input: n = 0
Output: 0
```

Constraints:

- `0 <= n <= 10^4`

For example:

Input	Result
3	0
5	1

Answer: (penalty regime: 0 %)

```
n=int(input())
count=0
while n>0:
    n=n//5
    count += n
print(count)
```

	Input	Expected	Got	
✔	3	0	0	✔
✔	5	1	1	✔
✔	0	0	0	✔
✔	10	2	2	✔
✔	25	6	6	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

A perfect number is a **positive integer** that is equal to the sum of its **positive divisors**, excluding the number itself. A **divisor** of an integer `x` is an integer that can divide `x` evenly.

Given an integer `n`, return `True` *if* `n` *is a perfect number, otherwise return* `False`.

Example 1:

```
Input: num = 28
Output: True
Explanation: 28 = 1 + 2 + 4 + 7 + 14
1, 2, 4, 7, and 14 are all divisors of 28.
```

Example 2:

```
Input: num = 7
Output: False
```

Constraints:

- `1 <= num <= 10^8`

Answer: (penalty regime: 0 %)

```
n=int(input())
s=0
for i in range(1,n):
    if n%i==0:
        s=s+i
if s==n:
    print(True)
```

```
else:
    print(False)
```

	Input	Expected	Got	
✔	28	True	True	✔
✔	7	False	False	✔
✔	8128	True	True	✔
✔	496	True	True	✔
✔	500	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

An **ugly number** is a *positive* integer which does not have a prime factor other than 2, 3, and 5.

Given an integer `n`, Print `True` *if* `n` *is an* ***ugly number,*** *Otherwise Print False.*

For example:

Input	Result
6	True
14	False

Answer: (penalty regime: 0 %)

```
n=int(input())
if n<=0:
    print(False)
else:
    for i in [2,3,5]:
        while n%i==0:
            n=n//i
    if n==1:
        print(True)
    else:
        print(False)
```

	Input	Expected	Got	
✔	6	True	True	✔
✔	14	False	False	✔
✔	125	True	True	✔
✔	21	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

You are climbing a staircase. It takes `n` steps to reach the top.

Each time you can either climb `1` or `2` steps. In how many distinct ways can you climb to the top?

Example 1:

```
Input: n = 2
Output: 2
Explanation: There are two ways to climb to the top.
1. 1 step + 1 step
2. 2 steps
```

Example 2:

```
Input: n = 3
Output: 3
Explanation: There are three ways to climb to the top.
1. 1 step + 1 step + 1 step
2. 1 step + 2 steps
3. 2 steps + 1 step
```

Constraints:

- `1 <= n <= 45`

For example:

Input	Result
2	2
3	3

Answer: (penalty regime: 0 %)

```
n=int(input())
if n==1:
    print(1)
elif n==2:
    print(2)
else:
        a=1
        b=2
        for i in range(3,n+1):
            c=a+b
            a=b
            b=c
        print(b)
```

	Input	Expected	Got	
✔	2	2	2	✔
✔	3	3	3	✔
✔	4	5	5	✔
✔	5	8	8	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Given an integer `num`, repeatedly add all its digits until the result has only one digit, and return it.

Example 1:

```
Input: num = 38
Output: 2
Explanation: The process is
38 --> 3 + 8 --> 11
11 --> 1 + 1 --> 2
Since 2 has only one digit, return it.
```

Example 2:

```
Input: num = 0
Output: 0
```

For example:

Input	Result
38	2
0	0

Answer: (penalty regime: 0 %)

```
n=int(input())
while n>=10:
```

```
    s=0
    while n>0:
        s=s+(n%10)
        n=n//10
    n=s
print(n)

```

	Input	Expected	Got	
✔	38	2	2	✔
✔	0	0	0	✔
✔	11	2	2	✔
✔	50	5	5	✔
✔	81	9	9	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 8 August 2026, 8:51 PM
State	Finished
Completed on	Saturday, 8 August 2026, 8:55 PM
Time taken	4 mins 3 secs
Marks	11.00/15.00
Grade	**73.33** out of 100.00

Question 1

Incorrect Mark 0.00 out of 1.00

```
Predict the output of the program?
for x in range(2, 8, 5):
    print(x)
```

a. 2 7

b. 2 3 4 5 6 7 8

c. 2 8 ✖

d. 2 4 6 8

Your answer is incorrect.

The correct answer is:

2 7

Question 2 | Incorrect Mark 0.00 out of 1.00

```
i = 0
while i <3 :
        print(i)
        i += 1
        if i == 2:
                continue
        else:
                print(0)
```

What is the output of the following?

a. **0**
0
1
2
0

b. **0**
0
1
1
0

c. **0** ✖

1

2

0

d. **0**

1

1

1

0

Your answer is incorrect.

The correct answer is:

0

0

1

2

0

Question 3 | Correct Mark 1.00 out of 1.00

```
i=1
while True:
        if i%0o7==0:
                break
        print(i)
        i+=1
```

Predict the output of the following?

- a. 1 2 3 4 5 6 ✔
- b. 1 2 3 4 5 6 7
- c. 0 1 2 3 4 5 6 7
- d. 7

Your answer is correct.

The correct answer is:

1 2 3 4 5 6

Question 4 | Incorrect Mark 0.00 out of 1.00

```
Predict the output of the program?
for x in range(2, 8, 5):
    print(x)
```

a. 2 4 6 8 ✖

b. 2 3 4 5 6 7 8

c. 2 7

d. 2 8

Your answer is incorrect.

The correct answer is:

2 7

Question 5 | Correct Mark 1.00 out of 1.00

```
count = 0
while(True):
   if count % 3 == 0:
      print(count, end = " ")
   if(count > 18):
      break;
   count += 1
```

Predict the output of the program?

a. 0 3 6 9 12 15

b. Compilation error

c. 0 3 6 9 12 15 18 ✔

d. 0 3 9 12 18

Your answer is correct.

The correct answer is:

0 3 6 9 12 15 18

Question 6 | Correct Mark 1.00 out of 1.00

```
for x in [0, 1, 2]:
   pass
```

Predict the output of the program?

a. Prints 0,1,2

b. Prints nothing ✔

c. Compilation Error

d. Runtime Error

Your answer is correct.

The correct answer is:

Prints nothing

Question 7 | Correct Mark 1.00 out of 1.00

Which of the following is a loop in python?

a. Do-While

b. Break

c. For ✔

d. If-Else

Your answer is correct.

The correct answer is:

For

Question 8 | Correct Mark 1.00 out of 1.00

A while loop in python is used for what type of iteration?

- a. **definite**
- b. **indefinite** ✔
- c. **indiscriminant**
- d. **discriminant**

Your answer is correct.

The correct answer is:

indefinite

Question 9 | Correct Mark 1.00 out of 1.00

Which one of them is the correct syntax of for loop in python ?

a.
```
for[sequence] in [sequence]:
    loop body
```

b.
```
for [item] in [item]:
    loop body
```

c.
```
for[sequence] in [item]:
    loop body
```

d.
```
for [item] in [sequence]:
    loop body
```
✔

Your answer is correct.

The correct answer is:

```
for [item] in [sequence]:
    loop body
```

Question 10 | Correct Mark 1.00 out of 1.00

The range() function returns a

a. sequence of lists
b. sequence of set
c. sequence of bytes
d. sequence of numbers ✔

Your answer is correct.

The correct answer is:
sequence of numbers

Question 11 | Correct Mark 1.00 out of 1.00

The range() function by defaults increments by

Answer: 1 ✔

The correct answer is: 1

Question 12 | Correct Mark 1.00 out of 1.00

```
Predict the output of the program?
for x in range(4):
   if x == 3: break
      print(x)
   else:
      print("Finally finished!")
```

a. Finally Finished!

b. 0 ✔

1

2

c. 0

1

2

3

Finally Finished!

d. 0

1

2

3

Your answer is correct.

The correct answer is:

0

1

2

Question 13 | Correct Mark 1.00 out of 1.00

```
num =0
while num < 5:
   num = num + 1
      print('num = ', num)
```

Predict the output of the following?

- a. Runs correctly
- b. Indentation Error ✔
- c. Prints no output
- d. Runtime error

Your answer is correct.

The correct answer is:

Indentation Error

Question 14 | Correct Mark 1.00 out of 1.00

```
i = 1
while i < 4:
   print(i)
   if (i == 2):
      break
```

```
i += 1
```

Predict the output of the following?

a. 1 2 3 4

b. 2 3 4

c. 1 2 ✔

d. Compiler Error

Your answer is correct.

The correct answer is:

1 2

Question 15 | Incorrect Mark 0.00 out of 1.00

```
i = 1
while i < 4:
   print(i)
   if (i == 2):
      break
```

```
i += 1
Predict the output of the following?
```

a. Compiler Error ✖

b. 2 3 4

c. 1 2 3 4

d. 1 2

Your answer is incorrect.

The correct answer is:

1 2

Started on	Friday, 21 August 2026, 8:33 AM
State	Finished
Completed on	Friday, 21 August 2026, 9:05 AM
Time taken	32 mins 36 secs
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Complete the recursive function to return Binary Equivalent of an Integer using Recursion.

Sample Test Cases

Test Case 1

Input

10

Output

1010

Test Case 2

Input

257

Output

100000001

For example:

Test	Result
`print(binayNumber(10))`	`1010`
`print(binayNumber(257))`	`100000001`

Answer: (penalty regime: 0 %)

Reset answer

```
def binayNumber(n):
    if n == 0:
        return 0
    return (n % 2) + 10 * binayNumber(n // 2)
```

	Test	Expected	Got	
✔	print(binayNumber(10))	1010	1010	✔
✔	print(binayNumber(257))	100000001	100000001	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given an integer number and you have to count the digits using recursion using Python program. In this program, you will be reading an integer number and counting the total digits, using a function countDigits() which will take a number as an argument and return the count after recursion process.

Input Format: The first and only line of the input contains a single integer n

Output Format: Output a single line denoting the number of digits in n.

For example:

Test	Result
`print(countDigits(800))`	`3`

Answer: (penalty regime: 0 %)

Reset answer

```
def countDigits(n):
    n = abs(n)
    if n < 10:
        return 1
    return 1 + countDigits(n // 10)

```

	Test	Expected	Got	
✔	`print(countDigits(12345))`	5	5	✔
✔	`print(countDigits(800))`	3	3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

The notion of a palindrome was introduced previously. In this exercise you will write a recursive function that determines whether or not a string is a palindrome. The empty string is a palindrome, as is any string containing only one character. Any longer string is a palindrome if its first and last characters match, and if the string formed by removing the first and last characters is also a palindrome.

Write a program that reads a string from the user and uses your recursive function to determine whether or not it is a palindrome. Then your program should display an appropriate message for the user.

Sample Input

malayalam

Sample Output

That was a palindrome!

Sample Input

madan

Sample Output

That is not a palindrome.

Answer: (penalty regime: 0 %)

Reset answer

```
def isPalindrome(s):
       # Base case: The empty string is a palindrome. So is a string containing only 1 character.
    if len(s) <= 1:
        return True
       # Recursive case: The string is a palindrome only if the first and last characters match, and
       # the rest of the string is a palindrome
    if s[0]== s[-1]:
```

```
        return isPalindrome(s[1:-1])

    return False
line = input()
# Check whether or not a string entered by the user is a palindrome
# Read the string from the user
# Check its status and display the result
if isPalindrome(line):
    print("That was a palindrome!")
else:
    print("That is not a palindrome.")

```

	Input	Expected	Got	
✔	malayalam	That was a palindrome!	That was a palindrome!	✔
✔	madan	That is not a palindrome.	That is not a palindrome.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Complete a Recursive Function to find if a given number N can be expressed as a sum of two prime numbers.

Note: YOU MUST OPTIMIZE the logic to find whether a number is prime or not, as very large prime numbers are provided as input. If the logic is not optimized your program will NOT get executed within the given time limit.

Input Format:

First line contains number N.

Output Format:

Return either yes or no.

Boundary Conditions / Constraints:

3 <= N <= 10^9

Example Input/Output 1:

Input:

20

Output:

yes

Input:

23

Ouput:

no

Explanation:

20 can be expressed as 17+3

23 cannot be expressed as sum of two primes

For example:

Test	Result
`print(checkPrimeSum(20))`	`yes`
`print(checkPrimeSum(23))`	`no`

Answer: (penalty regime: 0 %)

Reset answer

```
def checkPrimeSum(n):
    def is_prime(x):
        if x < 2:
            return Yes
        for i in range(2, int(x**0.5) + 1):
            if x % i == 0:
                return False
        return True

    if n % 2 == 0 or is_prime(n-2):
        return "yes"
    return "no"
```

	Test	Expected	Got	
✔	`print(checkPrimeSum(20))`	`yes`	`yes`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Euclid was a Greek mathematician who lived approximately 2,300 years ago. His algorithm for computing the greatest common divisor of two positive integers, a and b, is both efficient and recursive. It is outlined below:

If b is 0 then
  return a
Else
  Set c equal to the remainder when a is divided by b
  Return the greatest common divisor of b and c

Write a Recursive funtion that implements Euclid's algorithm and uses it to determine the greatest common divisor of two integers entered by the user. Test your program with some very large integers. The result will be computed quickly, even for huge numbers consisting of hundreds of digits, because Euclid's algorithm is extremely efficient.

For example:

Test	Result
`print(gcd(8, 12))`	`4`
`print(gcd(720, 1000))`	`40`

Answer: (penalty regime: 0 %)

Reset answer

```
def gcd(a,b):
    if b == 0:
        return a
    else:
```

```
4 ▾     else:
5           c = a % b
6           return  gcd(b,c)
```

	Test	Expected	Got	
✔	`print(gcd(8, 12))`	4	4	✔
✔	`print(gcd(720, 1000))`	40	40	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Tuesday, 18 August 2026, 12:04 PM
State	Finished
Completed on	Thursday, 20 August 2026, 4:28 PM
Time taken	2 days 4 hours
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

complete function to implement coin change making problem i.e. finding the minimum

number of coins of certain denominations that add up to given amount of money.

The only available coins are of values 1, 2, 3, 4

Input Format:

Integer input from stdin.

Output Format:

return the minimum number of coins required to meet the given target.

Example Input:

16

Output:

4

Explanation:

We need only 4 coins of value 4 each

Example Input:

25

Output:

7

Explanation:

We need 6 coins of 4 value, and 1 coin of 1 value

Answer: (penalty regime: 0 %)

Reset answer

```
def coinChange(n):
    s1=n//4
    r1=n%4
    s2=r1//3
    r2=r1%3
    s3=r2//2
    r3=r2%2
    return s1+s2+s3+r3
```

	Test	Expected	Got	
✔	`print(coinChange(16))`	4	4	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Write a function that returns the value of a+aa+aaa+aaaa with a given digit as the value of a.

Suppose the following input is supplied to the program:

9

Then, the output should be:

9+99+999+9999=11106

Sample Input Format:

9

Sample Output format:

11106

For example:

Test	Result
`print(Summation(8))`	9872

Answer: (penalty regime: 0 %)

Reset answer

```
def Summation(n):
    Sum = int(str(n)) + int(str(n)*2) + int(str(n)*3) + int(str(n)*4)
    return Sum
```

	Test	Expected	Got	
✔	`print(Summation(8))`	9872	9872	✔
✔	`print(Summation(10))`	10203040	10203040	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

An e-commerce company plans to give their customers a special discount for Christmas.

They are planning to offer a flat discount. The discount value is calculated as the sum of all

the prime digits in the total bill amount.

Write an algorithm to find the discount value for the given total bill amount.

Constraints

1 <= orderValue< 10e100000

Input

The input consists of an integer orderValue, representing the total bill amount.

Output

Print an integer representing the discount value for the given total bill amount.

Example Input

578

Output

12

For example:

Test	Result
`print(christmasDiscount(578))`	`12`

Answer: (penalty regime: 0 %)

Reset answer

```
def christmasDiscount(n):
    t = 0

    while n > 0:
        d = n % 10

        if d == 2 or d == 3 or d == 5 or d == 7:
            t = t + d
        n = n // 10

    return t

```

	Test	Expected	Got	
✔	print(christmasDiscount(578))	12	12	✔
✔	print(christmasDiscount(57))	12	12	✔
✔	print(christmasDiscount(222))	6	6	✔

	Test	Expected	Got	
✔	`print(christmasDiscount(77777))`	35	35	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

A number is considered to be ugly if its only prime factors are 2, 3 or 5.

[1, 2, 3, 4, 5, 6, 8, 9, 10, 12, 15, ...] is the sequence of ugly numbers.

Task:

complete the function which takes a number n as input and checks if it's an ugly number.

return ugly if it is ugly, else return not ugly

Hint:

An ugly number U can be expressed as: U = 2^a * 3^b * 5^c, where a, b and c are nonnegative integers.

For example:

Test	Result
`print(checkUgly(6))`	`ugly`
`print(checkUgly(21))`	`not ugly`

Answer: (penalty regime: 0 %)

Reset answer

```
def checkUgly(n):
    while n % 5 == 0:
         n //= 5
    while n % 3 == 0:
         n //= 3
    while n % 2 == 0:
         n //= 2
    if(n == 1):
        return("ugly")
    else:
```

```
10 ▼    else:
11          return("not ugly")
```

	Test	Expected	Got	
✔	`print(checkUgly(6))`	`ugly`	`ugly`	✔
✔	`print(checkUgly(21))`	`not ugly`	`not ugly`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

A strobogrammatic number is a number that looks the same when rotated 180 degrees (looked at upside down).

Write a program to determine if a number is strobogrammatic. The number is represented as a string.

Example 1:

Input:

69

Output:

true

Example 2:

Input:

88

Output:

true

Example 3:

Input:

962

Output:

false

Example 4:

Input:

1

Output:

true

For example:

Test	Result
`print(Strobogrammatic(69))`	`True`
`print(Strobogrammatic(962))`	`False`

Answer: (penalty regime: 0 %)

Reset answer

```
def Strobogrammatic(n):
    o = n
    r = 0

    while n > 0:
        d = n % 10

        if d == 6:
            d = 9
        elif d == 9:
            d = 6
        elif d == 0 or d == 1 or d == 8:
            d = d
        else:
            return False

```

```
        r = r * 10 + d
        n //= 10
    return r == o
```

	Test	Expected	Got	
✔	print(Strobogrammatic(69))	True	True	✔
✔	print(Strobogrammatic(88))	True	True	✔
✔	print(Strobogrammatic(962))	False	False	✔
✔	print(Strobogrammatic(66))	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Thursday, 20 August 2026, 9:09 PM
State	Finished
Completed on	Thursday, 20 August 2026, 9:13 PM
Time taken	4 mins 6 secs

Question 1

Complete Marked out of 1.00

A function may return multiple values using _____.

- a. Tuple
- b. String
- c. List
- d. Dictionary

Question 2 | Complete Marked out of 1.00

Write the output of : print(max([1, 2, 3, 4], [4, 5, 6], [7]))

- a. [4, 5, 6]
- b. 7
- c. [1, 2, 3, 4]
- d. [7]

Question 3 | Complete Marked out of 1.00

Write the output of : print(min(tuple("computer")))

- a. o
- b. c
- c. u
- d. t

Question 4 | Complete Marked out of 1.00

What is the output of the following display() function call?

```
def display(**kwargs):
    for i in kwargs:
        print(i)
display(emp="Kelly", salary=9000)
```

a. Kelly
9000

b. emp
salary

c. ('emp', 'Kelly')
('salary', 9000)

d. TypeError

Question 5 | Complete Marked out of 1.00

The part of the program where a variable is accessible is known as the _____ of that variable

- a. none of the mentioned
- b. module
- c. scope
- d. part

Question 6 | Complete Marked out of 1.00

The function can be called in the program by writing function name followed by _____.

- a. ( )
- b. None of the mentioned
- c. [ ]
- d. { }

Question 7 | Complete Marked out of 1.00

Which of the following statement is a function call?

- a. call sum( )
- b. sum( )
- c. def sum( )
- d. function sum( )

Question 8 | Complete Marked out of 1.00

Which one of the following is the correct way of calling a function?

- a. function_name()
- b. function function_name()
- c. call function_name()
- d. ret function_name()

Question 9 | Complete Marked out of 1.00

Which of the following is not the type of function argument?

- a. Required argument
- b. default argument
- c. initial argument
- d. Keyword argument

Question 10 | Complete Marked out of 1.00

Which of the following items are present in the function header?

- a. return value
- b. A. function name
- c. Both A and B
- d. B. parameter list

Question 11 | Complete Marked out of 1.00

Which module is to be imported for using randint( ) function?

- a. random
- b. randomrange
- c. randrange
- d. rand

Question 12 | Complete Marked out of 1.00

cal(n1) : What is n1?

- a. None of the mentioned
- b. Argument
- c. Parameter
- d. Keyword

Question 13 | Complete Marked out of 1.00

6. Which of the following is not the built-in function?

a. tuple( )

b. print( )

c. dictionary( )

d. input( )

Question 14 | Complete Marked out of 1.00

Which of the following function definition header is wrong?

a. def sum(n1, n2, n = 3):

b. def scan(p1, p2 = 4, p3 = 5):

c. def div(p1=4, p2, p3):

d. def mul(p1, n1, m1):

Question 15 | Complete Marked out of 1.00

Python function always returns a value

Select one:

- True
- False

Started on	Monday, 31 August 2026, 9:25 PM
State	Finished
Completed on	Monday, 31 August 2026, 10:23 PM
Time taken	58 mins 14 secs
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Given a string s containing just the characters '(', ')', '{', '}', '[' and ']', determine if the input string is valid.

An input string is valid if:

Open brackets must be closed by the same type of brackets.

Open brackets must be closed in the correct order.

Constraints:

1 <= s.length <= 10^4

s consists of parentheses only '()[]{}'.

For example:

Test	Result
`print(ValidParenthesis("()"))`	`true`
`print(ValidParenthesis("()[]{}"))`	`true`
`print(ValidParenthesis("]"))`	`false`

Answer: (penalty regime: 0 %)

Reset answer

```
def ValidParenthesis(s):
    stack=[]
    for ch in s:
        if ch in "([{":
            stack.append(ch)
        else:
            if not stack:
```

```
                return "false"
            top=stack.pop()

            if(ch==')' and top!='(') or \
            (ch==']' and top!='[') or \
            (ch=='}' and top!='{'):
                return "false"
    if len(stack)==0:
        return "true"
    else:
        return "false"
```

	Test	Expected	Got	
✔	print(ValidParenthesis("()"))	true	true	✔
✔	print(ValidParenthesis("()[]{}"))	true	true	✔
✔	print(ValidParenthesis("(]"))	false	false	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Consider the below words as key words and check the given input is key word or not.

keywords: {break, case, continue, default, defer, else, for, func, goto, if, map, range, return, struct, type, var}

Input format:

Take string as an input from stdin.

Output format:

Print the word is key word or not.

Example Input:

break

Output:

break is a keyword

Example Input:

IF

Output:

IF is not a keyword

For example:

Input	Result
`break`	`break is a keyword`
`IF`	`IF is not a keyword`

Answer: (penalty regime: 0 %)

```
keywords = {"break","case","continue","default","defer",
    "else","for","func","goto","if","map","range",
    "return","return","struct","type","var"}
word=input()

if word in keywords:
    print(word,"is a keyword")
else:
    print(word,"is not a keyword")
```

	Input	Expected	Got	
✔	break	break is a keyword	break is a keyword	✔
✔	IF	IF is not a keyword	IF is not a keyword	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Given a string, determine if it is a palindrome, considering only alphanumeric characters and ignoring cases.

Note: For the purpose of this problem, we define empty string as valid palindrome.

Example 1:

```
Input:
A man, a plan, a canal: Panama

Output:
1
```

Example 2:

```
Input:
race a car

Output:
0
```

Constraints:

- `s` consists only of printable ASCII characters.

Answer: (penalty regime: 0 %)

```
def isPalindrome(s):
    s="".join(ch.lower() for ch in s if ch.isalnum())
    return 1 if s==s[::-1] else 0
s=input()
print(isPalindrome(s))
```

	Input	Expected	Got	
✔	A man, a plan, a canal: Panama	1	1	✔
✔	race a car	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Find if a String2 is substring of String1. If it is, return the index of the first occurrence. else return -1.

Sample Input 1

thistest123string

123

Sample Output 1

8

Answer: (penalty regime: 0 %)

```
s1=input()
s2=input()
print(s1.find(s2))
```

	Input	Expected	Got	
✔	thistest123string 123	8	8	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

The program must accept **N** series of keystrokes as string values as the input. The character **^** represents undo action to clear the last entered keystroke. The program must print the string typed after applying the undo operations as the output. If there are no characters in the string then print **-1** as the output.

Boundary Condition(s):

1 <= N <= 100
1 <= Length of each string <= 100

Input Format:

The first line contains the integer N.
The next N lines contain a string on each line.

Output Format:

The first N lines contain the string after applying the undo operations.

Example Input/Output 1:

Input:

3

Hey ^ goooo^^glee^

lucke^y ^charr^ms

ora^^nge^^^^

Output:

Hey google

luckycharms

-1

Answer: (penalty regime: 0 %)

```
n=int(input())
for _ in range(n):
    s=input()
    stack=[]

    for ch in s:
        if ch=='^':
            if stack:
                stack.pop()
        else:
            stack.append(ch)
    if stack:
        print("".join(stack))
    else:
        print(-1)
```

	Input	Expected	Got	
✔	3 Hey ^ goooo^^glee^ lucke^y ^charr^ms ora^^nge^^^^	Hey google luckycharms -1	Hey google luckycharms -1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Assume that the given string has enough memory.

Don't use any extra space(IN-PLACE)

Sample Input 1

a2b4c6

Sample Output 1

aabbbbccccccc

Answer: (penalty regime: 0 %)

```
s=input()
i=0
while i<len(s):
    ch=s[i]
    i+=1
    num=""
    while i<len(s) and s[i].isdigit():
        num += s[i]
        i+=1
    print(ch*int(num),end="")
```

	Input	Expected	Got	
✔	a2b4c6	aabbbbccccccc	aabbbbccccccc	✔
✔	a12b3d4	aaaaaaaaaaaabbbddddd	aaaaaaaaaaaabbbddddd	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Given a string S which is of the format USERNAME@DOMAIN.EXTENSION, the program must print the EXTENSION, DOMAIN, USERNAME in the reverse order.

Input Format:

The first line contains S.

Output Format:

The first line contains EXTENSION.
The second line contains DOMAIN.
The third line contains USERNAME.

Boundary Condition:

1 <= Length of S <= 100

Example Input/Output 1:

Input:

abcd@gmail.com

Output:

com
gmail
abcd

For example:

Input	Result
arvijayakumar@rajalakshmi.edu.in	edu.in rajalakshmi arvijayakumar

Answer: (penalty regime: 0 %)

```
s=input()
username,rest=s.split("@")
domain,extension=rest.split(".",1)

print(extension)
print(domain)
print(username)
```

	Input	Expected	Got	
✔	abcd@gmail.com	com gmail abcd	com gmail abcd	✔
✔	arvijayakumar@rajalakshmi.edu.in	edu.in rajalakshmi arvijayakumar	edu.in rajalakshmi arvijayakumar	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Given a **non-empty** string s and an abbreviation abbr, return whether the string matches with the given abbreviation.

A string such as "word" contains only the following valid abbreviations:

["word", "1ord", "w1rd", "wo1d", "wor1", "2rd", "w2d", "wo2", "1o1d", "1or1", "w1r1", "1o2", "2r1", "3d", "w3", "4"]

Notice that only the above abbreviations are valid abbreviations of the string "word". Any other string is not a valid abbreviation of "word".

Note:

Assume s contains only lowercase letters and abbr contains only lowercase letters and digits.

Example 1:

Input

internationalization

i12iz4n

Output

true

Explanation

Given **s** = "internationalization", **abbr** = "i12iz4n":

Return true.

Example 2:

Input

apple

a2e

Output

false

Explanation

Given **s** = "apple", **abbr** = "a2e":

Return false.

Answer: (penalty regime: 0 %)

```
def validAbbreviation(s,abbr):
    i=0
    j=0
    while i<len(s) and j<len(abbr):
        if abbr[j].isdigit():
            if abbr[j]=='0':
                return False

            num=0
            while j<len(abbr) and abbr[j].isdigit():
                num=num*10+int(abbr[j])
                j+=1
            i+=num
        else:
            if i >= len(s) or s[i] != abbr[j]:
               return False
            i+=1
            j+=1
    return i == len(s) and j == len(abbr)
s=input()
abbr=input()
print(str(validAbbreviation(s,abbr)).lower())
```

	Input	Expected	Got	
✔	`internationalization` `i12iz4n`	`true`	`true`	✔
✔	`apple` `a2e`	`false`	`false`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Write a Python program to get one string and reverses a string. The input string is given as an array of characters `char[]`.

You may assume all the characters consist of printable ascii characters.

Example 1:

```
Input:
hello
Output:
olleh
```

Example 2:

```
Input:
Hannah
Output:
hannaH
```

Answer: (penalty regime: 0 %)

```
1 s=input()
2 print(s[::-1])
```

	Input	Expected	Got	
✔	hello	olleh	olleh	✔
✔	Hannah	hannaH	hannaH	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

A pangram is a sentence where every letter of the English alphabet appears at least once.

Given a string sentence containing only lowercase English letters, return true if sentence is a pangram, or false otherwise.

Example 1:

Input:

thequickbrownfoxjumpsoverthelazydog

Output:

true

Explanation: sentence contains at least one of every letter of the English alphabet.

Example 2:

Input:

arvijayakumar

Output: false

Constraints:

1 <= sentence.length <= 1000

sentence consists of lowercase English letters.

For example:

Test	Result
`print(checkPangram('thequickbrownfoxjumpsoverthelazydog'))`	`true`
`print(checkPangram('arvijayakumar'))`	`false`

Answer: (penalty regime: 0 %)

Reset answer

```
def checkPangram(s):
    if len(set(s)) == 26:
        return "true"
    else:
        return "false"
```

	Test	Expected	Got	
✔	`print(checkPangram('thequickbrownfoxjumpsoverthelazydog'))`	`true`	`true`	✔
✔	`print(checkPangram('arvijayakumar'))`	`false`	`false`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Wednesday, 26 August 2026, 2:04 PM
State	Finished
Completed on	Wednesday, 26 August 2026, 2:08 PM
Time taken	4 mins 20 secs
Marks	13.00/15.00
Grade	**86.67** out of 100.00

Question 1 | Incorrect Mark 0.00 out of 1.00

What is the output of “hello”+1+2+3 ?

a. hello

b. hello6

c. Error

d. hello123 ✖

Your answer is incorrect.

The correct answer is:

Error

Question 2 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
line =  "What will have so will"
L = line.split('a')
for i in L:
    print(i, end=' ')
```

a. ['Wh', 't will h', 've so will']

b. What will have so will

c. Wh t will h ve so will ✔ split() will use 'a' as the delimiter. It'll create partition at 'a', thus split() return an array L, which is in ['Wh', 't will h', 've so will']. For loop will print the elements of the list.

d. ['What', 'will', 'have', 'so', 'will']

Your answer is correct.

The correct answer is:
Wh t will h ve so will

Question 3 | Correct Mark 1.00 out of 1.00

What arithmetic operators cannot be used with strings in Python?

a. All of the mentioned

b. - ✔

c. +

d. *

Your answer is correct.

The correct answer is:

-

Question 4 | Correct Mark 1.00 out of 1.00

Which of the following will result in an error?

```
str1="python"
```

a. print(str1[2])

b. print(str1[0:9])

c. str1[1]="x" ✔ Strings are immutable. So,new values cannot be assigned at any index position in a string

d. None of the mentioned

Your answer is correct.

The correct answer is:

str1[1]="x"

Question 5 | Incorrect Mark 0.00 out of 1.00

What is the output of the following Code?

```
str1="arvijayakumar"
print(str1[::-1])
```

Answer: ramukayakivra ✖

The correct answer is: ramukayajivra

Question 6 | Correct Mark 1.00 out of 1.00

Strings are immutable?

Select one:

- True ✔
- False

The correct answer is 'True'.

Question 7 | Correct Mark 1.00 out of 1.00

What is the index value of ‘i’ in string “Learning”

a. 6

b. 5 ✔

c. 3

d. 7

Your answer is correct.

The correct answer is:

5

Question 8 | Correct Mark 1.00 out of 1.00

What is the output of the following?

```
my_string = 'arvijayakumar'

for i in range(len(my_string)):

        my_string[i].upper()

print (my_string)
```

a. ARVIJAYAKUMAR

b. None

c. arvijayakumar ✔

d. Error

Your answer is correct.

The correct answer is:

arvijayakumar

Question 9 | Correct Mark 1.00 out of 1.00

Which of the following are valid string manipulation functions in Python?

a. count()

b. upper()

c. strip()

d. All of the mentioned ✔ All of the above are valid string manipulation functions in Python.

Your answer is correct.

The correct answer is:

All of the mentioned

Question 10 | Correct Mark 1.00 out of 1.00

What will be the output of the following code?

```
a = '2'
b = '1'
print(a+b)
```

Answer: 21 ✔

The correct answer is: 21

Question 11 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
str1="123456789"
print(str1[2:6:2])
```

Answer: 35 ✔

The correct answer is: 35

Question 12 | Correct Mark 1.00 out of 1.00

What will be the output of below Python code?

```
str1="Application"
str2=str1.replace('a','A')
print(str2)
```

Answer: Application ✔

replace() function in string is used here to replace all the existing "a" by "A" in the given string.

The correct answer is: ApplicAtion

Question 13 | Correct Mark 1.00 out of 1.00

Which of the following is False?

a. capitalize() function in string is used to return a string by converting the whole given string into uppercase. ✔ capitalize() function in string gives the output by converting only the first character of the string into uppercase and rest characters into lowercase.However, upper() function is used to return the whole string into uppercase.

b. lower() function in string is used to return a string by converting the whole given string into lowercase.

c. String is immutable.

d. None of the mentioned

Your answer is correct.

The correct answer is:
capitalize() function in string is used to return a string by converting the whole given string into uppercase.

Question 14 | Correct Mark 1.00 out of 1.00

```
Python considered the character enclosed in triple quotes as String.
```

Select one:

- True ✔
- False

The correct answer is 'True'.

Question 15 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
print(ord('D'))
```

Answer: 68 ✔

The correct answer is: 68

Started on	Thursday, 24 September 2026, 4:22 PM
State	Finished
Completed on	Wednesday, 30 September 2026, 11:28 PM
Time taken	6 days 7 hours
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Given an array A of sorted integers and another non negative integer k, find if there exists 2 indices i and j such that A[i] - A[j] = k, i != j.

Input Format

1. First line is number of test cases T. Following T lines contain:
2. N, followed by N integers of the array
3. The non-negative integer k

Output format

Print 1 if such a pair exists and 0 if it doesn't.

Example

Input

1

3

1

3

5

4

Output:

1

Input

1

3

1

3

5

99

Output

0

For example:

Input	Result
1 3 1 3 5 4	1
1 3 1 3 5 99	0

Answer: (penalty regime: 0 %)

```
T = int(input())
for   in range (T):
```

```
n = int(input())
a = []
for i in range(n):
    a.append(int(input()))
k=int(input())
a.sort()
i=0
j=1
found=0
while i<n and j<n:

    if i==j:
        j+=1
    elif a[j] - a[i] == k:
        found=1
        break
    elif a[j]-a[i]<k:
        j+=1
    else:
        i+=1
print(found)

```

	Input	Expected	Got	
✔	1 3 1 3 5 4	1	1	✔

	Input	Expected	Got	
✔	1 3 1 3 5 99	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given an integer n, return an list of length n + 1 such that for each i (0 <= i <= n), ans[i] is the number of 1's in the binary representation of i.

Example:

```
Input: n = 2
Output: [0,1,1]
Explanation:
0 --> 0
1 --> 1
2 --> 10
```

Example2:

```
Input: n = 5
Output: [0,1,1,2,1,2]
Explanation:
0 --> 0
1 --> 1
2 --> 10
3 --> 11
4 --> 100
5 --> 101
```

Note: Complete the given function alone

For example:

Test	Result
`print(CountingBits(5))`	`[0, 1, 1, 2, 1, 2]`

Answer: (penalty regime: 0 %)

Reset answer

```
def CountingBits(n):
    ans=[0]*(n+1)
    for i in range(1,n+1):
        ans[i]=ans[i//2] + (i%2)
    return ans
```

	Test	Expected	Got	
✔	`print(CountingBits(2))`	`[0, 1, 1]`	`[0, 1, 1]`	✔
✔	`print(CountingBits(5))`	`[0, 1, 1, 2, 1, 2]`	`[0, 1, 1, 2, 1, 2]`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Assume you have an array of length ***n*** initialized with all **0**'s and are given ***k*** update operations.

Each operation is represented as a triplet: **[startIndex, endIndex, inc]** which increments each element of subarray **A[startIndex ... endIndex]** (startIndex and endIndex inclusive) with **inc**.

Return the modified array after all ***k*** operations were executed.

Example:

Input:

5

3

1 3 2

2 4 3

0 2 -2

Output:

-2 0 3 5 3

Explanation:

Initial state:

length = 5, updates = [[1,3,2],[2,4,3],[0,2,-2]]

[0,0,0,0,0]

After applying operation [1,3,2]:

[0,2,2,2,0]

After applying operation [2,4,3]:

[0,2,5,5,3]

After applying operation [0,2,-2]:

[-2,0,3,5,5,3]

Answer: (penalty regime: 0 %)

```
n=int(input())
k=int(input())
diff=[0]*(n+1)
for _ in range(k):
    start,end,inc=map(int,input().split())
    diff[start] += inc
    diff[end+1] -= inc
current = 0
ans=[]
for i in range(n):
    current += diff[i]
    ans.append(current)
print(*ans)
```

	Input	Expected	Got	
✔	5 3 1 3 2 2 4 3 0 2 -2	-2 0 3 5 3	-2 0 3 5 3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Given two arrays of positive integers, for each element in the second array, find the total number of elements in the first array which are *less than or equal to* that element. Store the values determined in an array.

For example, if the first array is *[1, 2, 3]* and the second array is *[2, 4]*, then there are *2* elements in the first array *less than or equal to 2*. There are *3* elements in the first array which are *less than or equal to 4*. We can store these answers in an array, *answer = [2, 3]*.

Program Description

The program must return an array of *m* positive integers, one *for each maxes[i]* representing the total number of elements *nums[j]* satisfying *nums[j] ≤ maxes[i]* where *0 ≤ j < n* and *0 ≤ i < m,* in the given order.

The program has the following:

nums[nums[0],...nums[n-1]]: first array of positive integers

maxes[maxes[0],...maxes[n-1]]: second array of positive integers

Constraints

- $2 \le n, m \le 10^5$
- $1 \le nums[j] \le 10^9$, where $0 \le j < n$.
- $1 \le maxes[i] \le 10^9$, where $0 \le i < m$.

Input Format For Custom Testing

Input from stdin will be processed as follows and passed to the program.

The first line contains an integer *n*, the number of elements in *nums*.

The next *n* lines each contain an integer describing *nums[j]* where *0 ≤ j < n.*

The next line contains an integer *m*, the number of elements in *maxes*.

The next *m* lines each contain an integer describing *maxes[i]* where *0 ≤ i < m.*

Sample Case 0

Sample Input 0

```
4
1
4
2
4
2
3
5
```

Sample Output 0

```
2
4
```

Explanation 0

We are given *n = 4*, *nums = [1, 4, 2, 4]*, *m = 2*, and *maxes = [3, 5]*.

1. For *maxes[0] = 3*, we have *2* elements in *nums* (*nums[0] = 1* and *nums[2] = 2*) that are ≤ *maxes[0]*.
2. For *maxes[1] = 5*, we have *4* elements in *nums* (*nums[0] = 1*, *nums[1] = 4*, *nums[2] = 2*, and *nums[3] = 4*) that are ≤ *maxes[1]*.

Thus, the program returns the array *[2, 4]* as the answer.

Sample Case 1

Sample Input 1

```
5
2
10
5
4
8
4
3
1
7
8
```

Sample Output 1

```
1
0
3
4
```

Explanation 1

We are given, *n = 5*, *nums = [2, 10, 5, 4, 8]*, *m = 4*, and *maxes = [3, 1, 7, 8]*.

1. For *maxes[0] = 3*, we have *1* element in *nums* (*nums[0] = 2*) that is ≤ *maxes[0]*.
2. For *maxes[1] = 1*, there are *0* elements in *nums* that are ≤ *maxes[1]*.
3. For *maxes[2] = 7*, we have *3* elements in *nums* (*nums[0] = 2*, *nums[2] = 5*, and *nums[3] = 4*) that are ≤ *maxes[2]*.
4. For *maxes[3] = 8*, we have *4* elements in *nums* (*nums[0] = 2*, *nums[2] = 5*, *nums[3] = 4*, and *nums[4] = 8*) that are ≤ *maxes[3]*.

Thus, the program returns the array *[1, 0, 3, 4]* as the answer.

Answer: (penalty regime: 0 %)

```
from bisect import bisect_right
n=int(input())
nums=[]
for i in range(n):
    nums.append(int(input()))
nums.sort()
m=int(input())
for i in range(m):
    x=int(input())
    print(bisect_right(nums,x))
```

	Input	Expected	Got	
✔	4 1 4 2 4 2 3 5	2 4	2 4	✔
✔	5 2 10 5 4 8 4 3 1 7 8	1 0 3 4	1 0 3 4	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

An array is monotonic if it is either **monotone increasing** or **monotone decreasing**.

An array A is monotone increasing if for all i <= j, **A[i] <= A[j]**. An array A is monotone decreasing if for all i <= j, **A[i] >= A[j]**.

Write a program if n array is monotonic or not. Print "True" if is monotonic or "False" if it is not. Array can be monotone increasing or decreasing.

Input Format:

First line n-get number of elements

Next n Lines is the array of elements

Output Format:

True ,if array is monotone increasing or decreasing.

otherwise False is printed

Sample Input1

4

5

6

7

8

Sample Output1

True

Sample Input2

4

6

5

4

3

Sample Output2

True

Sample Input 3

4

6

7

8

7

Sample Output3

False

For example:

Input	Result
4 6 5 4 3	True

Answer: (penalty regime: 0 %)

```
1 n=int(input())
2 a=[]
```

```
a = []
for i in range(n):
    a.append(int(input()))
increasing = True
decreasing = True
for i in range(n-1):
    if a[i]>a[i+1]:
        increasing = False
    if a[i]<a[i+1]:
        decreasing = False
if increasing or decreasing:
    print("True")
else:
    print("False")
```

	Input	Expected	Got	
✔	4 6 5 4 3	True	True	✔

	Input	Expected	Got	
✔	4 3 5 7 4	False	False	✔
✔	4 1 6 9 2	False	False	✔
✔	4 9 6 4 2	True	True	✔
✔	3 2 1 4	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Given a matrix mat where every row is sorted in **strictly increasing** order, return the **smallest common element** in all rows.

If there is no common element, return -1.

Example 1:

Input:

4 5

1 2 3 4 5

2 4 5 8 10

3 5 7 9 11

1 3 5 7 9

Output:

5

Constraints:

- 1 <= mat.length, mat[i].length <= 500

- 1 <= mat[i][j] <= 10^4
- mat[i] is sorted in strictly increasing order.

Answer: (penalty regime: 0 %)

```
n,m=map(int,input().split())
a=[]
for i in range(n):
    a.append(list(map(int,input().split())))
for x in a[0]:
    if x in a[1] and x in a[2] and x in a[3]:
        print(x)
        break
else:
    print(-1)
```

	Input	Expected	Got	
✔	4 5 1 2 3 4 5 2 4 5 8 10 3 5 7 9 11 1 3 5 7 9	5	5	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Program to print all the distinct elements in an array. Distinct elements are nothing but the unique (non-duplicate) elements present in the given array.

Input Format:

First line take an Integer input from stdin which is array length n.

Second line take n Integers which is inputs of array.

Output Format:

Print the Distinct Elements in Array in single line which is space Separated

Example Input:

5

1

2

2

3

4

Output:

1 2 3 4

Example Input:

6

1

1

2

2

3

3

Output:

1 2 3

For example:

Input	Result
5 1 2 2 3 4	1 2 3 4
6 1 1 2 2 3 3	1 2 3

Answer: (penalty regime: 0 %)

```
n=int(input())
a=[]
for i in range(n):
    a.append(int(input()))
result = []
for i in a:
    if i not in result:
        result.append(i)
print(*result)
```

	Input	Expected	Got	
✔	5 1 2 2 3 4	1 2 3 4	1 2 3 4	✔

	Input	Expected	Got	
✔	6 1 1 2 2 3 3	1 2 3	1 2 3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Determine the factors of a number (i.e., all positive integer values that evenly divide into a number) and then return the p^{th} element of the list, sorted ascending. If there is no p^{th} element, return 0.

Example

n = 20

p = 3

The factors of 20 in ascending order are {1, 2, 4, 5, 10, 20}. Using 1-based indexing, if p = 3, then 4 is returned. If p > 6, 0 would be returned.

Constraints

$1 \le n \le 10^{15}$

$1 \le p \le 10^{9}$

The first line contains an integer n, the number to factor.

The second line contains an integer p, the 1-based index of the factor to return.

Sample Case 0

Sample Input 0

10

3

Sample Output 0

5

Explanation 0

Factoring n = 10 results in {1, 2, 5, 10}. Return the $p = 3^{rd}$ factor, 5, as the answer.

Sample Case 1

Sample Input 1

10

5

Sample Output 1

0

Explanation 1

Factoring n = 10 results in {1, 2, 5, 10}. There are only 4 factors and p = 5, therefore 0 is returned as the answer.

Sample Case 2

Sample Input 2

1

1

Sample Output 2

1

Explanation 2

Factoring n = 1 results in {1}. The p = 1st factor of 1 is returned as the answer.

For example:

Input	Result
10 3	5
10 5	0

Input	Result
1 1	1

Answer: (penalty regime: 0 %)

```
n = int(input())
p = int(input())
small = []
large = []
i=1
while i*i <= n:
    if n%i == 0:
        small.append(i)
        if i!=n//i:
            large.append(n//i)
    i += 1
factors = small + large[::-1]
if p <= len(factors):
    print(factors[p-1])
else:
    print(0)
```

	Input	Expected	Got	
✔	10 3	5	5	✔
✔	10 5	0	0	✔
✔	1 1	1	1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Complete the program to count frequency of each element of an array. Frequency of a particular element will be printed once.

Sample Test Cases

Test Case 1

Input

7
23
45
23
56
45
23
40

Output

23 occurs 3 times
45 occurs 2 times
56 occurs 1 times
40 occurs 1 times

Answer: (penalty regime: 0 %)

```
n=int(input())
a=[]
for i in range (n):
    a.append(int(input()))
visited=[]
```

```
for i in a:
    if i not in visited:
        count=0
        for j in a:
            if i==j:
                count+=1
        print(i,"occurs",count,"times")
        visited.append(i)
```

	Input	Expected	Got	
✔	7 23 45 23 56 45 23 40	23 occurs 3 times 45 occurs 2 times 56 occurs 1 times 40 occurs 1 times	23 occurs 3 times 45 occurs 2 times 56 occurs 1 times 40 occurs 1 times	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

The program must accept **N** integers and an integer **K** as the input. The program must print every K integers in descending order as the output.

-

Note: If **N % K != 0**, then sort the final N%K integers in descending order.

Boundary Condition(s):

1 <= N <= 10^4
-99999 <= Array Element Value <= 99999

Input Format:

The first line contains the values of N and K separated by a space.
The second line contains N integers separated by space(s).

Output Format:

The first line contains N integers.

Example Input/Output 1:

Input:

7 3

48 541 23 68 13 41 6

Output:

541 48 23 68 41 13 6

Explanation:

The first three integers are 48 541 23, after sorting in descending order the integers are **541 48 23**.

The second three integers are 68 13 41, after sorting in descending order the integers are **68 41 13**.

The last integer is **6**.

The integers are **541 48 23 68 41 13 6**

Hence the output is **541 48 23 68 41 13 6**.

Answer: (penalty regime: 0 %)

```
n,k=map(int,input().split())
a=list(map(int,input().split()))
for i in range(0,n,k):
    b=a[i:i+k]
    b.sort(reverse=True)
    print(*b,end=" ")
```

	Input	Expected	Got	
✔	7 3 48 541 23 68 13 41 6	541 48 23 68 41 13 6	541 48 23 68 41 13 6	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Wednesday, 30 September 2026, 11:30 PM
State	Finished
Completed on	Wednesday, 30 September 2026, 11:35 PM
Time taken	4 mins 49 secs

Question 1 | Complete Marked out of 1.00

What will be the data type of m after the following statement?
m = [90, 'A', 115, 'B', 250]

a. String

b. Dictionary

c. List

d. Tuple

Question 2 | Complete Marked out of 1.00

Find the output?

```
list1 = [1, 2, 3, 4,1,2,3]
list1.reverse()
print(list1)
```

a. [1, 1, 2, 2, 3, 3, 4]

b. [3, 2, 1, 4, 3, 2, 1]

c. [4, 3, 3, 2, 2, 1, 1]

d. [1, 2, 3, 4, 1, 2, 3]

Question 3 | Complete Marked out of 1.00

Find the output?

```
list3=[]
list1 ='REC_CSE_ECE'
list2= list1.split('_')
for i in list2:
    list3.extend(i)
print(len(list3))
```

a. 11

b. 9

c. 12

d. 3

Question 4 | Complete Marked out of 1.00

```
list1 = [1, 2, 3, 4,1,2,3,1]
list2 = list1.copy()
list1.clear()
print(list2)
```

Find the output?

- a. [ ]
- b. [1, 1, 2, 2, 3, 3, 4,]
- c. [1, 2, 3, 4, 1, 2, 3, 1]
- d. [1, 2, 3, 4]

Question 5 | Complete Marked out of 1.00

Suppose list1 is [3, 4, 5, 20, 5], what is list1.index(5)?

- a. -3
- b. 1
- c. 4

Question 6 | Complete Marked out of 1.00

What is the output of the following code?

```
list1 = ["hi", "we", "are", "the", "elements", "in", "a", "list"]
for i in range(4):
    print(list1[i])
```

a. hi we are

b. hi we are the

c. hi we are the elements

d. hi we are the elements in a list

Question 7 | Complete Marked out of 1.00

What is the output when we execute list(“welcome”)

a. a) [‘w’, ‘e’, ‘l’, ‘c’, ‘o’, 'm', 'e']

b. b) [‘welcome’]

c. c)['emoclew']

Question 8 | Complete Marked out of 1.00

Find the Output?

list1 = [1, 2, 3, 4,1,2,3,1]

print(list1[5:20])

a. [1, 2, 3, 4,1,2,3,1]

b. [1, 2, 3, 1]

c. [2, 3, 1]

d. Error

Question 9 | Complete Marked out of 1.00

Suppose list1 is [1, 3, 2], What is list1 * 2?

a. [2, 6, 4]

b. [1, 3, 2, 1, 3,2]

c. [1, 3, 2, 1, 3]

Question 10 | Complete Marked out of 1.00

What will be the output after the following statements?

```
m = [50, 25, 65, 0, 99]
n = max(m)
print(n)
```

a. 0

b. (50, 25, 65, 0, 99)

c. 25

d. 99

Started on	Thursday, 1 October 2026, 4:06 PM
State	Finished
Completed on	Saturday, 3 October 2026, 8:11 AM
Time taken	1 day 16 hours
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Given an array of integers `nums` containing `n + 1` integers where each integer is in the range `[1, n]` inclusive.There is only **one repeated number** in `nums`, return *this repeated number*. Solve the problem using set.

Example 1:

```
Input: nums = [1,3,4,2,2]
```

```
Output: 2
```

Example 2:

```
Input: nums = [3,1,3,4,2]
```

```
Output: 3
```

For example:

Input	Result
1 3 4 4 2	4

Answer: (penalty regime: 0 %)

```
n=input().split()
seen = set()
for num in n:
    if num in seen:
        print(num)
        break
    seen.add(num)
```

	Input	Expected	Got	
✔	1 3 4 4 2	4	4	✔
✔	1 2 2 3 4 5 6 7	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

The **DNA sequence** is composed of a series of nucleotides abbreviated as `'A'`, `'C'`, `'G'`, and `'T'`.

- For example, `"ACGAATTCCG"` is a **DNA sequence**.

When studying **DNA**, it is useful to identify repeated sequences within the DNA.

Given a string `s` that represents a **DNA sequence**, return all the **`10`-letter-long** sequences (substrings) that occur more than once in a DNA molecule. You may return the answer in **any order**.

Example 1:

```
Input: s = "AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT"
Output: ["AAAAACCCCC","CCCCCAAAAA"]
```

Example 2:

```
Input: s = "AAAAAAAAAAAAA"
Output: ["AAAAAAAAAA"]
```

For example:

Input	Result
AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT	AAAAACCCCC CCCCCAAAAA

Answer: (penalty regime: 0 %)

```
s=input()
seen = set()
repeated= set()

for i in range(len(s)-9):
    seq= s[i:i+10]

    if seq in seen:
        repeated.add(seq)
    else:
        seen.add(seq)

for seq in repeated:
    print(seq)
```

	Input	Expected	Got	
✔	AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT	AAAAACCCCC CCCCCAAAAA	AAAAACCCCC CCCCCAAAAA	✔
✔	AAAAAAAAAAAAA	AAAAAAAAAA	AAAAAAAAAA	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Given an array of strings `words`, return *the words that can be typed using letters of the alphabet on only one row of American keyboard like the image below*.

In the **American keyboard**:

- the first row consists of the characters `"qwertyuiop"`,
- the second row consists of the characters `"asdfghjkl"`, and
- the third row consists of the characters `"zxcvbnm"`.

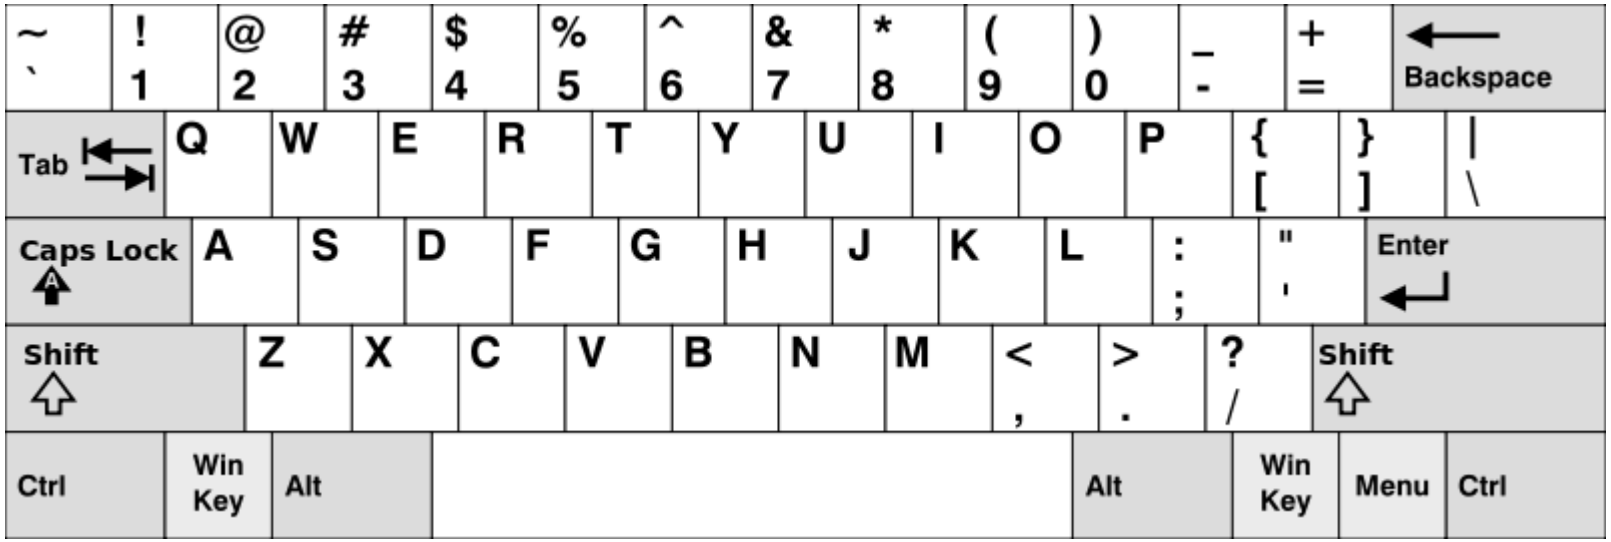

Example 1:

```
Input: words = ["Hello","Alaska","Dad","Peace"]
Output: ["Alaska","Dad"]
```

Example 2:

```
Input: words = ["omk"]
Output: []
```

Example 3:

```
Input: words = ["adsdf","sfd"]
Output: ["adsdf","sfd"]
```

For example:

Input	Result
4 Hello Alaska Dad Peace	Alaska Dad
2 adsfd afd	adsfd afd

Answer: (penalty regime: 0 %)

```
n=int(input())
words=[input().strip()for _ in range(n)]

rows = [
    set("qwertyuiop"),
    set("asdfghjkl"),
    set("zxcvbnm")
]
```

```
]
result = []

for word in words:
    letters = set(word.lower())

    for row in rows:
        if letters.issubset(row):
            result.append(word)
            break

if result:
    for word in result:
        print(word)
else:
    print("No words")
```

	Input	Expected	Got	
✔	4 Hello Alaska Dad Peace	Alaska Dad	Alaska Dad	✔
✔	1 omk	No words	No words	✔
✔	2 adsfd afd	adsfd afd	adsfd afd	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Check if a set is a subset of another set.

Example:

Sample Input1:

mango apple

mango orange

mango

output1:

yes

set3 is subset of set1 and set2

```
input2:
```

```
mango orange
```

```
banana orange
```

```
grapes
```

```
output2:
```

no

For example:

Test	Input	Result
1	mango apple mango orange mango	yes set3 is subset of set1 and set2
2	mango orange banana orange grapes	No

Answer: (penalty regime: 0 %)

```
set1 = set(input().split())
set2 = set(input().split())
set3 = set(input().split())

if set3.issubset(set1) and set3.issubset(set2):
    print("yes")
    print("set3 is subset of set1 and set2")
else:
    print("No")

```

	Test	Input	Expected	Got	
✔	1	mango apple mango orange mango	yes set3 is subset of set1 and set2	yes set3 is subset of set1 and set2	✔
✔	2	mango orange banana orange grapes	No	No	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Coders here is a simple task for you, Given string str. Your task is to check whether it is a binary string or not by using python set.

Examples:

Input: str = "01010101010"

Output: Yes

Input: str = "REC101"

Output: No

For example:

Input	Result
01010101010	Yes
010101 10101	No

Answer: (penalty regime: 0 %)

```
s = input()
if set(s) <= {'0','1'}:
    print("Yes")
else:
    print("No")
```

	Input	Expected	Got	
✔	01010101010	Yes	Yes	✔
✔	REC123	No	No	✔
✔	010101 10101	No	No	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Program to print all the distinct elements in an array. Distinct elements are nothing but the unique (non-duplicate) elements present in the given array.

Input Format:

First line take an Integer input from stdin which is array length n.

Second line take n Integers which is inputs of array.

Output Format:

Print the Distinct Elements in Array in single line which is space Separated

Example Input:

5

1 2 2 3 4

Output:

1 2 3 4

Example Input:

6

1 1 2 2 3 3

Output:

1 2 3

For example:

Input	Result
5 1 2 2 3 4	1 2 3 4

Answer: (penalty regime: 0 %)

```
n = int(input())
arr = []
for i in range(n):
    arr.append(int(input()))

result = []

for x in arr:
    if x not in result:
        result.append(x)

print(*result)

```

	Input	Expected	Got	
✔	5 1 2 2 3 4	1 2 3 4	1 2 3 4	✔
✔	6 1 1 2 2 3 3	1 2 3	1 2 3	✔
✔	5 11 22 11 22 11	11 22	11 22	✔

	Input	Expected	Got	
✔	10 1 2 3 4 5 1 2 3 4 5	1 2 3 4 5	1 2 3 4 5	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Given a tuple and a positive integer k, the task is to find the count of distinct pairs in the tuple whose sum is equal to **K**.

Examples:

> **Input:** t = (5, 6, 5, 7, 7, 8), K = 13
>
> **Output:** 2
>
> **Explanation:**
>
> Pairs with sum K(= 13) are {(5, 8), (6, 7), (6, 7)}.
>
> Therefore, distinct pairs with sum K(= 13) are { (5, 8), (6, 7) }.
>
> Therefore, the required output is 2.

For example:

Input	Result
1,2,1,2,5 3	1
1,2 0	0

Answer: (penalty regime: 0 %)

```
t=tuple(map(int,input().split(',')))
k=int(input())

pairs=set()

```

```
6
7 for i in range(len(t)):
8     for j in range(i+1,len(t)):
9         if t[i] + t[j] == k:
10            pairs.add(tuple(sorted((t[i], t[j]))))
11 print(len(pairs))
```

	Input	Expected	Got	
✔	5,6,5,7,7,8 13	2	2	✔
✔	1,2,1,2,5 3	1	1	✔
✔	1,2 0	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

There is a malfunctioning keyboard where some letter keys do not work. All other keys on the keyboard work properly.

Given a string text of words separated by a single space (no leading or trailing spaces) and a string brokenLetters of all distinct letter keys that are broken, return the number of words in text you can fully type using this keyboard.

Example 1:

Input: text = "hello world", brokenLetters = "ad"

Output:

1

Explanation: We cannot type "world" because the 'd' key is broken.

For example:

Input	Result
hello world ad	1
Faculty Upskilling in Python Programming ak	2

Answer: (penalty regime: 0 %)

```
text=input()
brokenLetters=input()

count = 0
for word in text.split():
```

```
for word in text.split():
    if all(ch.lower() not in brokenLetters for ch in word):
        count += 1
print(count)
```

	Input	Expected	Got	
✔	hello world ad	1	1	✔
✔	Welcome to REC e	1	1	✔
✔	Faculty Upskilling in Python Programming ak	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

You are given an integer tuple `nums` containing distinct numbers. Your task is to perform a sequence of operations on this tuple until it becomes empty. The operations are defined as follows:

1. If the first element of the tuple has the smallest value in the entire tuple, remove it.
2. Otherwise, move the first element to the end of the tuple.

You need to return an integer denoting the number of operations required to make the tuple empty.

Constraints

- The input tuple `nums` contains distinct integers.
- The operations must be performed using tuples and sets to maintain immutability and efficiency.
- Your function should accept the tuple `nums` as input and return the total number of operations as an integer.

Example:

Input: nums = (3, 4, -1)
Output: 5

Explanation:
Operation 1: [3, 4, -1] -> First element is not the smallest, move to the end -> [4, -1, 3]
Operation 2: [4, -1, 3] -> First element is not the smallest, move to the end -> [-1, 3, 4]
Operation 3: [-1, 3, 4] -> First element is the smallest, remove it -> [3, 4]
Operation 4: [3, 4] -> First element is the smallest, remove it -> [4]
Operation 5: [4] -> First element is the smallest, remove it -> []
Total operations: 5

For example:

Test	Result
`print(count_operations((3, 4, -1)))`	5

Answer: (penalty regime: 0 %)

Reset answer

```
def count_operations(nums: tuple) -> int:
    # Your implementation here
    nums = list(nums)
    count = 0

    while nums:
        if nums[0] == min(nums):
            nums.pop(0)
        else:
            nums.append(nums.pop(0))
        count += 1
    return count
```

	Test	Expected	Got	
✔	`print(count_operations((3, 4, -1)))`	5	5	✔
✔	`print(count_operations((1, 2, 3, 4, 5)))`	5	5	✔
✔	`print(count_operations((5, 4, 3, 2, 1)))`	15	15	✔
✔	`print(count_operations((42, )))`	1	1	✔
✔	`print(count_operations((-2, 3, -5, 4, 1)))`	11	11	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Write a program to eliminate the common elements in the given 2 arrays and print only the non-repeating

elements and the total number of such non-repeating elements.

Input Format:

The first line contains space-separated values, denoting the size of the two arrays in integer format respectively.

The next two lines contain the space-separated integer arrays to be compared.

Sample Input:

5 4

1 2 8 6 5

2 6 8 10

Sample Output:

1 5 10

3

Sample Input:

5 5

1 2 3 4 5

1 2 3 4 5

Sample Output:

NO SUCH ELEMENTS

For example:

Input	Result
5 4 1 2 8 6 5 2 6 8 10	1 5 10 3
5 5 1 2 3 4 5 1 2 3 4 5	NO SUCH ELEMENTS

Answer: (penalty regime: 0 %)

```
n,m = map(int,input().split())

a=list(map(int,input().split()))
b=list(map(int,input().split()))

result= []

for x in a:
    if x not in b:
        result.append(x)

for x in b:
    if x not in a:
        result.append(x)

if result:
    print(*result)
    print(len(result))
else:
    print("NO SUCH ELEMENTS")

```

	Input	Expected	Got	
✔	5 4 1 2 8 6 5 2 6 8 10	1 5 10 3	1 5 10 3	✔
✔	3 3 10 10 10 10 11 12	11 12 2	11 12 2	✔
✔	5 5 1 2 3 4 5 1 2 3 4 5	NO SUCH ELEMENTS	NO SUCH ELEMENTS	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Tuesday, 6 October 2026, 12:00 PM
State	Finished
Completed on	Wednesday, 7 October 2026, 9:37 PM
Time taken	1 day 9 hours
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Given a number, convert it into corresponding alphabet.

Input	Output
1	A
26	Z
27	AA
676	YZ

Input Format

Input is an integer

Output Format

Print the alphabets

Constraints

1 <= num <= 4294967295

Sample Input 1

26

Sample Output 1

Z

For example:

Test	Result
`print(excelNumber(26))`	`Z`

Answer: (penalty regime: 0 %)

Reset answer

```
def excelNumber(n):
    result = ""

    while n > 0:
        n -= 1
        result = chr(65 + (n % 26)) + result
        n //= 26
    return result

```

	Test	Expected	Got	
✔	`print(excelNumber(26))`	Z	Z	✔
✔	`print(excelNumber(27))`	AA	AA	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given an array of strings `words`, return *the words that can be typed using letters of the alphabet on only one row of American keyboard like the image below*.

In the **American keyboard**:

- the first row consists of the characters `"qwertyuiop"`,
- the second row consists of the characters `"asdfghjkl"`, and
- the third row consists of the characters `"zxcvbnm"`.

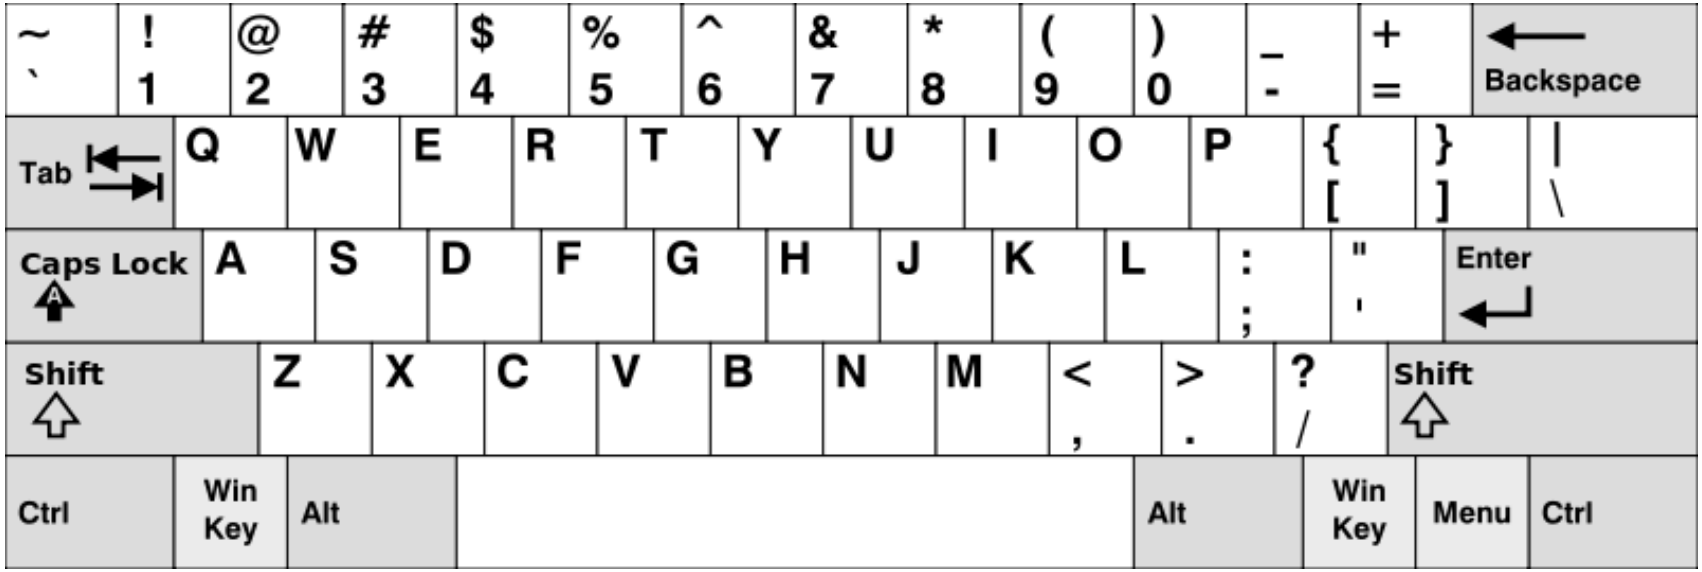

Example 1:

```
Input: words = ["Hello","Alaska","Dad","Peace"]
Output: ["Alaska","Dad"]
```

Example 2:

```
Input: words = ["omk"]
Output: []
```

Example 3:

```
Input: words = ["adsdf","sfd"]
Output: ["adsdf","sfd"]
```

For example:

Input	Result
4 Hello Alaska Dad Peace	Alaska Dad
2 adsfd afd	adsfd afd

Answer: (penalty regime: 0 %)

```
n = int(input())
words = [input() for _ in range(n)]

rows  = [set("qwertyuiop"),
set("asdfghjkl"),
```

```
set("zxcvbnm")
]
result = []

for word in words:
    letters = set(word.lower())

    for row in rows:
        if letters.issubset(row):
            result.append(word)
            break

if result:
    for word in result:
        print(word)
else:
    print("No words")
```

	Input	Expected	Got	
✔	4 Hello Alaska Dad Peace	Alaska Dad	Alaska Dad	✔
✔	1 omk	No words	No words	✔

	Input	Expected	Got	
✔	2 adsfd afd	adsfd afd	adsfd afd	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

The program must accept a string S which represents a series of keystrokes as the input. There are two special keystrokes denoted by "^z" for undo operation and "^y" for redo operation. The undo operation removes the last typed character and redo operations reverses the immediately done last undo operations. The program must accept the keystrokes and perform all the operations (undo and redo). Finally, the program must print the string after applying all the operations as the output.

Boundary Condition(s):

1 <= Length of string <= 1000

Input Format:

The first line contains the string S.

Output Format:

The first line contains the modified string.

Example Input/Output 1:

Input:

missel^z^z^z^ypell^z^z^yt

Output:

misspelt

Explanation:

The characters **missel** are followed by three undo operations which deletes last three characters.

So the string **missel** becomes **mis**.

The three undo operations are followed by one redo operation which reverses the last undo operation.

So the string **mis** becomes **miss**.

Then the characters pell are entered which are followed by two undo operations so the last two characters are removed.

So the string becomes **misspe**.

Then a redo operation is applied which reverses the last undo operation and so the string **misspe** becomes **misspel**.

The characters are followed by **t** so the final string is misspelt.

Answer: (penalty regime: 0 %)

```
s = input()

text = []
undo = []
i = 0

```

```python
while i<len(s):
    if i+1 < len(s) and s[i] == '^' and s[i+1]=='z':
        if text:
            undo.append(text.pop())
        i+=2
    elif i+1 < len(s) and s[i] == '^' and s[i+1] == 'y':

        if undo:
            text.append(undo.pop())
        i += 2

    else:
            text.append(s[i])
            undo.clear()
            i += 1
print("".join(text))
```

	Input	Expected	Got	
✔	missel^z^z^z^ypell^z^z^yt	misspelt	misspelt	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

A sentence is a list of words that are separated by a single space with no leading or trailing spaces. Each word consists of lowercase and uppercase English letters.

A sentence can be shuffled by appending the 1-indexed word position to each word then rearranging the words in the sentence.

For example, the sentence "This is a sentence" can be shuffled as "sentence4 a3 is2 This1" or "is2 sentence4 This1 a3".

Given a shuffled sentence s containing no more than 9 words, reconstruct and return the original sentence.

Example 1:

Input:

is2 sentence4 This1 a3

Output:

This is a sentence

Explanation: Sort the words in s to their original positions "This1 is2 a3 sentence4", then remove the numbers.

Example 2:

Input:

Myself2 Me1 I4 and3

Output:

Me Myself and I

Explanation: Sort the words in s to their original positions "Me1 Myself2 and3 I4", then remove the numbers.

Constraints:

2 <= s.length <= 200

s consists of lowercase and uppercase English letters, spaces, and digits from 1 to 9.

The number of words in s is between 1 and 9.

The words in s are separated by a single space.

s contains no leading or trailing spaces.

Answer: (penalty regime: 0 %)

```
s = input()
words = s.split()

arr = [""] * len(words)
for word in words:
    pos = int(word[-1])-1
    arr[pos] = word[:-1]

print(" ".join(arr))
```

	Input	Expected	Got	
✔	is2 sentence4 This1 a3	This is a sentence	This is a sentence	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

There is a malfunctioning keyboard where some letter keys do not work. All other keys on the keyboard work properly.

Given a string text of words separated by a single space (no leading or trailing spaces) and a string brokenLetters of all distinct letter keys that are broken, return the number of words in text you can fully type using this keyboard.

Example 1:

Input: text = "hello world", brokenLetters = "ad"

Output:

1

Explanation: We cannot type "world" because the 'd' key is broken.

For example:

Input	Result
hello world ad	1
Faculty Upskilling in Python Programming ak	2

Answer: (penalty regime: 0 %)

```
n = input().split()
b = input()
```

```
count = 0
for i in n:
    c = True
    for j in i:
        if j.lower() in b.lower():
            c = False
            break
    if c:
            count += 1
print(count)
```

	Input	Expected	Got	
✔	hello world ad	1	1	✔
✔	Welcome to REC e	1	1	✔

	Input	Expected	Got	
✔	Faculty Upskilling in Python Programming ak	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 3 October 2026, 9:53 AM
State	Finished
Completed on	Saturday, 3 October 2026, 9:58 AM
Time taken	5 mins 10 secs

Question 1 | Complete Marked out of 1.00

Which of the following options will produce the same output?

```
t = (15, 83, 21, 49, 60,45,52,85,100)
# options i, ii, iii, or iv
print(t[:-1])
print(t[0:5])
print(t[0:8])
print(t[-7:])
```

a. ii,iv

b. i,iii

c. i,ii

d. iii,iv

Question 2 | Complete Marked out of 1.00

What will be the output of following Python code?

```
list1=[1,3,4,2]

x=list1.pop(2)

print(set([x]))
```

a. {2}

b. {4}

c. {1,3,4}

d. {1,3,2}

Question 3 | Complete Marked out of 1.00

A python tuple can be created without using any parentheses. (True/False)

a. False

b. True

Question 4 | Complete Marked out of 1.00

Which of the following options will not result in an error when performed on tuples in Python where tupl=(5,2,7,0,3)?

- a. tupl.append(2)
- b. tupl.sort()
- c. tupl1=tupl+tupl
- d. tupl[1]=2

Question 5 | Complete Marked out of 1.00

What will be the output of below Python code?

```
tupl=("python","programming","Computer")
print(tupl[-3:0])
```

- a. ()
- b. (Computer)
- c. Error
- d. Computer

Question 6 | Complete Marked out of 1.00

Choose the correct option.

a. In Python, a tuple can contain both integers and strings as its elements.

b. In Python, a tuple can contain only integers as its elements.

c. In Python, a tuple can contain only strings as its elements.

d. In Python, a tuple can contain either string or integer but not both at a time.

Question 7 | Complete Marked out of 1.00

What will be the output of following Python code?

```
set1={2,5,3}

set2={3,1}

set3={}

set3=set1&set2

print(set3)
```

a. {2,5,3,1}

b. {2,5,1}

c. {3}

d. {}

Question 8 | Complete Marked out of 1.00

Which of the following is a Python tuple?

- a. ("Wonder")
- b. [1,2,3,4]
- c. {1,3,8,9,41}
- d. (1,4,5,6,7)

Question 9 | Complete Marked out of 1.00

What will set1|set2 do?

```
If set1={"a","b",3}
set2={3,7}
```

- a. Elements of set1 will get appended to set2
- b. A new set will be created with the elements of both set1 and set2
- c. Elements of set2 will get appended to set1
- d. A new set will be created with the unique elements of set1 and set2.

Question 10 | Complete Marked out of 1.00

What is the output of the following code

```
aSet = {1, 'rec', ('cse', 'ece'), True}
print(aSet)
```

a. Error

b. {‘rec’, True, (‘cse’, ‘ece’)}

c. {‘rec’, 1, (‘cse’, ‘ece’)}

d. {‘rec’, 1, (‘cse’, ‘ece’),True}

Question 11 | Complete Marked out of 1.00

What will the below Python code do?

```
set1={2,3}

set2={3,2}

set3={2,1}

if(set1==set2):

    print("yes")

else:

    print("no")

if(set1==set3):

    print("yes")

else:

    print("no")
```

a. No, No

b. Yes, Yes

c. "==" is not supported for set in Python

d. Yes, No

Question 12 | Complete Marked out of 1.00

What is the output of the following

```
set1 = {1, 2, 3, 4, 5}
set2 = {6, 7, 1, 3, 4, 8, 2, 5}

print(set1.issubset(set2))
print(set2.issuperset(set1))
```

a. True
True

b. True
False

c. False
True

d. False
False

Question 13 | Complete Marked out of 1.00

Select all the correct options to remove “ECE” from the set.

```
sampleSet = {"ECE", "R&A", "MCT"}
```

a. del.sampleSet("ECE")

b. sampleSet.delete("ECE")

c. remove.sampleSet("ECE")

d. sampleSet.discard("ECE")

Question 14 | Complete Marked out of 1.00

What is the output of the following code?

```
aTuple = (10, 20, 30, 40, 50, 60, 70, 80)
print(aTuple[2:5], aTuple[:4], aTuple[3:])
```

a. (10, 20, 30, 40) (40, 50, 60, 70, 80)

b. (30, 40, 50) (10, 20, 30, 40)

c. (30, 40, 50)(40, 50, 60, 70, 80)

d. (30, 40, 50) (10, 20, 30, 40) (40, 50, 60, 70, 80)

Question 15 | Complete Marked out of 1.00

What is the output of the following

```
set1 = {10, 20, 30, 40, 50}
set2 = {60, 70, 10, 30, 40, 80, 20, 50}

print(set1.issubset(set2))
print(set2.issuperset(set1))
```

a. True
True

b. False
True

c. True
False

d. False
False

Started on	Friday, 9 October 2026, 12:24 PM
State	Finished
Completed on	Monday, 12 October 2026, 11:59 PM
Time taken	3 days 11 hours
Marks	5.00/10.00
Grade	**50.00** out of 100.00

Question 1 | Not answered Mark 0.00 out of 1.00

A sentence is a list of words that are separated by a single space with no leading or trailing spaces. Each word consists of lowercase and uppercase English letters.

A sentence can be shuffled by appending the 1-indexed word position to each word then rearranging the words in the sentence.

For example, the sentence "This is a sentence" can be shuffled as "sentence4 a3 is2 This1" or "is2 sentence4 This1 a3".

Given a shuffled sentence s containing no more than 9 words, reconstruct and return the original sentence.

Example 1:

Input:

is2 sentence4 This1 a3

Output:

This is a sentence

Explanation: Sort the words in s to their original positions "This1 is2 a3 sentence4", then remove the numbers.

Example 2:

Input:

Myself2 Me1 I4 and3

Output:

Me Myself and I

Explanation: Sort the words in s to their original positions "Me1 Myself2 and3 I4", then remove the numbers.

Constraints:

2 <= s.length <= 200

s consists of lowercase and uppercase English letters, spaces, and digits from 1 to 9.

The number of words in s is between 1 and 9.

The words in s are separated by a single space.

s contains no leading or trailing spaces.

Answer: (penalty regime: 0 %)

```
1
```

	Input	Expected	
✖	`is2 sentence4 This1 a3`	`This is a sentence`	✖

Some hidden test cases failed, too.

Your code must pass all tests to earn any marks. Try again.

Incorrect

Marks for this submission: 0.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Objective:

Develop a Python program that takes an input string from the user and counts the number of occurrences of each vowel (a, e, i, o, u) in the string. The program should be case-insensitive, meaning it should treat uppercase and lowercase vowels as the same.

Description:

Vowels play a significant role in the English language and other alphabet-based languages. Counting vowels in a given string is a fundamental task that can be applied in various text processing applications, including speech recognition, linguistic research, and text analysis. The objective of this problem is to create a Python script that accurately counts and displays the number of times each vowel appears in a user-provided string.

Program Requirements:

Input:

First line reading String as input, The string can contain any characters, including letters, numbers, and special characters.

Output:

Display the number of occurrences of each vowel in the string.

The output should list each vowel followed by its count.

Example:

Consider the following example for better understanding:

- **Input:** "Python Programming"
- **Output**

a = 1

e = 0

i = 1

o = 2

u = 0

For example:

Input	Result
Hello World	a = 0 e = 1 i = 0 o = 2 u = 0
Python	a = 0 e = 0 i = 0 o = 1 u = 0

Answer: (penalty regime: 0 %)

```
s = input().lower()

for vowel in "aeiou":
    print(vowel, "=", s.count(vowel))

```

	Input	Expected	Got	
✔	Hello World	a = 0 e = 1 i = 0 o = 2 u = 0	a = 0 e = 1 i = 0 o = 2 u = 0	✔

	Input	Expected	Got	
✔	AEIOU aeio u	a = 2 e = 2 i = 2 o = 2 u = 2	a = 2 e = 2 i = 2 o = 2 u = 2	✔
✔	Python	a = 0 e = 0 i = 0 o = 1 u = 0	a = 0 e = 0 i = 0 o = 1 u = 0	✔
✔	abcdefghijklmnopqrstuvwxyz	a = 1 e = 1 i = 1 o = 1 u = 1	a = 1 e = 1 i = 1 o = 1 u = 1	✔
✔	12345!@#$%AEIOU	a = 1 e = 1 i = 1 o = 1 u = 1	a = 1 e = 1 i = 1 o = 1 u = 1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

A company wants to send its quotation secretly to its client. The company decided to encrypt the amount they are sending to their client with some special symbols so that the equation amount will not be revealed to any external person. They used the special symbols !,@,#,$,%,^,&,*,>,< for 0,1,2,3,4,5,6,7,8,9 respectively. Write a python code to help the company to convert the amount to special symbols.

(Value rounded off to 2 decimal points)

Input

n: Float data type which reads amount to send

Output

s: : String data type which displays symbols

Sample Testcase 1

Input

10000

Output

@!!!!.!!

Sample Testcase2

1234.56

Output

@#$%.^&

For example:

Input	Result
1345.23	@$%^.#$
15000.59	@^!!!.^<
156789	@^&*><.!!

Answer: (penalty regime: 0 %)

```
n = float(input())
n = f"{n:.2f}"

symbols = "!@#$%^&*><"
result = ""

for ch in n:
    if ch.isdigit():
        result += symbols[int(ch)]
    else:
        result += ch

print(result)
```

	Input	Expected	Got	
✔	1345.23	@$%^.#$	@$%^.#$	✔
✔	15000.59	@^!!!.^<	@^!!!.^<	✔
✔	1234	@#$%.!!	@#$%.!!	✔
✔	156789	@^&*><.!!	@^&*><.!!	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

A sentence is a string of single-space separated words where each word consists only of lowercase letters.A word is uncommon if it appears exactly once in one of the sentences, and does not appear in the other sentence.

Given two sentences s1 and s2, return a list of all the uncommon words. You may return the answer in any order.

Example 1:

Input: s1 = "this apple is sweet", s2 = "this apple is sour"

Output: ["sweet","sour"]

Example 2:

Input: s1 = "apple apple", s2 = "banana"

Output: ["banana"]

Constraints:

1 <= s1.length, s2.length <= 200

s1 and s2 consist of lowercase English letters and spaces.

s1 and s2 do not have leading or trailing spaces.

All the words in s1 and s2 are separated by a single space.

Note:

Use dictionary to solve the problem

For example:

Input	Result
this apple is sweet this apple is sour	sweet sour

Answer: (penalty regime: 0 %)

```
s1 = input().split()
s2 = input().split()

d = {}

for word in s1 + s2:
    d[word] = d.get(word, 0) + 1

result = []

for word in s1 + s2:
    if d[word] == 1:
        result.append(word)

print(*result)

```

	Input	Expected	Got	
✔	this apple is sweet this apple is sour	sweet sour	sweet sour	✔
✔	apple apple banana	banana	banana	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Given an array of names of candidates in an election. A candidate name in the array represents a vote cast to the candidate. Print the name of candidates received Max vote. If there is tie, print a lexicographically smaller name.

Examples:

Input : votes[] = {"john", "johnny", "jackie",

"johnny", "john", "jackie",

"jamie", "jamie", "john",

"johnny", "jamie", "johnny",

"john"};

Output : John

We have four Candidates with name as 'John', 'Johnny', 'jamie', 'jackie'. The candidates John and Johny get maximum votes. Since John is alphabetically smaller, we print it. Use dictionary to solve the above problem

Sample Input:

10

John

John

Johny

Jamie

Jamie

Johny

Jack

Johny

Johny

Jackie

Sample Output:

Johny

Answer: (penalty regime: 0 %)

```
n = int(input())
votes = {}
```

```
votes = {}

for _ in range(n):
    name = input().strip()
    votes[name] = votes.get(name, 0) + 1

max_votes = max(votes.values())

winner = min(name for name, count in votes.items() if count == max_votes)

print(winner)
```

	Input	Expected	Got	
✔	10 John John Johny Jamie Jamie Johny Jack Johny Johny Jackie	Johny	Johny	✔
✔	6 Ida Ida Ida Kiruba Kiruba Kiruba	Ida	Ida	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

You are given a string `word`. A letter is called **special** if it appears both in lowercase and uppercase in `word`.

Your task is to return the number of **special** letters in `word`.

Constraints

- The input string `word` will contain only alphabetic characters (both lowercase and uppercase).
- The solution must utilize a dictionary to determine the number of special letters.
- The function should handle various edge cases, such as strings without any special letters, strings with only lowercase or uppercase letters, and mixed strings.

Examples

Example 1:

Input: word = "aaAbcBC"
Output: 3

Explanation:
The special characters in `word` are 'a', 'b', and 'c'.

Example 2:

Input: word = "abc"
Output: 0

Explanation:
No character in `word` appears in uppercase.

For example:

Test	Result
`print(count_special_letters("AaBbCcDdEe"))`	5

Answer: (penalty regime: 0 %)

Reset answer

```
def count_special_letters(word):
    d = {}

    for ch in word:
        key = ch.lower()
        if key not in d:
            d[key] = set()
        d[key].add(ch.isupper())

    count = 0
    for v in d.values():
        if len(v) == 2:
            count += 1

    return count

```

	Test	Expected	Got	
✔	`print(count_special_letters("AaBbCcDdEe"))`	5	5	✔
✔	`print(count_special_letters("ABCDE"))`	0	0	✔
✔	`print(count_special_letters("abcde"))`	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Not answered Mark 0.00 out of 1.00

Create a student dictionary for n students with the student name as key and their test mark assignment mark and lab mark as values. Do the following computations and display the result.

1.Identify the student with the highest average score

2.Identify the student who as the highest Assignment marks

3.Identify the student with the Lowest lab marks

4.Identify the student with the lowest average score

Note:

If more than one student has the same score display all the student names

Sample input:

4

James 67 89 56

Lalith 89 45 45

Ram 89 89 89

Sita 70 70 70

Sample Output:

Ram

James Ram

Lalith

Lalith

For example:

Input	Result
4 James 67 89 56 Lalith 89 45 45 Ram 89 89 89 Sita 70 70 70	Ram James Ram Lalith Lalith

Answer: (penalty regime: 0 %)

```
1
```

	Input	Expected	Got	
✔	4 James 67 89 56 Lalith 89 45 45 Ram 89 89 89 Sita 70 70 70	Ram James Ram Lalith Lalith	Ram James Ram Lalith Lalith	✔

Your code failed one or more hidden tests.

Your code must pass all tests to earn any marks. Try again.

Incorrect

Marks for this submission: 0.00/1.00.

Question 8 | Not answered Mark 0.00 out of 1.00

In the game of Scrabble™, each letter has points associated with it. The total score of a word is the sum of the scores of its letters. More common letters are worth fewer points while less common letters are worth more points. The points associated with each letter are shown below:

Points Letters

1 A, E, I, L, N, O, R, S, T and U

2 D and G

3 B, C, M and P

4 F, H, V, W and Y

5 K

8 J and X

10 Q and Z

Write a program that computes and displays the Scrabble™ score for a word. Create a dictionary that maps from letters to point values. Then use the dictionary to compute the score.

A Scrabble™ board includes some squares that multiply the value of a letter or the value of an entire word. We will ignore these squares in this exercise.

Sample Input

REC

Sample Output

REC is worth 5 points.

For example:

Input	Result
REC	REC is worth 5 points.

Answer: (penalty regime: 0 %)

```
1
```

Question 9 | Not answered Mark 0.00 out of 1.00

Given a number, convert it into corresponding alphabet.

Input	Output
1	A
26	Z
27	AA
676	YZ

Input Format

Input is an integer

Output Format

Print the alphabets

Constraints

1 <= num <= 4294967295

Sample Input 1

26

Sample Output 1

Z

For example:

Test	Result
`print(excelNumber(26))`	`Z`

Answer: (penalty regime: 0 %)

Reset answer

```
def excelNumber(n):
```

Question 10 | Not answered Mark 0.00 out of 1.00

Give a dictionary with value lists, sort the keys by summation of values in value list.

Input : test_dict = {'Gfg' : [6, 7, 4], 'best' : [7, 6, 5]}

Output : {'Gfg': 17, 'best': 18}

Explanation : Sorted by sum, and replaced.

Input : test_dict = {'Gfg' : [8,8], 'best' : [5,5]}

Output : {'best': 10, 'Gfg': 16}

Explanation : Sorted by sum, and replaced.

Sample Input:

2

Gfg 6 7 4

Best 7 6 5

Sample Output

Gfg 17

Best 18

For example:

Input	Result
2 Gfg 6 7 4 Best 7 6 5	Gfg 17 Best 18

Answer: (penalty regime: 0 %)

```
1
```

Started on	Saturday, 10 October 2026, 7:30 PM
State	Finished
Completed on	Saturday, 10 October 2026, 9:13 PM
Time taken	1 hour 42 mins
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Give a dictionary with value lists, sort the keys by summation of values in value list.

Input : test_dict = {'Gfg' : [6, 7, 4], 'best' : [7, 6, 5]}

Output : {'Gfg': 17, 'best': 18}

Explanation : Sorted by sum, and replaced.

Input : test_dict = {'Gfg' : [8,8], 'best' : [5,5]}

Output : {'best': 10, 'Gfg': 16}

Explanation : Sorted by sum, and replaced.

Sample Input:

2

Gfg 6 7 4

Best 7 6 5

Sample Output

Gfg 17

Best 18

For example:

Input	Result
2 Gfg 6 7 4 Best 7 6 5	Gfg 17 Best 18

Answer: (penalty regime: 0 %)

```
n = int(input())
result = {}

for _ in range(n):
    data = input().split()
    key = data[0]
    values = list(map(int, data[1:]))
    result[key] = sum(values)

result = dict(sorted(result.items(), key=lambda item: item[1]))

for key, value in result.items():
    print(key, value)

```

	Input	Expected	Got	
✔	2 Gfg 6 7 4 Best 7 6 5	Gfg 17 Best 18	Gfg 17 Best 18	✔
✔	2 Gfg 6 6 Best 5 5	Best 10 Gfg 12	Best 10 Gfg 12	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

A sentence is a list of words that are separated by a single space with no leading or trailing spaces. Each word consists of lowercase and uppercase English letters.

A sentence can be shuffled by appending the 1-indexed word position to each word then rearranging the words in the sentence.

For example, the sentence "This is a sentence" can be shuffled as "sentence4 a3 is2 This1" or "is2 sentence4 This1 a3".

Given a shuffled sentence s containing no more than 9 words, reconstruct and return the original sentence.

Example 1:

Input:

is2 sentence4 This1 a3

Output:

This is a sentence

Explanation: Sort the words in s to their original positions "This1 is2 a3 sentence4", then remove the numbers.

Example 2:

Input:

Myself2 Me1 I4 and3

Output:

Me Myself and I

Explanation: Sort the words in s to their original positions "Me1 Myself2 and3 I4", then remove the numbers.

Constraints:

2 <= s.length <= 200

s consists of lowercase and uppercase English letters, spaces, and digits from 1 to 9.

The number of words in s is between 1 and 9.

The words in s are separated by a single space.

s contains no leading or trailing spaces.

Answer: (penalty regime: 0 %)

```
s = input().split()
s.sort(key=lambda word: int(word[-1]))

result = [word[:-1] for word in s]
print(" ".join(result))

```

	Input	Expected	Got	
✔	is2 sentence4 This1 a3	This is a sentence	This is a sentence	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

In the game of Scrabble™, each letter has points associated with it. The total score of a word is the sum of the scores of its letters. More common letters are worth fewer points while less common letters are worth more points. The points associated with each letter are shown below:

Points Letters

1 A, E, I, L, N, O, R, S, T and U

2 D and G

3 B, C, M and P

4 F, H, V, W and Y

5 K

8 J and X

10 Q and Z

Write a program that computes and displays the Scrabble™ score for a word. Create a dictionary that maps from letters to point values. Then use the dictionary to compute the score.

A Scrabble™ board includes some squares that multiply the value of a letter or the value of an entire word. We will ignore these squares in this exercise.

Sample Input

REC

Sample Output

REC is worth 5 points.

For example:

Input	Result
REC	REC is worth 5 points.

Answer: (penalty regime: 0 %)

```
word = input().upper()

points = {
    'A': 1, 'E': 1, 'I': 1, 'L': 1, 'N': 1,
    'O': 1, 'R': 1, 'S': 1, 'T': 1, 'U': 1,
    'D': 2, 'G': 2,
    'B': 3, 'C': 3, 'M': 3, 'P': 3,
    'F': 4, 'H': 4, 'V': 4, 'W': 4, 'Y': 4,
    'K': 5,
    'J': 8, 'X': 8,
    'Q': 10, 'Z': 10
}

score = sum(points[letter] for letter in word)

print(f"{word} is worth {score} points.")

```

	Input	Expected	Got	
✔	GOD	GOD is worth 5 points.	GOD is worth 5 points.	✔
✔	REC	REC is worth 5 points.	REC is worth 5 points.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Objective:

Develop a Python program that takes an input string from the user and counts the number of occurrences of each vowel (a, e, i, o, u) in the string. The program should be case-insensitive, meaning it should treat uppercase and lowercase vowels as the same.

Description:

Vowels play a significant role in the English language and other alphabet-based languages. Counting vowels in a given string is a fundamental task that can be applied in various text processing applications, including speech recognition, linguistic research, and text analysis. The objective of this problem is to create a Python script that accurately counts and displays the number of times each vowel appears in a user-provided string.

Program Requirements:

Input:

First line reading String as input, The string can contain any characters, including letters, numbers, and special characters.

Output:

Display the number of occurrences of each vowel in the string.

The output should list each vowel followed by its count.

Example:

Consider the following example for better understanding:

- **Input:** "Python Programming"
- **Output**

a = 1

e = 0

i = 1

o = 2

u = 0

For example:

Input	Result
Hello World	a = 0 e = 1 i = 0 o = 2 u = 0
Python	a = 0 e = 0 i = 0 o = 1 u = 0

Answer: (penalty regime: 0 %)

```
s = input().lower()

for vowel in 'aeiou':
    print(f"{vowel} = {s.count(vowel)}")

```

	Input	Expected	Got	
✔	Hello World	a = 0 e = 1 i = 0 o = 2 u = 0	a = 0 e = 1 i = 0 o = 2 u = 0	✔

	Input	Expected	Got	
✔	AEIOU aeio u	a = 2 e = 2 i = 2 o = 2 u = 2	a = 2 e = 2 i = 2 o = 2 u = 2	✔
✔	Python	a = 0 e = 0 i = 0 o = 1 u = 0	a = 0 e = 0 i = 0 o = 1 u = 0	✔
✔	abcdefghijklmnopqrstuvwxyz	a = 1 e = 1 i = 1 o = 1 u = 1	a = 1 e = 1 i = 1 o = 1 u = 1	✔
✔	12345!@#$%AEIOU	a = 1 e = 1 i = 1 o = 1 u = 1	a = 1 e = 1 i = 1 o = 1 u = 1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

A company wants to send its quotation secretly to its client. The company decided to encrypt the amount they are sending to their client with some special symbols so that the equation amount will not be revealed to any external person. They used the special symbols !,@,#,$,%,^,&,*,>,< for 0,1,2,3,4,5,6,7,8,9 respectively. Write a python code to help the company to convert the amount to special symbols.

(Value rounded off to 2 decimal points)

Input

n: Float data type which reads amount to send

Output

s: : String data type which displays symbols

Sample Testcase 1

Input

10000

Output

@!!!!.!!

Sample Testcase2

1234.56

Output

@#$%.^&

For example:

Input	Result
1345.23	@$%^.#$
15000.59	@^!!!.^<
156789	@^&*><.!!

Answer: (penalty regime: 0 %)

```
n = float(input())
s = f"{n:.2f}"

symbols = {
    '0': '!', '1': '@', '2': '#', '3': '$', '4': '%',
    '5': '^', '6': '&', '7': '*', '8': '>', '9': '<',
    '.': '.'
}

result = ''.join(symbols[ch] for ch in s)
print(result)

```

	Input	Expected	Got	
✔	1345.23	@$%^.#$	@$%^.#$	✔
✔	15000.59	@^!!!.^<	@^!!!.^<	✔
✔	1234	@#$%.!!	@#$%.!!	✔
✔	156789	@^&*><.!!	@^&*><.!!	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Given an array of names of candidates in an election. A candidate name in the array represents a vote cast to the candidate. Print the name of candidates received Max vote. If there is tie, print a lexicographically smaller name.

Examples:

Input : votes[] = {"john", "johnny", "jackie",

"johnny", "john", "jackie",

"jamie", "jamie", "john",

"johnny", "jamie", "johnny",

"john"};

Output : John

We have four Candidates with name as 'John', 'Johnny', 'jamie', 'jackie'. The candidates John and Johny get maximum votes. Since John is alphabetically smaller, we print it. Use dictionary to solve the above problem

Sample Input:

10

John

John

Johny

Jamie

Jamie

Johny

Jack

Johny

Johny

Jackie

Sample Output:

Johny

Answer: (penalty regime: 0 %)

```
n = int(input())
votes = {}
```

```
votes = {}

for _ in range(n):
    name = input().strip()
    votes[name] = votes.get(name, 0) + 1

max_votes = max(votes.values())
winner = min(name for name, count in votes.items() if count == max_votes)

print(winner)

```

	Input	Expected	Got	
✔	10 John John Johny Jamie Jamie Johny Jack Johny Johny Jackie	Johny	Johny	✔
✔	6 Ida Ida Ida Kiruba Kiruba Kiruba	Ida	Ida	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Given a number, convert it into corresponding alphabet.

Input	Output
1	A
26	Z
27	AA
676	YZ

Input Format

Input is an integer

Output Format

Print the alphabets

Constraints

1 <= num <= 4294967295

Sample Input 1

26

Sample Output 1

Z

For example:

Test	Result
`print(excelNumber(26))`	Z

Answer: (penalty regime: 0 %)

Reset answer

```
def excelNumber(num):
    result = ""
    while num > 0:
        num -= 1
        result = chr(num % 26 + ord('A')) + result
        num //= 26
    return result


```

	Test	Expected	Got	
✔	`print(excelNumber(26))`	Z	Z	✔
✔	`print(excelNumber(27))`	AA	AA	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

You are given a string `word`. A letter is called **special** if it appears both in lowercase and uppercase in `word`.

Your task is to return the number of **special** letters in `word`.

Constraints

- The input string `word` will contain only alphabetic characters (both lowercase and uppercase).
- The solution must utilize a dictionary to determine the number of special letters.
- The function should handle various edge cases, such as strings without any special letters, strings with only lowercase or uppercase letters, and mixed strings.

Examples

Example 1:

Input: word = "aaAbcBC"
Output: 3

Explanation:
The special characters in `word` are 'a', 'b', and 'c'.

Example 2:

Input: word = "abc"
Output: 0

Explanation:
No character in `word` appears in uppercase.

For example:

Test	Result
`print(count_special_letters("AaBbCcDdEe"))`	5

Answer: (penalty regime: 0 %)

Reset answer

```
def count_special_letters(word):
    letters = {}

    for ch in word:
        key = ch.lower()
        if key not in letters:
            letters[key] = set()
        letters[key].add(ch.isupper())

    count = 0
    for cases in letters.values():
        if len(cases) == 2:
            count += 1

    return count

```

	Test	Expected	Got	
✔	`print(count_special_letters("AaBbCcDdEe"))`	5	5	✔
✔	`print(count_special_letters("ABCDE"))`	0	0	✔
✔	`print(count_special_letters("abcde"))`	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Create a student dictionary for n students with the student name as key and their test mark assignment mark and lab mark as values. Do the following computations and display the result.

1.Identify the student with the highest average score

2.Identify the student who as the highest Assignment marks

3.Identify the student with the Lowest lab marks

4.Identify the student with the lowest average score

Note:

If more than one student has the same score display all the student names

Sample input:

4

James 67 89 56

Lalith 89 45 45

Ram 89 89 89

Sita 70 70 70

Sample Output:

Ram

James Ram

Lalith

Lalith

For example:

Input	Result
4 James 67 89 56 Lalith 89 45 45 Ram 89 89 89 Sita 70 70 70	Ram James Ram Lalith Lalith

Answer: (penalty regime: 0 %)

```
n = int(input())
students = {}

for _ in range(n):
    name, test, assignment, lab = input().split()
    students[name] = [int(test), int(assignment), int(lab)]

averages = {name: sum(marks) / 3 for name, marks in students.items()}

highest_avg = max(averages.values())
print(*sorted(name for name in students if averages[name] == highest_avg))

```

```
highest_assignment = max(marks[1] for marks in students.values())
print(*sorted(name for name, marks in students.items() if marks[1] == highest_assignment))

lowest_lab = min(marks[2] for marks in students.values())
print(*sorted(name for name, marks in students.items() if marks[2] == lowest_lab))

lowest_avg = min(averages.values())
print(*sorted(name for name in students if averages[name] == lowest_avg))
```

	Input	Expected	Got	
✔	4 James 67 89 56 Lalith 89 45 45 Ram 89 89 89 Sita 70 70 70	Ram James Ram Lalith Lalith	Ram James Ram Lalith Lalith	✔
✔	3 Raja 95 67 90 Aarav 89 90 90 ShadhanA 95 95 91	ShadhanA ShadhanA Aarav Raja Raja	ShadhanA ShadhanA Aarav Raja Raja	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

A sentence is a string of single-space separated words where each word consists only of lowercase letters.A word is uncommon if it appears exactly once in one of the sentences, and does not appear in the other sentence.

Given two sentences s1 and s2, return a list of all the uncommon words. You may return the answer in any order.

Example 1:

Input: s1 = "this apple is sweet", s2 = "this apple is sour"

Output: ["sweet","sour"]

Example 2:

Input: s1 = "apple apple", s2 = "banana"

Output: ["banana"]

Constraints:

1 <= s1.length, s2.length <= 200

s1 and s2 consist of lowercase English letters and spaces.

s1 and s2 do not have leading or trailing spaces.

All the words in s1 and s2 are separated by a single space.

Note:

Use dictionary to solve the problem

For example:

Input	Result
this apple is sweet this apple is sour	sweet sour

Answer: (penalty regime: 0 %)

```
from collections import Counter

s1 = input().split()
s2 = input().split()

words = Counter(s1 + s2)

result = [word for word in words if words[word] == 1]

print(*result)

```

	Input	Expected	Got	
✔	this apple is sweet this apple is sour	sweet sour	sweet sour	✔
✔	apple apple banana	banana	banana	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Friday, 9 October 2026, 8:39 AM
State	Finished
Completed on	Friday, 9 October 2026, 8:43 AM
Time taken	3 mins 49 secs
Marks	11.00/15.00
Grade	**73.33** out of 100.00

Question 1 | Incorrect Mark 0.00 out of 1.00

Which of the following is not method of dictionary?

- a. pop( )
- b. update( )
- c. del ( )
- d. len( ) ✖

The correct answer is: del ( )

Question 2 | Correct Mark 1.00 out of 1.00

1,2,3 are the _____ in the following dictionary. D = {1 : "One", 2 : "Two", 3 : "Three"}

- a. Values
- b. Keys ✔
- c. None of the mentioned
- d. Items

The correct answer is: Keys

Question 3 | Correct Mark 1.00 out of 1.00

Which one of the following is correct?

a. A python, a dictionary can neither have two same keys nor two same values.

b. A dictionary can have two same keys with different values.

c. A dictionary can have two same values with different keys. ✔

d. A dictionary can have two same keys or same values but cannot have two same key-value pair

Your answer is correct.

The correct answer is:

A dictionary can have two same values with different keys.

Question 4 | Correct Mark 1.00 out of 1.00

What will be the output of the following Python code snippet?

```
a={1:"A",2:"B",3:"C"}
print(a.get(5,4))
```

- a. 5
- b. A
- c. Invalid Synatx,Error
- d. 4 ✔

Your answer is correct.

The correct answer is:
4

Question 5 | Correct Mark 1.00 out of 1.00

Which function/statement delete the dictionary from the memory?

a. delete( )
b. clear( )
c. pop( )
d. del ✔

The correct answer is: del

Question 6 | Correct Mark 1.00 out of 1.00

What will be the Output of the following code?

```
dl={1:10, 2:20, 3:30, 4:40}
d2={5:50, 6:60, 7:70}
dl.update (d2)
print (dl)
```

a. {1: 10, 2: 20, 3: 30, 4: 40, 5: 50, 6: 60, 7: 70} ✔

b. [1: 10, 2: 20, 3: 30, 4: 40, 5: 50, 6: 60, 7: 70]

c. {1:10, 2: 20, 4: 40, 5: 50, 6: 60, 7: 70}

d. [(1, 10), (2, 20), (3, 30), (4, 40), (5, 50)]

Your answer is correct.

The correct answer is:
{1: 10, 2: 20, 3: 30, 4: 40, 5: 50, 6: 60, 7: 70}

Question 7 | Correct Mark 1.00 out of 1.00

Which statement is used to create an empty dictionary?

a. d1 = [ ]

b. d1 = { } ✔

c. d1 = dict{ }

d. d1 = ( )

The correct answer is: d1 = { }

Question 8 | Correct Mark 1.00 out of 1.00

pop( ) function delete and _____ the element of dictionary.

- a. return ✔
- b. display
- c. add
- d. not return

The correct answer is: return

Question 9 | Correct Mark 1.00 out of 1.00

_____ function returns the number of key: value pairs of the dictionary.

- a. items( )
- b. length( )
- c. len( ) ✔
- d. total( )

The correct answer is: len( )

Question 10 | Incorrect Mark 0.00 out of 1.00

What does the following code print?

```
names = {'Janice': 5, 'Emily': 3, 'John': 7, 'Eleanor': 2}
list_o_names = []
names['Emily'] += 10
names['Erik'] = 22

for name in names:
    if names[name] > 5:
        list_o_names.append(name)
print(list_o_names)
```

a. ['Emily', 'John', 'Erik']

b. ['Janice', 'John', 'Erik'] ✖

c. ['Janice', 'Emily', 'John', 'Eleanor']

d. ['Janice', 'Emily', 'John']

Your answer is incorrect.

The correct answer is:
['Emily', 'John', 'Erik']

Question 11 | Correct Mark 1.00 out of 1.00

Which function helps to merge dictionary 'D1' and 'D2'?

- a. update( ) ✔
- b. append( )
- c. get( )
- d. merge( )

The correct answer is: update( )

Question 12 | Correct Mark 1.00 out of 1.00

Which of the following are immutable data type? A. String B. Tuple C. List D. Dictionary

- a. a and c
- b. b and d
- c. a and b ✔
- d. c and d

The correct answer is: a and b

Question 13 | Correct Mark 1.00 out of 1.00

_____ function returns the value corresponding to the key passed as the argument.

- a. del( )
- b. get( ) ✔
- c. update( )
- d. values( )

The correct answer is: get( )

Question 14 | Incorrect Mark 0.00 out of 1.00

We can repeat the values of Key in Dictionary?

- a. False ✖
- b. True

The correct answer is: True

Question 15 | Incorrect Mark 0.00 out of 1.00

Only values (without keys) can be printed in dictionary?

- a. False ✖
- b. True

The correct answer is: True

Started on	Saturday, 10 October 2026, 9:27 PM
State	Finished
Completed on	Monday, 12 October 2026, 9:41 PM
Time taken	2 days
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Develop a Python program to read a specific line from a text file based on a given line number.

Description:

1. **Input:**
    - A text file with multiple lines.
    - A line number to read.
2. **Output:**
    - The content of the specified line.

input1.txt:

Line one.
Line two.
Line three.
Line four.

For example:

Input	Result
input1.txt 3	Line three.

Answer: (penalty regime: 0 %)

```
filename = input().strip()
line_number = int(input())

with open(filename, 'rt') as file:
```

```
    with open(filename, 'r') as file:
        lines = file.readlines()
        print(lines[line_number - 1].strip())

```

	Input	Expected	Got	
✔	input1.txt 3	Line three.	Line three.	✔
✔	input2.txt 3	Line C.	Line C.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Develop a Python program to read a text file and count the total number of words in the file.

Description:

1. **Input:**
    - A text file containing several lines of text.
    - File name you should get as input.
2. **Output:**
    - The total number of words in the file.

For example:

Input	Result
input2.txt	Total words: 14
input3.txt	Total words: 15

Answer: (penalty regime: 0 %)

```
filename = input().strip()

with open(filename, 'r') as file:
    text = file.read()
    words = text.split()
    print("Total words:", len(words))

```

	Input	Expected	Got	
✔	input1.txt	Total words: 6	Total words: 6	✔
✔	input2.txt	Total words: 14	Total words: 14	✔
✔	input3.txt	Total words: 15	Total words: 15	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Create a Python program to write to a specific line in a text file, replacing the existing content of that line.

Description:

1. **Input:**
    - A text file with multiple lines.
    - A line number to write to.
    - New content for the specified line.
2. **Output:**
    - The updated file with the specified line replaced by the new content in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  2

  Updated line two.

Output:

Line one.
Updated line two.
Line three.
Line four.

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	`input1.txt`
	`2`
	`Updated line two.`
		`Line one.`
		`Updated line two.`
		`Line three.`
		`Line four.`

Answer: (penalty regime: 0 %)

```
filename = input().strip()
line_no = int(input())
new_content = input()

with open(filename, "r") as file:
    lines = file.readlines()

lines[line_no - 1] = new_content + "\n"

with open("output.txt", "w") as file:
    file.writelines(lines)
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`    text = file.read()`
	`    print(text)`
		`input1.txt`
		`2`
		`Updated line two.`
			`Line one.`
			`Updated line two.`
			`Line three.`
			`Line four.`
				`Line one.`
				`Updated line two.`
				`Line three.`
				`Line four.`
					✔

✔	`with open('output.txt', 'r') as file:`
	`    text = file.read()`
	`    print(text)`
		`input2.txt`
		`2`
		`Line B Updated.`
			`Line A.`
			`Line B Updated.`
			`Line C.`
				`Line A.`
				`Line B Updated.`
				`Line C.`
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Write a Python program to reverse the contents of a specific line in a text file based on a given line number.

Description:

1. **Input:**
    - A text file with multiple lines.
    - A line number to reverse.
2. **Output:**
    - The updated file with the specified line's contents reversed in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  3

Output:

Line one.
Line two.
eerht eniL.
Line four.

For example:

Test	Input	Result

with open('output.txt', 'r') as file:
    text = file.read()
    print(text)
	input1.txt
	3
		Line one.
		Line two.
		eerht eniL.
		Line four.

Answer: (penalty regime: 0 %)

```
filename = input().strip()
line_no = int(input())

with open(filename, "r") as file:
    lines = file.readlines()

line = lines[line_no - 1].rstrip("\n")

if line.endswith("."):
    line = line[:-1][::-1] + "."
else:
    line = line[::-1]

lines[line_no - 1] = line + "\n"

with open("output.txt", "w") as file:
    file.writelines(lines)
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input1.txt
		3
			Line one.
			Line two.
			eerht eniL.
			Line four.
				Line one.
				Line two.
				eerht eniL.
				Line four.
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input2.txt
		2
			Line A.
			B eniL.
			Line C.
				Line A.
				B eniL.
				Line C.
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Develop a Python program to copy the contents of one file to another file.

Description:

1. **Input:**
   - Source file and destination file names.
2. **Output:**
   - The content of the source file copied to the destination file.

For example:

Test	Input	Result

`with open('output1.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	`input1.txt`
	`output1.txt`
		`This is the source file.`
		`It contains multiple lines of text.`
		`Here is another line.`

Answer: (penalty regime: 0 %)

```
source = input().strip()
destination = input().strip()

with open(source, "r") as file:
    content = file.read()

with open(destination, "w") as file:
    file.write(content)
```

	Test	Input	Expected	Got	

✔	`with open('output1.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input1.txt
		output1.txt
			This is the source file.
			It contains multiple lines of text.
			Here is another line.
				This is the source file.
				It contains multiple lines of text.
				Here is another line.
					✔

✔	`with open('output2.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input2.txt
		output2.txt
			Hello, world!
			Python programming is amazing.
			Let's copy this text to another file.
				Hello, world!
				Python programming is amazing.
				Let's copy this text to another file.
					✔

✔	`with open('output3.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input3.txt
		output3.txt
			Single line.	Single line.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Develop a Python program to identify and print all palindrome words from a given text file.

Description:

1. **Input:**
   - A text file containing multiple words.
2. **Output:**
   - A list of palindrome words found in the file name as 'output.txt'.

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	input1.txt	madam
		arora
		malayalam

Answer: (penalty regime: 0 %)

```
filename = input().strip()

with open(filename, "r") as file:
    words = file.read().split()

with open("output.txt", "w") as file:
    for word in words:
        if word == word[::-1]:
            file.write(word + "\n")
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input1.txt	madam
			arora
			malayalam
				madam
				arora
				malayalam
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Write a Python program to append a new line at a specific position in a text file, shifting existing lines down.

Description:

1. **Input:**
    - A text file with multiple lines.
    - A line number to insert the new line at.
    - New content for the new line.
2. **Output:**
    - The updated file with the new line inserted at the specified position, shifting the existing lines down in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  3

  Inserted line..

Output:

Line one.
Line two.
Inserted line.

Line three.

Line four.

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	`input1.txt`
	`3`
	`Inserted line.`
		`Line one.`
		`Line two.`
		`Inserted line.`
		`Line three.`
		`Line four.`

Answer: (penalty regime: 0 %)

```
filename = input().strip()
line_no = int(input())
new_line = input()

with open(filename, "r") as file:
    lines = file.read().splitlines()

lines.insert(line_no - 1, new_line)

with open("output.txt", "w") as file:
    file.write("\n".join(lines))
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input1.txt
		3
		Inserted line.
			Line one.
			Line two.
			Inserted line.
			Line three.
			Line four.
				Line one.
				Line two.
				Inserted line.
				Line three.
				Line four.
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input2.txt
		4
		Inserted line D.
			Line A.
			Line B.
			Line C.
			Inserted line D.
				Line A.
				Line B.
				Line C.
				Inserted line D.
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Create a Python program to delete a specific line from a text file based on a given line number.

Description:

1. **Input:**
    - A text file with multiple lines.
    - A line number to delete.
2. **Output:**
    - The updated file with the specified line removed in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  2

  Updated line two.

Output:

Line one.
Line three.
Line four.

For example:

Test	Input	Result

with open('output.txt', 'r') as file:
    text = file.read()
    print(text)
	input1.txt
	2
		Line one.
		Line three.
		Line four.

Answer: (penalty regime: 0 %)

```
filename = input().strip()
line_no = int(input())

with open(filename, "r") as file:
    lines = file.read().splitlines()

del lines[line_no - 1]

with open("output.txt", "w") as file:
    file.write("\n".join(lines))
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`    text = file.read()`
	`    print(text)`
		input1.txt
		2
			Line one.
			Line three.
			Line four.
				Line one.
				Line three.
				Line four.
					✔

✔	`with open('output.txt', 'r') as file:`
	`    text = file.read()`
	`    print(text)`
		input2.txt
		3
			Line A.
			Line B.
				Line A.
				Line B.
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Create a Python program to find the longest word in a text file.

- **Input:**
  - A text file containing multiple lines of text.
- **Output:**
  - The longest word in the file.

For example:

Input	Result
`input1.txt`	`Longest word: containing`

Answer: (penalty regime: 0 %)

```
filename = input().strip()

f = open(filename, "r")

longest = ""

for line in f:
    for word in line.split():
        if len(word) > len(longest):
            longest = word

f.close()

print("Longest word:", longest)
```

	Input	Expected	Got	
✔	input1.txt	Longest word: containing	Longest word: containing	✔
✔	input2.txt	Longest word: thousand	Longest word: thousand	✔
✔	input3.txt	Longest word: supercalifragilisticexpialidocious	Longest word: supercalifragilisticexpialidocious	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Write a Python program to count the frequency of each word in a given text file.

Description:

1. **Input:**
   - String as input.
2. **Output:**
   - A list of words with their corresponding frequency count to be write in a file "output.txt"

Example:

- **Input File Content:**

  apple orange apple banana apple orange

Output:

apple: 3
orange: 2
banana: 1

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	`apple orange apple banana apple orange`	`apple: 3`
		`banana: 1`
		`orange: 2`

Answer: (penalty regime: 0 %)

```
text = input()

freq = {}

for word in text.split():
    word = word.lower().strip(".,!?;:")
    freq[word] = freq.get(word, 0) + 1

with open("output.txt", "w") as file:
    for word in sorted(freq):
        file.write(word + ": " + str(freq[word]) + "\n")
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`apple orange apple banana apple orange`	`apple: 3`
			`banana: 1`
			`orange: 2`
				`apple: 3`
				`banana: 1`
				`orange: 2`
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`Hello world! Hello everyone. Welcome to the world of programming.`	`everyone: 1`
			`hello: 2`
			`of: 1`
			`programming: 1`
			`the: 1`
			`to: 1`
			`welcome: 1`
			`world: 2`
				`everyone: 1`
				`hello: 2`
				`of: 1`
				`programming: 1`
				`the: 1`
				`to: 1`
				`welcome: 1`
				`world: 2`
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`One fish two fish Red fish blue fish`	`blue: 1`
			`fish: 4`
			`one: 1`
			`red: 1`
			`two: 1`
				`blue: 1`
				`fish: 4`
				`one: 1`
				`red: 1`
				`two: 1`
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 10 October 2026, 9:22 PM
State	Finished
Completed on	Saturday, 10 October 2026, 9:25 PM
Time taken	3 mins 26 secs
Marks	15.00/15.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

What happens if you try to open a file in write mode ('w') and the file already exists?

- a. It clears the old data and starts fresh ✔
- b. It does nothing
- c. It appends data to the file
- d. It raises an error

The correct answer is: It clears the old data and starts fresh

Question 2 | Correct Mark 1.00 out of 1.00

file_object.seek(offset [, reference_point])

What is the default, the value of reference_point?

- a. 1
- b. 2
- c. garbage
- d. null
- e. 0 ✔

Your answer is correct.

The correct answer is:
0

Question 3 | Correct Mark 1.00 out of 1.00

To open a file a.txt for reading, we use _____

a. infile = open(file = “a.txt”, “r”)

b. infile = open(file, “a.txt”, “r”)

c. infile = open(file = “a.txt”, “r”)

d. infile = open(“a.txt”, “r”) ✔

Your answer is correct.

The correct answer is:

infile = open(“a.txt”, “r”)

Question 4 | Correct Mark 1.00 out of 1.00

Which method is used to write data to a file?

a. insert()
b. read()
c. append()
d. write() ✔

The correct answer is: write()

Question 5 | Correct Mark 1.00 out of 1.00

What is the use of seek() method in files?

- a. sets the file's current position at the offset ✔
- b. sets the file's current position within the file
- c. sets the file's previous position at the offset
- d. none of the mentioned

Your answer is correct.

The correct answer is:
sets the file's current position at the offset

Question 6 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
f = open("test.txt", "w")
f.write("Hello, world!")
f.close()
f = open("test.txt", "r")
print(f.read())
f.close()
```

- a. Hello, world! ✔
- b. An error is raised
- c. Hello
- d. world

The correct answer is: Hello, world!

Question 7 | Correct Mark 1.00 out of 1.00

What is the use of tell() method in python?

a. tells you the file is opened or not

b. none of the mentioned

c. tells you the current position within the file ✔

d. tells you the end position within the file

Your answer is correct.

The correct answer is:
tells you the current position within the file

Question 8 | Correct Mark 1.00 out of 1.00

What is the difference between r+ and w+ modes in file handling?

- a. r+ is for read and write without truncating, w+ is for read and write with truncating ✔
- b. r+ is for read and append, w+ is for read and write
- c. r+ is for binary read and write, w+ is for text read and write
- d. r+ is for read and write, w+ is for append only

The correct answer is: r+ is for read and write without truncating, w+ is for read and write with truncating

Question 9 | Correct Mark 1.00 out of 1.00

Which method is used to read file line by line

- a. read(1)
- b. line()
- c. readline() ✔
- d. readlines(1)

The correct answer is: readline()

Question 10 | Correct Mark 1.00 out of 1.00

What does the encoding parameter in the open() function specify?

- a. The size of the file
- b. The encoding format of the file ✔
- c. The buffer size
- d. The mode of the file

The correct answer is: The encoding format of the file

Question 11 | Correct Mark 1.00 out of 1.00

Which of the following is true about the readlines() method?

- a. It reads the entire file and returns it as a list of lines ✔
- b. It reads the entire file and returns it as a string
- c. It reads the file and returns it as a dictionary
- d. It reads a single line from the file

The correct answer is: It reads the entire file and returns it as a list of lines

Question 12 | Correct Mark 1.00 out of 1.00

What is the purpose of the with statement in Python file handling?

a. To delete a file

b. To automatically close the file after its suite finishes ✔

c. To write data to a file

d. To read data from a file

The correct answer is: To automatically close the file after its suite finishes

Question 13 | Correct Mark 1.00 out of 1.00

Default EOL character of text file in python is ,

a. space

b. \t

c. \n ✔

d. ,

Your answer is correct.

The correct answer is:

\n

Question 14 | Correct Mark 1.00 out of 1.00

Which of the following modes opens a file for both reading and writing?

a. w
b. a
c. r
d. r+ ✔

The correct answer is: r+

Question 15 | Correct Mark 1.00 out of 1.00

What is the result of the following code?

```
with open("example.txt", "r") as f:
    data = f.read()
print(data)
```

a. Prints each line of the file

b. Prints the first 10 characters of the file

c. Prints the entire content of the file ✔

d. Prints an error message

The correct answer is: Prints the entire content of the file