


HTML LIST OF TAGS AND ATTRIBUTES

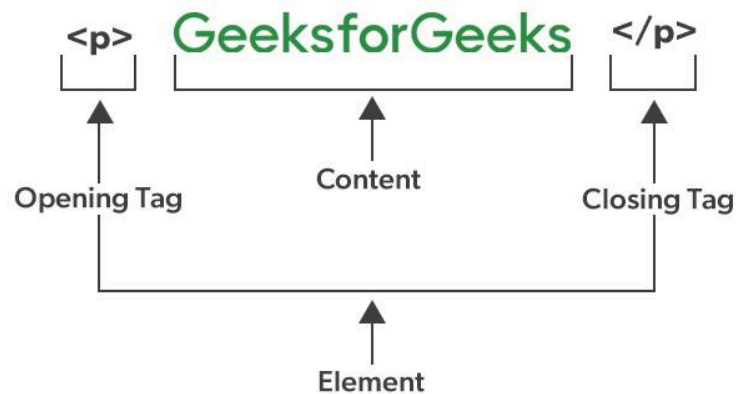

HTML TAGS

HTML Tags are the starting and ending parts of an HTML element. They begin with < symbol and end with > symbol. Whatever is written inside < and > are called tags.

HTML ELEMENTS

The **HTML element** consists of both the opening and closing tags as well as what's *inside* those tags. It normally consists of some structure that's used to define the respective tags.

HTML ATTRIBUTES

HTML Attributes is used to define the character of an HTML element. It always placed in the opening tag of an element. It generally provides additional styling (attribute) to the element.

LIST OF TAGS:

1. DOCTYPE html: `<!DOCTYPE html>` declares the document as an HTML5 page, telling browsers how to render it correctly and ensuring consistent display.

2. abbreviation: `<abbr>` defines an abbreviation or acronym, providing a tooltip with its full meaning when hovered over, improving accessibility and clarity.

3. acronym: [`<acronym>`](#) defines an acronym, giving additional semantic meaning and sometimes a tooltip with the full form, but it is deprecated in HTML5.

4. address: [`<address>`](#) specifies contact information for a person, organization, or author, usually displayed in italics and often used in footers or contact sections.

5. anchor: [`<anchor>`](#) creates a hyperlink to another page, section, email, or location, allowing users to navigate between web resources.

6. applet: [`<applet>`](#) embeds a Java program (applet) into an HTML page, allowing it to run in the browser; it is deprecated in modern HTML.

7. area: [`<area>`](#) defines a clickable region within an image map, linking different parts of an image to different URLs.

8. article: [`<article>`](#) represents a self-contained piece of content, like a blog post or news item, that can be independently distributed or reused.

9. aside: [`<aside>`](#) defines content that is related to the main content but separate, like a sidebar, tip, or advertisement.

10. audio: [`<audio>`](#) embeds audio content, such as music or podcasts, and can include controls for play, pause, and volume.

11. base: [`<base>`](#) sets a base URL for all relative links in the document, so you don't have to write full URLs every time.

12. basefont: [`<basefont>`](#) sets the default font, size, and color for the page.

13. bdi: [`<bdi>`](#) (Bi-Directional Isolation) isolates a portion of text so its direction (LTR or RTL) does not affect surrounding content, useful for multilingual text.

14. bdo : [`<bdo>`](#) (Bi-Directional Override) explicitly overrides the text direction, forcing it to display left-to-right (ltr) or right-to-left (rtl).

15. **bgsound:** [`<bgsound>`](#) plays background audio automatically when a page loads.
16. **big:** [`<big>`](#) slightly increases the size of text.
17. **blockquote:** [`<blockquote>`](#) displays long quotations from other sources.
18. **body:** [`<body>`](#) defines the main content of the HTML page.
19. **bold:** [`<b>`](#) makes text bold without extra importance.
20. **break:** [`<br>`](#) inserts a line break.
21. **button:** [`<button>`](#) defines a clickable button.
22. **caption:** [`<caption>`](#) specifies a table's caption.
23. **canvas:** [`<canvas>`](#) defines a drawable area for graphics and animations.
24. **center:** [`<center>`](#) centers content horizontally. (Deprecated)
25. **cite:** [`<cite>`](#) marks the title of a work, displayed in italics.
26. **code:** [`<code>`](#) represents computer code text.
27. **colgroup:** [`<colgroup>`](#) groups columns in a table for styling.
28. **col:** [`<col>`](#) sets properties for columns within a `<colgroup>`.
29. **comment:** [`<comment>`](#) inserts a comment in the HTML code.
30. **data:** [`<data>`](#) associates content with a machine-readable value.
31. **datalist:** [`<datalist>`](#) provides autocomplete options for input elements.
32. **dd:** [`<dd>`](#) defines a description in a description list.
33. **define:** [`<dfn>`](#) marks the defining instance of a term.
34. **delete:** [`<del>`](#) marks deleted text.
35. **details:** [`<details>`](#) creates an expandable/collapsible section.
36. **dialog:** [`<dialog>`](#) defines a popup dialog box.
37. **dir:** [`<dir>`](#) creates a directory list.

38. **div:** [`<div>`](#) groups content into a division or section.
39. **dl:** [`<dl>`](#) represents a description list.
40. **dt:** [`<dt>`](#) represents a term/name in a description list.
41. **embed:** [`<embed>`](#) embeds external multimedia content like Flash.
42. **fieldset:** [`<fieldset>`](#) groups related form elements together.
43. **figcaption:** [`<figcaption>`](#) adds caption to a figure.
44. **figure:** [`<figure>`](#) represents self-contained content, like images.
45. **font:** [`<font>`](#) set font, size, and color.
46. **footer:** [`<footer>`](#) defines footer content for a document/section.
47. **form:** [`<form>`](#) represents a web form for user input.
48. **frame:** [`<frame>`](#) defines a browser window frame.
49. **frameset:** [`<frameset>`](#) groups frames in a window.
50. **head:** [`<head>`](#) contains metadata and links for the document.
51. **header:** [`<header>`](#) represents introductory content or a heading section.
52. **heading:** [`<h1>`](#)–[`<h6>`](#) defines headings of the page from highest to lowest.
53. **hgroup:** [`<hgroup>`](#) groups multiple headings.
54. **hr:** [`<hr>`](#) inserts a horizontal line.
55. **html:** [`<html>`](#) defines the root element of the HTML page.
56. **iframe:** [`<iframe>`](#) embeds another HTML document in a frame.
57. **image:** [`<img>`](#) displays an image.
58. **input:** [`<input>`](#) creates input controls in a form.
59. **ins:** [`<ins>`](#) marks inserted text.
60. **isindex:** [`<isindex>`](#) creates a single-line text query.

61. **italic:** `<i>` italicizes text for emphasis or technical terms.
67. **kbd:** `<kbd>` marks text as keyboard input.
68. **keygen:** `<keygen>` generates key-pair for forms.
69. **label:** `<label>` provides label for form input elements.
70. **legend:** `<legend>` titles a `<fieldset>` element.
71. **link:** `<link>` links external resources like CSS or icons.
72. **list:** `<li>` represents an item in a list.
73. **main:** `<main>` marks the main content of the page.
74. **mark:** `<mark>` highlights text for reference or attention.
75. **marquee:** `<marquee>` scrolls text or images.
76. **menuitem:** `<menuitem>` defines a menu command.
77. **meta:** `<meta>` stores metadata about the HTML document.
78. **meter:** `<meter>` displays a scalar measurement within a known range.
79. **nav:** `<nav>` represents navigation links for the site.
80. **nobreak:** `<nobr>` prevents line breaks.
81. **noembed:** `<noembed>` alternative content for unsupported embed.
82. **noscript:** `<noscript>` displays content when scripts are disabled.
83. **object:** `<object>` embeds multimedia content.
84. **optgroup:** `<optgroup>` groups options in a dropdown menu.
85. **option:** `<option>` defines a choice in a dropdown list.
86. **output:** `<output>` displays results from calculations or scripts.
87. **paragraph:** `<p>` represents a paragraph of text.
88. **param:** `<param>` defines parameters for an object element.
89. **em :** `<em>` marks text with emphasis.

90. **pre:** `<pre>` displays preformatted text.
91. **progress:** `<progress>` represents progress of a task.
92. **q:** `<q>` represents a short inline quotation.
93. **rp:** `<rp>` provides parentheses for ruby annotations.
94. **rt:** `<rt>` provides ruby annotation text.
95. **ruby:** `<ruby>` marks text with ruby annotations.
96. **s:** `<s>` marks text as no longer correct.
97. **samp:** `<samp>` represents sample computer output.
98. **script:** `<script>` embeds client-side script like JavaScript.
99. **section:** `<section>` represents a standalone section of content.
100. **small:** `<small>` reduces font size.
101. **source:** `<source>` defines media source for audio/video.
102. **spacer:** `<spacer>` creates empty space.
103. **span:** `<span>` generic inline container for text or elements.
104. **strike:** `<strike>` strikethrough text.
105. **strong:** `<strong>` marks text as important, bold style.
106. **style:** `<style>` adds CSS styling within HTML.
107. **sub:** `<sub>` adds subscript text.
108. **sup:** `<sup>` adds superscript text.
109. **summary:** `<summary>` adds summary for a `<details>` element.
110. **svg:** `<svg>` defines Scalable Vector Graphics content.
111. **table:** `<table>` represents tabular data in rows and columns.
112. **tbody:** `<tbody>` groups table body rows.
113. **td:** `<td>` represents a standard table cell.

114. **template:** [`<template>`](#) stores reusable HTML fragments.

115. **tfoot:** [`<tfoot>`](#) defines table footer.

116. **th:**[`<th>`](#) represents a table header cell.

117. **thead:** [`<thead>`](#) groups table header rows.

118. **time:** [`<time>`](#) represents a specific date/time.

119. **title:** [`<title>`](#) sets the document title.

120. **tr:** [`<tr>`](#) defines a table row.

121. **track:** [`<track>`](#) provides text tracks for media elements.

122. **tt:** [`<tt>`](#) teletype text.

123. **underline:** [`<u>`](#) underlines text.

124. **var:** [`<var>`](#) represents a variable in code or math.

125. **video:** [`<video>`](#) embeds video content.

126. **wbr:** [`<wbr>`](#) suggests a line break opportunity.

127. **xmp:** [`<xmp>`](#) displays preformatted text literally.

LIST OF ATTRIBUTES:

1. The href Attribute

The `<a>` tag defines a hyperlink. The `href` attribute specifies the URL of the page the link goes to:

2. The src Attribute

The `<img>` tag is used to embed an image in an HTML page. The `src` attribute specifies the path to the image to be displayed:

There are two ways to specify the URL in the `src` attribute:

1. Absolute URL - Links to an external image that is hosted on another website.

Example: `src="https://www.w3schools.com/images/img_girl.jpg"`.

Notes: External images might be under copyright. If you do not get permission to use it, you may be in violation of copyright laws. In addition, you cannot control external images; it can suddenly be removed or changed.

2. Relative URL - Links to an image that is hosted within the website. Here, the URL does not include the domain name. If the URL begins without a slash, it will be relative to the current page. Example: `src="img_girl.jpg"`. If the URL begins with a slash, it will be relative to the domain. Example: `src="/images/img_girl.jpg"`.

Tip: It is almost always best to use relative URLs. They will not break if you change domain.

3. The width and height Attributes

The `<img>` tag should also contain the `width` and `height` attributes, which specify the width and height of the image (in pixels):

4. The alt Attribute

The required `alt` attribute for the `<img>` tag specifies an alternate text for an image, if the image for some reason cannot be displayed. This can be due to a slow connection, or an error in the `src` attribute, or if the user uses a screen reader.

5. The style Attribute

The `style` attribute is used to add styles to an element, such as color, font, size, and more.

6. The lang Attribute

You should always include the `lang` attribute inside the `<html>` tag, to declare the language of the Web page. This is meant to assist search engines and browsers.

7. The title Attribute

The `title` attribute defines some extra information about an element.

Suggestion:

1. Always Use Lowercase Attributes

2. Always Quote Attribute Values

Note: Double quotes around attribute values are the most common in HTML, but single quotes can also be used.