

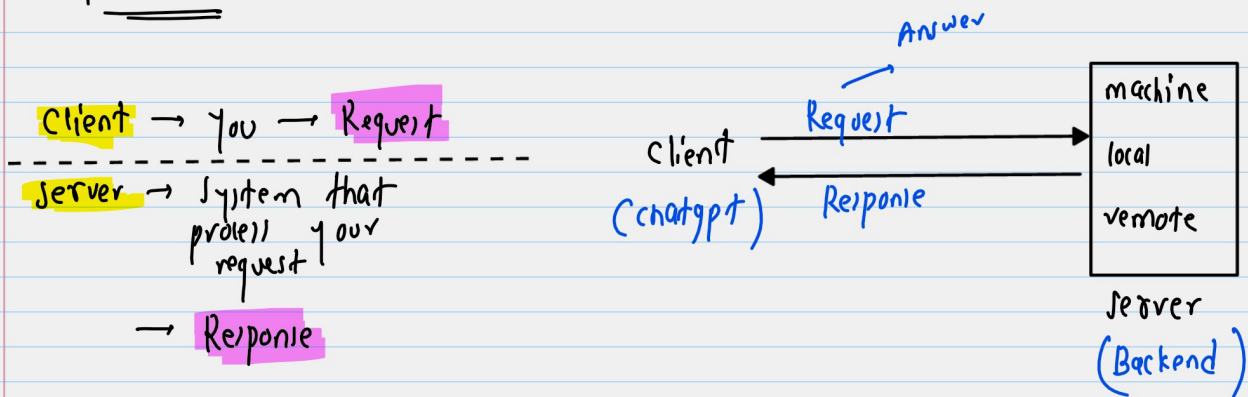
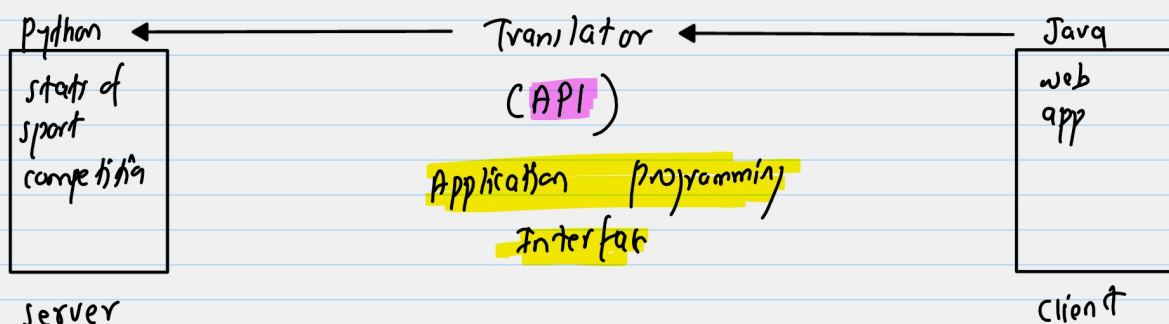


19-07-2026


fast API

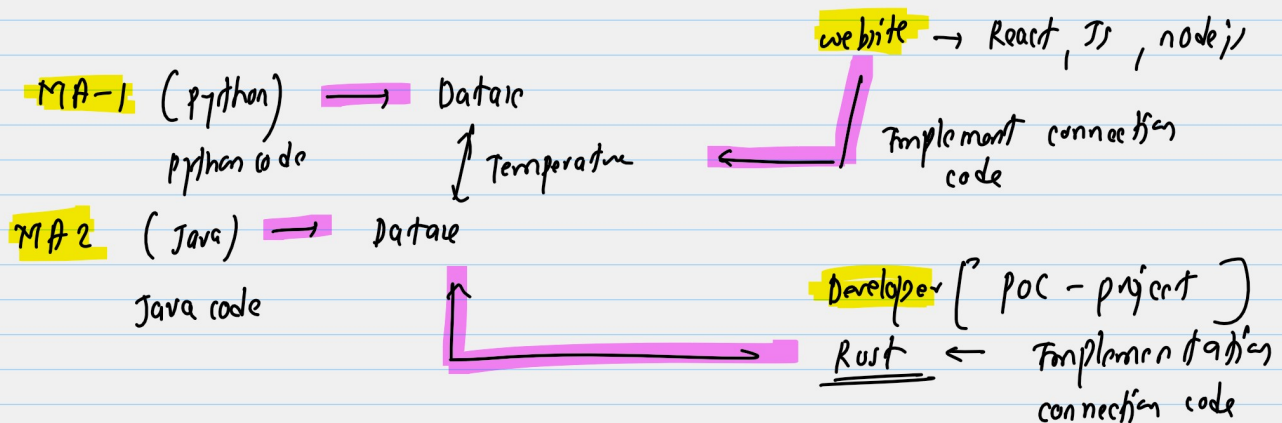

API :-

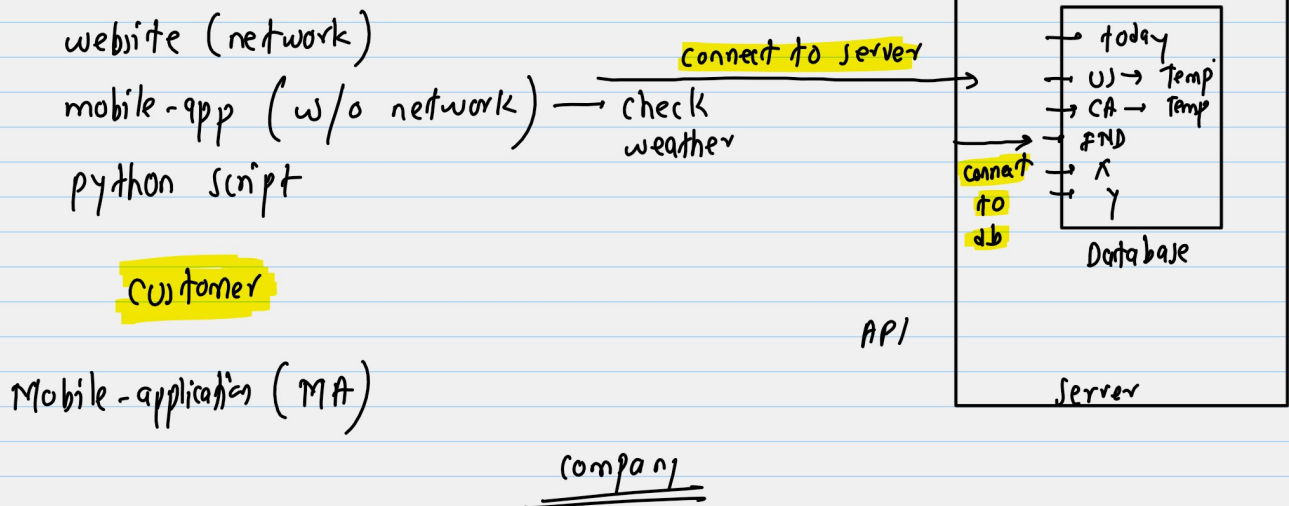

python - Dart

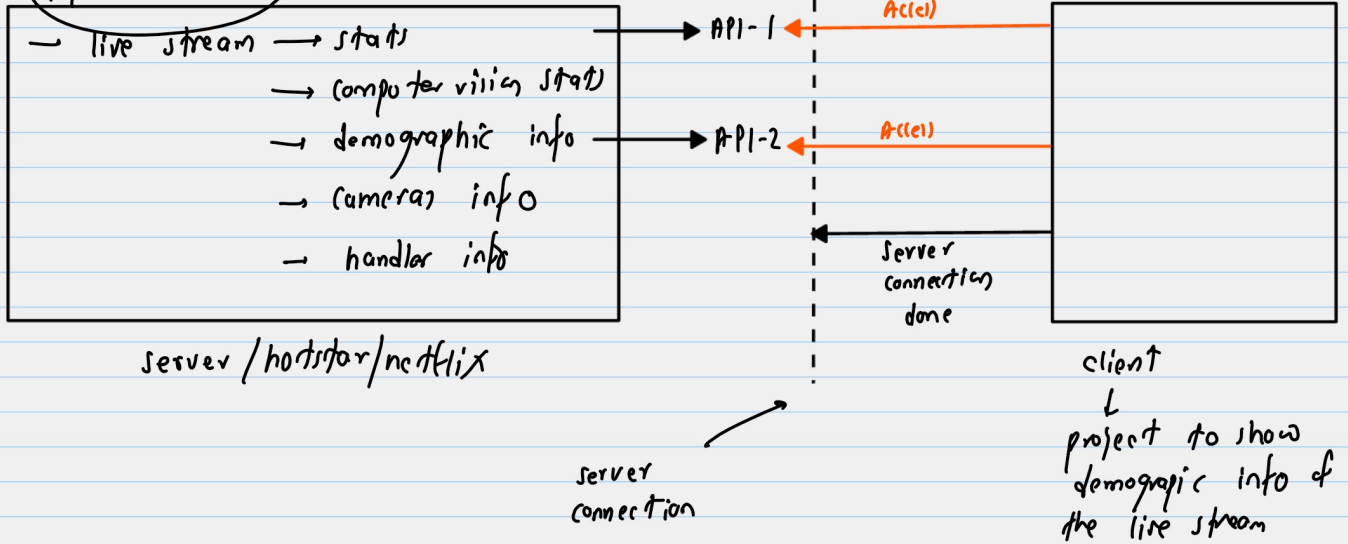

who creates API? **server**


who uses API? **client**

can we access every-data of server? **NO**


To have limited access, we create limited **API's**

layman understanding examples :

→ restaurant

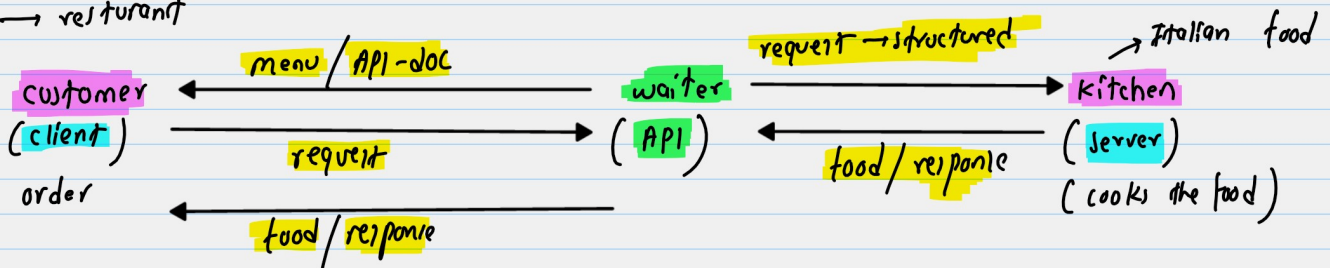

API is an agreed-upon contract that lets each piece of software ask another piece of software to do something.

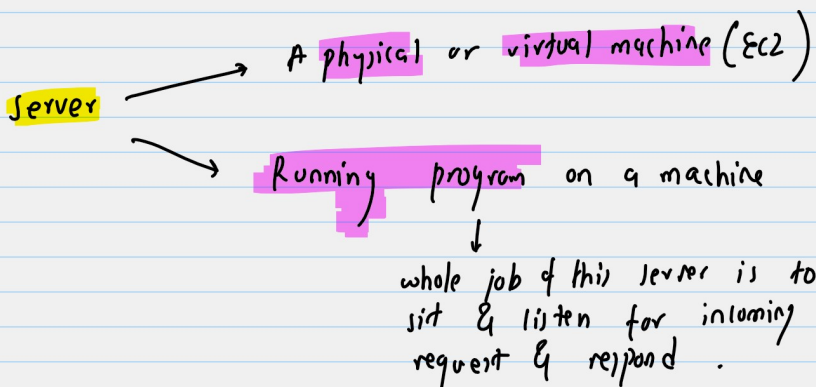

python server.py


server.py

while True :

obj = request()

process if obj else continue

port

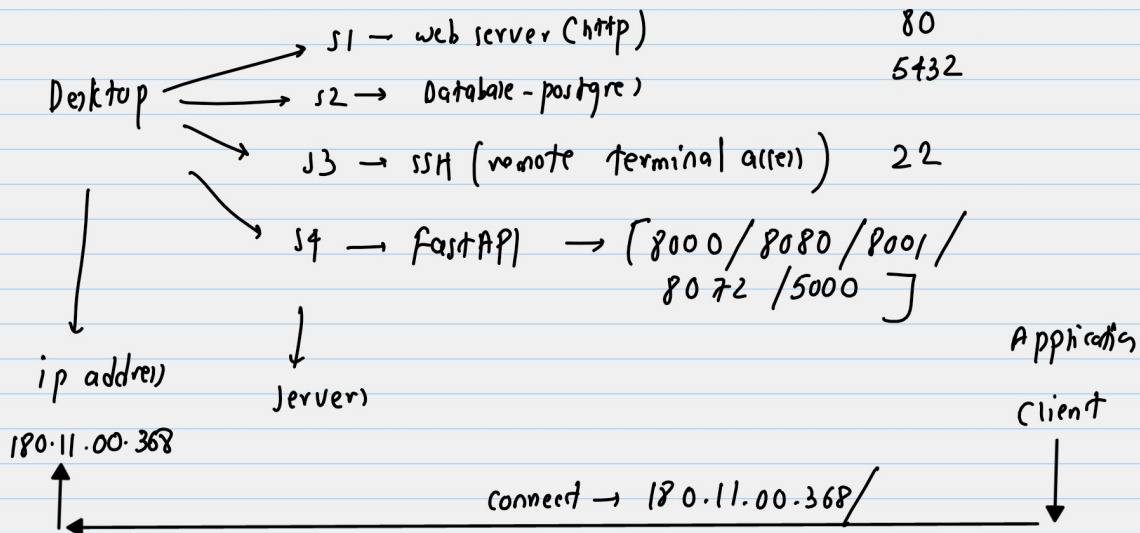

port below 1024 are "privileged" on most OS

0 - 1024 →

0 - 65535 → port range

ip-address → street address of your house



port → door no to your room

This same machine

→ localhost

→ 127.0.0.1

↑
special address that means same machine

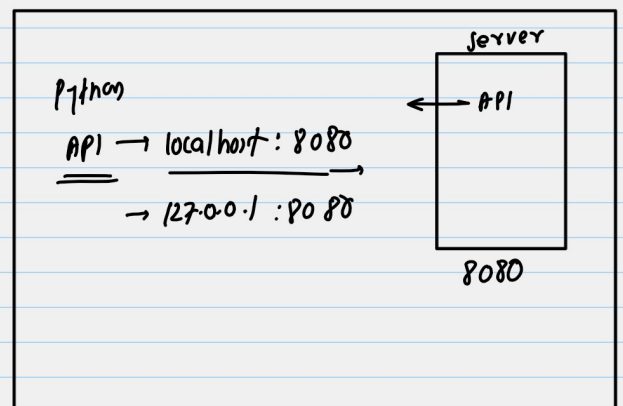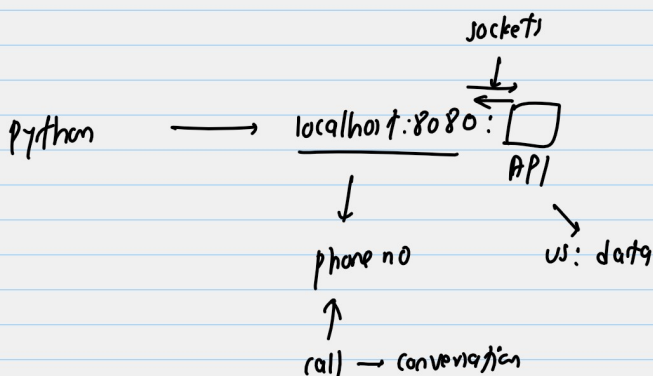


PC/server → expose

Server → Bind

127.0.0.1 ← itself

192.168.1.50 ← wifi network ip

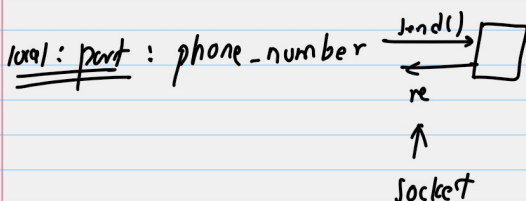

Server → Bind → localhost
 PPI ← inside ← PC

Server → Bind → 0.0.0.0 → open its ports to every active interface on the machine

← 127.0.0.1 } secure
 ← localhost }
 ← 192.168.x.x } restricted
 ← public interface } open access

Uvicorn

(actual server/program)

- socket creation
- binding → access
- listening & accepting

doorman, stands at the door all day.

→ notice when some walks up the street


→ send them to waiter (PPI)

Fastapi

(Framework)

- what happens once a request has arrived
- waiter → holds the menu

customer → what do i do?
 (request)
 pizza ↓

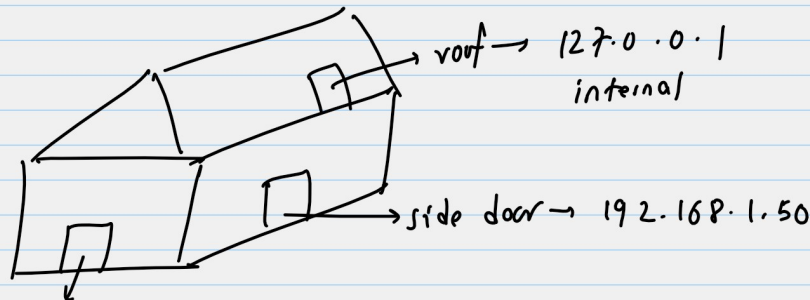

access everyone → 200.18.80.132

accept request from all doors → 0.0.0.0

