GeeksforGeeks

A computer science portal for geeks

Login

Home	Algorithms	DS	GATE	Interview	Corner	Q&A	С	C++	Java	Books	Contribute	Ask a Q	About
Array	Bit Magic	C/C+	+ Artic	cles GF	acts	Linked Li	st	MCQ	Misc	Output	t String	Tree	Graph

Flattening a Linked List

Given a linked list where every node represents a linked list and contains two pointers of its type:

- (i) Pointer to next node in the main list (we call it 'right' pointer in below code)
- (ii) Pointer to a linked list where this node is head (we call it 'down' pointer in below code).

All linked lists are sorted. See the following example



Write a function flatten() to flatten the lists into a single linked list. The flattened linked list should also be sorted. For example, for the above input list, output list should be 5->7->8->10->19->20->22->28->30->35->40->45->50.

The idea is to use Merge() process of merge sort for linked lists. We use merge() to merge lists one by one. We recursively merge() the current list with already flattened list.

The down pointer is used to link nodes of the flattened list.

Following is C implementation.

Google™ Custom Search



53,527 people like GeeksforGeeks.











Interview Experiences

Advanced Data Structures

Dynamic Programming

Greedy Algorithms

Backtracking

Pattern Searching

Divide & Conquer

Mathematical Algorithms

Recursion

Geometric Algorithms

```
#include <stdlib.h>
// A Linked List Node
typedef struct Node
    int data;
    struct Node *right;
    struct Node *down;
} Node;
/* A utility function to insert a new node at the begining
   of linked list */
void push (Node** head ref, int new data)
    /* allocate node */
    Node* new node = (Node *) malloc(sizeof(Node));
    new node-\overline{>}right = NULL;
    /* put in the data */
    new node->data = new data;
    /* link the old list off the new node */
    new node->down = (*head ref);
    /* move the head to point to the new node */
    (*head ref)
                   = new node;
/* Function to print nodes in the flattened linked list */
void printList(Node *node)
    while (node != NULL)
        printf("%d ", node->data);
        node = node->down:
// A utility function to merge two sorted linked lists
Node* merge ( Node* a, Node* b )
    // If first list is empty, the second list is result
    if (a == NULL)
        return b;
    // If second list is empty, the second list is result
    if (b == NULL)
```



Popular Posts

All permutations of a given string

Memory Layout of C Programs

Understanding "extern" keyword in C

Median of two sorted arrays

Tree traversal without recursion and without stack!

Structure Member Alignment, Padding and Data Packing


Intersection point of two Linked Lists

Lowest Common Ancestor in a BST.

Check if a binary tree is BST or not

Sorted Linked List to Balanced BST

```
return a;
    // Compare the data members of head nodes of both lists
    // and put the smaller one in result
    Node* result;
    if( a->data < b->data )
        result = a;
        result->down = merge( a->down, b );
    else
        result = b;
        result->down = merge(a, b->down);
    return result;
// The main function that flattens a given linked list
Node* flatten (Node* root)
    // Base cases
    if ( root == NULL || root->right == NULL )
        return root;
    // Merge this list with the list on right side
    return merge( root, flatten(root->right) );
// Driver program to test above functions
int main()
    Node* root = NULL;
    /* Let us create the following linked list
       5 -> 10 -> 19 -> 28
            20
                        35
                        V
                  50
                        40
                        V
       30
                        45
```

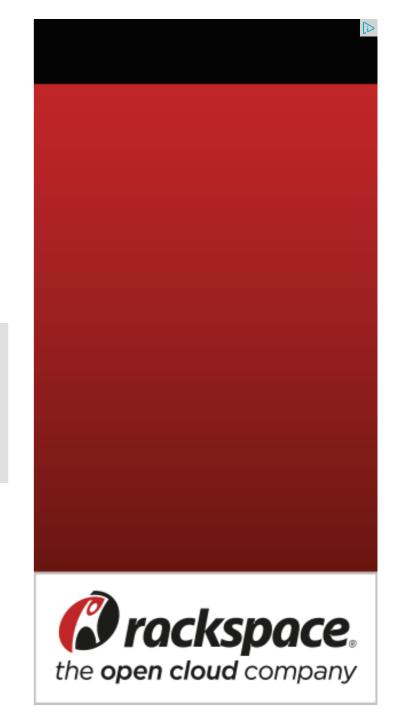



```
705
```



```
push ( & root, 30 );
push( &root, 8 );
push( &root, 7 );
push( &root, 5 );
push( &( root->right ), 20 );
push( &( root->right ), 10 );
push( &( root->right->right ), 50 );
push( &( root->right->right ), 22 );
push( &( root->right->right ), 19 );
push( &( root->right->right->right ), 45 );
push( &( root->right->right->right ), 40 );
push( &( root->right->right->right ), 35 );
push( &( root->right->right->right ), 20 );
// Let us flatten the list
root = flatten(root);
// Let us print the flatened linked list
printList(root);
return 0;
```

Output:

```
5 7 8 10 19 20 20 22 30 35 40 45 50
```

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

Recent Comments

Abhi You live US or India?

Google (Mountain View) interview 44 minutes ago

Aman Hi, Why arent we checking for conditions...

Write a C program to Delete a Tree. 1 hour ago

kzs please provide solution for the problem...

Backtracking | Set 2 (Rat in a Maze) · 1 hour ago

Sanjay Agarwal bool

tree::Root to leaf path given sum(tree...

Root to leaf path sum equal to a given number · 1

hour ago

GOPI GOPINATH @admin Highlight this sentence "We can easily...

Count trailing zeroes in factorial of a number · 1

hour ago

newCoder3006 If the array contains negative numbers also. We...

Find subarray with given sum · 2 hours ago

Free Online Database

Z zoho.com/creator/online-database

Create database apps in minutes. Just Drag-&-drop. Try NOW!



Related Tpoics:

- Given a linked list, reverse alternate nodes and append at the end
- Pairwise swap elements of a given linked list by changing links
- Self Organizing List | Set 1 (Introduction)
- Merge a linked list into another linked list at alternate positions
- QuickSort on Singly Linked List
- Delete N nodes after M nodes of a linked list
- Design a stack with operations on middle element
- Swap Kth node from beginning with Kth node from end in a Linked List









Writing code in comment? Please use ideone.com and share the link here.

@geeksforgeeks, Some rights reserved

Contact Us!

AdChoices D

- ▶ Linked List
- ► C++ Code
- ► Linked Data

AdChoices ▷

- Java Array
- ► Flatten Stomach
- Stomach Flat

AdChoices ▷

- ► Flat Tummy
- ► Flat ABS com
- ► Flat Belly

Powered by WordPress & MooTools, customized by geeksforgeeks team