

Given an array `arr[]`, find the maximum $j - i$ such that `arr[j] > arr[i]`

Given an array `arr[]`, find the maximum $j - i$ such that `arr[j] > arr[i]`.

Examples:

Input: {34, 8, 10, 3, 2, 80, 30, 33, 1}

Output: 6 ($j = 7, i = 1$)

Input: {9, 2, 3, 4, 5, 6, 7, 8, 18, 0}

Output: 8 ($j = 8, i = 0$)

Input: {1, 2, 3, 4, 5, 6}

Output: 5 ($j = 5, i = 0$)

Input: {6, 5, 4, 3, 2, 1}

Output: -1

Method 1 (Simple but Inefficient)

Run two loops. In the outer loop, pick elements one by one from left. In the inner loop, compare the picked element with the elements starting from right side. Stop the inner loop when you see an element greater than the picked element and keep updating the maximum $j-i$ so far.

```
#include <stdio.h>
/* For a given array arr[], returns the maximum j - i such that
   arr[j] > arr[i] */
int maxIndexDiff(int arr[], int n)
{
```


Google™ Custom Search



GeeksforGeeks



53,520 people like [GeeksforGeeks](#).



[Interview Experiences](#)

[Advanced Data Structures](#)

[Dynamic Programming](#)

[Greedy Algorithms](#)

[Backtracking](#)

[Pattern Searching](#)

[Divide & Conquer](#)

[Mathematical Algorithms](#)

[Recursion](#)

```

int maxDiff = -1;
int i, j;

for (i = 0; i < n; ++i)
{
    for (j = n-1; j > i; --j)
    {
        if(arr[j] > arr[i] && maxDiff < (j - i))
            maxDiff = j - i;
    }
}

return maxDiff;
}

int main()
{
    int arr[] = {9, 2, 3, 4, 5, 6, 7, 8, 18, 0};
    int n = sizeof(arr)/sizeof(arr[0]);
    int maxDiff = maxIndexDiff(arr, n);
    printf("\n %d", maxDiff);
    getchar();
    return 0;
}

```



Popular Posts

[All permutations of a given string](#)

[Memory Layout of C Programs](#)

[Understanding "extern" keyword in C](#)

[Median of two sorted arrays](#)

[Tree traversal without recursion and without stack!](#)

[Structure Member Alignment, Padding and Data Packing](#)

[Intersection point of two Linked Lists](#)

[Lowest Common Ancestor in a BST.](#)

[Check if a binary tree is BST or not](#)

[Sorted Linked List to Balanced BST](#)

Time Complexity: $O(n^2)$

Method 2 (Efficient)

To solve this problem, we need to get two optimum indexes of `arr[]`: left index `i` and right index `j`. For an element `arr[i]`, we do not need to consider `arr[i]` for left index if there is an element smaller than `arr[i]` on left side of `arr[i]`. Similarly, if there is a greater element on right side of `arr[j]` then we do not need to consider this `j` for right index. So we construct two auxiliary arrays `LMin[]` and `RMax[]` such that `LMin[i]` holds the smallest element on left side of `arr[i]` including `arr[i]`, and `RMax[j]` holds the greatest element on right side of `arr[j]` including `arr[j]`. After constructing these two auxiliary arrays, we traverse both of these arrays from left to right. While traversing `LMin[]` and `RMa[]` if we see that `LMin[i]` is greater than `RMax[j]`, then we must move ahead in `LMin[]` (or do `i++`) because all elements on left of `LMin[i]` are greater than or equal to `LMin[i]`. Otherwise we must move ahead in `RMax[j]` to look for a greater `j - i` value.

Thanks to celicom for suggesting the algorithm for this method.

```
#include <stdio.h>
```

```

/* Utility Functions to get max and minimum of two integers */
int max(int x, int y)
{
    return x > y? x : y;
}

int min(int x, int y)
{
    return x < y? x : y;
}

/* For a given array arr[], returns the maximum j - i such that
   arr[j] > arr[i] */
int maxIndexDiff(int arr[], int n)
{
    int maxDiff;
    int i, j;

    int *LMin = (int *)malloc(sizeof(int)*n);
    int *RMax = (int *)malloc(sizeof(int)*n);

    /* Construct LMin[] such that LMin[i] stores the minimum value
       from (arr[0], arr[1], ... arr[i]) */
    LMin[0] = arr[0];
    for (i = 1; i < n; ++i)
        LMin[i] = min(arr[i], LMin[i-1]);

    /* Construct RMax[] such that RMax[j] stores the maximum value
       from (arr[j], arr[j+1], ..arr[n-1]) */
    RMax[n-1] = arr[n-1];
    for (j = n-2; j >= 0; --j)
        RMax[j] = max(arr[j], RMax[j+1]);

    /* Traverse both arrays from left to right to find optimum j - i
       This process is similar to merge() of MergeSort */
    i = 0, j = 0, maxDiff = -1;
    while (j < n && i < n)
    {
        if (LMin[i] < RMax[j])
        {
            maxDiff = max(maxDiff, j-i);
            j = j + 1;
        }
        else
            i = i+1;
    }
}

```

Deploy Early. Deploy Often.

DevOps from
Rackspace:

Automation

FIND OUT HOW ►



```

    return maxDiff;
}


/* Driver program to test above functions */
int main()
{
    int arr[] = {9, 2, 3, 4, 5, 6, 7, 8, 18, 0};
    int n = sizeof(arr)/sizeof(arr[0]);
    int maxDiff = maxIndexDiff(arr, n);
    printf("\n %d", maxDiff);
    getchar();
    return 0;
}

```

Time Complexity: O(n)

Auxiliary Space: O(n)

Please write comments if you find the above codes/algorithms incorrect, or find other ways to solve the same problem.

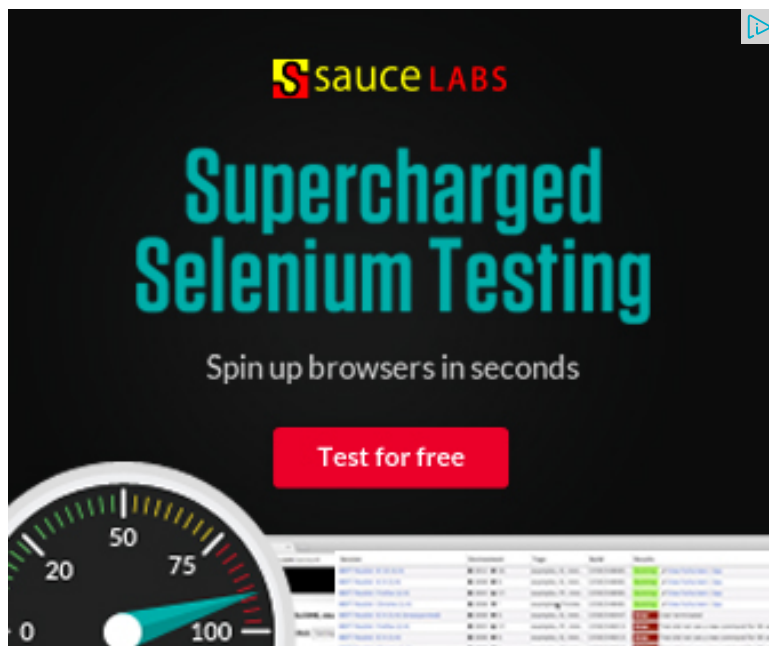

Related Tpoics:

- Remove minimum elements from either side such that $2 \times \text{min}$ becomes more than max

Recent Comments

Aman Hi, Why arent we checking for conditions...

Write a C program to Delete a Tree. · 13 minutes ago

kzs please provide solution for the problem...

Backtracking | Set 2 (Rat in a Maze) · 17 minutes ago

Sanjay Agarwal bool

tree::Root_to_leaf_path_given_sum(tree...

Root to leaf path sum equal to a given number · 42 minutes ago

GOPI GOPINATH @admin Highlight this sentence "We can easily...

Count trailing zeroes in factorial of a number · 44 minutes ago

newCoder3006 If the array contains negative numbers also. We...

Find subarray with given sum · 1 hour ago

newCoder3006 Code without using while loop. We can do it...

Find subarray with given sum · 1 hour ago

AdChoices

► [C++ Code](#)

► [C++ Array](#)

► [Java Array](#)

- [Divide and Conquer | Set 6 \(Search in a Row-wise and Column-wise Sorted 2D Array\)](#)
- [Bucket Sort](#)
- [Kth smallest element in a row-wise and column-wise sorted 2D array | Set 1](#)
- [Find the number of zeroes](#)
- [Find if there is a subarray with 0 sum](#)
- [Divide and Conquer | Set 5 \(Strassen's Matrix Multiplication\)](#)
- [Count all possible groups of size 2 or 3 that have sum as multiple of 3](#)



6



0



0

Writing code in comment? Please use [ideone.com](https://www.ideone.com) and share the link here.

[▶ C++ Array](#)

AdChoices

[▶ Array Max](#)

[▶ Array Reference](#)

[▶ An Array](#)

AdChoices

[▶ Int C++](#)

[▶ Int in Array](#)

[▶ C++ Java](#)

@geeksforgeeks, **Some rights reserved**

Contact Us!

Powered by **WordPress** & **MooTools**, customized by geeksforgeeks team