

Access specifier of methods in interfaces

In Java, all methods in an interface are *public* even if we do not specify *public* with method names. Also, data fields are *public static final* even if we do not mention it with fields names. Therefore, data fields must be initialized.

Consider the following example, *x* is by default *public static final* and *foo()* is *public* even if there are no specifiers.

```
interface Test {  
    int x = 10; // x is public static final and must be initialized here  
    void foo(); // foo() is public  
}
```

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

Google™ Custom Search




GeeksforGeeks



53,527 people like GeeksforGeeks.



Facebook

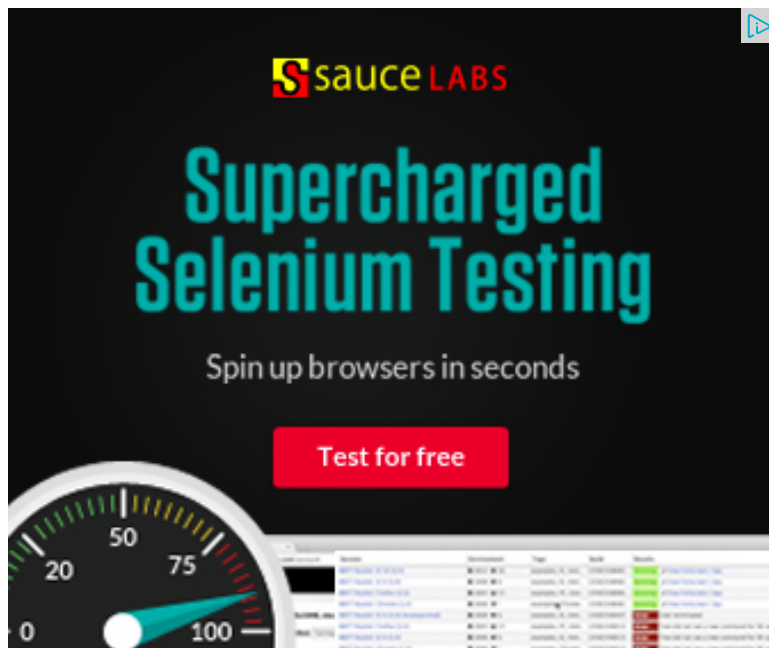

[Interview Experiences](#)

[Advanced Data Structures](#)

[Dynamic Programming](#)

[Greedy Algorithms](#)

[Backtracking](#)

[Pattern Searching](#)

[Divide & Conquer](#)

[Mathematical Algorithms](#)

[Recursion](#)

[Geometric Algorithms](#)

Deploy Early. Deploy Often.

DevOps from Rackspace:

Automation

[FIND OUT HOW ►](#)



rackspace
the open cloud company

Related Tpoics:

- [Backtracking | Set 8 \(Solving Cryptarithmic Puzzles\)](#)
- [Tail Recursion](#)
- [Find if two rectangles overlap](#)
- [Analysis of Algorithm | Set 4 \(Solving Recurrences\)](#)
- [Print all possible paths from top left to bottom right of a mXn matrix](#)
- [Generate all unique partitions of an integer](#)
- [Russian Peasant Multiplication](#)
- [Closest Pair of Points | O\(nlogn\) Implementation](#)



Writing code in comment? Please use [ideone.com](#) and share the link here.

Sort by Newest ▼

Join the discussion...GS · 3 months ago

void foo(); // foo() is public

Methods in interface are abstract too

^ | ▼ · Reply · Share ›

 Subscribe Add Disqus to your site

Popular Posts

[All permutations of a given string](#)[Memory Layout of C Programs](#)[Understanding “extern” keyword in C](#)[Median of two sorted arrays](#)[Tree traversal without recursion and without stack!](#)[Structure Member Alignment, Padding and Data Packing](#)[Intersection point of two Linked Lists](#)[Lowest Common Ancestor in a BST.](#)[Check if a binary tree is BST or not](#)[Sorted Linked List to Balanced BST](#)

Market research
that's fast and
accurate.

Get \$75 off

 Google consumer surveys

Recent Comments

Abhi You live US or India?

[Google \(Mountain View\) interview](#) · 35 minutes ago

Aman Hi, Why arent we checking for conditions...

[Write a C program to Delete a Tree.](#) · 1 hour ago

kzs please provide solution for the problem...

[Backtracking | Set 2 \(Rat in a Maze\)](#) · 1 hour ago

Sanjay Agarwal bool

tree::Root_to_leaf_path_given_sum(tree...

[Root to leaf path sum equal to a given number](#) · 1

hour ago


GOPI GOPINATH @admin Highlight this sentence "We can easily...

[Count trailing zeroes in factorial of a number](#) · 1

hour ago

newCoder3006 If the array contains negative numbers also. We...


[Find subarray with given sum](#) · 2 hours ago

AdChoices 

[► Data Interfaces](#)

[► Interfaces Java](#)


[► C++ Interfaces](#)

AdChoices 

► [Interfaces](#)

► [Interfaces Of](#)

► [Interfaces With](#)

AdChoices 

► [Interfaces Java](#)

► [Java Interfaces](#)

► [Interfaces In](#)

@geeksforgeeks, **Some rights reserved**

Contact Us!

Powered by **WordPress** & **MooTools**, customized by geeksforgeeks team