

Greedy Algorithms

Question 1

Which of the following standard algorithms is not a Greedy algorithm?

- A** Dijkstra's shortest path algorithm
- B** Prim's algorithm
- C** Kruskal algorithm
- D** Huffman Coding
- E** Bellmen Ford Shortest path algorithm

[Discuss it](#)

Question 2

A networking company uses a compression technique to encode the message before transmitting over the network. Suppose the message contains the following




GeeksQuiz

4,126 people like [GeeksQuiz](#).



Facebook social plugin

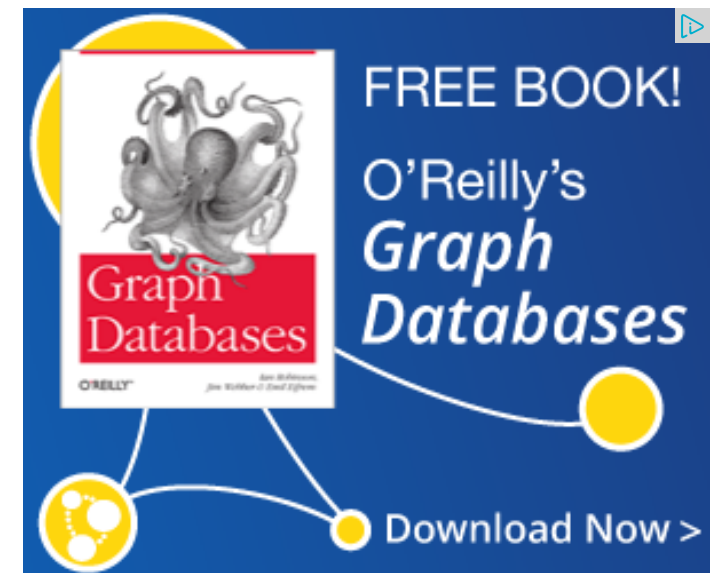

characters with their frequency:

character	Frequency
a	5
b	9
c	12
d	13
e	16
f	45

If the compression technique used is Huffman Coding, how many bits will be saved in the message?

A

B

C

D

224

800

576

324

Discuss it

Categories

Articles (28)

C (4)

C++ (2)

Data Structures (13)

DBMS (1)

Operating Systems (1)

Searching and Sorting (7)

Programs (7)

Quizzes (1,392)

Aptitude (1)

Computer Science Quizzes (1,391)

Algorithms (146)

C (203)

C++ (123)

Data Structures (131)

GATE (709)

Java (51)

Operating Systems (28)

Question 3

What is the time complexity of Huffman Coding?

- A $O(N)$
 - B $O(N \log N)$
 - C $O(N(\log N)^2)$
 - D $O(N^2)$

Discuss it

Question 4


In question #2, which of the following represents the word "dead"?

- A** 1011111100101
- B** 0100000011010
- C** Both A and B
- D** None of these

Discuss it

Question 5

Which of the following is true about Kruskal and Prim MST algorithms? Assume that

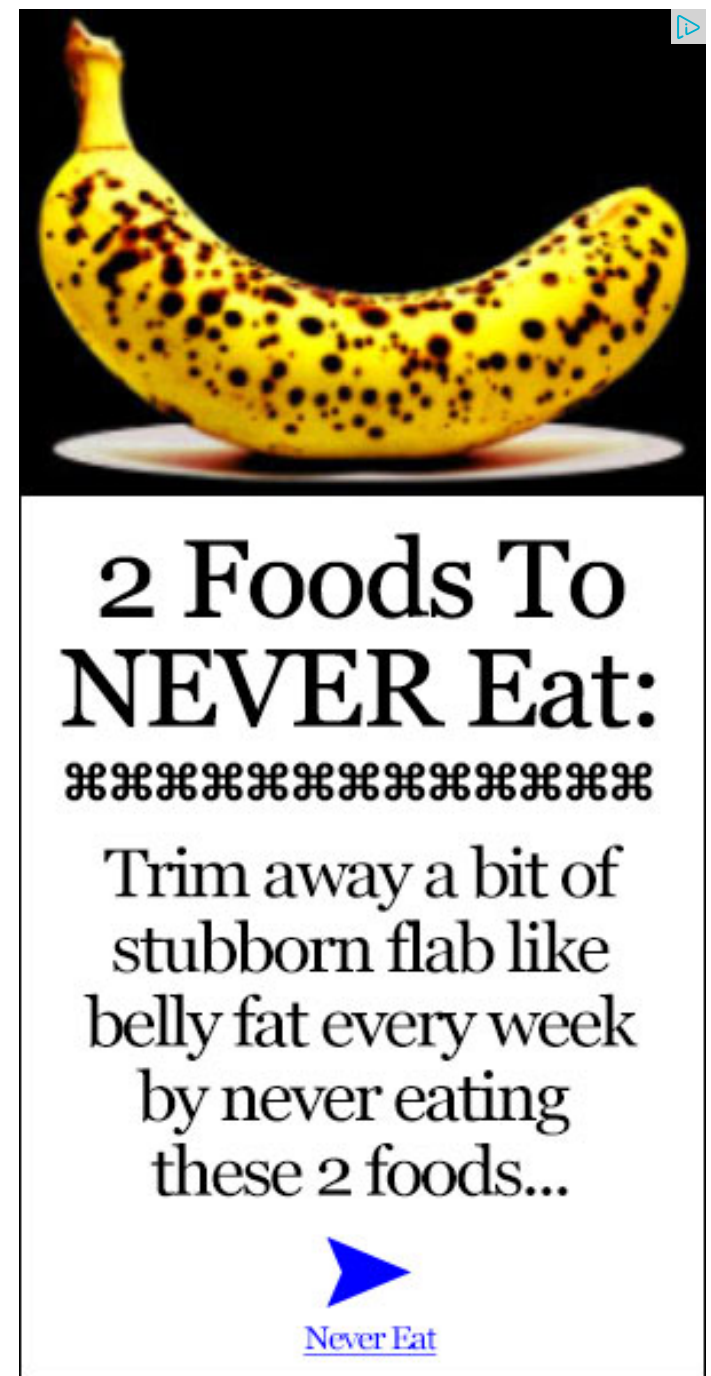

Recent Discussions

Prim is implemented for adjacency list representation using Binary Heap and Kruskal is implemented using union by rank.

- A** Worst case time complexity of both algorithms is same.
- B** Worst case time complexity of Kruskal is better than Prim
- C** Worst case time complexity of Prim is better than Kruskal

[Discuss it](#)

Question 6

Which of the following is true about Huffman Coding.

- A** Huffman coding may become lossy in some cases
- B** Huffman Codes may not be optimal lossless codes in some cases
- C** In Huffman coding, no code is prefix of any other code.
- D** All of the above

[Discuss it](#)

Question 7

Suppose the letters a, b, c, d, e, f have probabilities $\frac{1}{2}$, $\frac{1}{4}$, $\frac{1}{8}$, $\frac{1}{16}$, $\frac{1}{32}$, $\frac{1}{32}$ respectively. Which of the following is the Huffman code for the letter a, b, c, d, e, f?

Sumit Khatri this is the sorting technique which can work...

[Insertion Sort · 7 hours ago](#)

Sumit Khatri no, quick sort requires more swaps than...

[Selection Sort · 7 hours ago](#)

Sumit Khatri yes, it is the only sorting technique which...

[Selection Sort · 7 hours ago](#)

Sudhakar Mishra I think it should be $2n + 1$


[Data Structures | Binary Trees | Question 12 · 8 hours ago](#)

Sudhakar Mishra $(2n)! / ((n+1)! * n!)$

[Data Structures | Binary Trees | Question 6 · 1 day ago](#)

Sudhakar Mishra Always Y will be more than one because after...


[Data Structures | Stack | Question 7 · 1 day ago](#)

AdChoices 

[▶ Greedy Algorithms](#)

[▶ Algorithms in Java](#)


[▶ Scheduling Algorithms](#)

AdChoices 

[▶ Java Algorithms](#)

[▶ Algorithms](#)

[▶ Multiple Choice Quiz](#)

AdChoices 

[▶ Multiple Choice Quiz](#)

[▶ Compression Algorithms](#)

- A** 0, 10, 110, 1110, 11110, 11111
- B** 11, 10, 011, 010, 001, 000
- C** 11, 10, 01, 001, 0001, 0000
- D** 110, 100, 010, 000, 001, 111

[Discuss it](#)

Question 8

What is the average length of the correct answer to the above question on Huffman codes?

- A** 3
- B** 2.1875
- C** 2.25
- D** 2.19375

[Discuss it](#)

There are 8 questions to complete.

Cquate

 cquate.com

The New Language of Computing
For Algorithm Prototyping



0

 Tweet

0



0

Valid **XHTML Strict 1.0**

Powered by **WordPress & MooTools** | MiniMoo 1.3.4