

Check divisibility by 7

Given a number, check if it is divisible by 7. You are not allowed to use modulo operator, floating point arithmetic is also not allowed.

A simple method is repeated subtraction. Following is another interesting method.

Divisibility by 7 can be checked by a recursive method. A number of the form $10a + b$ is divisible by 7 if and only if $a - 2b$ is divisible by 7. In other words, subtract twice the last digit from the number formed by the remaining digits. Continue to do this until a small number.

Example: the number 371: $37 - (2 \times 1) = 37 - 2 = 35$; $3 - (2 \times 5) = 3 - 10 = -7$; thus, since -7 is divisible by 7, 371 is divisible by 7.

Following is C implementation of the above method

```
// A Program to check whether a number is divisible by 7
#include <stdio.h>

int isDivisibleBy7( int num )
{
    // If number is negative, make it positive
    if( num < 0 )
        return isDivisibleBy7( -num );

    // Base cases
    if( num == 0 || num == 7 )
        return 1;
    if( num < 10 )
        return 0;

    // Recur for ( num / 10 - 2 * num % 10 )
    return isDivisibleBy7( num / 10 - 2 * ( num - num / 10 * 10 ) );
}
```


Google™ Custom Search



GeeksforGeeks



53,525 people like [GeeksforGeeks](#).



Interview Experiences

Advanced Data Structures

Dynamic Programming

Greedy Algorithms

Backtracking

Pattern Searching

Divide & Conquer

Mathematical Algorithms

Recursion

Geometric Algorithms

```

}

// Driver program to test above function
int main()
{
    int num = 616;
    if( isDivisibleBy7(num) )
        printf( "Divisible" );
    else
        printf( "Not Divisible" );
    return 0;
}

```

Output:

Divisible

How does this work? Let 'b' be the last digit of a number 'n' and let 'a' be the number we get when we split off 'b'.

The representation of the number may also be multiplied by any number relatively prime to the divisor without changing its divisibility. After observing that 7 divides 21, we can perform the following:

$$10.a + b$$

after multiplying by 2, this becomes

$$20.a + 2.b$$

and then

$$21.a - a + 2.b$$

Eliminating the multiple of 21 gives

$$-a + 2b$$

and multiplying by -1 gives

$$a - 2b$$

There are other interesting methods to check divisibility by 7 and other numbers. See following Wiki page for details.

Popular Posts

[All permutations of a given string](#)

[Memory Layout of C Programs](#)

[Understanding "extern" keyword in C](#)

[Median of two sorted arrays](#)

[Tree traversal without recursion and without stack!](#)

[Structure Member Alignment, Padding and](#)

[Data Packing](#)

[Intersection point of two Linked Lists](#)

[Lowest Common Ancestor in a BST.](#)


[Check if a binary tree is BST or not](#)

[Sorted Linked List to Balanced BST](#)

References:

http://en.wikipedia.org/wiki/Divisibility_rule

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

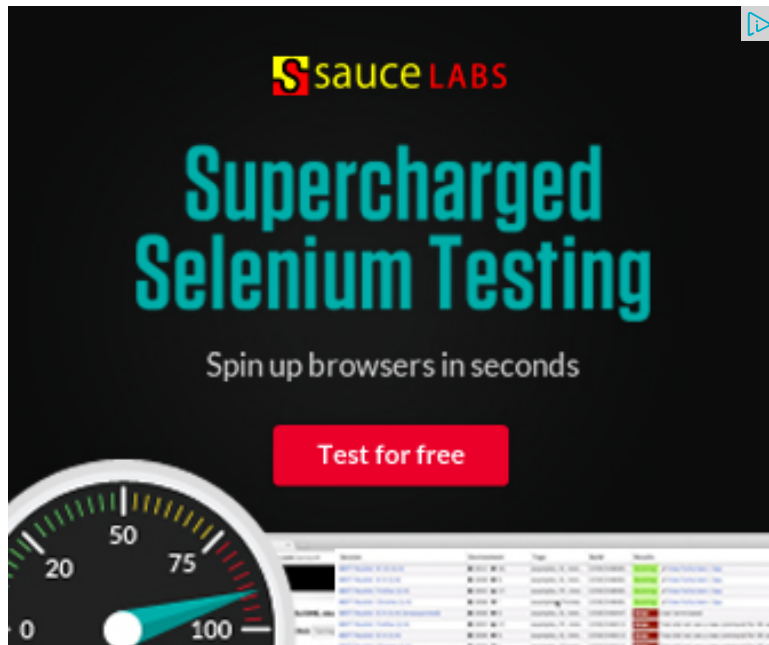

Related Topics:

- [Backtracking | Set 8 \(Solving Cryptarithmic Puzzles\)](#)
- [Tail Recursion](#)
- [Find if two rectangles overlap](#)
- [Analysis of Algorithm | Set 4 \(Solving Recurrences\)](#)
- [Print all possible paths from top left to bottom right of a mXn matrix](#)
- [Generate all unique partitions of an integer](#)
- [Russian Peasant Multiplication](#)
- [Closest Pair of Points | O\(nlogn\) Implementation](#)



1



Tweet

0



0

Writing code in comment? Please use ideone.com and share the link here.



Recent Comments

Abhi You live US or India?

Google (Mountain View) interview · 15 minutes ago

Aman Hi, Why arent we checking for conditions...

Write a C program to Delete a Tree. · 55 minutes ago

kzs please provide solution for the problem...

Backtracking | Set 2 (Rat in a Maze) · 58 minutes ago

Sanjay Agarwal bool

tree::Root_to_leaf_path_given_sum(tree...


Root to leaf path sum equal to a given number · 1 hour ago

GOPI GOPINATH @admin Highlight this sentence "We can easily...

Count trailing zeroes in factorial of a number · 1 hour ago

newCoder3006 If the array contains negative numbers also. We...

Find subarray with given sum · 1 hour ago

AdChoices 

[▶ Divisible](#)

[▶ C++ Source Code](#)


[▶ Java C++](#)

AdChoices 

► [Divisible](#)

► [Programming C++](#)

► [Java Source Code](#)

AdChoices 

► [Programming C++](#)

► [C++ Language](#)

► [Test C++](#)

@geeksforgeeks, **Some rights reserved**

[Contact Us!](#)

Powered by **WordPress** & **MooTools**, customized by geeksforgeeks team