

## Final arrays in Java

Predict the output of following Java program.

```
class Test
{
    public static void main(String args[])
    {
        final int arr[] = {1, 2, 3, 4, 5}; // Note: arr is final
        for (int i = 0; i < arr.length; i++)
        {
            arr[i] = arr[i]*10;
            System.out.println(arr[i]);
        }
    }
}
```

Output:

```
10
20
30
40
50
```

The array *arr* is declared as final, but the elements of array are changed without any problem. Arrays are objects and object variables are always references in Java. So, when we declare an object variable as final, it means that the variable cannot be changed to refer to anything else. For example, the following program 1 compiles without any error and program fails in compilation.

```
// Program 1
class Test
```

Google™ Custom Search



GeeksforGeeks



53,527 people like GeeksforGeeks.



Interview Experiences

Advanced Data Structures

Dynamic Programming

Greedy Algorithms

Backtracking

Pattern Searching

Divide & Conquer

Mathematical Algorithms

Recursion

```

{
    int p = 20;
    public static void main(String args[])
    {
        final Test t = new Test();
        t.p = 30;
        System.out.println(t.p);
    }
}

```

Output: 30

```

// Program 2
class Test
{
    int p = 20;
    public static void main(String args[])
    {
        final Test t1 = new Test();
        Test t2 = new Test();
        t1 = t2;
        System.out.println(t1.p);
    }
}

```

Output: Compiler Error: cannot assign a value to final variable t1

*So a final array means that the array variable which is actually a reference to an object, cannot be changed to refer to anything else, but the members of array can be modified.*

As an exercise, predict the output of following program

```

class Test
{
    public static void main(String args[])
    {
        final int arr1[] = {1, 2, 3, 4, 5};
        int arr2[] = {10, 20, 30, 40, 50};
        arr2 = arr1;
        arr1 = arr2;
        for (int i = 0; i < arr2.length; i++)
            System.out.println(arr2[i]);
    }
}

```

Please write comments if you find anything incorrect, or you want to share more information



## Popular Posts

[All permutations of a given string](#)

[Memory Layout of C Programs](#)

[Understanding "extern" keyword in C](#)

[Median of two sorted arrays](#)

[Tree traversal without recursion and without stack!](#)

[Structure Member Alignment, Padding and Data Packing](#)


[Intersection point of two Linked Lists](#)

[Lowest Common Ancestor in a BST.](#)

[Check if a binary tree is BST or not](#)

[Sorted Linked List to Balanced BST](#)

about the topic discussed above.

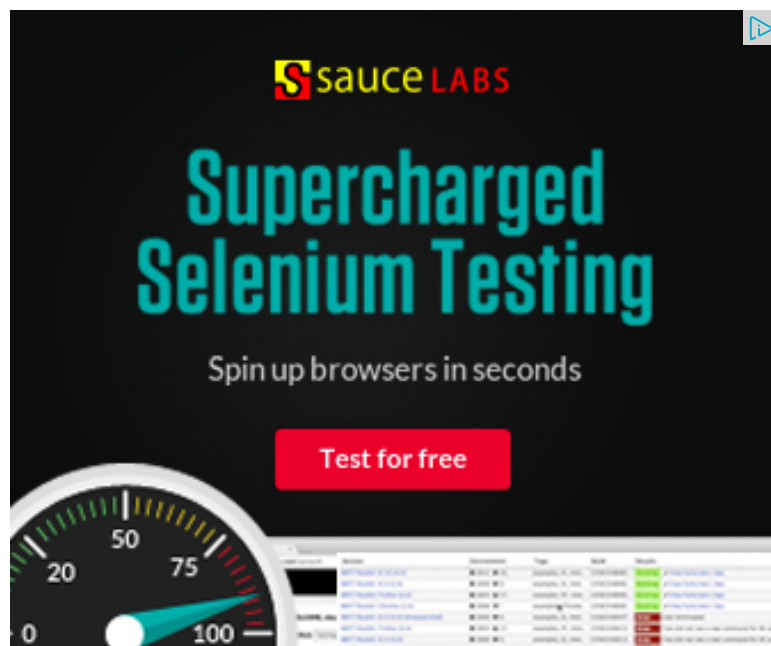

## Related Topics:

- Inner class in java
- How to compare two arrays in Java?
- Can we override private methods in Java?
- Can we Overload or Override static methods in java ?
- Static class in Java
- Do we need forward declarations in Java?
- Checked vs Unchecked Exceptions in Java
- Bitwise right shift operators in Java



0

 Tweet

0



1

Writing code in comment? Please use [ideone.com](https://ideone.com) and share the link here.

7 Comments


GeeksforGeeks

# Deploy Early. Deploy Often.

DevOps from  
Rackspace:

## Automation

[FIND OUT HOW ►](#)



**rackspace**  
the open cloud company



Join the discussion...



**Prem** · 6 days ago

Really nice blog

^ | v · Reply · Share ›



**Ranger** · 12 days ago

test.java:11: error: cannot assign a value to final variable arr1

arr1 = arr2;

^

1 error

Does it mean the final check is running in compile time?

^ | v · Reply · Share ›



**mdev** · 9 months ago

Output is : Compilation Error

^ | v · Reply · Share ›



**mdev** · 9 months ago

Results in ERROR.

^ | v · Reply · Share ›



**mdev** · 9 months ago

Nice article,,,,,

/\* Paste your code here (You may **delete** these lines **if not** writing c

705



Subscribe

## Recent Comments

Abhi You live US or India?

[Google \(Mountain View\) interview](#) · 38 minutes ago

**Aman** Hi, Why arent we checking for conditions...

[Write a C program to Delete a Tree.](#) · 1 hour ago

kzs please provide solution for the problem...

[Backtracking | Set 2 \(Rat in a Maze\)](#) · 1 hour ago

**Sanjay Agarwal** bool

tree::Root\_to\_leaf\_path\_given\_sum(tree...

Root to leaf path sum equal to a given number · 1 hour ago

**GOPI GOPINATH** @admin Highlight this sentence "We can easily...

Count trailing zeroes in factorial of a number · 1 hour ago

**newCoder3006** If the array contains negative numbers also. We...

[Find subarray with given sum](#) · 2 hours ago

AdChoices ▶

▶ [JavaScript Array](#)

▶ [Java Array](#)

▶ [Java JavaScript](#)

^ | v • Reply • Share ›



**dark** • a year ago

error

```
/* Paste your code here (You may delete these lines if not writing c
```

^ | v • Reply • Share ›



**OP** → dark • a year ago

yes, the output of exercise is error.

error is in line arr1 = arr2;

^ | v • Reply • Share ›

AdChoices ▶

▶ [String Java](#)

▶ [Java Script Void](#)

▶ [Java Object](#)

AdChoices ▶

▶ [String Java](#)

▶ [Java Script Void](#)

▶ [Java Public](#)

✉ Subscribe

Ⓓ Add Disqus to your site

@geeksforgeeks, **Some rights reserved**

**Contact Us!**

Powered by **WordPress** & **MooTools**, customized by geeksforgeeks team