

Searching for Patterns | Set 5 (Finite Automata)

Given a text $txt[0..n-1]$ and a pattern $pat[0..m-1]$, write a function `search(char pat[], char txt[])` that prints all occurrences of $pat[]$ in $txt[]$. You may assume that $n > m$.

Examples:

1) Input:

```
txt[] = "THIS IS A TEST TEXT"
pat[] = "TEST"
```

Output:

Pattern found at index 10

2) Input:

```
txt[] = "AABAACAADAABAAABAA"
pat[] = "AABA"
```

Output:

```
Pattern found at index 0
Pattern found at index 9
Pattern found at index 13
```

Pattern searching is an important problem in computer science. When we do search for a string in notepad/word file or browser or database, pattern searching algorithms are used to show the search results.


Google™ Custom Search



GeeksforGeeks



53,524 people like [GeeksforGeeks](#).



[Interview Experiences](#)

[Advanced Data Structures](#)

[Dynamic Programming](#)

[Greedy Algorithms](#)

[Backtracking](#)

[Pattern Searching](#)

[Divide & Conquer](#)

[Mathematical Algorithms](#)

[Recursion](#)


We have discussed the following algorithms in the previous posts:

Naive Algorithm

KMP Algorithm

Rabin Karp Algorithm

In this post, we will discuss Finite Automata (FA) based pattern searching algorithm. In FA based algorithm, we preprocess the pattern and build a 2D array that represents a Finite Automata. Construction of the FA is the main tricky part of this algorithm. Once the FA is built, the searching is simple. In search, we simply need to start from the first state of the automata and first character of the text. At every step, we consider next character of text, look for the next state in the built FA and move to new state. If we reach final state, then pattern is found in text. Time complexity of the search process is $O(n)$. Before we discuss FA construction, let us take a look at the following FA for pattern ACACAGA.

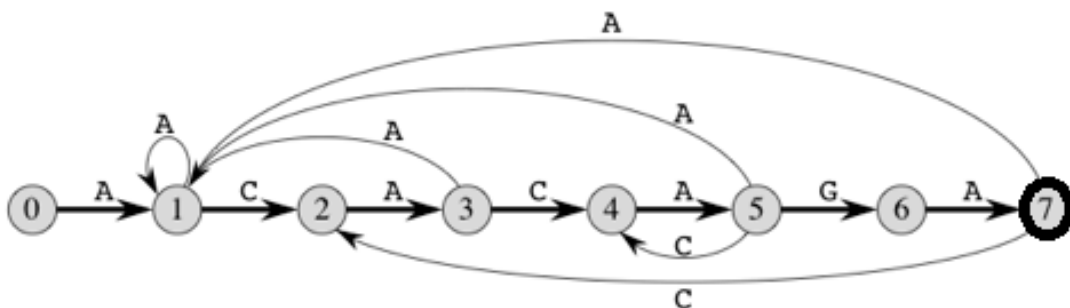

state	character			
	A	C	G	T
0	1	0	0	0
1	1	2	0	0
2	3	0	0	0
3	1	4	0	0
4	5	0	0	0
5	1	4	6	0
6	7	0	0	0
7	1	2	0	0

The above diagrams represent graphical and tabular representations of pattern ACACAGA.



Popular Posts

All permutations of a given string

Memory Layout of C Programs

Understanding "extern" keyword in C

Median of two sorted arrays

Tree traversal without recursion and without stack!

Structure Member Alignment, Padding and Data Packing

Intersection point of two Linked Lists

Lowest Common Ancestor in a BST.

Check if a binary tree is BST or not

Sorted Linked List to Balanced BST

Number of states in FA will be $M+1$ where M is length of the pattern. The main thing to construct FA is to get the next state from the current state for every possible character. Given a character x and a state k , we can get the next state by considering the string `pat[0..k-1]x` which is basically concatenation of pattern characters `pat[0]`, `pat[1]` ... `pat[k-1]` and the character x . The idea is to get length of the longest prefix of the given pattern such that the prefix is also suffix of `pat[0..k-1]x`. The value of length gives us the next state. For example, let us see how to get the next state from current state 5 and character 'C' in the above diagram. We need to consider the string, `pat[0..5]C` which is "ACACAC". The length of the longest prefix of the pattern such that the prefix is suffix of "ACACAC" is 4 ("ACAC"). So the next state (from state 5) is 4 for character 'C'.

In the following code, `computeTF()` constructs the FA. The time complexity of the `computeTF()` is $O(m^3 \cdot \text{NO_OF_CHARS})$ where m is length of the pattern and `NO_OF_CHARS` is size of alphabet (total number of possible characters in pattern and text). The implementation tries all possible prefixes starting from the longest possible that can be a suffix of `pat[0..k-1]x`. There are better implementations to construct FA in $O(m \cdot \text{NO_OF_CHARS})$ (Hint: we can use something like [lps array construction in KMP algorithm](#)). We have covered the better implementation in our [next post on pattern searching](#).


```
#include<stdio.h>
#include<string.h>
#define NO_OF_CHARS 256

int getNextState(char *pat, int M, int state, int x)
{
    // If the character c is same as next character in pattern,
    // then simply increment state
    if (state < M && x == pat[state])
        return state+1;

    int ns, i; // ns stores the result which is next state

    // ns finally contains the longest prefix which is also suffix
    // in "pat[0..state-1]c"

    // Start from the largest possible value and stop when you find
    // a prefix which is also suffix
    for (ns = state; ns > 0; ns--)
    {
        if (pat[ns-1] == x)
        {
```

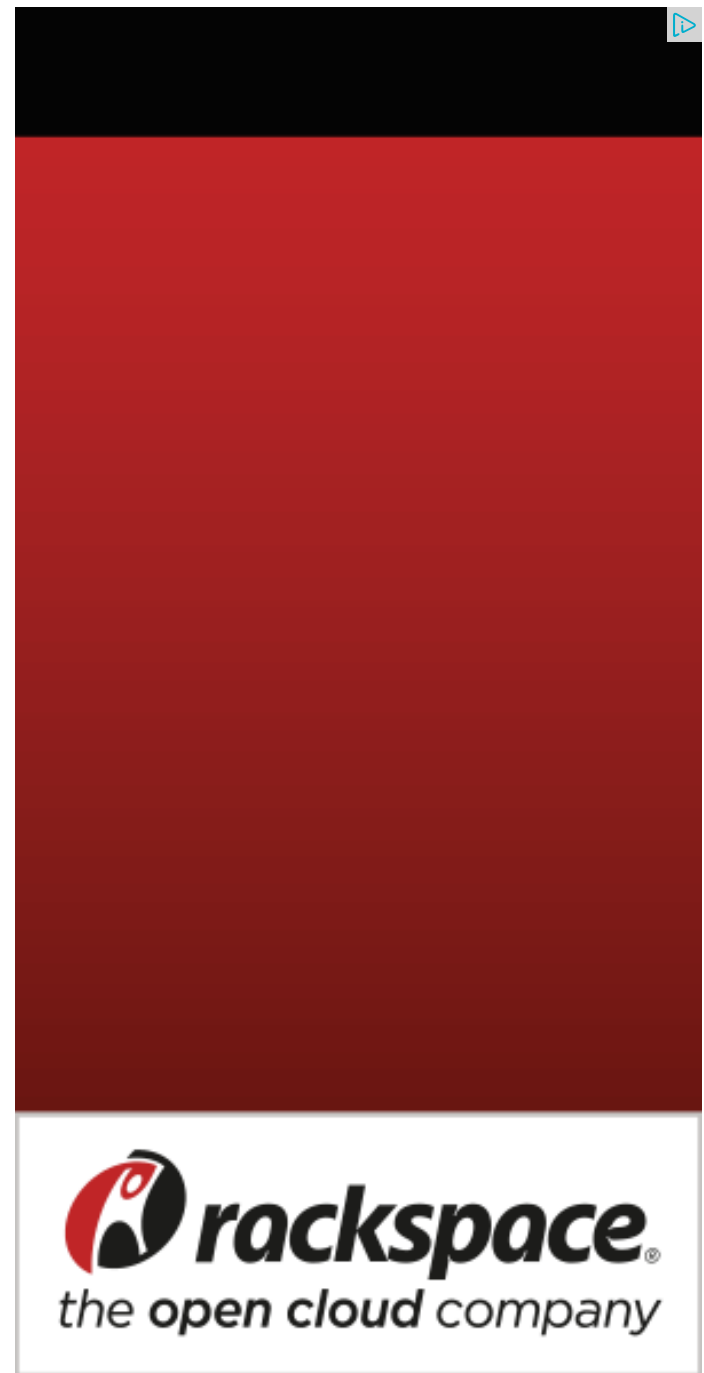

Recent Comments

Abhi You live US or India?

Google (Mountain View) interview · 2 minutes ago

Aman Hi, Why arent we checking for conditions...

Write a C program to Delete a Tree. · 42 minutes ago

kzs please provide solution for the problem...

Backtracking | Set 2 (Rat in a Maze) · 45 minutes ago

Sanjay Agarwal bool

tree::Root_to_leaf_path_given_sum(tree...

Root to leaf path sum equal to a given number · 1 hour ago

GOPI GOPINATH @admin Highlight this sentence "We can easily...

Count trailing zeroes in factorial of a number · 1 hour ago

newCoder3006 If the array contains negative numbers also. We...

Find subarray with given sum · 1 hour ago

AdChoices 

[► Patterns Java](#)

[► Number Patterns](#)

[► Computer Geeks](#)

AdChoices 

```

        for(i = 0; i < ns-1; i++)
        {
            if (pat[i] != pat[state-ns+1+i])
                break;
        }
        if (i == ns-1)
            return ns;
    }

    return 0;
}

/* This function builds the TF table which represents Finite Automata
   given pattern */
void computeTF(char *pat, int M, int TF[][NO_OF_CHARS])
{
    int state, x;
    for (state = 0; state <= M; ++state)
        for (x = 0; x < NO_OF_CHARS; ++x)
            TF[state][x] = getNextState(pat, M, state, x);
}

/* Prints all occurrences of pat in txt */
void search(char *pat, char *txt)
{
    int M = strlen(pat);
    int N = strlen(txt);

    int TF[M+1][NO_OF_CHARS];

    computeTF(pat, M, TF);

    // Process txt over FA.
    int i, state=0;
    for (i = 0; i < N; i++)
    {
        state = TF[state][txt[i]];
        if (state == M)
        {
            printf ("\n patterb found at index %d", i-M+1);
        }
    }
}

// Driver program to test above function
int main()

```

```

{
    char *txt = "AABAACAADAABAAABAA";
    char *pat = "AABA";
    search(pat, txt);
    return 0;
}

```

Output:

```

Pattern found at index 0
Pattern found at index 9
Pattern found at index 13


```

References:

Introduction to Algorithms by Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, Clifford Stein

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

- [Computer Geeks](#)
- [C++ Source Code](#)
- [C++ Java](#)
- AdChoices 
- [C++ Example](#)
- [C++ Programming](#)
- [C++ Program](#)

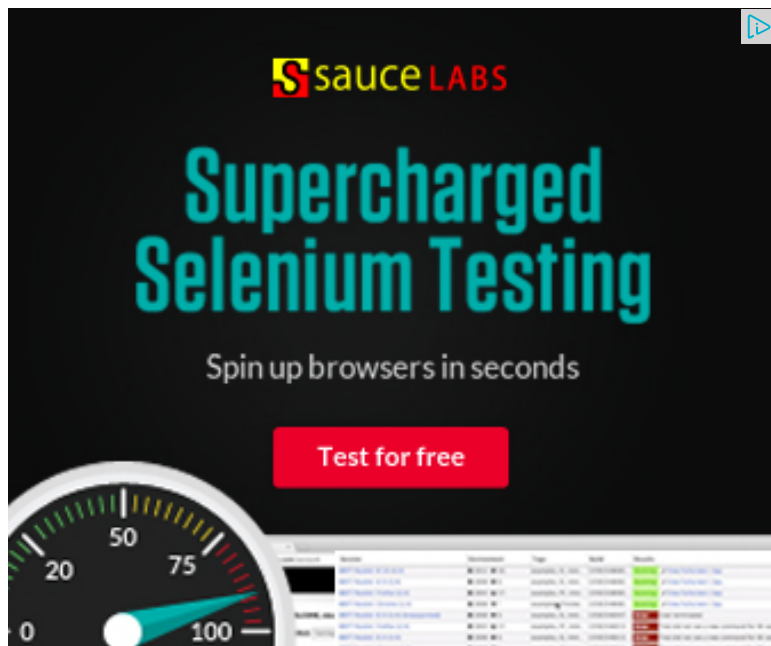

Related Topics:

- Print all possible words from phone digits
- Printing Longest Common Subsequence
- Suffix Array | Set 2 (nLogn Algorithm)
- Rearrange a string so that all same characters become d distance away
- Recursively remove all adjacent duplicates
- Find the first non-repeating character from a stream of characters
- Dynamic Programming | Set 33 (Find if a string is interleaved of two other strings)
- Remove "b" and "ac" from a given string



1



0



0

Writing code in comment? Please use ideone.com and share the link here.

@geeksforgeeks, **Some rights reserved**

Contact Us!

Powered by **WordPress** & **MooTools**, customized by geeksforgeeks team