

## Greedy Algorithms | Set 8 (Dijkstra's Algorithm for Adjacency List Representation)

We recommend to read following two posts as a prerequisite of this post.


1. Greedy Algorithms | Set 7 (Dijkstra's shortest path algorithm)
2. Graph and its representations

We have discussed [Dijkstra's algorithm and its implementation for adjacency matrix representation of graphs](#). The time complexity for the matrix representation is  $O(V^2)$ . In this post,  $O(E \log V)$  algorithm for adjacency list representation is discussed.

As discussed in the previous post, in Dijkstra's algorithm, two sets are maintained, one set contains list of vertices already included in SPT (Shortest Path Tree), other set contains vertices not yet included. With adjacency list representation, all vertices of a graph can be traversed in  $O(V+E)$  time using [BFS](#). The idea is to traverse all vertices of graph using [BFS](#) and use a Min Heap to store the vertices not yet included in SPT (or the vertices for which shortest distance is not finalized yet). Min Heap is used as a priority queue to get the minimum distance vertex from set of not yet included vertices. Time complexity of operations like extract-min and decrease-key value is  $O(\log V)$  for Min Heap.

Following are the detailed steps.


- 1) Create a Min Heap of size  $V$  where  $V$  is the number of vertices in the given graph. Every node of min heap contains vertex number and distance value of the vertex.
- 2) Initialize Min Heap with source vertex as root (the distance value assigned to source vertex is 0). The distance value assigned to all other vertices is INF (infinite).
- 3) While Min Heap is not empty, do following
  - .....a) Extract the vertex with minimum distance value node from Min Heap. Let the extracted

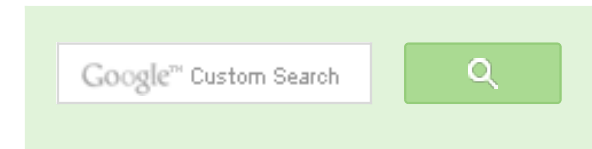

GeeksforGeeks



53,523 people like [GeeksforGeeks](#).



[Interview Experiences](#)

[Advanced Data Structures](#)

[Dynamic Programming](#)

[Greedy Algorithms](#)

[Backtracking](#)

[Pattern Searching](#)

[Divide & Conquer](#)

[Mathematical Algorithms](#)

[Recursion](#)

[Geometric Algorithms](#)



## Popular Posts

[All permutations of a given string](#)

[Memory Layout of C Programs](#)

[Understanding "extern" keyword in C](#)

[Median of two sorted arrays](#)

[Tree traversal without recursion and without stack!](#)

[Structure Member Alignment, Padding and Data Packing](#)

[Intersection point of two Linked Lists](#)


[Lowest Common Ancestor in a BST.](#)

[Check if a binary tree is BST or not](#)

vertex be  $u$ .


.....b) For every adjacent vertex  $v$  of  $u$ , check if  $v$  is in Min Heap. If  $v$  is in Min Heap and distance value is more than weight of  $u-v$  plus distance value of  $u$ , then update the distance value of  $v$ .

Let us understand with the following example. Let the given source vertex be 0

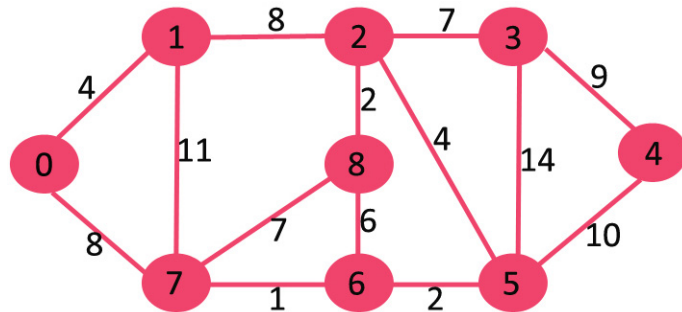


Initially, distance value of source vertex is 0 and INF (infinite) for all other vertices. So source vertex is extracted from Min Heap and distance values of vertices adjacent to 0 (1 and 7) are updated. Min Heap contains all vertices except vertex 0.


The vertices in green color are the vertices for which minimum distances are finalized and are not in Min Heap




Since distance value of vertex 1 is minimum among all nodes in Min Heap, it is extracted from Min Heap and distance values of vertices adjacent to 1 are updated (distance is updated if the a vertex is not in Min Heap and distance through 1 is shorter than the previous distance). Min Heap contains all vertices except vertex 0 and 1.

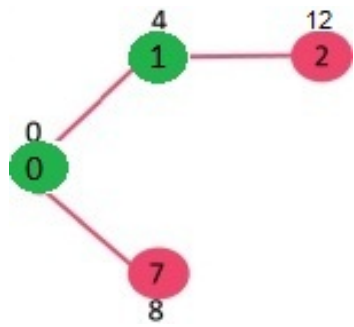


Pick the vertex with minimum distance value from min heap. Vertex 7 is picked. So min heap now contains all vertices except 0, 1 and 7. Update the distance values of adjacent vertices of 7. The distance value of vertex 6 and 8 becomes finite (15 and 9 respectively).



Pick the vertex with minimum distance from min heap. Vertex 6 is picked. So min heap now contains all vertices except 0, 1, 7 and 6. Update the distance values of adjacent vertices of 6. The distance value of vertex 5 and 8 are updated.

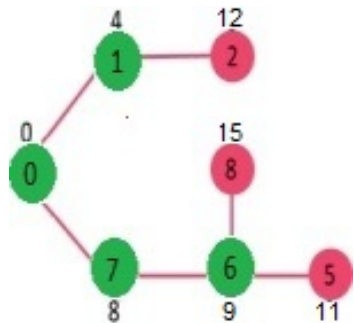

Above steps are repeated till min heap doesn't become empty. Finally, we get the following shortest path tree.

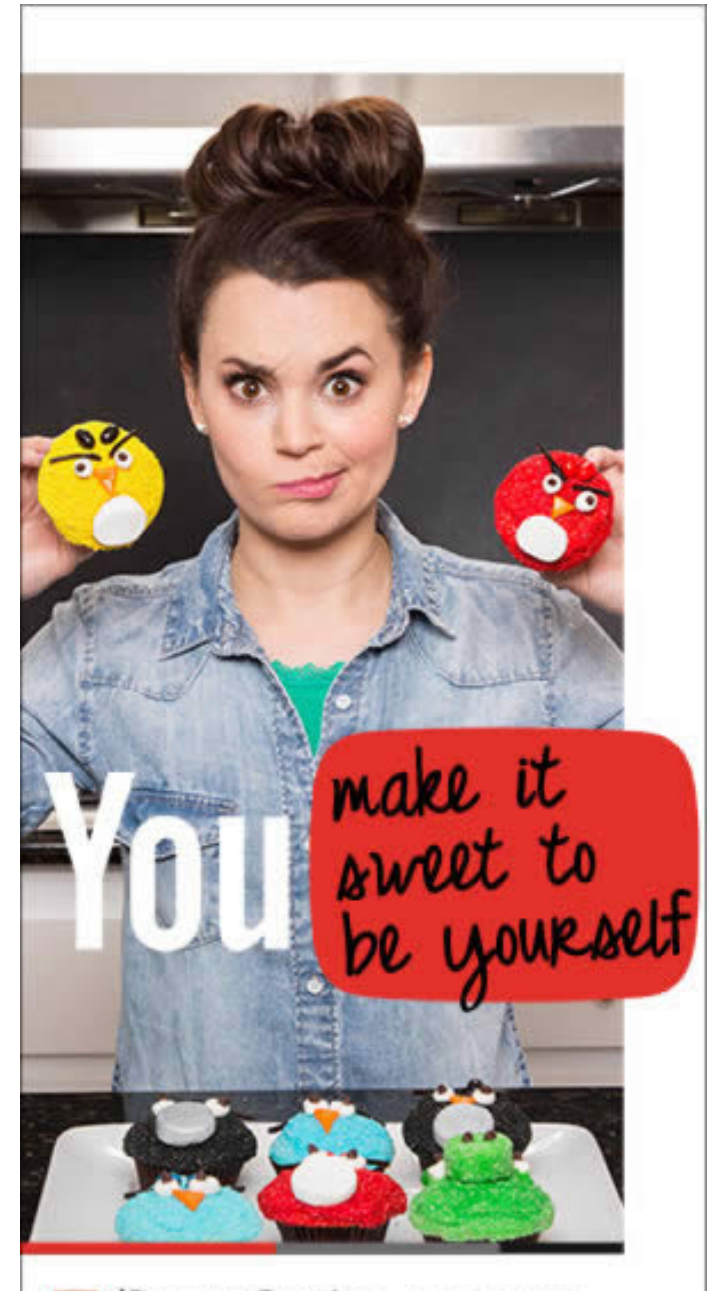

705



Subscribe

## Recent Comments

**Aman** Hi, Why arent we checking for conditions...

Write a C program to Delete a Tree. · 33 minutes ago

kzs please provide solution for the problem...

Backtracking | Set 2 (Rat in a Maze) · 36 minutes ago

**Sanjay Agarwal** bool

tree::Root\_to\_leaf\_path\_given\_sum(tree...

Root to leaf path sum equal to a given number · 1 hour ago

**GOPI GOPINATH** @admin Highlight this sentence "We can easily...


Count trailing zeroes in factorial of a number · 1 hour ago

**newCoder3006** If the array contains negative numbers also. We...

Find subarray with given sum · 1 hour ago

**newCoder3006** Code without using while loop. We can do it..

Find subarray with given sum · 1 hour ago

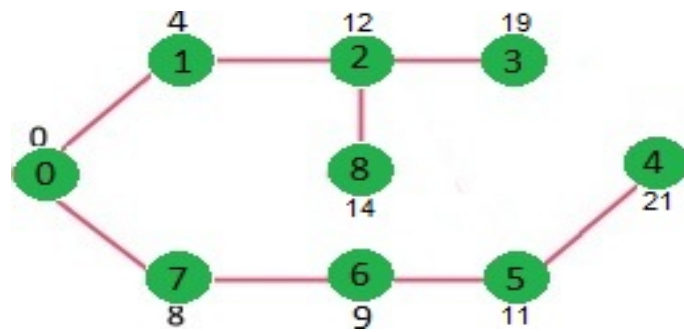

```
// C / C++ program for Dijkstra's shortest path algorithm for adjacenc;
// list representation of graph
```

```
#include <stdio.h>
#include <stdlib.h>
#include <limits.h>
```

```
// A structure to represent a node in adjacency list
```

```
struct AdjListNode
{
    int dest;
    int weight;
    struct AdjListNode* next;
};
```

```
// A structure to represent an adjacency list
```

```
struct AdjList
{
    struct AdjListNode *head; // pointer to head node of list
};
```

```
// A structure to represent a graph. A graph is an array of adjacency
// Size of array will be V (number of vertices in graph)
```

```
struct Graph
{
    int V;
    struct AdjList* array;
};
```

```
// A utility function to create a new adjacency list node
```

```
struct AdjListNode* newAdjListNode(int dest, int weight)
{
    struct AdjListNode* newNode =
        (struct AdjListNode*) malloc(sizeof(struct AdjListNode));
    newNode->dest = dest;
    newNode->weight = weight;
}
```

```

newNode->next = NULL;
return newNode;
}

// A utility function that creates a graph of V vertices
struct Graph* createGraph(int V)
{
    struct Graph* graph = (struct Graph*) malloc(sizeof(struct Graph))
    graph->V = V;

    // Create an array of adjacency lists. Size of array will be V
    graph->array = (struct AdjList*) malloc(V * sizeof(struct AdjList))

    // Initialize each adjacency list as empty by making head as NULL
    for (int i = 0; i < V; ++i)
        graph->array[i].head = NULL;

    return graph;
}

// Adds an edge to an undirected graph
void addEdge(struct Graph* graph, int src, int dest, int weight)
{
    // Add an edge from src to dest. A new node is added to the adjac
    // list of src. The node is added at the begining
    struct AdjListNode* newNode = newAdjListNode(dest, weight);
    newNode->next = graph->array[src].head;
    graph->array[src].head = newNode;

    // Since graph is undirected, add an edge from dest to src also
    newNode = newAdjListNode(src, weight);
    newNode->next = graph->array[dest].head;
    graph->array[dest].head = newNode;
}

// Structure to represent a min heap node
struct MinHeapNode
{
    int v;
    int dist;
};

// Structure to represent a min heap
struct MinHeap
{
    int size; // Number of heap nodes present currently
    int capacity; // Capacity of min heap

```

AdChoices ▶

► [C++ Vector](#)

► [C++ Code](#)

► [Algorithms Java](#)

AdChoices ▶

► [Algorithms Java](#)

► [Graph C++](#)

► [Representation](#)

AdChoices ▶

► [Graph Theory](#)

► [Graph Java](#)

► [Graph Coloring](#)

```

    int *pos;        // This is needed for decreaseKey()
    struct MinHeapNode **array;
};

// A utility function to create a new Min Heap Node
struct MinHeapNode* newMinHeapNode(int v, int dist)
{
    struct MinHeapNode* minHeapNode =
        (struct MinHeapNode*) malloc(sizeof(struct MinHeapNode));
    minHeapNode->v = v;
    minHeapNode->dist = dist;
    return minHeapNode;
}

// A utility function to create a Min Heap
struct MinHeap* createMinHeap(int capacity)
{
    struct MinHeap* minHeap =
        (struct MinHeap*) malloc(sizeof(struct MinHeap));
    minHeap->pos = (int *) malloc(capacity * sizeof(int));
    minHeap->size = 0;
    minHeap->capacity = capacity;
    minHeap->array =
        (struct MinHeapNode**) malloc(capacity * sizeof(struct MinHeapNode));
    return minHeap;
}

// A utility function to swap two nodes of min heap. Needed for min heap
void swapMinHeapNode(struct MinHeapNode** a, struct MinHeapNode** b)
{
    struct MinHeapNode* t = *a;
    *a = *b;
    *b = t;
}

// A standard function to heapify at given idx
// This function also updates position of nodes when they are swapped.
// Position is needed for decreaseKey()
void minHeapify(struct MinHeap* minHeap, int idx)
{
    int smallest, left, right;
    smallest = idx;
    left = 2 * idx + 1;
    right = 2 * idx + 2;

    if (left < minHeap->size &&
        minHeap->array[left]->dist < minHeap->array[smallest]->dist )

```



```

    smallest = left;

    if (right < minHeap->size &&
        minHeap->array[right]->dist < minHeap->array[smallest]->dist )
        smallest = right;

    if (smallest != idx)
    {
        // The nodes to be swapped in min heap
        MinHeapNode *smallestNode = minHeap->array[smallest];
        MinHeapNode *idxNode = minHeap->array[idx];

        // Swap positions
        minHeap->pos[smallestNode->v] = idx;
        minHeap->pos[idxNode->v] = smallest;

        // Swap nodes
        swapMinHeapNode(&minHeap->array[smallest], &minHeap->array[idx]);

        minHeapify(minHeap, smallest);
    }
}

// A utility function to check if the given minHeap is empty or not
int isEmpty(struct MinHeap* minHeap)
{
    return minHeap->size == 0;
}

// Standard function to extract minimum node from heap
struct MinHeapNode* extractMin(struct MinHeap* minHeap)
{
    if (isEmpty(minHeap))
        return NULL;

    // Store the root node
    struct MinHeapNode* root = minHeap->array[0];

    // Replace root node with last node
    struct MinHeapNode* lastNode = minHeap->array[minHeap->size - 1];
    minHeap->array[0] = lastNode;

    // Update position of last node
    minHeap->pos[root->v] = minHeap->size-1;
    minHeap->pos[lastNode->v] = 0;

    // Reduce heap size and heapify root

```

```

--minHeap->size;
minHeapify(minHeap, 0);

return root;
}

// Function to decrease dist value of a given vertex v. This function
// uses pos[] of min heap to get the current index of node in min heap
void decreaseKey(struct MinHeap* minHeap, int v, int dist)
{
    // Get the index of v in heap array
    int i = minHeap->pos[v];

    // Get the node and update its dist value
    minHeap->array[i]->dist = dist;

    // Travel up while the complete tree is not heapified.
    // This is a O(Logn) loop
    while (i && minHeap->array[i]->dist < minHeap->array[(i - 1) / 2]->dist)
    {
        // Swap this node with its parent
        minHeap->pos[minHeap->array[i]->v] = (i-1)/2;
        minHeap->pos[minHeap->array[(i-1)/2]->v] = i;
        swapMinHeapNode(&minHeap->array[i], &minHeap->array[(i - 1) / 2]);

        // move to parent index
        i = (i - 1) / 2;
    }
}

// A utility function to check if a given vertex
// 'v' is in min heap or not
bool isInMinHeap(struct MinHeap *minHeap, int v)
{
    if (minHeap->pos[v] < minHeap->size)
        return true;
    return false;
}

// A utility function used to print the solution
void printArr(int dist[], int n)
{
    printf("Vertex    Distance from Source\n");
    for (int i = 0; i < n; ++i)
        printf("%d \t\t %d\n", i, dist[i]);
}

```



```

// The main function that calculates distances of shortest paths from s
// vertices. It is a O(ELogV) function
void dijkstra(struct Graph* graph, int src)
{
    int V = graph->V; // Get the number of vertices in graph
    int dist[V];      // dist values used to pick minimum weight edge

    // minHeap represents set E
    struct MinHeap* minHeap = createMinHeap(V);

    // Initialize min heap with all vertices. dist value of all vertices
    for (int v = 0; v < V; ++v)
    {
        dist[v] = INT_MAX;
        minHeap->array[v] = newMinHeapNode(v, dist[v]);
        minHeap->pos[v] = v;
    }

    // Make dist value of src vertex as 0 so that it is extracted first
    minHeap->array[src] = newMinHeapNode(src, dist[src]);
    minHeap->pos[src] = src;
    dist[src] = 0;
    decreaseKey(minHeap, src, dist[src]);

    // Initially size of min heap is equal to V
    minHeap->size = V;

    // In the following loop, min heap contains all nodes
    // whose shortest distance is not yet finalized.
    while (!isEmpty(minHeap))
    {
        // Extract the vertex with minimum distance value
        struct MinHeapNode* minHeapNode = extractMin(minHeap);
        int u = minHeapNode->v; // Store the extracted vertex number

        // Traverse through all adjacent vertices of u (the extracted
        // vertex) and update their distance values
        struct AdjListNode* pCrawl = graph->array[u].head;
        while (pCrawl != NULL)
        {
            int v = pCrawl->dest;

            // If shortest distance to v is not finalized yet, and dist
            // through u is less than its previously calculated distance
            if (isInMinHeap(minHeap, v) && dist[u] != INT_MAX &&
                pCrawl->weight + dist[u] < dist[v])
            {

```

```

        dist[v] = dist[u] + pCrawl->weight;

        // update distance value in min heap also
        decreaseKey(minHeap, v, dist[v]);
    }
    pCrawl = pCrawl->next;
}

// print the calculated shortest distances
printArr(dist, V);
}

```

```

// Driver program to test above functions
int main()
{
    // create the graph given in above figure
    int V = 9;
    struct Graph* graph = createGraph(V);
    addEdge(graph, 0, 1, 4);
    addEdge(graph, 0, 7, 8);
    addEdge(graph, 1, 2, 8);
    addEdge(graph, 1, 7, 11);
    addEdge(graph, 2, 3, 7);
    addEdge(graph, 2, 8, 2);
    addEdge(graph, 2, 5, 4);
    addEdge(graph, 3, 4, 9);
    addEdge(graph, 3, 5, 14);
    addEdge(graph, 4, 5, 10);
    addEdge(graph, 5, 6, 2);
    addEdge(graph, 6, 7, 1);
    addEdge(graph, 6, 8, 6);
    addEdge(graph, 7, 8, 7);

    dijkstra(graph, 0);

    return 0;
}

```

Output:

Vertex	Distance from Source
0	0
1	4
2	12

3	19
4	21
5	11
6	9
7	8
8	14

**Time Complexity:** The time complexity of the above code/algorithm looks  $O(V^2)$  as there are two nested while loops. If we take a closer look, we can observe that the statements in inner loop are executed  $O(V+E)$  times (similar to BFS). The inner loop has `decreaseKey()` operation which takes  $O(\log V)$  time. So overall time complexity is  $O(E+V) \cdot O(\log V)$  which is  $O((E+V) \cdot \log V) = O(E \log V)$

Note that the above code uses Binary Heap for Priority Queue implementation. Time complexity can be reduced to  $O(E + V \log V)$  using Fibonacci Heap. The reason is, Fibonacci Heap takes  $O(1)$  time for decrease-key operation while Binary Heap takes  $O(\log n)$  time.


#### Notes:

- 1) The code calculates shortest distance, but doesn't calculate the path information. We can create a parent array, update the parent array when distance is updated (like [prim's implementation](#)) and use it to show the shortest path from source to different vertices.
- 2) The code is for undirected graph, same dijkstra function can be used for directed graphs also.
- 3) The code finds shortest distances from source to all vertices. If we are interested only in shortest distance from source to a single target, we can break the for loop when the picked minimum distance vertex is equal to target (Step 3.a of algorithm).
- 4) Dijkstra's algorithm doesn't work for graphs with negative weight edges. For graphs with negative weight edges, [Bellman-Ford algorithm](#) can be used, we will soon be discussing it as a separate post.

#### References:

[Introduction to Algorithms](#) by Clifford Stein, Thomas H. Cormen, Charles E. Leiserson, Ronald L. Algorithms by Sanjoy Dasgupta, Christos Papadimitriou, Umesh Vazirani

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

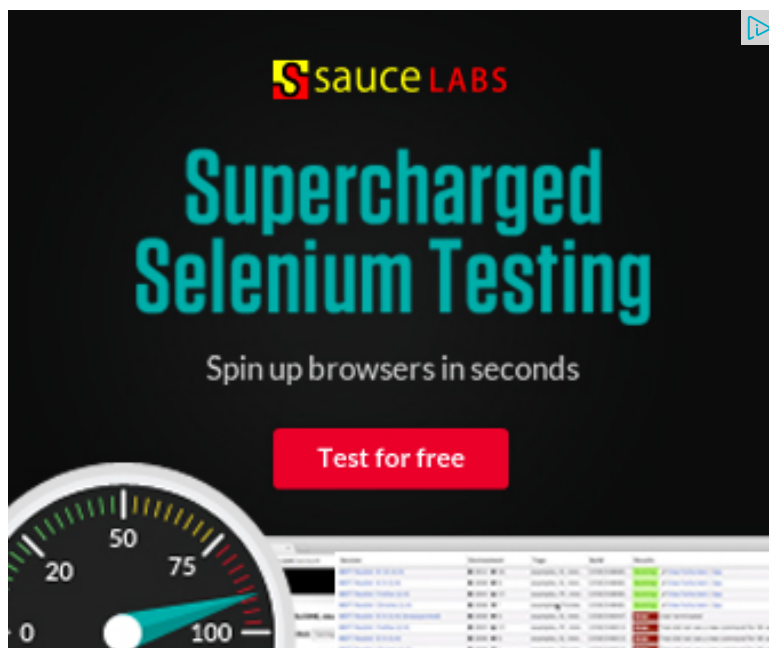

## Related Topics:

- Some interesting shortest path questions | Set 1
- Graph Coloring | Set 2 (Greedy Algorithm)
- Graph Coloring | Set 1 (Introduction and Applications)
- Johnson's algorithm for All-pairs shortest paths
- Travelling Salesman Problem | Set 2 (Approximate using MST)
- Travelling Salesman Problem | Set 1 (Naive and Dynamic Programming)
- Detect cycle in an undirected graph
- Find maximum number of edge disjoint paths between two vertices



11



Tweet

0



0

Writing code in comment? Please use [ideone.com](https://ideone.com) and share the link here.

10 Comments

GeeksforGeeks

Sort by Newest ▼



JOIN THE DISCUSSION...



**andrei** · 12 days ago

How does the code change in case of directed graphs?

^ | v ·



**hello** · 7 months ago

3rd point in the Notes section says, as soon as the distance for the target is found, there is no other way to go that target having minimum distance than the one calculated by the algorithm. If interested in single target, program should loop for the whole vertices...

^ | v ·



**Kumar Vikram** · 11 months ago

There was some bugs in my earlier comment. This is the corrected code.

[sourcecode language="C++"]

```
#include<iostream>
```

```
#include <list>
```

```
#include <limits.h>
```

```
using namespace std;
```

```
class AdjListNode
```

```
{
```

```
int v;
```

```
int weight;
```

```
public:
```

```
AdjListNode(int _v, int _w) { v = _v; weight = _w;}
```

```
int getV() { return v; }
```

```
int getWeight() { return weight; }
```

```
};
```

```
class Graph
```

see more

^ | v ·



**Kumar Vikram** · 11 months ago

Another Implementation using Adjacency List in C++.

```
#include<iostream>
#include <list>
#include <limits.h>

using namespace std;

class AdjListNode
{
    int v;
    int weight;
public:
    AdjListNode(int _v, int _w) { v = _v; weight = _w;}
    int getV()      { return v; }
    int getWeight() { return weight; }
```

see more

^ | v ·



**Sandeep Jain** · a year ago

This is to avoid integer overflow.

^ | v ·



**Sandeep Jain** · a year ago

This is to avoid integer overflow.

^ | v .



**Sarthak Mall 'shanky'** · a year ago

in the line.

if (isInMinHeap(minHeap, v) && dist[u] != INT\_MAX && pCrawl->weight + dist[u]  
what is the utility of dist[u] != INT\_MAX? Can anybody please explain?

^ | v .



**Sarthak Mall 'shanky'** · a year ago

in the line.

if (isInMinHeap(minHeap, v) && dist[u] != INT\_MAX && pCrawl->weight + dist[u]  
what is the utility of dist[u] != INT\_MAX? Can anybody please explain?

^ | v .



**Sai Nikhil** · a year ago

many thanks for this. I was looking for this implementation :)

can you implement the same using a Fibonnacci heap, so that the decreaseK  
amortized cost and running time then becomes  $O(E + V \log V)$  ...

3 ^ | v .



**nikunj** → Sai Nikhil · 2 months ago

hi..

do you have the code of dijkstra implemented with fibonacci heap.?

if yes, then please send it to me at coolnik2006@gmail.com

Thanks

^ | v .

Subscribe

Add Disqus to your site



