

Atividade 004

Laura Vitória Fabiani.....RA: 24008833-2

Estação 01:

The screenshot shows an IDE with a Java file named `Main.java`. The code defines a `Main` class with a static final `String ENTRADA` and a static final `Map<Character, String> SIMBOLOS` initialized with a `LinkedHashMap`. The `static` block contains four `put` calls for the operators: `=` (ATRIBUICAO), `+` (SOMA), `-` (SUBTRACAO), and `*` (MULTIPLICACAO).

Below the code editor is the `Run` console. It shows the command used to run the program and the output. The output includes the student's name and RA, followed by the `ENTRADA` string. Below this, a table displays the lexical analysis results for the input string.

LEXEMA	TOKEN
media	IDENTIFICADOR
=	ATRIBUICAO
somaNotas	IDENTIFICADOR
/	DIVISAO
quantidadeAlunos	IDENTIFICADOR
;	PONTO_E_VIRGULA

Estação 02:

The screenshot shows an IDE with a Java file named `Main.java` and its execution output in the Run console.

Code in Main.java:

```
4  
5 public class Main {  
6     static final String ALUNO = "Laura"; 1 usage  
7     static final String RA = "24008833-2"; 1 usage  
8  
9     static final String IDENTIFICADOR_PERSONALIZADO = "nota_Prova"; 1 usage  
10  
11     static final Set<String> PALAVRAS_RESERVADAS = new HashSet<>() 1 usage
```


Run Console Output:

```
10          DIGITO          INTEIRO  
;          SIMBOLO          PONTO_E_VIRGULA  
  
=== TESTE D - caractere inválido ===  
ENTRADA: int valor# = 1;  
LEXEMA          CLASSE          TOKEN  
-----  
int             LETRA           PALAVRA_RESERVADA  
valor           LETRA           IDENTIFICADOR  
#              DESCONHECIDO     ERRO_LEXICO  
=              SIMBOLO          ATRIBUICAO  
1              DIGITO          INTEIRO  
;              SIMBOLO          PONTO_E_VIRGULA  
|  
Process finished with exit code 0
```

The bottom status bar shows the file path: `Atividade_004 > src > Main > IDENTIFICADOR_PERSONALIZADO`, along with settings like `9:66 CRLF UTF-8 4 spaces`.

Estação 03

a)

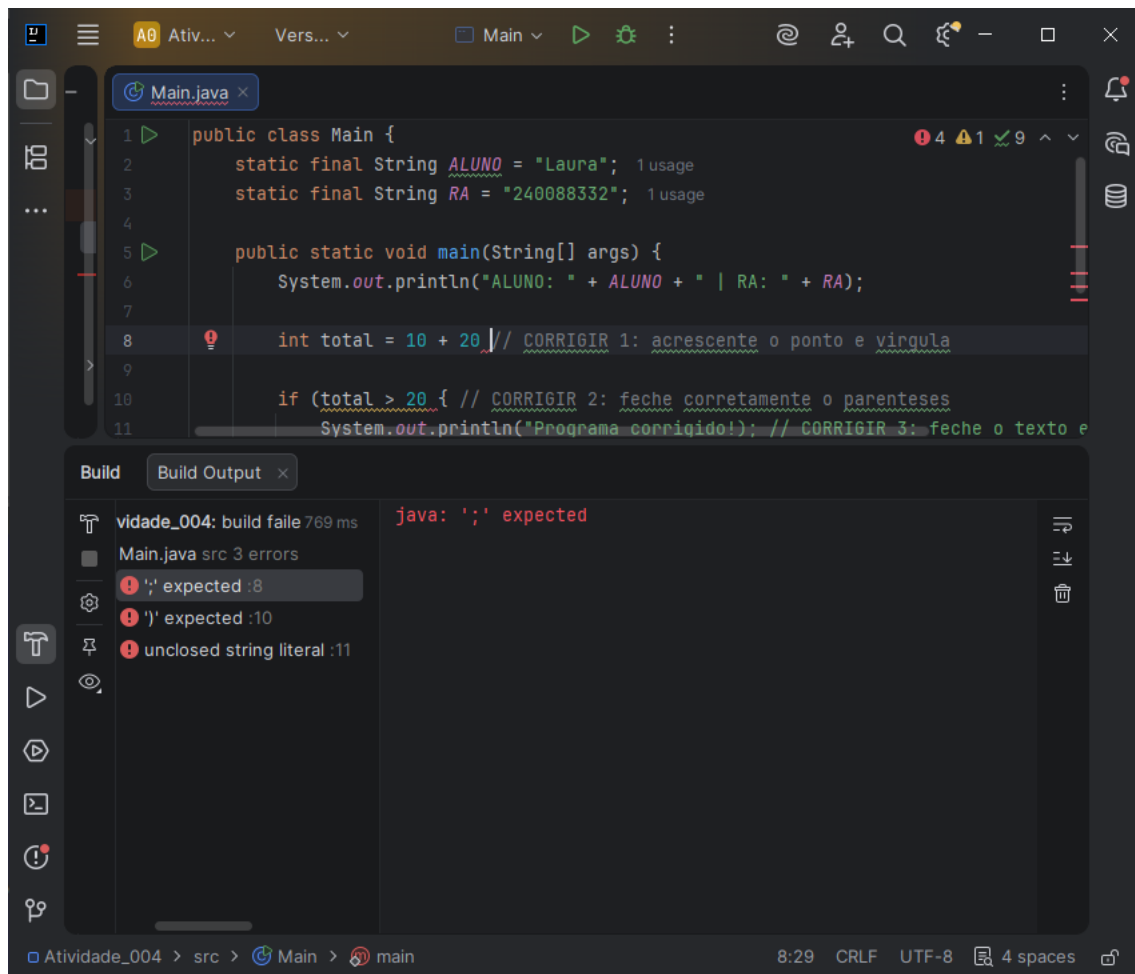

b)

The screenshot shows an IDE window with a Java file named `Main.java`. The code defines a `Main` class with two static final strings, `ALUNO` and `RA`, and a `main` method. The `main` method prints the values of `ALUNO` and `RA`, calculates a sum, and prints a message based on a conditional check. The IDE highlights several issues with yellow squiggly lines and a lightbulb icon, with comments like "CORRIGIR 1: acrescente o ponto e virgula" and "CORRIGIR 2: feche corretamente o parenteses". Below the code editor, the `Run` tab shows the execution output, which matches the code's logic: it prints the student's name and RA, the sum (30), and the message "Programa corrigido!". The status bar at the bottom indicates the file is in the `src` directory, and the editor is set to `CRLF` line endings, `UTF-8` encoding, and `4 spaces` indentation.

```
1 public class Main {
2     static final String ALUNO = "Laura"; 1 usage
3     static final String RA = "240088332"; 1 usage
4
5     public static void main(String[] args) {
6         System.out.println("ALUNO: " + ALUNO + " | RA: " + RA);
7
8         int total = 10 + 20; // CORRIGIR 1: acrescente o ponto e virgula
9
10        if (total > 20) { // CORRIGIR 2: feche corretamente o parenteses
11            System.out.println("Programa corrigido!"); // CORRIGIR 3: feche o texto
12        }
13    }
14 }
```

Run Main

```
"C:\Program Files\Java\jdk-11\bin\java.exe" "-javaagent:C:\Program Files\JetBrains\IntelliJ IDEA\bin\idea_rt.jar=5000:C:\Program Files\JetBrains\IntelliJ IDEA\bin" -Dfile.encoding=UTF-8
ALUNO: Laura | RA: 240088332
Programa corrigido!
Resultado: 30

Process finished with exit code 0
```

Atividade_004 > src > Main > main 10:30 CRLF UTF-8 4 spaces

Estação 04:

