

## Design Patterns *Java/C# Edition*

Joseph W. Yoder

*The Refactory, Inc.*

[www.refactory.com](http://www.refactory.com)

[yoder@refactory.com](mailto:yoder@refactory.com)

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 1

---

---

---

---

---

---

---

## The Refactory Principals

John Brant

Brian Foote

Ralph Johnson

Don Roberts

Joe Yoder

## Refactory Affiliates

Dragos Manolescu

Brian Marick

Bill Opdyke

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 2

---

---

---

---

---

---

---

## The Refactory, Inc.

The Refactory principles and affiliates are experienced in software development, especially in object-oriented technology. We've been studying and developing software since 1973. Our current focus has been object-oriented technology, software architecture, and patterns. We have developed frameworks using Smalltalk, C++, and Java, have helped design several applications, and mentored many new Smalltalk, Java and C++ developers. Highly experienced with Frameworks, Software Evolution, Refactoring, Objects, Flexible and Adaptable Systems (Adaptive Object-Models), Testing, Workflow Systems, and Agile Software Development including methods like eXtreme Programming (XP).

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 3

---

---

---

---

---

---

---

## Design Patterns

- A new category of knowledge
- Knowledge is not new, but talking about it is
- Make you a better designer
- Improves communication between designers

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 4

---

---

---

---

---

---

---

## Why Patterns?

People do not design from first principles.

People design by reusing things they've seen before.

Same techniques appear over and over.

Software industry needs to document what we do.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 5

---

---

---

---

---

---

---

## Patterns

Patterns in solutions come from patterns in problems.

"A pattern is a solution to a problem in a context."

"Each pattern describes a problem which occurs over and over again in our environment, and then describes the core of the solution to that problem, in such a way that you can use this solution a million times over, without ever doing it the same way twice."

Christopher Alexander -- *A Pattern Language*

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 6

---

---

---

---

---

---

---

## Patterns

A pattern is a balance of forces

Forces: all the issues that affect a problem.

Typical software design forces: efficiency, clarity, maintainability, safety.

Design is the art of making trade-offs.

Patterns should make trade-offs explicit.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 7

---

---

---

---

---

---

---

---

## Patterns are not

❖ Patterns are not idioms

❖ Patterns are not algorithms

❖ Patterns are not components

❖ Patterns are not a “*silver bullet*”

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 8

---

---

---

---

---

---

---

---

## Object-Oriented Design Patterns

Repeating organization of classes (objects)  
and the way they interact

***Design Patterns: Elements of Reusable  
Object-Oriented Software***

Erich Gamma, Richard Helm,  
Ralph Johnson, and John Vlissides  
Addison-Wesley, 1995.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 9

---

---

---

---

---

---

---

---

## Overall Goals

You will be able to:

- describe what patterns are, and why they are important
- recognize all the patterns in “Design Patterns”
- *use patterns to solve specific design problems*
- *use patterns to document a design*
- learn new patterns when you need them

You will not:

- learn everything there is to know about patterns

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 10

---

---

---

---

---

---

---

---

## Class Overview

➤ Presentation

➤ *Reading Groups*

➤ *Exercises*

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 11

---

---

---

---

---

---

---

---

## Patterns in Java and C#

Java and C# frameworks were influenced by the GoF

- black-box
- use patterns (they're *everywhere*)

Java and C# has features that affect how design patterns are applied

- interfaces
- serialization
- distribution
- concurrency
- GUI (AWT, Swing)
- inner classes
- protection

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 12

---

---

---

---

---

---

---

---

## Outline of Course

What are patterns? – Composite, Chain of Responsibility, Template Method

More Patterns – Decorator, Null Object, Strategy

How patterns work together

Abstract Factory, Adapter, Builder, Command, Factory Method, Memento, Observer, Prototype, Singleton, State

Documenting system designs with patterns

Centralized vs. distributed - Interpreter, Visitor, Iterator

Bridge, Facade, Flyweight, Mediator, Proxy

Other Patterns and where to find more information

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 13

---

---

---

---

---

---

---

---

## Notation

Design Patterns Book uses OMT

We use this to show the correlation

Sometimes we use UML which is similar



(a) Abstract and concrete classes



(b) Participant Client class (left) and Worker Client class (right)

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 14

---

---

---

---

---

---

---

---

## More Notation

Class Diagrams:



(c) Class relationships



(d) Pseudocode annotation

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 15

---

---

---

---

---

---

---


---

## Yet More Notation

Object Diagrams:



Interaction Diagrams:




Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 16

## Template Method

Problem: Some classes have a similar algorithm, but it is a little different for each class.

Solution: Define the skeleton of the algorithm as a method in a superclass, deferring some steps to subclasses.

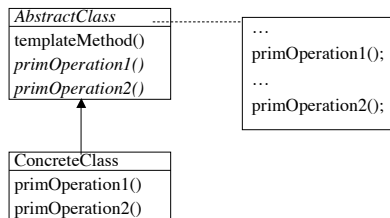

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 17

## Template Method

A template method calls abstract methods.

Usually a template method is created by generalizing several existing methods.

Template Method separates the invariant part of an algorithm from the parts that vary with each subclass.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 18

## Template Method (example)

```
public abstract class View {  
    public abstract doDisplay();  
    public void display() {  
        setFocus();  
        doDisplay();  
        resetFocus();  
    }  
}  
  
public class ListView extends View {  
    public void doDisplay() {  
        setScrollBarWidth();  
        ...  
    }  
}  
  
public class ButtonView extends View {  
    public void doDisplay() {  
        setButtonWidth();  
        ...  
    }  
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 19

---

---

---

---

---

---

---

## Composite

Context:

Developing OO software

Problem:

Complex part-whole hierarchy has lots of similar classes.

Example: document, chapter, section, paragraph.

Forces

- simplicity -- treat composition of parts like a part
- power -- create new kind of part by composing existing ones
- safety -- no special cases, treat everything the same

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 20

---

---

---


---

---

---

---

## Document as a Tree

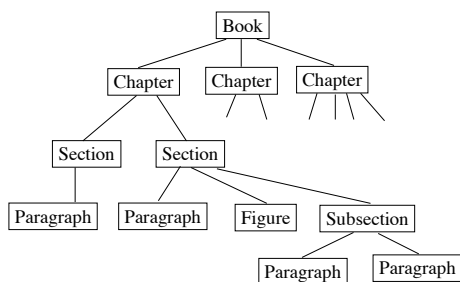

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 21

---

---

---

---

---


---

---

## Composite

Idea: make abstract "component" class.

Alternative 1: every component has a (possibly empty) set of components.



Problem: many components have no components

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 22

---

---

---

---


---

---

---

---

## Composite Pattern



Composite and Component have the exact same interface.

- interface for enumerating children
- Component implements children() by returning empty set
- interface for adding/removing children?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 23

---

---

---

---

---

---

---

---

## Two Design Alternatives

Component does not know what it is a part of.

Component can be in many composite.

Component can be accessed only through composite.

Component knows what it is a part of.

Component can be in only one composite.

Component can be accessed directly.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 24

---

---

---

---

---

---

---

---



## Component Knows its Composite

Rules when component knows its single composite.

A is a part of B if and only if B is the composite of A.

Duplicating information is dangerous!

Problem: how to ensure that pointers from components to composite and composite to components are consistent.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 25

---

---

---

---

---

---

---

## Ensuring Consistency

Solution:

Only public operations that change container are  
addComponent/removeComponent

These operations update the container of the  
component.

There is no other way to change the container.

```
Composite addComponent(Component c) {  
    components.add(c);  
    c.parent = this;  
}
```

In C++, Composite must be friend of component.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 26

---

---

---


---

---

---

---

## Example: Equipment



```
class CompositeEquipment {  
    int weight() {  
        int total = 0; Equipment item;  
        for (Enumeration e = children(); e.hasMoreElements();  
            item = (Equipment) e.nextElement())  
        {  
            total += item.weight;  
        }  
        return total;  
    }  
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 27

---

---

---

---


---

---

---

## Example: Views and Figures

Big window can contain smaller windows.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 28

---

---

---

---


---

---

---

---

## The Java Component Class

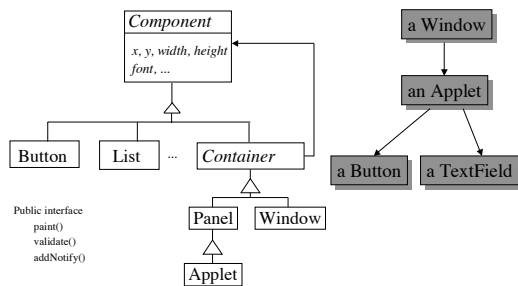

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 29

---

---

---

---

---

---

---

---

## Adding Container

Standard questions for adding:

Where is the collection stored?

Add at front or rear?

How do you update back pointer to parent?

What if component already is in a container?

Does a component need to know if its position changed?

```
public Component add(Component comp) {
    addImpl(comp, null, -1);
    return comp;
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 30

---

---

---

---

---

---

---

---

## More of Container add()

```
protected void addImpl(Component comp, Object constraints, int index) { ...  
    /* Add component to list; allocate new array if necessary. */  
    if (index == -1 || index == ncomponents) {  
        component[ncomponents++] = comp;  
    } else {  
        System.arraycopy(component, index, component,  
                           index + 1, ncomponents - index);  
        component[index] = comp;  
        ncomponents++;  
    }  
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 31

---

---

---

---

---

---

---

## More of Container add()

```
/* What do you do if component already has parent? */  
if (comp.parent != null) {  
    comp.parent.remove(comp);  
}  
comp.parent = this;  
  
/* How can component know it has a new position? */  
if (peer != null) {  
    comp.addNotify();  
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 32

---

---

---

---

---

---

---

## Painting

If Container used only the Composite pattern, it would implement Paint like:

```
public void paint(Graphics g) {  
    for (int i = 0; ++i <= ncomponents; ) {  
        component[i].paint(g);  
    }  
}
```

But it also uses the Bridge pattern, which changes things.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 33

---

---

---

---

---

---

---

## Summary of Composite

Composite is a kind of Component

Permits arbitrary hierarchies

Add/remove Component from Composite

Operations on Composite iterate over Components

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 34

---

---

---

---

---

---

---

## Chain of Responsibility

Avoid coupling the sender of a request to its receiver by giving more than one object a chance to handle the request. Chain the receiving objects and pass the request along the chain until an object handles it.

Usually found with Composite - chain of parents.

Examples:

“inheriting” color from car  
event handlers in GUI

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 35

---

---

---


---

---

---

---

## Chain of Responsibility

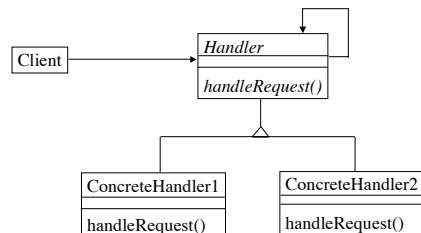

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 36

---

---

---

---

---

---

---

## Chain of Responsibility

Usually mixed with other patterns

- Composite often has Chain of Responsibility up the tree.
- Sometimes request is encoded as a Command
- Sometimes request sent to Strategy

Example: GUI System (Windows, Button Widgets, ...)

```
onMouseClicked() { ...  
    if hookmethod available handle request  
    else parent.onMouseClicked();  
    ... }
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 37

---

---

---

---

---

---

---

---

## What is a Design Pattern?

Design Pattern: repeating structure of design elements

Pattern is about design, but includes low-level coding details.

Pattern includes both problem and solution.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 38

---

---

---

---

---

---

---

---

## What is a Design Pattern?

Details of implementing pattern depend on language and environment.

Pattern is often not the most obvious solution.

Pattern can be applied to many kinds of problems.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 39

---

---

---

---

---

---

---

---

## Parts of a Pattern (Alexander)

Problem - when to use the pattern  
Solution - what to do to solve problem  
Context - when to consider the pattern  
  
Forces - pattern is a balance of forces  
  
Consequences, positive and negative

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 40

---

---

---

---

---

---

---

## Parts of a Pattern

Examples:

Teach both problem and solution  
  
Are the best teacher  
  
Are proof of pattern-hood

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 41

---

---

---

---

---

---

---

## Parts of a Pattern (Gamma et. al.)

Intent - brief description of problem and solution  
Also Known As  
Motivation - prototypical example  
Applicability - problem, forces, context  
Structure/Participants/Collaborations - solution  
Consequences - forces  
Implementation/Sample Code - solution  
Known Uses  
Related Patterns

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 42

---

---

---

---

---

---

---

## GoF Design Patterns

### Creational patterns

Abstract factory  
Builder  
Factory method  
Prototype  
Singleton

### Structural patterns

Adapter  
Bridge  
Composite  
Decorator  
Facade  
Flyweight  
Proxy

### Behavioral Patterns

Chain of Responsibility  
Command  
Interpreter  
Iterator  
Mediator  
Memento  
Observer  
State  
Strategy  
Template Method  
Visitor

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 43

---

---

---

---

---

---

---

---

## Decorators

Decorators add a responsibility to an object by

- making the object a component
- forwarding messages to component and handling others

Possible examples from Java

Double, Integer, Float, etc.

Decorators add an attribute to an object.

Decorator forwards operations to the component.

Component gets values from its decorator.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 44

---

---

---

---


---

---

---

---

## Decorator Structure



Decorator forwards most operations to the object it is decorating.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 45

---

---

---

---


---

---

---

---

## Decorator Example

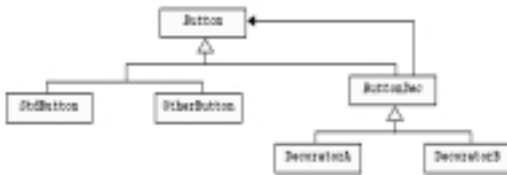

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 46

---

---

---

---

---

---

---

## Design Patterns in AWT

- 1.0 Event-handling by Chain of Responsibility  
problem, either Mediator or lots of subclasses
- 1.1 Event-handling by Observer and Adapter

Java uses lot's of Patterns but just because you use  
a Pattern doesn't necessarily mean a good design!

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 47

---

---

---

---

---

---

---

## Strategy Pattern

Define a family of algorithms, encapsulate each one, and  
make them interchangeable.

Strategy pattern means:

- easy to replace one algorithm with another
- can change dynamically
- can make a class hierarchy of algorithms
- can factor algorithms into smaller reusable pieces
- can encapsulate private data of algorithm
- can define an algorithm in one place

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 48

---

---

---

---

---

---

---



## Strategy Pattern

For procedural languages you would have conditional code spread throughout your application for dealing with special cases.

```
onDisplayButton()
case OS of:
  'NT' : setButtonWidth: 100;
  'UNIX': setButtonWidth: 125;
...
onMousePressed()
case OS of:
  'NT' : setButtonShadowWidth: 10;
  'UNIX': setButtonShadowWidth: 15;
...
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 49

---

---

---


---

---

---

---

## Strategy



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 50

---

---

---


---

---

---

---

## Strategy (an example)



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 51

---

---

---

---

---

---

---

## Moving Code “Refactoring”

To move a function to a different class, add an argument to refer to the original class of which it was a member and change all references to member variables to use the new argument.

If you are moving it to the class of one of the arguments, you can make the argument be the receiver.

Moving function *f* from class *X* to class *B*

```
class X {
  int f(A anA, B aB){
    return (anA.size + size) / aB.size;
  } ...
class B {
  int f(A anA, X anX){
    return (anA.size + anX.size) / size;
  } ...
```


Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 52

## Moving Code

You can also pass in a parameter object which gives the algorithm all of the values that it will need.

Inner Classes can help by providing access to values that the algorithm may need.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 53


## NullObject

**Author:** Bobby Woolf, PLoPD 3

### Intent:

- provide surrogate for another object that shares same interface
- usually does nothing but can provide default behavior
- encapsulate implementation decisions of how to do nothing

### Structure:



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 54

## Design Patterns

### Teaching

- help novices learn to act like experts

### Design

- vocabulary for design alternatives
- help see and evaluate tradeoffs

### Documentation

- vocabulary for describing a design
- describes "why" more than other techniques

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 55

---

---

---

---

---

---

---

## Review

Patterns: solutions to recurring problems

OO design patterns: Recurring structures of objects that solve design problems

Stretch from design to code

We have seen: Composite, Chain of Responsibility, Decorator, Null Object, Strategy, Template Method

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 56

---

---

---

---

---

---

---

## Goals of Next Session

Be able to recognize the creational patterns: Abstract Factory, Builder, Factory Method, Prototype, Singleton

Be able to describe relationships among creational patterns

Be able to recognize Adapter, Command, Memento, Observer, & State

Learn more about how patterns work together

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 57

---

---

---

---

---

---

---

## How Patterns Work Together

Some patterns are commonly used together

Some patterns are alternatives

Some patterns have common context

Creational patterns:

Some objects have to create other objects.

How can we parameterize them with the kind of objects that they create?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 58

---

---

---

---

---

---

---

## Creational Patterns

Factory Method

*Factory Object*

Abstract Factory

Builder

Prototype

Singleton

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 59

---

---

---


---

---

---

---

## Factory Method



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 60

---

---

---

---

---

---

---

## Factory Method

Don't (call constructor / send message to class) directly.  
Make a separate function / method to create object.

### Advantages:

- can change class of product in subclass
- can produce easier to read functions

### Disadvantages:

- slower, bulkier
- harder to read ALL the code

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 61

---

---

---

---

---

---

---

---

## Factory Object

Problem with factory method -- have to create subclass to parameterize.

Often end up with parallel class hierarchies.

Example: subclass of Tool for each figure you want to create or a large case statement or many methods.

Alternative: parameterize CreationTool with object that creates figure

(Note: Factory Object is generalization of Abstract Factory, Builder, and Prototype. It is not in the book.)

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 62

---

---

---

---


---

---

---

---

## Example

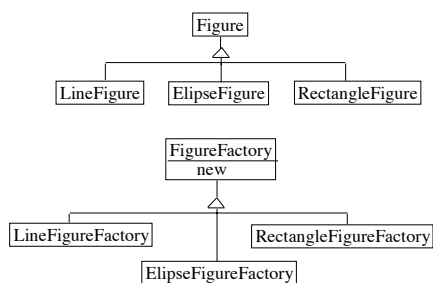

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 63

---

---

---

---

---

---

---

---

## Applicability

Use factory objects:

- when system creates them automatically
- when more than one class needs to have product specified
- when most subclasses only specialize to override factory method

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 64

---

---

---

---

---

---

---

## Prototype

Making a class hierarchy of factories seems wasteful.  
The parameters of an object can be as important as its class.

Solution:

Use any object as a factory by copying it to make a new instance.

Advantages

Don't need new factory hierarchy.

Can make new "class" by parameterizing an object

Disadvantages

Requires robust copying

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 65

---

---

---

---

---

---

---

## Prototype

Problem: a "chapter" or a "section" is a set of objects, not a single object. Users want to "create a new chapter". How should system create set of objects?

Solution: Specify the kind of objects to create by a prototypical instance, and create new objects by copying the prototype. If object is a composite or decorator then its entire substructure is copied.

Advantage: users can create new objects by composing old ones, and then treat the new object as a "prototype" for a whole new "class".

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 66

---

---

---


---

---

---

---

## Prototype

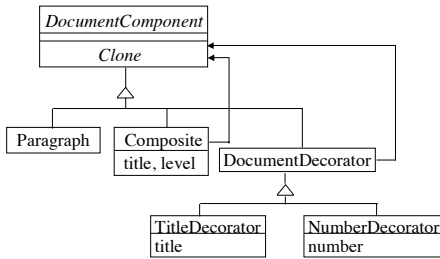

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.


Day 1 -- Slide 67

## Abstract Factory

Sometimes a group of products are related -- if you change one, you might need to change them all.

Solution:

Make a single object that can make any of the products.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 68


## Builder

Complex objects require a lot of work to make.

Solution:

Factory must keep track of partly built product.

Client specifies product by performing series of operations on factory.




Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 69

## Implementing Builder

Builder can make components using

- Factory Method
- Singleton (to come)
- Abstract Factory, or
- Prototype



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 70

---

---

---

---

---

---

---

---

## Summary of Factory Patterns

Factory method -- use in simple cases so that you can change product

Abstract factory -- use when there is a set of related products

Builder -- use when product is complex

Prototype -- use when Factory Method is awkward and when classes are not objects, or when you want to specify new "classes" by composition

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 71

---

---

---

---

---

---

---

---

## Singleton

What if you want to make sure that a class has only one instance?

One possibility is global variables. Another is using static member functions.

Best solution: store single instance in static member variable.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 72

---

---

---

---

---

---

---

---



## Singleton in Java

```
abstract public class Singleton
{
    protected Singleton() {}
    abstract protected Singleton makeInstance();
    private static Singleton soleInstance = null;
    public static Singleton Instance() {
        if (soleInstance == null)
            soleInstance = makeInstance();
        return soleInstance;
    };
};
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 73

---

---

---

---

---

---

---

## Summary

Certain combinations of patterns are common.

- Abstract Factory and Factory Method
- Builder and Singleton

Often one pattern is used to implement an object in another.

A single object will play different roles in different patterns.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 74

---

---

---

---

---

---

---

## Goals of Next Session

Learn State and Observer (Listeners)

Learn Memento

See more about how Patterns work together

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 75

---

---

---

---

---

---

---

## State Pattern

Problem: an object whose behavior changes as its state changes

Solution: make the state be a separate object, and delegate to it.

This results in a new class hierarchy of states.

Design of state is closely coupled to design of object.

Operations on states will change the state of the object.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 76

---

---

---


---

---

---

---

## State Pattern



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 77

---

---

---


---

---

---

---

## Toolbar State Example



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 78

---

---

---

---

---

---

---

## State

Behavior of drawing editor changes when you select a different tool.

Tools are the "current state" of the DrawingController; it delegates operations to the current state.

Make a class hierarchy of Tools.

DrawingController points to its "current Tool".

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 79

---

---

---


---

---

---

---

## State

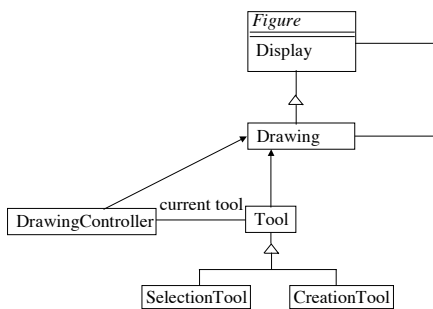

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 80

---

---

---

---

---


---

---

## Observer Pattern

Intent: Define a one-to-many dependency between objects so that when one object changes state, all its dependents are notified and updated automatically.

Example: Graphics system - moving box causes connecting lines to move.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 81

---

---

---

---


---

---

---

## Observer Pattern

Intent: Define a one-to-many dependency between objects so that when one object changes state, all its dependents are notified and updated automatically.

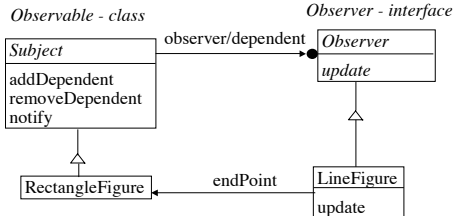

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 82

---

---

---

---


---

---

---

---

## Observer Pattern

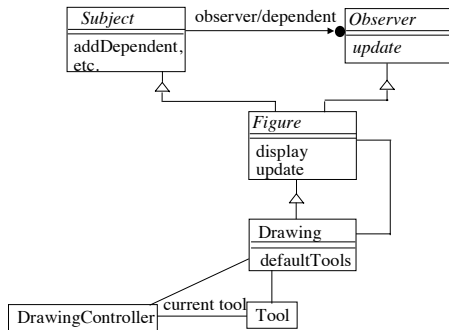

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 83

---

---

---

---

---

---

---

---

## Event Handling

AWT 1.0 uses Chain of Responsibility

AWT 1.1 uses Observer

Shows the trade-offs between patterns

Shows Patterns != Good

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 84

---

---

---

---

---

---

---

---

## Using Observer

Decide whether object is Subject, Observer, or both

Subjects must call notify() when they change state

Observers must define update()

Observers must register with Subjects

What are the arguments of notify() and update()?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 85

---

---

---

---

---

---

---

## Observer in Java

Original implementation of the Observer pattern:

Observer/Observable.

Observer is an interface.

Observable is a class that implements the ability to keep track of a set of Observers.

More modern implementation is the Listeners.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 86

---

---

---

---

---

---

---

## Listening instead of Observing

EventSource is a subject

EventListener is an observer

Many kinds of EventListeners,  
each with their own interface

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 87

---

---

---

---

---

---

---

## Different Kinds of Listeners

ActionListener

actionPerformed(ActionEvent)

ComponentListener

componentResized(ComponentEvent)

componentMoved(ComponentEvent)

componentShown(ComponentEvent)

componentHidden(ComponentEvent)

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 88

---

---

---

---

---

---

---

## Events in AWT 1.1

Applet is a "Listener"


Button has methods

addActionListener()

processActionEvent()

Applet registers with Button.

When Button processes action event,  
it calls applet



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 89

---

---

---


---

---

---

---

## Memento



Undo is not enough in the presence of a constraint system.  
Must go back to same state, not just reverse operation.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 90

---

---

---

---


---

---

---

## Memento

Without violating encapsulation, capture and externalize an object's internal state so that the object can be restored to this state later.

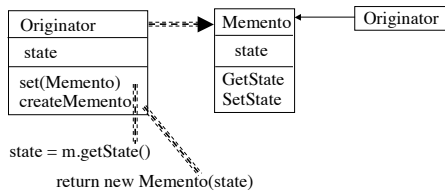


Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 91

## Adapter

Convert the interface of a class into another interface clients expect. Adapter lets classes work together that couldn't otherwise because of incompatible interfaces.

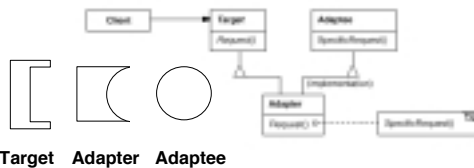

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 92

## Command

### Intent

Encapsulate a request as an object, thereby letting you parameterize clients with different requests, queue or log requests, and support undoable operations.

Menus often do this.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 93

## Summary

New patterns: Abstract Factory, Builder,  
Factory Method, Prototype, Singleton,  
Adapter, Command, Memento, Observer, State

See How Patterns work together

*Use Patterns to Document a Design*

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 94

---

---

---

---

---

---

---

## Goals of next session

Learn Interpreter, Iterator, Visitor

Be able to distribute an algorithm over a class  
hierarchy, or centralize it

Be able to explain some of the different kinds of  
trade-offs that patterns can make

Learn more about how patterns work together

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 95

---

---

---

---

---

---

---

## Replacing Cases with Subclasses

### Advantages

- instead of modifying case statements, add  
a new subclass
- can use inheritance to make new options

### Disadvantages

- program is spread out,  
+ harder to understand  
+ harder to replace algorithm
- state of object can change, but class can not

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 96

---

---

---

---

---

---

---



## The Interpreter Pattern

To write a little object-oriented interpreter for a language L:

- 1) make a subclass of LExpression for each rule in the grammar of L
- 2) for each subclass, define an Interpret method that takes the current context as an argument.
- 3) define interface for making a tree of LExpression.
- 4) define a program for L by building a tree.
- 5) run a program by calling Interpret() on the root of the tree

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 97

---

---

---


---

---

---

---

## Interpreter

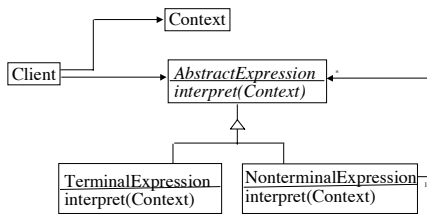

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 98

---

---

---

---

---

---

---

## Spreadsheet Rules

Spreadsheet rules of the form D3 + D4 or Subtotal(D2:D8)

Grammar is

```
expression ::= expression1 '+' expression |
              expression1 '-' expression |
expression1 ::= expression '*' expression |
              expression '/' expression |
              number | cellID |
              'Subtotal(' range ') '
range ::= cellID ':' cellID
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 99

---

---

---

---

---


---

---

## Spreadsheet Objects

```
new PlusExpression( new CellExpression(3,2),  
                    new CellExpression(3,3) )
```

Equivalent to "C2 + C3"



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 100

---

---

---

---

---

---

---

---

## Applying the Interpreter Pattern

Step 1: *Make a subclass of Expression for each rule in grammar*

Expression

BinaryExpression

PlusExpression, MinusExpression,  
TimesExpression, DivideExpression

ConstantExpression

CellExpression

SubtotalExpression

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 101

---

---

---

---

---

---

---

---

## Applying the Interpreter Pattern

Step 2. *Define a value(Spreadsheet) method for each subclass of Expression*

```
abstract class Expression {  
    public Number value(Spreadsheet s);  
    class PlusExpression extends Expression {  
        public Number value(Spreadsheet s) {  
            return operand1.value(s) + operand2.value(s);  
        }  
    }  
    class CellExpression extends Expression {  
        public Number value(Spreadsheet s) {  
            return s.cellvalue(row, column);  
        }  
    }  
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 102

---

---

---

---

---

---

---

---

## Applying the Interpreter Pattern

Step 3: *Define constructors for making expression tree*

```
Expression(Expression e1, Expression e2) {  
    operand1 = e1;  
    operand2 = e2;  
}
```

Step 4,5: *Build tree and evaluate it.*

```
ss.setExpression(3,4,new PlusExpression( new  
    CellExpression(3,2), new CellExpression(3,3)));  
ss.cellValue(3,4)
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 103

---

---

---

---

---

---

---

---

## Interpreter Pattern Examples

Other examples of Interpreter pattern:

- producing Postscript for a document
- regular expression checker
- figuring out the value of an insurance policy
- compiling a program

In C, the interpreter would be a switch statement.

Easy to add new kinds of expressions to the spreadsheet  
-- don't have to modify any existing code.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 104

---

---

---

---

---

---

---

---

## When to Centralize Algorithm

Use centralized algorithm when you need to

- change entire algorithm at once
- look at entire algorithm at once
- work with only a few kinds of components
- change algorithm, but not add new classes of components

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 105

---

---

---

---

---

---

---

---

## Visitor pattern

Visitor lets you centralize algorithm, lets you create a family of algorithms by inheritance, and lets you define a new operation without changing the classes of the elements on which it operates.

Major problem is that adding a new kind of parse node requires adding a new function to each visitor.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 106

---

---

---

---

---

---

---

## Interpreter To Visitor

- two kinds of classes: parse tree nodes and node visitor
- parse tree nodes have *Accept* function

```
class PlusExpression extends BinaryExpression
public Object accept(ExpressionVisitor v)
{
    return v.visitWithPlusExpression(this);
}
```

- each parse tree node calls a different Visit function
- visitor defines a Visit function for each class of node

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 107

---

---

---

---


---

---

---

## Interpreter without Visitor

=Cell1+Cell2



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 108

---

---

---

---

---

---

---

## Double Dispatch and Visitor

Double Dispatch – Effectively, the Visitor pattern lets you add operations to classes without changing them. Visitor achieves this by using a well known technique called double-dispatch. Double dispatch operation gets executed is dependent upon the kind of request and the type of the receiver. (Search google for Double Dispatch and Java).

$1 + 4.5 = 5.5$

- Double dispatch can be used to coerce the right type

Integer

+ (Number aNumber)

return aNumber.addFromInteger(this)

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 109

---

---

---

---

---


---

---

---

## Interpreter with Visitor

=Cell1+Cell2

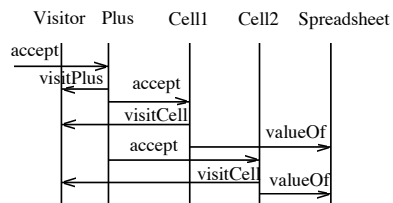

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 110

---

---

---

---

---

---

---

---

## Related Patterns

- Several patterns are often used with Interpreter
  - Visitor - to separate algorithm from tree classes
  - Iterator - to make traversal more abstract
  - Composite - to make tree
  - Template Method - to put reusable code in abstract class

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 111

---

---

---

---

---


---

---

---

## Iterator

Provide a way to access the elements of an aggregate object sequentially without exposing its underlying implementation.

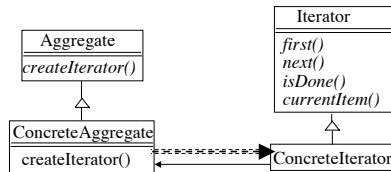

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 112

---

---

---

---

---

---

---

---

## Using Enumeration-style Iterators

```
public void printEmployees (Employees emp)
{
    for (e = emp.employees(); e.hasMoreElements(); )
    {
        Employee currentEmployee
            = (Employee) e.nextElement();
        currentEmployee.print();
    }
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 113

---

---

---

---

---

---

---

---

## Using Iterator-style Iterators

```
public void printEmployees (Employees emp)
{
    for (i = emp.employees(); i.hasNext(); )
    {
        Employee currentEmployee
            = (Employee) i.next ();
        currentEmployee.print();
    }
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 114

---

---

---

---

---

---

---

---

## The Enumeration Interface

```
public boolean hasMoreElements();  
public Object nextElement();
```

The old style Java external iterator convention

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 115

---

---

---

---

---

---

---

## The Iterator Interface

```
public boolean hasNext();  
public Object next ();  
public void remove();
```

The new style Java external iterator convention

Iterators in Java include Collections, Streams, ...

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 116

---

---

---

---

---

---

---

## Variations on Iterator

- 1) Internal iterator - iterate inside the Aggregate
  - easy to use, not as powerful as external iterator
  - works best with closures (Inner Classes)

- 2) Combine next() and currentItem()

Smalltalk has Internal and External Iterators

Collections with do: and Streams

Java has also implemented these ideas

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 117

---

---

---

---

---

---

---

## An Adapter on an Enumerator

```
class EnumerationAdapter implements Iterator
{
    private Enumeration e;
    public EnumerationAdapter(Enumeration e)
    { this.e = e; }
    public boolean hasNext() { return e.hasMoreElements(); }
    public Object next() { return e.nextElement(); }
    public void remove() {}
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 118

---

---

---

---

---

---

---

## Iterator and Composite

Composites usually have an iterator for their components.  
Can make Iterator on Component that will iterate over all the components in a tree.

Internal Iterator is easy: here is method on Component:

```
public void preorder(Command c) {
    c.evaluate(this);
    Enumeration e = children();
    for (; e.hasMoreElements(); ) {
        ((Component) e.nextElement()).preorder(c);
    }
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 119

---

---

---

---

---

---

---


## External Tree Iterator

Do a pre-order traversal.

Tree Iterator will have a stack of iterators, one for each ancestor of current node. The currentItem of each Iterator is the ancestor of the current node.

isDone is false for all iterators on the stack.

Tree Iterator is done when stack is empty.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 120

---

---

---

---

---

---

---



## External Tree Iterator

```
class TreeIterator {
public next() {
    if (stack.isEmpty()) return;
    stack.push(stack.top().currentItem().children());
    while (stack.top().isDone()) {
        stack.pop();
        stack.top().Next();}

    ElementType currentItem() {
        return stack.top().currentItem();}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 121

---

---

---

---

---

---

---

## Iterator and Visitor

Who is responsible for the traversal algorithm when you use Visitor and Composite?

The components? (most common in C++)

The visitor?

A separate iterator?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 122

---

---

---

---

---

---

---

## 1: The Components

If the component handles traversal, it looks like:

```
public Object accept(Visitor visitor) {
    visitor.visitA(this);
    for (Enumeration e = children();
        e.hasMoreElements() {
        item = (Item) e.nextElement();
        item.accept(visitor);
```

Otherwise, it looks like

```
public Object accept(Visitor visitor) {visitor.visitA(this);}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 123

---

---

---

---

---

---

---

## 2: The Visitor

If the visitor handles iteration, it looks like:

```
public Object visitA(ComponentA c) {  
    // do something with c  
    for (Iterator i = c.children();  
         !i.isDone(); i.next())  
    {  
        ((Component) i.currentItem()).accept(visitor);  
    }  
}
```

Otherwise Visitor visitA just interacts with componentA.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 124

---

---

---

---

---

---

---

## 3: An Iterator

If client calls Iterator, it looks like:

```
visitor = new ConcreteVisitor.  
for (Iterator i = component.iterator();  
     !i.isDone(); i.Next())  
{  
    ((Component) i.currentItem()).accept(visitor);  
}
```

Otherwise, the client looks like:

```
ConcreteVisitor visitor;  
treeRoot.accept(visitor);
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 125

---

---

---

---

---

---

---

## Tradeoffs

1: The Components

2: The Visitor

3: An Iterator

Highlight the tradeoffs and possibly look at a number  
4 which is letting the client do it.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 126

---

---

---

---

---

---

---

## Review

New patterns: Interpreter, Iterator, Visitor

Patterns interact:

- object can play different roles in different patterns
- patterns can be alternatives
- one pattern can set up another pattern

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 127

---

---

---

---

---

---

---

## Next Session

Learn remaining patterns

- Proxy
- Bridge
- Facade
- Flyweight
- Mediator

Remember intent of  
pattern so you can look  
it up when you need it.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 128

---

---

---

---

---

---

---

## Proxy

- Provide a surrogate or placeholder for another object to control access to it
  - represent an object in a remote address space
  - create expensive objects on demand
  - check access rights
- Proxy has same interface as "real subject", and forwards operations to it

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 129

---

---


---

---

---

---

---

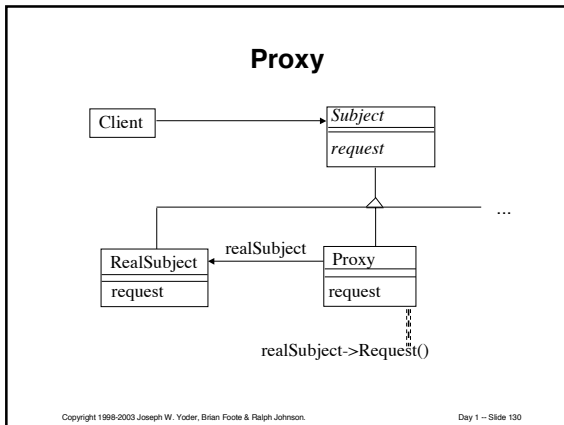


---

---

---

---

---

---

---

---

### Proxy

Remote proxy - first package arguments, then make remote procedure call.

Virtual proxy - compute objects, then forward request.

Protection proxy - check access rights, then forward request.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson. Day 1 -- Slide 131

---

---

---

---

---

---

---

---

### Dynamic Proxy Classes

Started in Java 2 1.3

- A *dynamic proxy class* is a class that implements a list of interfaces specified at runtime when the class is created
- A *proxy interface* is such an interface that is implemented by a proxy class
- A *proxy instance* is an instance of a proxy class

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson. Day 1 -- Slide 132

---

---

---

---

---

---

---

---

## How to Hide Information

Hiding the classes in one module from another makes changes easier. Some things that help are:

- Abstract classes
- Builder (or Abstract Factory)
  - Hide classes of products that will be used by other module in the builder.
  - Example: window builder, code generator
- Adapter
  - Hide class being used inside adapter
- Bridge and Facade

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 133

---

---

---

---


---

---

---

## Bridge

What do you do if both an abstraction and its implementation vary?

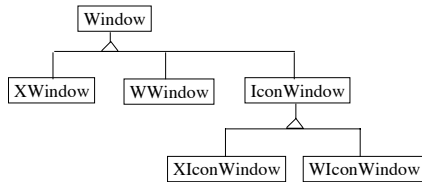

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 134

---

---

---

---


---

---

---

## Bridge

Decouple an abstraction from its implementation so that the two can vary independently.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 135

---

---

---

---

---


---

---

## Bridge and Builder

Use Builder to hide Window classes from application.

Use Bridge to hide platform classes from Builder.



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 136

---

---

---

---


---

---

---

## Bridge in the AWT

The look of a component depends on the windowing system.

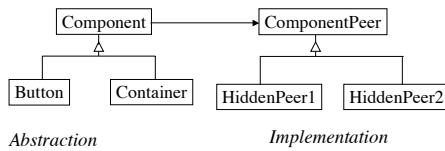

*Abstraction*

*Implementation*

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 137

---

---

---

---

---

---

---

## Standard Questions for Bridge

Where is the bridge set up?

When do we cross the bridge  
(from abstraction to implementation)?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 138

---

---

---


---

---

---

---

## Building the Bridge

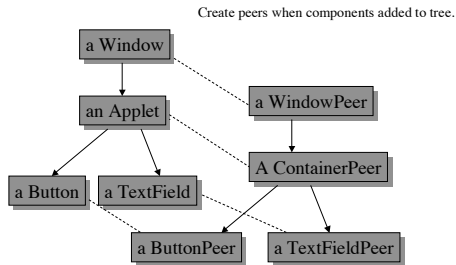

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 139

---

---

---

---

---

---

---

---

## How a Button Creates a Peer

```
/**
 * Creates the peer of the button. This peer allows us to
 * change the look of the button without changing its functionality.
 */
public void addNotify() {
    peer = getToolkit().createButton(this);
    super.addNotify();
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 140

---

---

---

---

---

---

---

---

## How a List Creates a Peer

```
/**
 * Creates the peer for the list. The peer allows us to modify the
 * list's appearance without changing its functionality.
 */
public void addNotify() {
    peer = getToolkit().createList(this);
    super.addNotify();
    synchronized (this) {
        visibleIndex = -1;
    }
}
```

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 141

---

---

---

---

---

---

---

---

## Flyweight

Use sharing to support large numbers of objects efficiently.

Separate intrinsic state (state stored in flyweight) from extrinsic state (state passed in as part of context).  
Minimize extrinsic state. Share flyweights that have the same intrinsic state.

Usually requires a factory that detects whether a flyweight exists with a particular intrinsic state and returns it.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 142

---

---

---


---

---

---

---

## Flyweights for Text

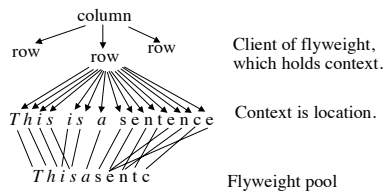

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 143

---

---

---


---

---

---

---

## Flyweight



Flyweight class is usually abstract, with concrete subclasses that define the intrinsic state.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 144

---

---

---

---

---

---

---



## Flyweight for CAD

A VLSI design system must model millions of transistors.

This is only possible by sharing structure. Most transistors are part of larger structures (registers, NAND gates, RAM) that designers prefer to think about. Each kind of structure is called a *cell*.

Each cell is interconnected with other cells.

Context is location and interconnections.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 145

---

---

---


---

---

---

---

## Flyweight for CAD

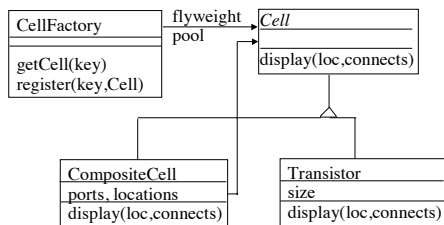

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 146

---

---

---

---


---

---

---

## Facade

Provide a unified interface to a set of interfaces in a subsystem. Facade defines a higher-level interface that makes the subsystem easier to use.

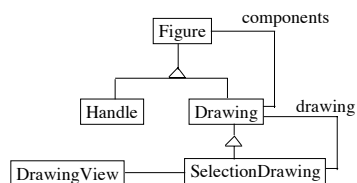

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 147

---

---

---

---

---

---

---

## Mediator

Define an object that encapsulates how a set of objects interact. Mediator promotes loose coupling by keeping objects from referring to each other explicitly, and it lets you vary their interaction independently.

Example: Insurance policies must be approved before they are issued. There is a procedure (which can change over time, and which is different for different kinds of policies) for approving a policy. This procedure must interact with work queues of managers and with the history that is kept on the customer. Instead of putting this procedure in the insurance policy, put it in a separate object that is easy to change. (This is a "business process")

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 148

---

---

---

---


---

---

---

---

## Mediator

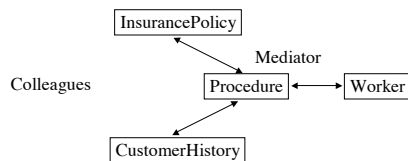

If interaction is main thing that changes, then make the interaction be an object.

Colleague classes become more reusable.

Mediator is the non-reusable part.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 149

---

---

---

---

---


---

---

---

## Mediator

*Business Rule*

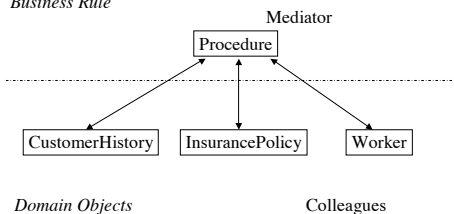

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 150

---

---

---

---


---

---

---

---

## Not Mediator



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 151

---

---

---

---

---

---

---

## Mediators

Are not reusable, but make other objects reusable

Used to glue together objects from a kit

Tend to be procedural, not object-oriented

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 152

---

---

---

---

---

---

---

## Patterns Protect from Change

Rule: if something is going to change, make it an object.

Strategy: make algorithm an object so it can change

State: make state-dependent behavior an object so it can change

Iterator: make the way you iterate over an aggregate an object so it can change

Facade: make a subsystem an object so it can change

Mediator: make the way objects interact an object so it can change

Factory: make the classes of your products an object so it can change

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 153

---

---

---

---

---

---

---

## Summary

You have now seen all of the Design Patterns

You should be able to recognize Abstract Factory, Adapter, Bridge, Builder, Chain of Responsibility, Command, Composite, Decorator, Façade, Factory Method, Flyweight, Interpreter, Iterator, Mediator, Memento, Null Object, Observer, Prototype, Proxy, Singleton, State, Strategy, Template Method, Visitor...

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 154

---

---

---

---

---

---

---

## Bird on Patterns

*Learn the patterns  
and then forget  
'em*

-- Charlie Parker

<http://www.hillside.net>



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 155

---

---

---

---

---

---

---

## Silver Buckshot

There are no silver bullets  
.....Fred Brooks

But maybe some silver buckshot...

- Objects
- Frameworks
- Patterns
- Architecture
- Process/Organization
- Tools

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 156

---

---

---

---

---

---

---

## UIUC Patterns Group Software Architecture Group Ralph Johnson's Group

- Objects
- Reuse
- Frameworks
- Adaptive Architecture
- Components
- Refactoring
- Evolution
- Patterns



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 157

---

---

---

---

---

---

---

---

## Our Perspective

Objects, Patterns, Frameworks, and Refactoring really do work, and can lead to the production of better, more durable, more reusable code

To achieve this requires a commitment to tools, architecture, and software evolution, and to people with superior technical skills and domain insight

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 158

---

---

---

---

---

---

---

---

## Next Session

- You will be able to
- find new patterns
  - learn new patterns

We'll also talk about writing patterns.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 159

---

---

---

---

---

---

---

---

## Other Patterns

Claim: people always use patterns to solve problems

Corollary: there are a lot of software patterns besides object-oriented design patterns!

patterns for user interface design  
patterns for distributed programming  
patterns for checking user input  
patterns for analysis  
patterns for how to manage a software project

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 160

---

---

---

---

---

---

---

## User Interface Patterns

Ward Cunningham and Kent Beck

<http://c2.com/cgi-bin/wiki?HistoryOfPatterns>

- Window per Task
- Few Panes
- Standard Panes
- Nouns and Verbs
- Short Menus

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 161

---

---

---

---

---

---

---

## Pattern Language

Set of patterns that tell you how to build something.

Complete -- all the patterns you need.

One pattern leads to another -- language gives order to consider them.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 162

---

---

---

---

---

---

---

## Mapping Objects To Persistence Pattern Language

Pattern Name	Description
<i>Persistent Layer</i>	Provide a layer for mapping your objects to the RDBMS or other data source.
<i>CRUD</i>	All persistent object need, at a minimum, create, read, update, and delete operations.
<i>SQL Code</i>	Defines the actual <i>SQL Code</i> that takes the values from the RDBMS or other data source and retrieves them for the object's use and vice-versa. It is where you define the <i>CRUD</i> operations.
<i>Attribute Mapping Methods</i>	Maps the values between the database values and attributes. This pattern also handles complex object mappings. Populates the object(s) with the row values.
<i>Type Conversion</i>	Works with <i>Map Attributes</i> to translates values from the database to the appropriate object types and vice-versa. Insures data integrity.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 163

## Mapping Objects To Persistence Pattern Language

Pattern Name	Description
<i>Change Manager</i>	Keeps track of when an object's values have been changed for maintaining consistency with the database. It determines the need to write the values to a database table or not.
<i>OID Manager</i>	Generates Unique Keys for the Object Ids during an insert.
<i>Transaction Manager</i>	Provides a mechanism to handle transactions while saving objects.
<i>Connection Manager</i>	Gets and maintains a connection to the database.
<i>Table Manager</i>	Manages the mappings from an object to its database table(s).

Joseph W. Yoder, Ralph Johnson and Bruce Wilson. *Connecting Custom Objects to Relational Databases* 7th Conference on Patterns Languages of Programs (PLoP '97) Monticello, Illinois, August 1997. Technical report #wucs-97-34, Dept. of Computer Science, Washington University Department of Computer Science, September 1998.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 164

## Security Patterns

Pattern Name	Description
<i>Single Access Point</i>	Providing a common security module and a single way to log into the system.
<i>Check Point</i>	Organizing security checks and their repercussions.
<i>Roles</i>	Organizing users with similar security privileges.
<i>Session</i>	Localizing global information in a multi-user environment.
<i>Limited View</i>	Allowing users to only see what they have access to.
<i>Full View with Errors</i>	Allowing users to see everything and generate errors.
<i>Secure Access Layer</i>	Integrating application security with low-level security.

Joseph W. Yoder and Jeffrey Burrows. *Architectural Patterns for Enabling Application Security* Fourth Conference on Patterns Languages of Programs (PLoP '97) Monticello, Illinois, September 1997. Technical report #wucs-97-34, Dept. of Computer Science, Washington University Department of Computer Science, September 1997. Pattern Languages of Programs Design 4 edited by Neil Harrison, Brian Foote, and Hans Rohnert. Addison Wesley, 2000.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 165

## Analysis Patterns

**David Hay**, Data Model Patterns: Conventions of Thought  
Dorset House Publishing, 1996 ISBN 0-932633-29-3  
**Martin Fowler**, Analysis Patterns, Addison-Wesley, 1997

Organizational structure	Hay, Fowler
Accountability	Fowler
Quantities	Hay, Fowler
Contracts	Hay, Fowler
Accounting	Hay, Fowler
Products and Inventories	Hay
Material Requirements Planning	Hay

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 166

---

---

---

---

---

---

---

---

## How Patterns Fit Together

- Some patterns naturally fit together
- Real designs use many patterns
- Add patterns to design one or two at a time
- One pattern leads to another
- Some patterns are alternatives
- Some patterns have similar contexts
- You can document a system by a sequence of design patterns, representing the sequence of decisions you made.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 167

---

---

---

---

---

---

---

---

## Using Patterns in Documentation

How do you tell which patterns are in a design?  
use names to give hints  
describe design as a sequence of patterns  
include in CASE tool

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 168

---

---

---

---

---

---

---

---



## Methods and Patterns

Patterns fill a hole ignored by analysis and design methods.

Methods give language for modeling, patterns give models.

Patterns are a layer on top of methods.

But patterns tell you what to do, too. Does this contradict method?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 169

---

---

---

---

---

---

---

## Methods vs. Patterns

Methods try to be general-purpose, patterns are specific.

Methods try to be domain independent, patterns are often domain dependent.

Different communities; people working on patterns tend to be developers who do not use any particular method.

Will methods grow to include patterns, or will patterns engulf methods?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 170

---

---

---

---

---

---

---

## What Can be a Pattern?

*Pattern Languages of Program Design* (edited by Coplien and Schmidt, Addison-Wesley, 1995, ISBN 0-201-60734-4) has:

How to make clients in client/server (Wolf and Liu)

Distributed programming (DeBruler, Aarsten et. al., Meszaros, Berczuk, Schmidt, Ran)

Decision support systems (Peterson)

Software process (Coplien, Whitenack, Foote and Opdyke)

Going from analysis to design (Kerth)

Standard architectures (Edwards, Meunier, Mularz, Shaw)

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 171

---

---

---

---

---

---

---

## Patterns

Let us describe our practices and let others criticize them.

Make it easier to teach software development.

Makes it easier to see when our techniques are no longer applicable.

Are hard to write.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 172

---

---

---

---

---

---

---

## Writing Patterns

You should write patterns because  
you will learn a lot about patterns  
you probably use some patterns that haven't been documented yet  
you meet a lot of good people that way

But writing is hard work, and not everybody has the time or the desire to do it.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 173

---

---

---

---

---

---

---

## Finding Patterns

Patterns come to those who wait -- must have time for reflection.

Patterns come to those who are prepared -- must have experience in domain of problem.

Patterns are refined in fire -- must have readers who criticize.

It is not a pattern until you have more than one example!

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 174

---

---

---

---

---

---

---

## How to Find Patterns

Look for a solution and document it.

What is the problem? When should you use the solution?

Why don't you use it all the time?

What are the drawbacks of the solution?

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 175

---

---

---

---

---

---

---

## Writers' Workshop

Excellent way to get feedback on pattern.

Author is silent while group discusses pattern. Group pretends author is not there.

Strong moderator ensures that discussion is positive.

Say what you like before you say what you don't like.

Discuss both form and content.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 176

---

---

---

---

---

---

---

## How to Learn New Patterns

Get a set of patterns.

Meet regularly to discuss them with a group.  
(Brown-bag lunch works well)

Group is best so you develop shared vocabulary.

Use the vocabulary in design reviews and design sessions.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 177

---

---

---

---

---

---

---

## How to Learn New Patterns

A pattern is usually hard to understand if you don't need it and have never used it. Don't worry, just get the big picture.

Learn what patterns are available, then study the pattern when you need it.

It isn't hard!

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 178

---

---

---

---

---

---

---

## Further information

<http://hillside.net>

Pointers to mailing lists, books, ftp archives, on-line patterns, conferences, etc.

[gang-of-4-patterns-request@cs.uiuc.edu](mailto:gang-of-4-patterns-request@cs.uiuc.edu)  
[patterns-request@cs.uiuc.edu](mailto:patterns-request@cs.uiuc.edu)  
[patterns-discussion-request@cs.uiuc.edu](mailto:patterns-discussion-request@cs.uiuc.edu)

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 179

---

---

---

---

---

---

---

## Frameworks and Patterns

Frameworks are a kind of pattern.

Frameworks contain Design Patterns.

Compared to Design Patterns, frameworks are

- more concrete
- more domain specific

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 180

---

---

---

---

---

---

---

## Design Patterns vs. Frameworks

Design patterns are more abstract

Frameworks are represented by programs, patterns are illustrated by programs.

Frameworks are specialized to particular domain.

Frameworks contain design patterns

Design patterns are easier to learn

Frameworks have bigger payoff

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 181

---

---

---

---

---

---

---

## Problems with Frameworks

Frameworks are hard to buy:

- Most are proprietary
- You can buy frameworks for GUI, distribution, or persistence, but not for accounting, real-time control, or scheduling

Frameworks are hard to learn:

- Many objects working together
- Design patterns make it easier

Frameworks are hard to make:

- Require experience
- Require iteration

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 182

---

---

---

---

---

---

---

## Conclusion

Reuse is capital intensive

- Must acquire assets
- Must learn assets

Patterns are cheaper to use than frameworks, and good preparation for frameworks. Frameworks have higher payoffs.

Developing reusable assets is very expensive.

Buy if you can.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 183

---

---

---

---

---

---

---

## Evolution of Object-Oriented Systems

Objects are good abstractions

- put data and behavior together
- Early reuse through subclassing and copying/pasting
- Nouns are objects / Verbs are actions

Patterns come into play with experience

- More reuse through "pluggable" components
- Action / Strategies can be objects as well

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 184

---

---

---

---

---

---

---

## Evolution of Object-Oriented Systems

Frameworks evolve as your code becomes more reusable

- White Box vs. Black Box
- Action / Strategies can be objects as well
- Refactoring and Testing becomes very important

Adaptive Object-Models

<http://www.adaptiveobjectmodel.com>

- Metadata (descriptive data) allows you to evolve the program without writing new code
- Can very quickly adapt to new business rules

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 185

---

---

---

---

---

---

---

## Adaptive Object-Models

Separates what changes from what doesn't.

Architectures that can dynamically adapt to new user requirements by storing descriptive (metadata) information about the business rules that are interpreted at runtime.

Sometimes called a "reflective architecture" or a "meta-architecture".

Highly Flexible – Business people (non-programmers) can change it too.

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.

Day 1 -- Slide 186

---

---

---



---

---


---

---

**PLoP Conferences**  
[www.hillside.net](http://www.hillside.net)


  
**MensorePLoP™ 2001**  
  
**2002**

**viking PLoP**  
*Denmark 2002*  
**EuroPLoP™ 2003**

  
**Chili PLoP™**

The Second Latin American Conference on  
Pattern Languages of Programming

August 15 - 17, 2002, Santiago, Chile (8:00 AM - 10:00 PM)



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.Day 1 -- Slide 187

---

---

---

---

---

---

---

---

## Summary

You have been introduced and should recognize many design patterns:  
 Abstract Factory, Adaptor, Bridge, Builder, Chain of Responsibility,  
 Command, Composite, Decorator, Façade, Factory Method, Flyweight,  
 Interpreter, Iterator, Mediator, Memento, Null Object, Observer, Prototype,  
 Proxy, Singleton, State, Strategy, Template Method, Visitor

You should also be familiar with some other types of patterns and how to find  
 more information about them.

• Analysis Patterns	• Process Patterns
• Architectural Patterns	• Persistence Patterns
• Coding Patterns	• Security Patterns
• GUI Patterns	• ...

“Patterns Generate Architecture”

Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.Day 1 -- Slide 188

---

---

---

---


---

---

---

---

## That's All



Copyright 1998-2003 Joseph W. Yoder, Brian Foote & Ralph Johnson.Day 1 -- Slide 189

---

---

---

---

---

---

---

---