Atividade da Aula 8

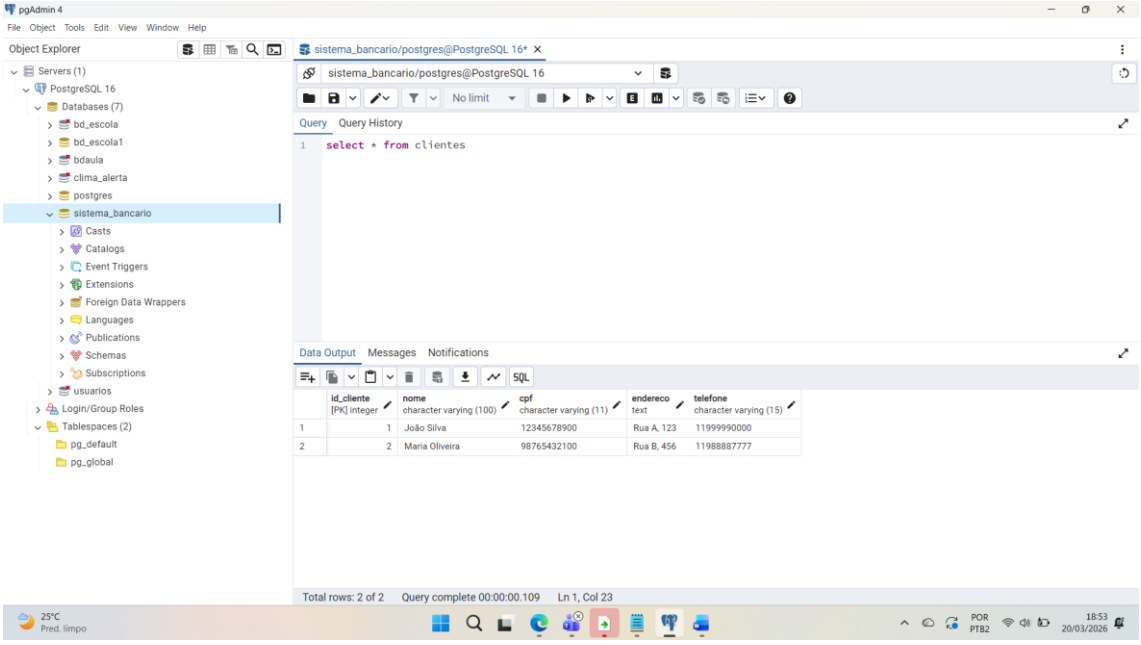

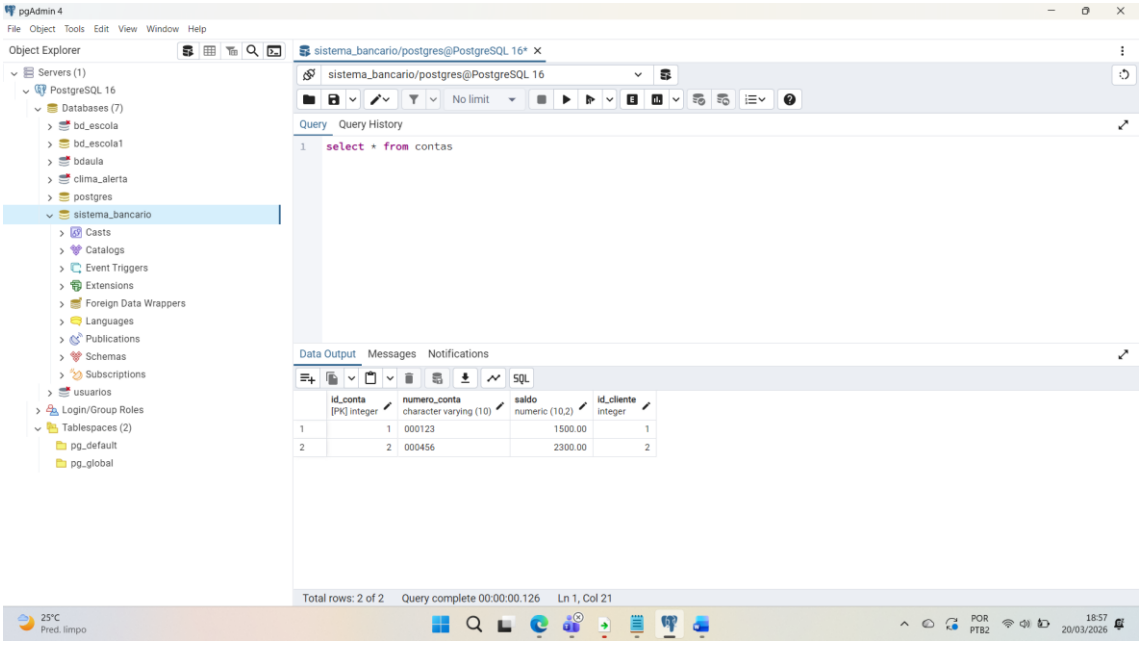

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- Servers (1)
  - PostgreSQL 16
    - Databases (7)
      - bd_escola
      - bd_escola1
      - bdaula
      - clima_alerta
      - postgres
      - sistema_bancario
        - Casts
        - Catalogs
        - Event Triggers
        - Extensions
        - Foreign Data Wrappers
        - Languages
        - Publications
        - Schemas
        - Subscriptions
      - usuarios
    - Login/Group Roles
    - Tablespaces (2)
      - pg_default
      - pg_global

sistema_bancario/postgres@PostgreSQL 16*

sistema_bancario/postgres@PostgreSQL 16

No limit

Query Query History

```sql
CREATE TABLE transacoes (
    id_transacao SERIAL PRIMARY KEY,
    id_conta INT REFERENCES contas(id_conta) ON DELETE CASCADE,
    tipo VARCHAR(15) CHECK (tipo IN ('Depósito', 'Saque', 'Transferência')),
    valor DECIMAL(10,2) NOT NULL CHECK (valor > 0),
    data_transacao TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
    destino_transferencia INT REFERENCES contas(id_conta)
);


INSERT INTO transacoes (id_conta, tipo, valor) VALUES
(1, 'Depósito', 500.00),
(2, 'Saque', 200.00);


INSERT INTO transacoes (id_conta, tipo, valor, destino_transferencia) VALUES
(1, 'Transferência', 300.00, 2);

SELECT * FROM clientes;
```

Data Output Messages Notifications

	id_cliente [PK] integer	nome character varying (100)	cpf character varying (11)	endereco text	telefone character varying (15)
1	1	João Silva	12345678900	Rua A, 123	11999990000
2	2	Maria Oliveira	98765432100	Rua B, 456	11988887777

Total rows: 2 of 2 Query complete 00:00:00.197 Ln 21, Col 1

23°C Pred. limpo POR PTB2 19:29 20/03/2026

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- Servers (1)
  - PostgreSQL 16
    - Databases (7)
      - bd_escola
      - bd_escola1
      - bdaula
      - clima_alerta
      - postgres
      - sistema_bancario
        - Casts
        - Catalogs
        - Event Triggers
        - Extensions
        - Foreign Data Wrappers
        - Languages
        - Publications
        - Schemas
        - Subscriptions
      - usuarios
    - Login/Group Roles
    - Tablespaces (2)
      - pg_default
      - pg_global

sistema_bancario/postgres@PostgreSQL 16*

sistema_bancario/postgres@PostgreSQL 16

No limit

Query Query History

```sql
SELECT contas.numero_conta, contas.saldo, clientes.nome
FROM contas
INNER JOIN clientes ON contas.id_cliente = clientes.id_cliente;
```

Data Output Messages Notifications

	numero_conta character varying (10)	saldo numeric (10,2)	nome character varying (100)
1	000123	1500.00	João Silva
2	000456	2300.00	Maria Oliveira

Servers

Total rows: 2 of 2 Query complete 00:00:00.119 Ln 4, Col 1

23°C Pred. limpo POR PTB2 19:34 20/03/2026

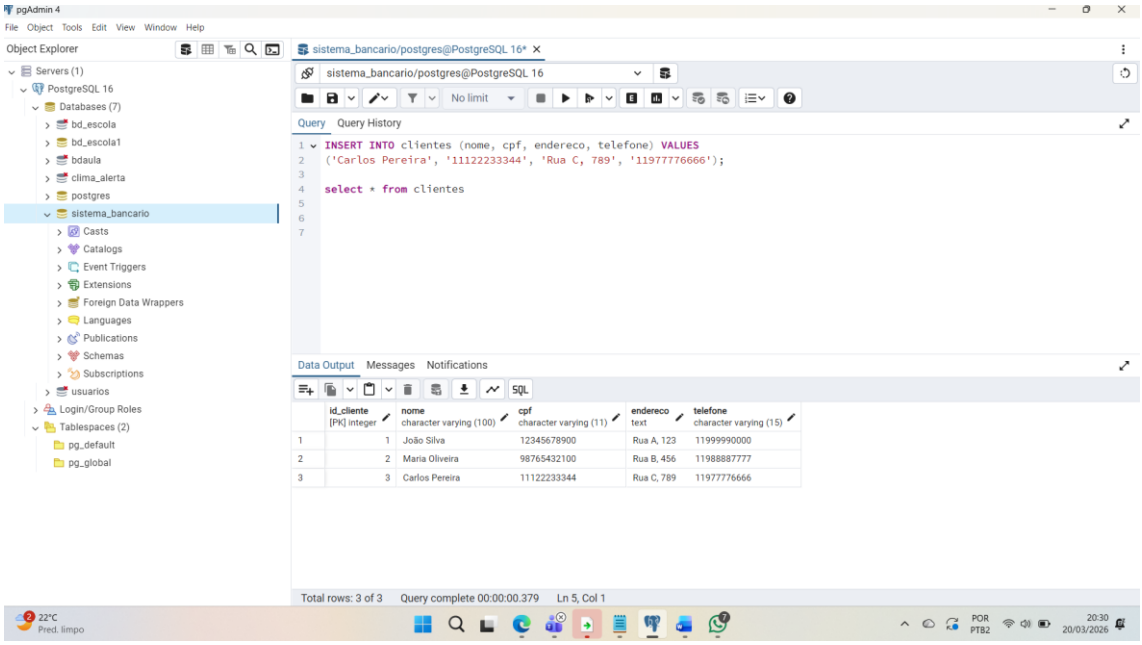

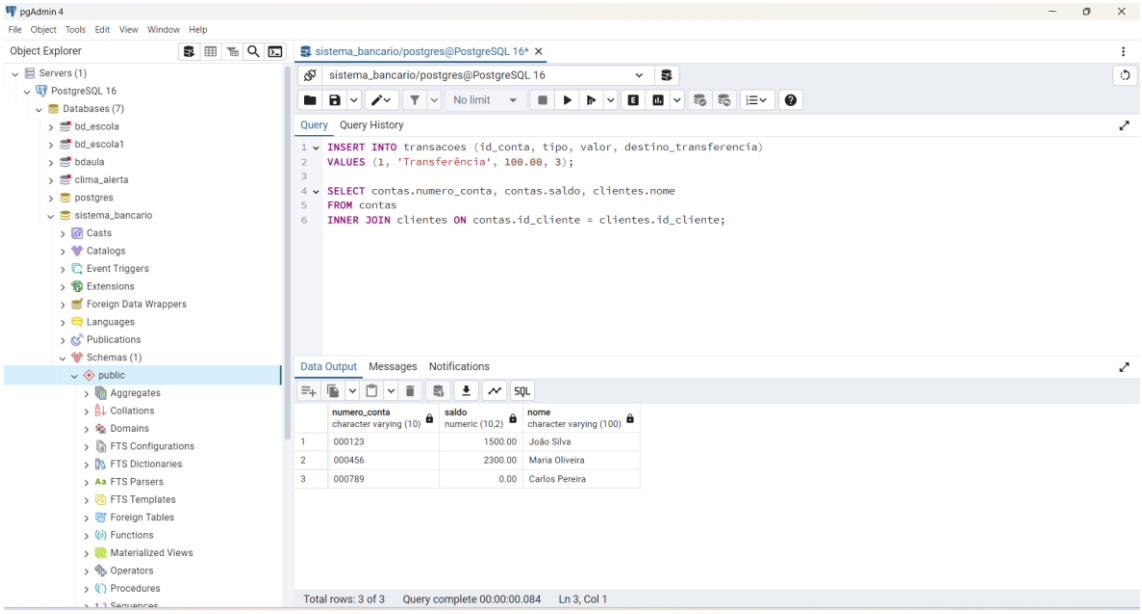

CREATE TABLE clientes
(id_cliente SERIAL PRIMARY KEY,
nome VARCHAR(100) NOT NULL,
cpf VARCHAR(11) UNIQUE NOT NULL,
endereco TEXT,
telefone VARCHAR(15));

INSERT INTO clientes (nome, cpf, endereco, telefone) VALUES ('João Silva', '12345678900', 'Rua A, 123', '11999990000'), ('Maria Oliveira', '98765432100', 'Rua B, 456', '11988887777');

CREATE TABLE contas (id_conta SERIAL PRIMARY KEY,
numero_conta VARCHAR(10) UNIQUE NOT NULL,
saldo DECIMAL(10,2) DEFAULT 0,
id_cliente INT REFERENCES clientes(id_cliente) ON DELETE CASCADE

```
);

INSERT INTO contas (numero_conta, saldo, id_cliente) VALUES ('000123', 1500.00,
1), ('000456', 2300.00, 2);


CREATE TABLE transacoes (
   id_transacao SERIAL PRIMARY KEY,
   id_conta INT REFERENCES contas(id_conta) ON DELETE CASCADE,
   tipo VARCHAR(15) CHECK (tipo IN ('Depósito', 'Saque', 'Transferência')),
   valor DECIMAL(10,2) NOT NULL CHECK (valor > 0),
   data_transacao TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
   destino_transferencia INT REFERENCES contas(id_conta)
);

INSERT INTO transacoes (id_conta, tipo, valor) VALUES
(1, 'Depósito', 500.00),
(2, 'Saque', 200.00);


INSERT INTO transacoes (id_conta, tipo, valor, destino_transferencia) VALUES
(1, 'Transferência', 300.00, 2);


SELECT * FROM clientes;
SELECT contas.numero_conta, contas.saldo, clientes.nome
FROM contas
INNER JOIN clientes ON contas.id_cliente = clientes.id_cliente;


SELECT contas.numero_conta, contas.saldo, clientes.nome

FROM contas

INNER JOIN clientes ON contas.id_cliente = clientes.id_cliente;



INSERT INTO clientes (nome, cpf, endereco, telefone) VALUES

('Carlos Pereira', '11122233344', 'Rua C, 789', '11977776666');


select * from clientes

INSERT INTO contas (numero_conta, saldo, id_cliente) VALUES
('000789', 0.00, 3);


INSERT INTO transacoes (id_conta, tipo, valor, destino_transferencia)
VALUES (1, 'Transferência', 100.00, 3);

SELECT contas.numero_conta, contas.saldo, clientes.nome
FROM contas
INNER JOIN clientes ON contas.id_cliente = clientes.id_cliente;
```