

# Supplementary Material: Occluded Face In-painting Using Generative Adversarial Networks — A Review

Victor Ivamoto<sup>1</sup>[0000–0001–5463–3645], Rodolfo Simões<sup>1</sup>[0000–0001–6989–1233],  
Bruno Kemmer<sup>1</sup>[0000–0002–6830–3281], and Clodoaldo Lima<sup>1</sup>[0000–0003–3381–5348]

University of São Paulo, São Paulo SP 03828-000, Brazil  
{vivamoto,simoesrodolfo,bruno.kemmer,c.lima}@usp.br

## 1 Research questions

The review attempts to answer the following research questions (RQ):

- (RQ1) What are the state-of-the-art models used as baseline?
- (RQ2) What are the datasets used in face inpainting?
- (RQ3) What are the occlusions used during training?
- (RQ4) What are the evaluation metrics?
- (RQ5) What are the model performance?
- (RQ6) What are the computational costs?

## 2 Research procedure

This review focuses the research on peer-reviewed online publishers’ databases, recognized by the scientific community for their high standard of quality. Some leading publishers of scientific publications include Springer, ACM, IEEE, Elsevier, Taylor & Francis, Inderscience, Emerald, World Scientific and Wiley. The research was carried out on the Scopus<sup>1</sup> portal, which indexes the publications of these publishers and provides an integrated search engine with advanced options for searching, filtering and linking to articles.

Chart 1 describes the canonical form of the search string applied to the title, abstract, and keywords of articles.

Table 1: Canonical search string.

TITLE-ABS-KEY ( ( gan OR generative ) AND ( inpaint* OR *occlu* ) AND ( face OR facial ) ) AND ( LIMIT-TO ( SRCTYPE , “p” ) OR LIMIT-TO ( SRCTYPE , “j” ) ) AND ( LIMIT-TO ( PUBSTAGE , “final” ) ) AND ( EXCLUDE ( DOCTYPE , “cr” ) OR EXCLUDE ( DOCTYPE , “re” ) ) AND ( LIMIT-TO ( LANGUAGE , “English” ) ) AND ( LIMIT-TO ( PUBYEAR , 2021 ) OR LIMIT-TO ( PUBYEAR , 2020 ) OR LIMIT-TO ( PUBYEAR , 2019 ) OR LIMIT-TO ( PUBYEAR , 2018 ) OR LIMIT-TO ( PUBYEAR , 2017 ) )
--

<sup>1</sup> <http://www.scopus.com>

Search date: 18/Nov/2021.

Years: from 2017 to 2021.

Document types: Article and conference paper.

Publication stage: Final.

Source type: Conference Proceeding and Journal.

Language: English, Portuguese and Spanish.

### 3 Inclusion and exclusion criteria

The literature review applied inclusion (IC) and exclusion (EC) criteria to select the articles to be read. Only articles that met at least one IC and are not rejected by any EC were selected.

Inclusion criteria (IC):

**(IC1)** The article proposes a new generative architecture, loss, or dataset for facial inpainting.

**(IC2)** The article proposes a new generative architecture, loss, or dataset for face painting.

Exclusion criteria (EC):

**(EC1)** Duplicate articles.

**(EC2)** Non-peer-reviewed articles, such as white papers, reports, book chapters, etc.

**(EC3)** Articles that were not written entirely in English, Portuguese, or Spanish.

**(EC4)** Articles not related to generative adversarial networks, computer vision, facial occlusion or face painting.

**(EC5)** Non-primary studies, such as reviews and meta-analyses.

**(EC6)** Studies published before 2017.

Scopus filters EC2, EC3, EC5 and EC6 after executing the search string.

### 4 Exported format

The fields exported in BibTeX format are in chart 2.

Table 2: Fields exported from Scopus search.

Author(s) – Document title – Year – Source title – volume, issue, pages – Source & document type – DOI – Publisher – Editor(s) – Language of original document – Abstract – Author keywords
---

## 5 Data extraction

After applying the inclusion and exclusion criteria, each remaining article was read in full and the information necessary to answer the research questions was extracted. The data extracted from each study were:

- (RQ1) Baseline models.
- (RQ2) Datasets used for model training.
- (RQ3) Occlusion objects and datasets.
- (RQ4) Performance evaluation metrics.
- (RQ5) Model performance.
- (RQ6) Computational costs.

## 6 Results

The search on Scopus returned 127 articles, 67 of which were rejected for one or more exclusion criteria and the others were read in full. This section summarizes the information collected from the research papers.

### 6.1 (RQ1) What are the state-of-the-art models used as baseline?

Table 3 lists the frequency the baseline models are used in other studies.

Table 3: Frequency of baseline models used in other studies.

Baseline	Number of studies	Baseline reference
DeepFillv1	24	[84]
Global&Local	21	[25]
ContextEncoder	18	[54]
PartialConv	11	[39]
GFC	10	[35]
PatchMatch	8	[4]
SHGM	7	[80]
Not available	7	-
EdgeConnect	7	[52]
deepfillv2	7	[83]
GMCNN	4	[68]
DCGAN	4	[60]
PICNet	3	[98]
CycleGAN	3	[99]
WGAN	2	[3]
TP-GAN	2	[23]
PEN-Net	2	[87]

continue

continuation

Table 3: Frequency of baseline models used in other studies.

Baseline	Number of studies	Baseline reference
MstNet	2	[92]
FCSW	2	[37]
EdgeCon2	2	[51]
DR-GAN	2	[62]
DFNet	2	[22]
CSA	2	[41]
Vid2Vid	1	[67]
UFID	1	[74]
SRN	1	[69]
SRGAN	1	[31]
SRC	1	[55]
SPN	1	[56]
SIMPCL	1	[79]
Shift-Net	1	[75]
SF	1	[61]
Self-regularization	1	[76]
RN	1	[86]
RGANFC	1	[66]
RegionFilling	1	[12]
OA-GAN	1	[14]
MVP+LDA	1	[103]
MSNPS	1	[77]
MLGN	1	[42]
Light-CNN	1	[71]
IdPrev	1	[96]
ICNN	1	[2]
GANimation	1	[57]
FRRN	1	[19]
FIP+LDA	1	[102]
FF-GAN	1	[82]
Eyes2Face	1	[10]
DR-GANAM	1	[63]
DMFN	1	[24]
DeMeshNet	1	[93]
DEGNet	1	[95]
CPF	1	[81]
CL	1	[73]
CDCGAN	1	[18]
CA	1	[32]
BicycleGAN	1	[100]


## 6.2 (RQ2) What are the datasets used in face inpainting?

He *et al.* use a private dataset (“non-public”), Niu *et al.* don’t disclose the dataset used in the research, and Cai *et al.* use images from the internet [21,53,5].

Figure 1 shows the frequency the datasets are used in research. The face datasets CelebA, CelebA-HQ and LFW are the most frequent datasets. QuickDraw Irregular Mask and NVIDIA Irregular Mask are datasets of binary masks used to create a synthetic occlusion dataset. In addition to face inpainting, some research use non-face datasets such as number, places, facades, or objects. A research may use more than one dataset.

Fig. 1: Datasets used in the research of face inpainting. The top 3 are face datasets. QuickDraw Irregular Mask and NVIDIA Irregular Mask are datasets of binary masks used to create a synthetic occlusion dataset. “NA” means “not available”, “non-public” is a private dataset, and “internet” means images collected from the internet. A research may use more than one dataset.

Datasets used in image inpainting.

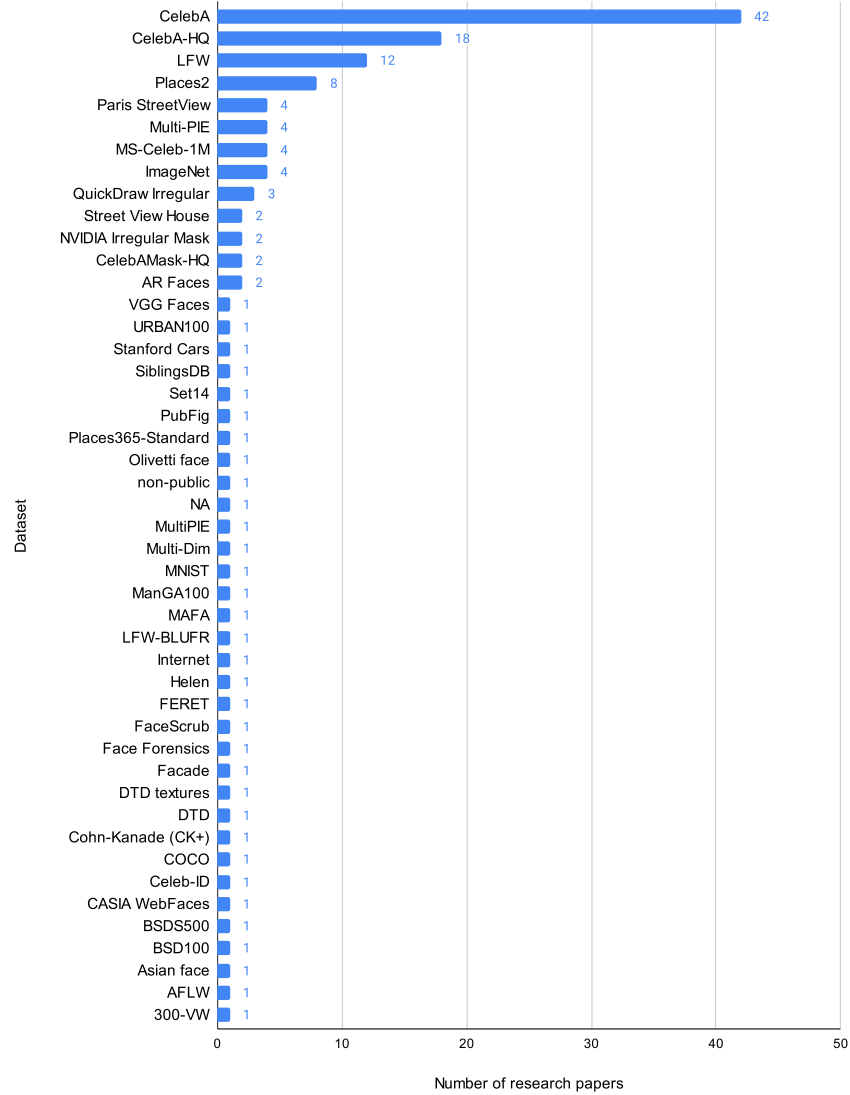


### 6.3 (RQ3) What are the occlusions used during training?

Model training requires a ground-truth occlusion-free face image to compare with the inpainted one. Since it's not possible to take pictures of the same individual with and without occlusions simultaneously, researchers create synthetic datasets. In general, the image of an object, binary mask or geometric shape with random normal noise or blank pixels is placed over the face image to create a synthetic occluded face dataset.

A simple method to create occluded images is placing objects over the face. Common objects are sunglasses, facial and eye masks, microphone, glasses, and hands. A binary mask is a matrix or a one-channel image whose pixel values are either 0 or 1. There's no hard convention on which value indicates the occluded and non-occluded regions, so the values may differ among models. The occlusion area may have any shape and size, such as square, circle, or irregular random format [38]. Yang *et al.* proposed an algorithm to create random rectangular and random shape masks [78]; whereas some studies use public available binary mask datasets [48,28,29]. The Quick Draw irregular mask dataset contains 50k training and 10k testing binary masks of size  $512 \times 512$  pixels, and the test set in NVIDIA irregular mask dataset contains 12,000 binary masks with hole-to-image area ratios ranging from 0% to 60% and mask size  $512 \times 512$  pixels. Figure 2 shows examples of binary masks in Quick Draw [26] and NVIDIA [40] irregular mask datasets.

Fig. 2: Binary masks datasets used to create synthetic occluded faces. The masks are placed over the entire image using equation 1. First rows: Quick Draw [26]. Second row: NVIDIA [40] irregular binary mask dataset.

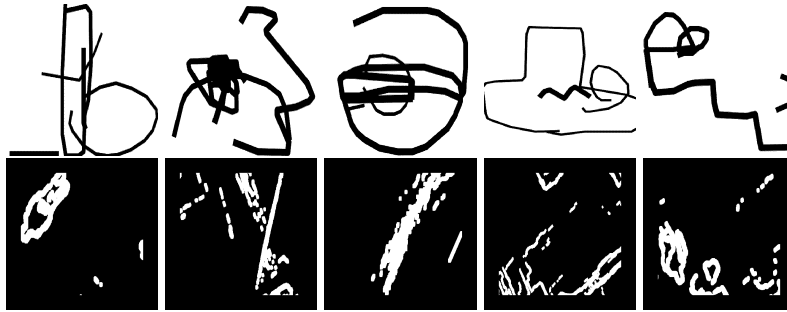

The binary mask is used with an occluded-face or an occlusion-free image. In the first approach, the binary mask indicates the hidden parts in the occluded-face image, and both mask and input image are the inputs of the network's generator. In the second approach, the binary mask is combined with an occlusion-free image to create the masked image, which is the single input of the generator. The mask and image combination is a matrix multiplication given by equation 1.

$$I_{masked} = I \otimes \mathbf{M} \quad (1)$$

where  $I_{masked}$  is the masked image,  $I$  is the original image,  $\mathbf{M}$  is the binary mask and  $\otimes$  is the Hadamard product. The inverse of the mask is simply  $\mathbf{1} - \mathbf{M}$ , where  $\mathbf{1}$  is a matrix of elements 1 with the same height and width as  $\mathbf{M}$

Other less common synthetic occlusions are homocentric squares pattern masks [16], mesh-like occlusions with random position, width, and transparency [36], circles around eyes, nose, and mouth [72], and irregular convex fiducial masks formed by connecting the contouring landmarks of the corresponding facial fiducial points [33].


#### 6.4 (RQ4) What are the evaluation metrics?

Forty-nine research report PSNR and forty-three research report SSIM, the two most frequent quantitative metrics. User study is the third most frequent metric used in 10 studies. The chart in figure 3 shows the frequency of evaluation metrics found in the literature.



Fig. 3: Evaluation metrics used in the research of face inpainting. PSNR and SSIM are pixel-level quantitative metric. User study is a qualitative metric. “NA” means “not available”. The others are quantitative metrics.

Evaluation metrics used in image inpainting research.

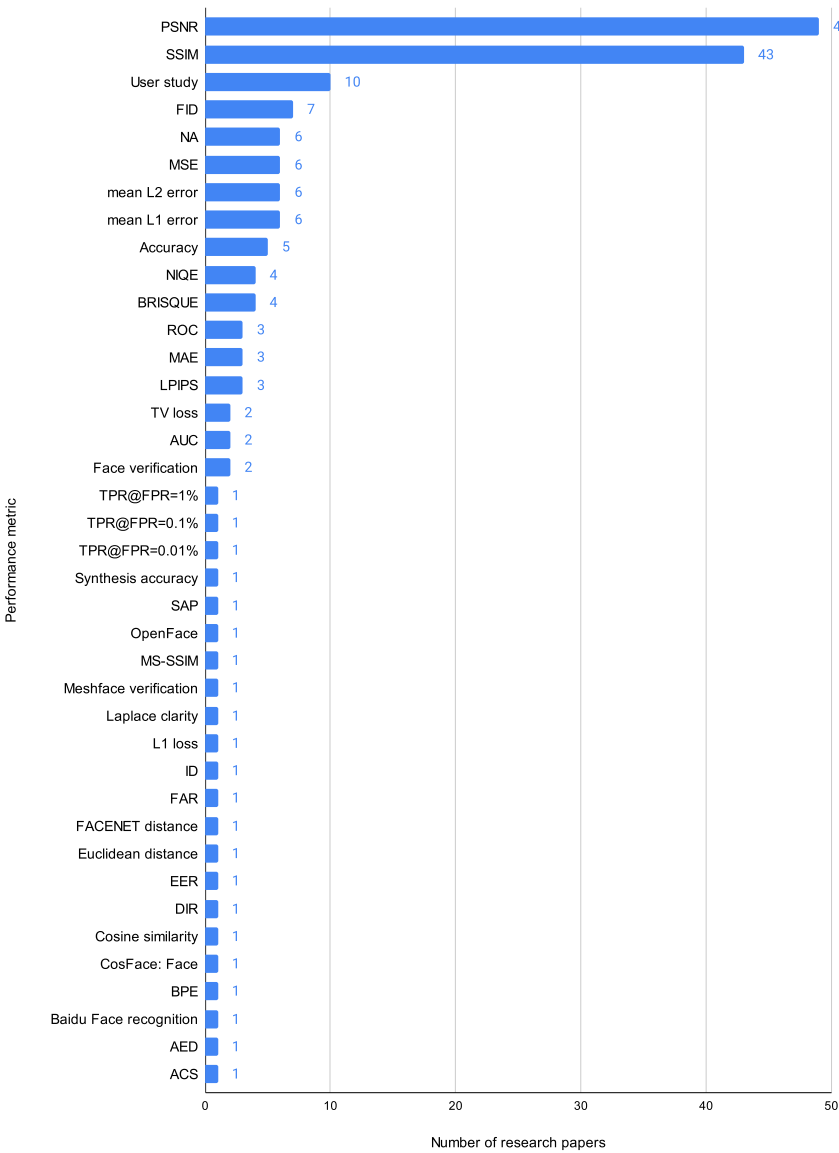

**6.5 (RQ5) What are the models performance?**

Tables 4 to 19 show the model performance with the evaluation metrics reported in respective study.

Table 4: Model performance by PSNR and SSIM.

Reference	Dataset	Occlusion %	PSNR	SSIM
[68]	CelebA-HQ 2k	-	25.7	0.955
[1]	CelebA	-	23.5	-
[46]	CelebA	-	20.4	0.832
[70]	CelebA	-	27.0	0.900
[58]	CelebA	20%	20.1	0.953
[58]	CelebA	40%	20.0	0.909
[58]	CelebA	60%	19.9	0.889
[58]	CelebA	80%	19.7	0.846
[96]	MS-celeb-1M	-	24.9	0.870
[6]	CelebA	O1	20.7	0.793
[6]	CelebA	O2	20.6	0.795
[6]	CelebA	O3	19.3	0.745
[6]	CelebA	O4	20.3	0.764
[6]	CelebA	O5	20.0	0.767
[6]	CelebA	O6	20.5	0.816
[6]	CelebA	average	20.2	0.780
[30]	CelebA	various	29.9	0.937
[50]	CelebA train /LFW test center		35.6	-
[50]	CelebA train /LFW test left		32.3	-
[50]	CelebA train /LFW test mask		29.3	-
[50]	CelebA train /LFW test random		37.1	-
[50]	CelebA train /LFW test grid		30.2	-
[49]	-	25%	21.5	0.665
[36]	AR	-	23.9	0.917
[36]	MultiPIE	-	28.2	0.918
[36]	FERET	-	28.2	0.931
[36]	LFW	-	23.2	0.869
[91]	CelebA	25%	19.3	0.913
[91]	CelebA	50%	18.9	0.836
[7]	CelebA	-	20.7	0.842
[17]	CelebA	14%	31.6	0.960
[14]	-	-	22.4	0.754
[14]	-	-	22.4	0.752
[38]	Places365-Standard	25%	24.1	0.851
[38]	CelebA-HQ	25%	27.1	0.905
[97]	CelebA	20%	22.2	0.861
[5]	-	-	22.6	0.787

continue

continuation

Table 4: Model performance by PSNR and SSIM.

Reference	Dataset	Occlusion %	PSNR	SSIM
[20]	CelebA	-	24.2	0.832
[101]	CelebA	-	21.1	0.737
[88]	LFW	-	32.3	0.847
[64]	CelebA	-	26.8	0.874
[11]	Set1-CelebA	-	21.1	0.794
[11]	Set2-CelebA	-	20.4	0.870
[11]	Set1-LFW	-	22.0	0.834
[11]	Set2-LFW	-	19.8	0.871

Table 5: Model performance by PSNR, SSIM, NIQE and BRISQUE.

Reference	Dataset	Occlusion	PSNR	SSIM	NIQE	BRISQUE
[13]	-	Mask	28.7	0.908	0.908	40.883
[13]	-	Hands	26.9	0.882	4.443	24.206
[13]	-	Sunglass	28.9	0.914	4.458	38.111
[13]	-	Mic	31.3	0.944	4.105	34.038
[47]	-	medical mask or micro- phone	24.5	0.813	4.464	34.175
[27]	-	-	32.8	0.981	4.499	42.504
[30]	CelebA	-	-	-	3.548	29.970

Table 6: Model performance by PSNR, SSIM and MSE

Reference	Dataset	Occlusion	PSNR	SSIM	MSE
[16]	CelebA	-	31.6	0.950	51.89
[16]	Multi-PIE	-	31.4	0.940	53.74
[16]	Places2	-	28.5	0.920	120.72
[89]	CelebA	25%	27.4	0.900	128.34
[85]	-	rectangular mask	32.4	0.973	0.044
[85]	-	random mask	30.3	0.930	0.097
[27]	-	-	32.8	0.981	34.145

Table 7: Model performance by PSNR, SSIM and Identity Distance.

	Reference Dataset Occlusion	PSNR	SSIM	Identity Distance
[59]	CelebA Center - 25%	28.6	0.920	0.65
[59]	CelebA Center - 50%	24.3	0.810	0.93
[59]	CelebA Vertical - 50%	19.5	0.760	0.26
[59]	CelebA Horizontal - 50%	19.8	0.960	0.48

Table 8: Model performance by PSNR, SSIM, FID and MAE.

Reference	Dataset	Occlusion	PSNR	SSIM	FID	MAE
[28]	CelebA-HQ	QuickDraw (1%~60%)	40.4	0.940	3.09	31.91
[28]	Paris Street View	QuickDraw (1%~60%)	39.6	0.910	17.64	33.81
[28]	Places2	QuickDraw (1%~60%)	39.7	0.930	4.47	27.77
[44]	CelebA-HQ	10%~20%	30.3	0.943	18.66	-
[44]	CelebA-HQ	20%~30%	27.7	0.906	32.72	-
[44]	CelebA-HQ	30%~40%	26.0	0.887	45.59	-
[44]	CelebA-HQ	40%~50%	24.3	0.830	65.29	-
[44]	Façade	10%~20%	28.0	0.928	10.22	-
[44]	Façade	20%~30%	25.3	0.872	20.62	-
[44]	Façade	30%~40%	24.3	0.832	21.83	-
[44]	Façade	40%~50%	23.1	0.795	25.9	-
[44]	Places2	10%~20%	27.6	0.918	14.05	-
[44]	Places2	20%~30%	25.0	0.856	14.18	-
[44]	Places2	30%~40%	23.1	0.807	25.95	-
[44]	Places2	40%~50%	28.8	0.761	35.56	-
[44]	ImageNet	10%~20%	28.1	0.910	15.02	-
[44]	ImageNet	20%~30%	25.9	0.859	23.78	-
[44]	ImageNet	30%~40%	23.9	0.812	35.22	-
[44]	ImageNet	40%~50%	22.7	0.765	45.1	-
[48]	Places2/CelebA	QuickDraw 10-20%	27.7	0.900	-	1.65
[48]	Places2/CelebA	QuickDraw 20-30%	25.7	0.881	-	2.83
[48]	Places2/CelebA	QuickDraw 30-40%	23.5	0.810	-	3.69
[48]	Places2/CelebA	QuickDraw 40-50%	22.0	0.740	-	5.00
[48]	Places2/CelebA	Fixed (25%)	22.1	0.841	-	3.76
[78]	Paris Street View	Center mask	27.5	0.930	-	0.28

continue

continuation

Table 8: Model performance by PSNR, SSIM, FID and MAE.

Reference	Dataset	Occlusion	PSNR	SSIM	FID	MAE
[78]	Paris Street View	Random mask	25.4	0.920	153.28	0.71

Table 9: Model performance by PSNR, SSIM, MS-SSIM, TV and FID.

Reference	Dataset	PSNR	MS-SSIM	TV	FID
[72]	CelebA	28.6	0.982	12.8	36.2
[72]	300-VW	28.7	0.976	9.3	11.1

Table 10: Model performance by AED, ACS, SAP and FID

Reference	Dataset	AED	ACS	SAP	FID
[45]	LFW	0.8493	81.38%	94.19%	26.53
[45]	CelebA	0.7547	85.14%	98.04%	20.51

Table 11: Model performance by lowest score, highest score, average score and face recognition rate.

Reference	Dataset	Lowest score	Highest score	Average score	Face recognition rate
[45]	CelebA	65.32	98.73	94.21	96.10%

Table 12: Model performance by L1 loss, PSNR, SSIM and FID.

Reference	Dataset	Occlusion	L1 loss	PSNR	SSIM	FID
[9]	Places2	25%	0.034	23.0	0.791	23.4
[9]	CelebA-HQ	25%	0.024	25.7	0.900	8.3

Table 13: Model performance by AUC and ACC for face rotations at  $\pm 30^\circ$ ,  $\pm 60^\circ$  and  $\pm 90^\circ$ .

Reference Dataset	$\pm 30^\circ$ $\pm 30^\circ$ $\pm 60^\circ$ $\pm 60^\circ$ $\pm 90^\circ$ $\pm 90^\circ$					
	ACC	AUC	ACC	AUC	ACC	AUC
[33] Multi-Dim	92.45	40.25	87.12	39.45	85.48	36.44

Table 14: Model performance by ACC and AUC.

Reference Dataset		Occlusion	ACC(%)	AUC(%)
[15]	LFW	Key point region	87.78	93.88
[15]	LFW	Random block	89.58	94.75
[15]	LFW	Irregular block	86.66	92.89

Table 15: Model performance by PSNR, SSIM and Accuracy.

Reference Dataset	PSNR	SSIM	Accuracy (%)
[90] CelebA	34.3	0.894	94.42

Table 16: Model performance by PSNR, SSIM, LPIPS and FID.

Reference Dataset		Occlusion	PSNR	SSIM	LPIPS	FID
[43]	CelebA	25%	27.5	0.933	0.045	3.21
[43]	CelebA-HQ	25%	27.2	0.920	0.042	7.14
[34]	CelebA-HQ	Irregular mask	26.6	0.942	0.076	-
[34]	CelebA-HQ	Center mask	25.3	0.953	0.056	-
[42]	CelebA	25%	28.0	0.930	0.056	-
[42]	CelebA-HQ	25%	26.3	0.900	0.047	-

Table 17: Model performance by rank-1, rank-5 and rank-10.

Reference Dataset		Rank-1	Rank-5	Rank-10
[11]	Set2-CelebA	64,2 $\pm$ 4,7	76,3 $\pm$ 3,3	80,3 $\pm$ 2,4
[11]	Set2-LFW	68,6 $\pm$ 4,6	77,6 $\pm$ 3,4	80,1 $\pm$ 2,7

Table 18: Model performance by PSNR, SSIM, L1 and L2.

Reference	Dataset	PSNR	SSIM	L1	L2
[8]	CelebA	32.3	0.890	0.95	0.08
[29]	CelebA-HQ	29.9	0.940	66.09	81.03
[94]	CelebA	26.1	0.895	15.63	-
[94]	CelebA-HQ	26.2	0.890	6.74	-

Table 19: Model performance by L1 error and L2 error.

Reference	Occlusion	L1 error	L2 error
[83]	Rectangular mask	8.6%	2%
[83]	free-form mask	9.1%	1.6%

## 6.6 (RQ6) What are the computational costs?

Table 20 lists the inference time and number of parameters of models found in the literature, and table 21 shows the training time.

Table 20: Reported inference time per image on GPU and CPU.

Reference	GPU Model	Image size	GPU (ms)	CPU (s)	# of Params
[96]	NVIDIA GTX 1080	128×128	50		
[9]	NVIDIA TITAN X	256×256	28		
[65]	NVIDIA GTX 1080 Ti	256×256	13		
[68]	NVIDIA TITAN X	256×256	49		12.562M
[44]	NVIDIA TITAN XP	256×256	200	1.5	
[28]	NVIDIA GeForce GTX 1080 Ti	256×256	193		
[45]	NVIDIA GTX 1080 Ti	512×256	107		
[29]	NVIDIA Quadro P6000	512×512	193		
[83]	NVIDIA Tesla V100	512×512	210	1.9	41M
[84]	NVIDIA GTX 1080 Ti	512×512	200	1.5	2.9M
[68]	NVIDIA TITAN X	512×512	146		12.562M

Table 21: Training time of models reported in the literature.

Reference	Dataset	Image size	Batch size	Training time	Iterations	GPU
[72]	300-VW	-	12	8h 5 epochs		NVIDIA TITAN X
			continue			

continuation

Table 21: Training time of models reported in the literature.

Reference	Dataset	Image size	Batch size	Training time	Iterations	GPU
[72]	Face Forensics	-	12	1.5h	5 epochs	NVIDIA TITAN X
[65]	Celeb-ID	256×256	12	3 days	-	NVIDIA GTX 1080 Ti
[72]	CelebA	128×128	16	15h	200k iterations	NVIDIA TITAN X
[16]	CelebA	128x128	-	3 days	50 epochs	NVIDIA TITAN X
[30]	CelebA	-	10	3 days	600 epochs	NVIDIA GeForce 1080 Ti
[42]	CelebA	256×256	10	3 days	40 epochs	-
[38]	CelebA-HQ	256×256	1	1.5 days	30 epochs	NVIDIA GTX 2070
[29]	CelebA-HQ	512×512	5	10 days	100 epochs	NVIDIA Quadro P6000
[28]	CelebA-HQ	256×256	5	7 days	100 epochs	NVIDIA GeForce GTX 1080 Ti
[78]	CelebA-HQ	256×256	16	1 day	40 epochs	NVIDIA RTX 5000 Max-Q
[42]	CelebA-HQ	256×256	10	3 days	80 epochs	-
[47]	CelebA Mask-HQ	256×256	12	3 days	600 epochs	NVIDIA GeForce 2080 Ti
[15]	Multi-PIE, LFW	128×128	4	6~8 days	4~5 epochs	NVIDIA 1080 Ti
[78]	Paris Street View	256×256	16	17h	52 epochs	NVIDIA RTX 5000 Max-Q
[38]	Place365-Standard	256×256	1	6h	30 epochs	NVIDIA GTX 2070
[84]	Places2	256x256	-	5 days	-	NVIDIA GTX 1080 Ti

## References

1. Altinel, F., Ozay, M., Okatani, T.: Deep structured energy-based image inpainting. vol. 2018-August, pp. 423–428. Institute of Electrical and Electronics Engineers Inc. (2018). <https://doi.org/10.1109/ICPR.2018.8546025>



2. Amos, B., Xu, L., Kolter, J.Z.: Input convex neural networks. In: Proceedings of the 34th International Conference on Machine Learning - Volume 70. p. 146–155. ICML'17, JMLR.org (2017)
3. Arjovsky, M., Chintala, S., Bottou, L.: Wasserstein generative adversarial networks. In: Proceedings of the 34th International Conference on Machine Learning - Volume 70. p. 214–223. ICML'17, JMLR.org (2017)
4. Barnes, C., Shechtman, E., Finkelstein, A., Goldman, D.B.: Patchmatch: A randomized correspondence algorithm for structural image editing. *ACM Trans. Graph.* **28**(3) (jul 2009). <https://doi.org/10.1145/1531326.1531330>
5. Cai, J., Han, H., Cui, J., Chen, J., Liu, L., Kevin Zhou, S.: Semi-supervised natural face de-occlusion. *IEEE Transactions on Information Forensics and Security* **16**, 1044–1057 (2021). <https://doi.org/10.1109/TIFS.2020.3023793>
6. Cai, J., Hu, H., Shan, S., Chen, X.: Fcsr-gan: End-to-end learning for joint face completion and super-resolution. In: Proceedings - 14th IEEE International Conference on Automatic Face and Gesture Recognition, FG 2019. Institute of Electrical and Electronics Engineers Inc. (2019). <https://doi.org/10.1109/FG.2019.8756607>
7. Can, C., Jun, Z., Xingzhong, X., Edwards, N.: A method of face repair based on encoder-decoder and dual discrimination network. In: Fu J., S.J. (ed.) Chinese Control Conference, CCC. vol. 2020-July, pp. 7565–7569. IEEE Computer Society (2020). <https://doi.org/10.23919/CCC50068.2020.9188514>
8. Cao, S., Sakurai, K.: Face completion with pyramid semantic attention and latent codes. In: Proceedings - 2020 8th International Symposium on Computing and Networking, CANDAR 2020. pp. 1–8. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/CANDAR51075.2020.00009>
9. Chen, M., Liu, Z., Ye, L., Wang, Y.: Attentional coarse-and-fine generative adversarial networks for image inpainting. *Neurocomputing* **405**, 259–269 (2020). <https://doi.org/10.1016/j.neucom.2020.03.090>
10. Chen, X., Qing, L., He, X., Su, J., Peng, Y.: From eyes to face synthesis: A new approach for human-centered smart surveillance. *IEEE Access* **6**, 14567–14575 (2018). <https://doi.org/10.1109/ACCESS.2018.2803787>
11. Cheung, Y.M., Li, M., Zou, R.: Facial structure guided gan for identity-preserved face image de-occlusion. In: ICMR 2021 - Proceedings of the 2021 International Conference on Multimedia Retrieval. pp. 46–54. Association for Computing Machinery, Inc (2021). <https://doi.org/10.1145/3460426.3463642>
12. Criminisi, A., Perez, P., Toyama, K.: Region filling and object removal by exemplar-based image inpainting. *IEEE Transactions on Image Processing* **13**(9), 1200–1212 (2004). <https://doi.org/10.1109/TIP.2004.833105>
13. DIn, N., Javed, K., Bae, S., Yi, J.: Effective removal of user-selected foreground object from facial images using a novel gan-based network. *IEEE Access* **8**, 109648–109661 (2020). <https://doi.org/10.1109/ACCESS.2020.3001649>
14. Dong, J., Zhang, L., Zhang, H., Liu, W.: Occlusion-aware gan for face de-occlusion in the wild. In: Proceedings - IEEE International Conference on Multimedia and Expo. vol. 2020-July. IEEE Computer Society (2020). <https://doi.org/10.1109/ICME46284.2020.9102788>
15. Duan, Q., Zhang, L.: Look more into occlusion: Realistic face frontalization and recognition with boostgan. *IEEE Transactions on Neural Networks and Learning Systems* **32**(1), 214–228 (2021). <https://doi.org/10.1109/TNNLS.2020.2978127>
16. Fang, Y., Li, Y., Tu, X., Tan, T., Wang, X.: Face completion with hybrid dilated convolution. *Signal Processing: Image Communication* **80** (2020). <https://doi.org/10.1016/j.image.2019.115664>

17. Ge, S., Li, C., Zhao, S., Zeng, D.: Occluded face recognition in the wild by identity-diversity inpainting. *IEEE Transactions on Circuits and Systems for Video Technology* **30**(10), 3387–3397 (2020). <https://doi.org/10.1109/TCSVT.2020.2967754>
18. Ghosh, A., Bhattacharya, B., Chowdhury, S.: Handwriting profiling using generative adversarial networks. pp. 4927–4928. AAAI press (2017)
19. Guo, Z., Chen, Z., Yu, T., Chen, J., Liu, S.: Progressive image inpainting with full-resolution residual network. In: *Proceedings of the 27th ACM International Conference on Multimedia*. p. 2496–2504. MM '19, Association for Computing Machinery, New York, NY, USA (2019). <https://doi.org/10.1145/3343031.3351022>
20. Han, C., Wang, J.: Face image inpainting with evolutionary generators. *IEEE Signal Processing Letters* **28**, 190–193 (2021). <https://doi.org/10.1109/LSP.2020.3048608>
21. He, Z., Wei, X., Zeng, K., Han, Z., Zou, Q., Wang, Z.: Low-quality watermarked face inpainting with discriminative residual learning. Association for Computing Machinery, Inc (2021). <https://doi.org/10.1145/3444685.3446261>
22. Hong, X., Xiong, P., Ji, R., Fan, H.: Deep fusion network for image completion. In: *Proceedings of the 27th ACM International Conference on Multimedia*. p. 2033–2042. MM '19, Association for Computing Machinery, New York, NY, USA (2019). <https://doi.org/10.1145/3343031.3351002>
23. Huang, R., Zhang, S., Li, T., He, R.: Beyond face rotation: Global and local perception gan for photorealistic and identity preserving frontal view synthesis. In: *2017 IEEE International Conference on Computer Vision (ICCV)*. pp. 2458–2467 (2017). <https://doi.org/10.1109/ICCV.2017.267>
24. Hui, Z., Li, J., Wang, X., Gao, X.: Image fine-grained inpainting (2020)
25. Iizuka, S., Simo-Serra, E., Ishikawa, H.: Globally and locally consistent image completion. *ACM Trans. Graph.* **36**(4) (jul 2017). <https://doi.org/10.1145/3072959.3073659>
26. Isakov, K.: Semi-parametric image inpainting (2018)
27. Jabbar, A., Li, X., Iqbal, M., Malik, A.: Fd-stackgan: Face de-occlusion using stacked generative adversarial networks. *KSII Transactions on Internet and Information Systems* **15**(7), 2547–2567 (2021). <https://doi.org/10.3837/tiis.2021.07.014>
28. Jam, J., Kendrick, C., Drouard, V., Walker, K., Hsu, G.S., Yap, M.: R-mnet: A perceptual adversarial network for image inpainting. In: *Proceedings - 2021 IEEE Winter Conference on Applications of Computer Vision, WACV 2021*. pp. 2713–2722. Institute of Electrical and Electronics Engineers Inc. (2021). <https://doi.org/10.1109/WACV48630.2021.00276>
29. Jam, J., Kendrick, C., Drouard, V., Walker, K., Hsu, G.S., Yap, M.: Symmetric skip connection wasserstein gan for high-resolution facial image inpainting. In: *VISIGRAPP 2021 - Proceedings of the 16th International Joint Conference on Computer Vision, Imaging and Computer Graphics Theory and Applications*. vol. 4, pp. 35–44. SciTePress (2021)
30. Khan, M., Ud Din, N., Bae, S., Yi, J.: Interactive removal of microphone object in facial images. *Electronics (Switzerland)* **8**(10) (2019). <https://doi.org/10.3390/electronics8101115>
31. Ledig, C., Theis, L., Huszár, F., Caballero, J., Cunningham, A., Acosta, A., Aitken, A., Tejani, A., Totz, J., Wang, Z., Shi, W.: Photo-realistic single image super-resolution using a generative adversarial network. In: *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 105–114 (2017). <https://doi.org/10.1109/CVPR.2017.19>
32. Li, H., Li, G., Lin, L., Yu, H., Yu, Y.: Context-aware semantic inpainting. *IEEE Transactions on Cybernetics* **49**(12), 4398–4411 (2019). <https://doi.org/10.1109/TCYB.2018.2865036>

33. Li, K., Zhao, Q.: If-gan: Generative adversarial network for identity preserving facial image inpainting and frontalization. In: Struc V., G.F.F. (ed.) Proceedings - 2020 15th IEEE International Conference on Automatic Face and Gesture Recognition, FG 2020. pp. 45–52. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/FG47880.2020.00022>
34. Li, X., Hu, G., Zhu, J., Zuo, W., Wang, M., Zhang, L.: Learning symmetry consistent deep cnns for face completion. *IEEE Transactions on Image Processing* **29**, 7641–7655 (2020). <https://doi.org/10.1109/TIP.2020.3005241>
35. Li, Y., Liu, S., Yang, J., Yang, M.H.: Generative face completion. In: 2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR). pp. 5892–5900 (2017). <https://doi.org/10.1109/CVPR.2017.624>
36. Li, Z., Hu, Y., He, R., Sun, Z.: Learning disentangling and fusing networks for face completion under structured occlusions. *Pattern Recognition* **99** (2020). <https://doi.org/10.1016/j.patcog.2019.107073>
37. Liao, H., Funka-Lea, G., Zheng, Y., Luo, J., Kevin Zhou, S.: Face completion with semantic knowledge and collaborative adversarial learning. In: Jawahar, C.V., Li, H., Mori, G., Schindler, K. (eds.) *Computer Vision – ACCV 2018*. pp. 382–397. Springer International Publishing, Cham (2019)
38. Lie, Y., Li, L.: Image inpainting using multi-scale neural network and shift-net. In: Proceedings - 2020 7th International Conference on Information Science and Control Engineering, ICISCE 2020. pp. 704–709. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/ICISCE50968.2020.00150>
39. Liu, G., Reda, F.A., Shih, K.J., Wang, T.C., Tao, A., Catanzaro, B.: Image inpainting for irregular holes using partial convolutions. In: Ferrari, V., Hebert, M., Sminchisescu, C., Weiss, Y. (eds.) *Computer Vision – ECCV 2018*. pp. 89–105. Springer International Publishing, Cham (2018)
40. Liu, G., Reda, F.A., Shih, K.J., Wang, T.C., Tao, A., Catanzaro, B.: Nvidia irregular mask dataset. In: <https://nv-adlr.github.io/publication/partialconv-inpainting> (2018)
41. Liu, H., Jiang, B., Xiao, Y., Yang, C.: Coherent semantic attention for image inpainting. In: 2019 IEEE/CVF International Conference on Computer Vision (ICCV). pp. 4169–4178 (2019). <https://doi.org/10.1109/ICCV.2019.00427>
42. Liu, J., Jung, C.: Facial image inpainting using multi-level generative network. In: Proceedings - IEEE International Conference on Multimedia and Expo. vol. 2019-July, pp. 1168–1173. IEEE Computer Society (2019). <https://doi.org/10.1109/ICME.2019.00204>
43. Liu, J., Jung, C.: Facial image inpainting using attention-based multi-level generative network. *Neurocomputing* **437**, 95–106 (2021). <https://doi.org/10.1016/j.neucom.2020.12.118>
44. Liu, W., Cao, C., Liu, J., Ren, C., Wei, Y., Guo, H.: Fine-grained image inpainting with scale-enhanced generative adversarial network. *Pattern Recognition Letters* **143**, 81–87 (2021). <https://doi.org/10.1016/j.patrec.2020.12.008>
45. Luo, X., He, X., Qing, L., Chen, X., Liu, L., Xu, Y.: Eyesgan: Synthesize human face from human eyes. *Neurocomputing* **404**, 213–226 (2020). <https://doi.org/10.1016/j.neucom.2020.04.121>
46. Ma, R., Hu, H.: Perceptual face completion using a local-global generative adversarial network. In: Proceedings - International Conference on Pattern Recognition. vol. 2018-August, pp. 1670–1675. Institute of Electrical and Electronics Engineers Inc. (2018). <https://doi.org/10.1109/ICPR.2018.8545559>

47. Maharjan, R., Ud Din, N., Yi, J.: Image-to-image translation based face de-occlusion. In: Jiang X., F.H. (ed.) *Proceedings of SPIE - The International Society for Optical Engineering*. vol. 11519. SPIE (2020). <https://doi.org/10.1117/12.2573031>
48. Maheshwari, U., Turlapati, V., Kiruthika, U.: Lucid-gan: An adversarial network for enhanced image inpainting. In: *CIVEMSA 2021 - IEEE International Conference on Computational Intelligence and Virtual Environments for Measurement Systems and Applications, Proceedings*. Institute of Electrical and Electronics Engineers Inc. (2021). <https://doi.org/10.1109/CIVEMSA52099.2021.9493581>
49. Maulana, A., Fatichah, C., Suciati, N.: Facial inpainting using generative adversarial network with feature reconstruction and landmark loss to preserve spatial consistency in unaligned face images. *International Journal of Intelligent Engineering and Systems* **13**(6), 219–228 (2020). <https://doi.org/10.22266/ijies2020.1231.20>
50. Miao, Y., Jia, H., Liu, X., Zhang, Y., Zhao, L.: Face image inpainting algorithm based on generative adversarial network. In: *Proceedings - 2019 6th International Conference on Information Science and Control Engineering, ICISCE 2019*. pp. 282–286. Institute of Electrical and Electronics Engineers Inc. (2019). <https://doi.org/10.1109/ICISCE48695.2019.00063>
51. Nazeri, K., Ng, E., Joseph, T., Qureshi, F., Ebrahimi, M.: Edgeconnect: Structure guided image inpainting using edge prediction. In: *2019 IEEE/CVF International Conference on Computer Vision Workshop (ICCVW)*. pp. 3265–3274 (2019). <https://doi.org/10.1109/ICCVW.2019.00408>
52. Nazeri, K., Ng, E., Joseph, T., Qureshi, F.Z., Ebrahimi, M.: Edgeconnect: Generative image inpainting with adversarial edge learning (2019)
53. Niu, Z., Li, H., Li, Y., Mei, Y., Yang, J.: An adaptive face image inpainting algorithm based on feature symmetry. *Symmetry* **12**(2) (2020). <https://doi.org/10.3390/sym12020190>
54. Pathak, D., Krähenbühl, P., Donahue, J., Darrell, T., Efros, A.A.: Context encoders: Feature learning by inpainting. In: *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 2536–2544 (2016). <https://doi.org/10.1109/CVPR.2016.278>
55. Ping, Q., Zhuang, L., Yu, N.: Pose-robust face recognition via part-based sparse representation. *Journal of University of Science and Technology of China* **41**(11), 975–981 (2011). <https://doi.org/10.3969/j.issn.0253-2778.2011.11.005>
56. Poon, H., Domingos, P.: Sum-product networks: A new deep architecture. In: *2011 IEEE International Conference on Computer Vision Workshops (ICCV Workshops)*. pp. 689–690 (2011). <https://doi.org/10.1109/ICCVW.2011.6130310>
57. Pumarola, A., Agudo, A., Martinez, A.M., Sanfeliu, A., Moreno-Noguer, F.: Ganimation: Anatomically-aware facial animation from a single image. In: Ferrari, V., Hebert, M., Sminchisescu, C., Weiss, Y. (eds.) *Computer Vision – ECCV 2018*. pp. 835–851. Springer International Publishing, Cham (2018)
58. Qiang, Z., He, L., Zhang, Q., Li, J.: Face inpainting with deep generative models. *International Journal of Computational Intelligence Systems* **12**(2), 1232–1244 (2019). <https://doi.org/10.2991/ijcis.d.191016.003>
59. Qin, J., Bai, H., Zhao, Y.: Face inpainting network for large missing regions based on weighted facial similarity. *Neurocomputing* **386**, 54–62 (2020). <https://doi.org/10.1016/j.neucom.2019.12.079>
60. Radford, A., Metz, L., Chintala, S.: Unsupervised representation learning with deep convolutional generative adversarial networks (2016)

61. Ren, Y., Yu, X., Zhang, R., Li, T.H., Liu, S., Li, G.: Structureflow: Image inpainting via structure-aware appearance flow. In: 2019 IEEE/CVF International Conference on Computer Vision (ICCV). pp. 181–190 (2019). <https://doi.org/10.1109/ICCV.2019.00027>
62. Tran, L., Yin, X., Liu, X.: Disentangled representation learning gan for pose-invariant face recognition. In: 2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR). pp. 1283–1292 (2017). <https://doi.org/10.1109/CVPR.2017.141>
63. Tran, L., Yin, X., Liu, X.: Representation learning by rotating your faces. *IEEE Transactions on Pattern Analysis and Machine Intelligence* **41**(12), 3007–3021 (2019). <https://doi.org/10.1109/TPAMI.2018.2868350>
64. Wang, F., Li, W., Liu, Y., Gong, Y., Gao, Z., Lu, J.: Face inpainting combining structured forest edge information and gated convolution. In: Proceedings - 2021 3rd International Conference on Natural Language Processing, ICNLP 2021. pp. 213–217. Institute of Electrical and Electronics Engineers Inc. (2021). <https://doi.org/10.1109/ICNLP52887.2021.00042>
65. Wang, M., Wen, X., Hu, S.M.: Faithful face image completion for hmd occlusion removal. In: Adjunct Proceedings of the 2019 IEEE International Symposium on Mixed and Augmented Reality, ISMAR-Adjunct 2019. pp. 251–256. Institute of Electrical and Electronics Engineers Inc. (2019). <https://doi.org/10.1109/ISMAR-Adjunct.2019.00-36>
66. Wang, Q., Fan, H., Sun, G., Ren, W., Tang, Y.: Recurrent generative adversarial network for face completion. *IEEE Transactions on Multimedia* **23**, 429–442 (2021). <https://doi.org/10.1109/TMM.2020.2978633>
67. Wang, T.C., Liu, M.Y., Zhu, J.Y., Liu, G., Tao, A., Kautz, J., Catanzaro, B.: Video-to-video synthesis. In: Bengio, S., Wallach, H., Larochelle, H., Grauman, K., Cesa-Bianchi, N., Garnett, R. (eds.) *Advances in Neural Information Processing Systems*. vol. 31. Curran Associates, Inc. (2018)
68. Wang, Y., Tao, X., Qi, X., Shen, X., Jia, J.: Image inpainting via generative multi-column convolutional neural networks. In: *Advances in Neural Information Processing Systems*. vol. 2018-December, pp. 331–340. Neural information processing systems foundation (2018)
69. Wang, Y., Tao, X., Shen, X., Jia, J.: Wide-context semantic image extrapolation. In: 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 1399–1408 (2019). <https://doi.org/10.1109/CVPR.2019.00149>
70. Wei, J., Lu, G., Liu, H., Yan, J.: Facial image inpainting with deep generative model and patch search using region weight. *IEEE Access* **7**, 67456–67468 (2019). <https://doi.org/10.1109/ACCESS.2019.2919169>
71. Wu, X., He, R., Sun, Z., Tan, T.: A light cnn for deep face representation with noisy labels. *IEEE Transactions on Information Forensics and Security* **13**(11), 2884–2896 (2018). <https://doi.org/10.1109/TIFS.2018.2833032>
72. Wu, Y., Singh, V., Kapoor, A.: From image to video face inpainting: Spatial-temporal nested gan (stn-gan) for usability recovery. In: Proceedings - 2020 IEEE Winter Conference on Applications of Computer Vision, WACV 2020. pp. 2385–2394. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/WACV45572.2020.9093473>
73. Xie, J., Lu, Y., Gao, R., Wu, Y.N.: Cooperative learning of energy-based model and latent variable model via mcmc teaching. *Proceedings of the AAAI Conference on Artificial Intelligence* **32**(1) (Apr 2018)

74. Xu, L., Zhang, H., Raitoharju, J., Gabbouj, M.: Unsupervised facial image de-occlusion with optimized deep generative models. In: 2018 8th International Conference on Image Processing Theory, Tools and Applications, IPTA 2018 - Proceedings. Institute of Electrical and Electronics Engineers Inc. (2019). <https://doi.org/10.1109/IPTA.2018.8608127>
75. Yan, Z., Li, X., Li, M., Zuo, W., Shan, S.: Shift-net: Image inpainting via deep feature rearrangement. In: Ferrari, V., Hebert, M., Sminchisescu, C., Weiss, Y. (eds.) Computer Vision – ECCV 2018. pp. 3–19. Springer International Publishing, Cham (2018)
76. Yang, C., Kim, T., Wang, R., Peng, H., Kuo, C.C.J.: Show, attend, and translate: Unsupervised image translation with self-regularization and attention. *IEEE Transactions on Image Processing* **28**(10), 4845–4856 (2019). <https://doi.org/10.1109/TIP.2019.2914583>
77. Yang, C., Lu, X., Lin, Z., Shechtman, E., Wang, O., Li, H.: High-resolution image inpainting using multi-scale neural patch synthesis. In: 2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR). pp. 4076–4084 (2017). <https://doi.org/10.1109/CVPR.2017.434>
78. Yang, W., Li, X., Zhang, L.: Toward semantic image inpainting: Where global context meets local geometry. *Journal of Electronic Imaging* **30**(2) (2021). <https://doi.org/10.1117/1.JEI.30.2.023028>
79. Yeh, R.A., Chen, C., Lim, T.Y., Hasegawa-Johnson, M.A., Do, M.N.: Semantic image inpainting with perceptual and contextual losses. *ArXiv* **abs/1607.07539** (2016)
80. Yeh, R.A., Chen, C., Lim, T.Y., Schwing, A.G., Hasegawa-Johnson, M., Do, M.N.: Semantic image inpainting with deep generative models. In: 2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR). pp. 6882–6890 (2017). <https://doi.org/10.1109/CVPR.2017.728>
81. Yim, J., Jung, H., Yoo, B., Choi, C., Park, D., Kim, J.: Rotating your face using multi-task deep neural network. In: 2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR). pp. 676–684 (2015). <https://doi.org/10.1109/CVPR.2015.7298667>
82. Yin, X., Yu, X., Sohn, K., Liu, X., Chandraker, M.: Towards large-pose face frontalization in the wild. In: Proceedings of the IEEE International Conference on Computer Vision (ICCV) (Oct 2017)
83. Yu, J., Lin, Z., Yang, J., Shen, X., Lu, X., Huang, T.: Free-form image inpainting with gated convolution. In: Proceedings of the IEEE International Conference on Computer Vision. vol. 2019-October, pp. 4470–4479. Institute of Electrical and Electronics Engineers Inc. (2019). <https://doi.org/10.1109/ICCV.2019.00457>
84. Yu, J., Lin, Z., Yang, J., Shen, X., Lu, X., Huang, T.: Generative image inpainting with contextual attention. In: Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition. pp. 5505–5514. IEEE Computer Society (2018). <https://doi.org/10.1109/CVPR.2018.00577>
85. Yu, L., Zhu, D., He, J.: Semantic segmentation guided face inpainting based on sn-patchgan. In: Proceedings - 2020 13th International Congress on Image and Signal Processing, BioMedical Engineering and Informatics, CISP-BMEI 2020. pp. 110–115. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/CISP-BMEI51763.2020.9263639>
86. Yu, T., Guo, Z., Jin, X., Wu, S., Chen, Z., Li, W., Zhang, Z., Liu, S.: Region normalization for image inpainting. *Proceedings of the AAAI Conference on Artificial Intelligence* **34**(07), 12733–12740 (Apr 2020). <https://doi.org/10.1609/aaai.v34i07.6967>

87. Zeng, Y., Fu, J., Chao, H., Guo, B.: Learning pyramid-context encoder network for high-quality image inpainting. In: 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 1486–1494 (2019). <https://doi.org/10.1109/CVPR.2019.00158>
88. Zhang, C., Wang, T.: Image inpainting using double discriminator generative adversarial networks. In: Journal of Physics: Conference Series. vol. 1732. IOP Publishing Ltd (2021). <https://doi.org/10.1088/1742-6596/1732/1/012052>
89. Zhang, H., Li, T.: Semantic face image inpainting based on generative adversarial network. In: Proceedings - 2020 35th Youth Academic Annual Conference of Chinese Association of Automation, YAC 2020. pp. 530–535. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/YAC51587.2020.9337498>
90. Zhang, K., Zhang, W., Yan, S., Jiang, J., Li, Y.: Cdc-wasserstein generated adversarial network for locally occluded face image recognition. In: bin Ahmad B.H., C.F. (ed.) Proceedings of SPIE - The International Society for Optical Engineering. vol. 11911. SPIE (2021). <https://doi.org/10.1117/12.2604573>
91. Zhang, M., Huang, L., Zhu, M.: Occluded face restoration based on generative adversarial networks. In: Proceedings - 2020 3rd International Conference on Advanced Electronic Materials, Computers and Software Engineering, AEMCSE 2020. pp. 315–319. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/AEMCSE50948.2020.00074>
92. Zhang, S., He, R., Sun, Z., Tan, T.: Multi-task convnet for blind face inpainting with application to face verification. In: 2016 International Conference on Biometrics (ICB). pp. 1–8 (2016). <https://doi.org/10.1109/ICB.2016.7550058>
93. Zhang, S., He, R., Sun, Z., Tan, T.: Demeshnet: Blind face inpainting for deep meshface verification. IEEE Transactions on Information Forensics and Security **13**(3), 637–647 (2018). <https://doi.org/10.1109/TIFS.2017.2763119>
94. Zhang, X., Shi, C., Wang, X., Wu, X., Li, X., Lv, J., Mumtaz, I.: Face inpainting based on gan by facial prediction and fusion as guidance information **111** (2021). <https://doi.org/10.1016/j.asoc.2021.107626>
95. Zhang, X., Wang, X., Kong, B., Shi, C., Yin, Y., Song, Q., Lyu, S., Lv, J., Shi, C., Li, X.: Domain embedded multi-model generative adversarial networks for image-based face inpainting (2020)
96. Zhao, Y., Chen, W., Xing, J., Li, X., Bessinger, Z., Liu, F., Zuo, W., Yang, R.: Identity preserving face completion for large ocular region occlusion. In: British Machine Vision Conference 2018, BMVC 2018. BMVA Press (2019)
97. Zhao, Y., Liu, L., Liu, H., Xie, G., Zhang, Y.: Face inpainting based on improved wgan-modified. In: 2020 International Symposium on Autonomous Systems, ISAS 2020. pp. 7–11. Institute of Electrical and Electronics Engineers Inc. (2020). <https://doi.org/10.1109/ISAS49493.2020.9378864>
98. Zheng, C., Cham, T.J., Cai, J.: Pluralistic image completion. In: 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 1438–1447 (2019). <https://doi.org/10.1109/CVPR.2019.00153>
99. Zhu, J.Y., Park, T., Isola, P., Efros, A.A.: Unpaired image-to-image translation using cycle-consistent adversarial networks. In: 2017 IEEE International Conference on Computer Vision (ICCV). pp. 2242–2251 (2017). <https://doi.org/10.1109/ICCV.2017.244>
100. Zhu, J.Y., Zhang, R., Pathak, D., Darrell, T., Efros, A.A., Wang, O., Shechtman, E.: Toward multimodal image-to-image translation. In: Guyon, I., Luxburg, U.V., Bengio, S., Wallach, H., Fergus, R., Vishwanathan, S., Garnett, R. (eds.) Advances in Neural Information Processing Systems. vol. 30. Curran Associates, Inc. (2017)

101. Zhu, W., Wang, X., Wu, Y., Zou, G.: A face occlusion removal and privacy protection method for iot devices based on generative adversarial networks. *Wireless Communications and Mobile Computing* **2021** (2021). <https://doi.org/10.1155/2021/6948293>
102. Zhu, Z., Luo, P., Wang, X., Tang, X.: Deep learning identity-preserving face space. In: 2013 IEEE International Conference on Computer Vision. pp. 113–120 (2013). <https://doi.org/10.1109/ICCV.2013.21>
103. Zhu, Z., Luo, P., Wang, X., Tang, X.: Multi-view perceptron: a deep model for learning face identity and view representations. In: Ghahramani, Z., Welling, M., Cortes, C., Lawrence, N., Weinberger, K.Q. (eds.) *Advances in Neural Information Processing Systems*. vol. 27. Curran Associates, Inc. (2014)