

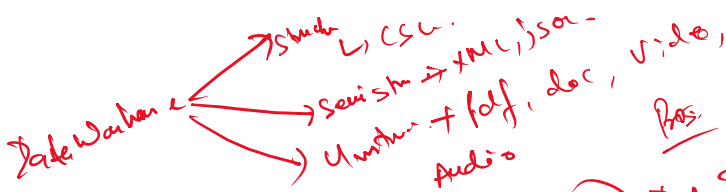


- ① Splunk Intro.
- ② Architect.
- ③ Comp.
- ④ use cases.
- ⑤ rival Tools.

①

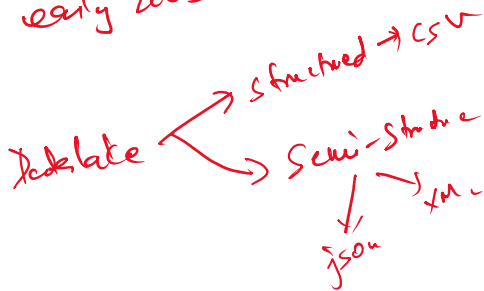

- ① Data Ingestion - Community support, Add-on

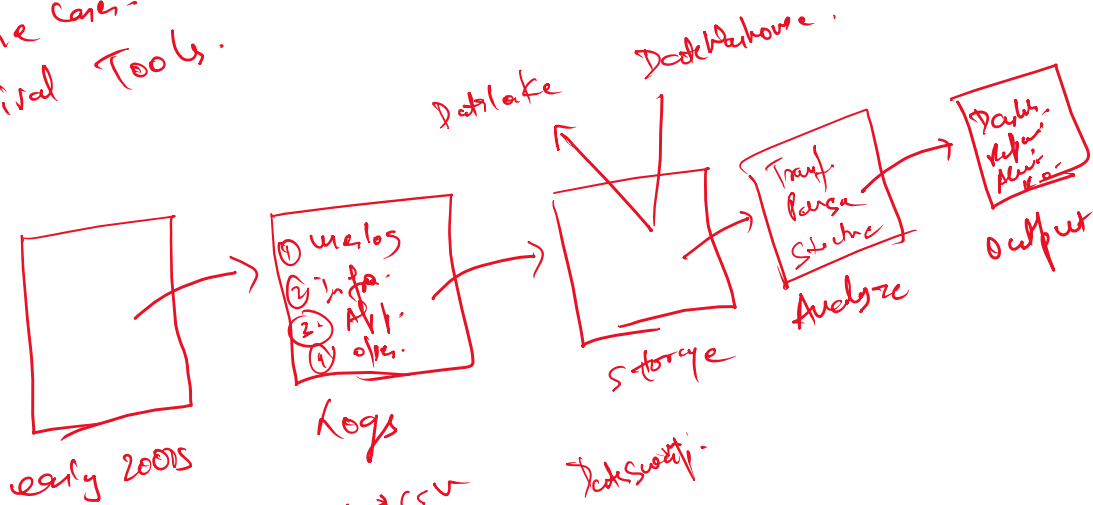


- ② Customer support

- ③ Data Analyse.

- ④ Pre req. learn Splunk.

Gui:-

- ① License Cost
- ② Integration Component.
- ③ App Verification.




LM - Splunk Enterprise
Security - Splunk ES
- Splunk
- SSI

Ctr
 Security - Splunk
 Obser. - Splunk
 Splunk STSI

③ APP

Monitoring → Reactive approach.
 Observability → Proactive approach

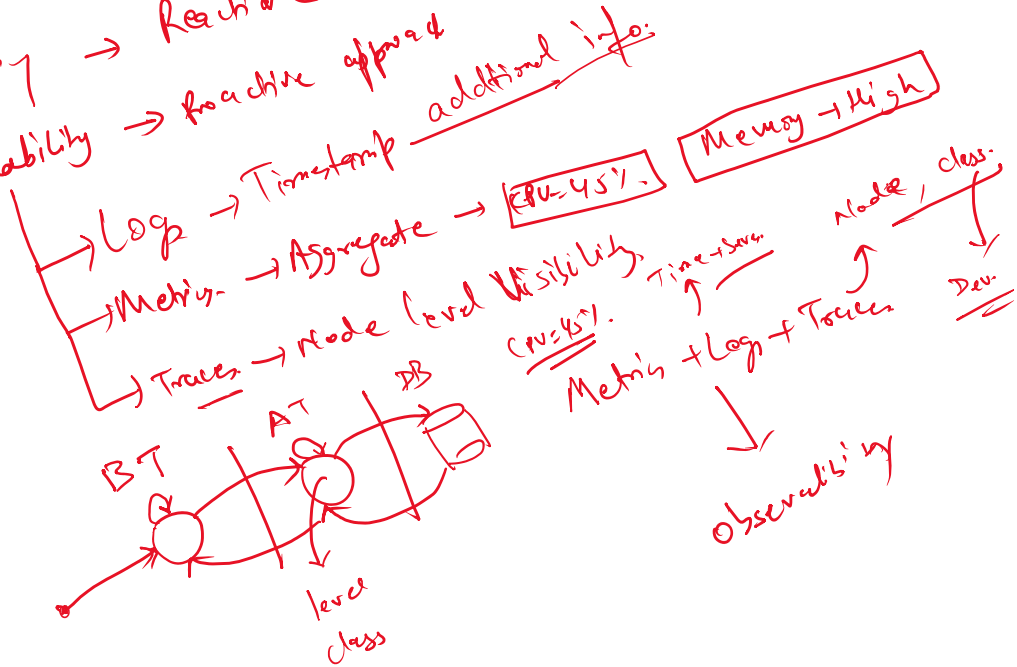

Splunk: Log Monitoring Tool.
 Dashboard, Report, Alert
 Splunk → Managed cloud.
 ↳ SAAS → URL


Component of splunk:-

Core
 ① Forwarder.
 ② Indexer.
 ③ Search Head
 ④ License Master.

⑤ Deployment Server
 ⑥ Deployer.
 ⑦ Cluster Master.
 Managed Component.



① Forwarder:- Forward the data from Source to Splunk.
 Agent = forwarder



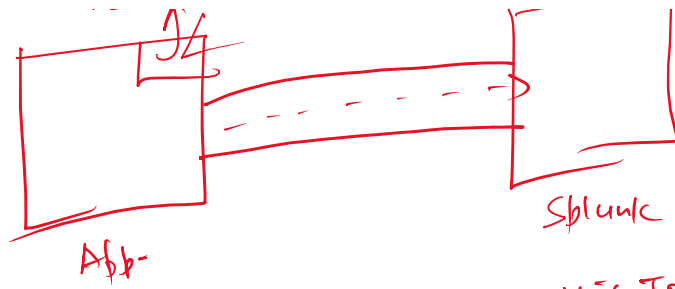

Two Ways


- Agentless → HEC Token, API Scripted, TCP/UDP Port, App/Addon.
- Agentful → Splunk Forwarder

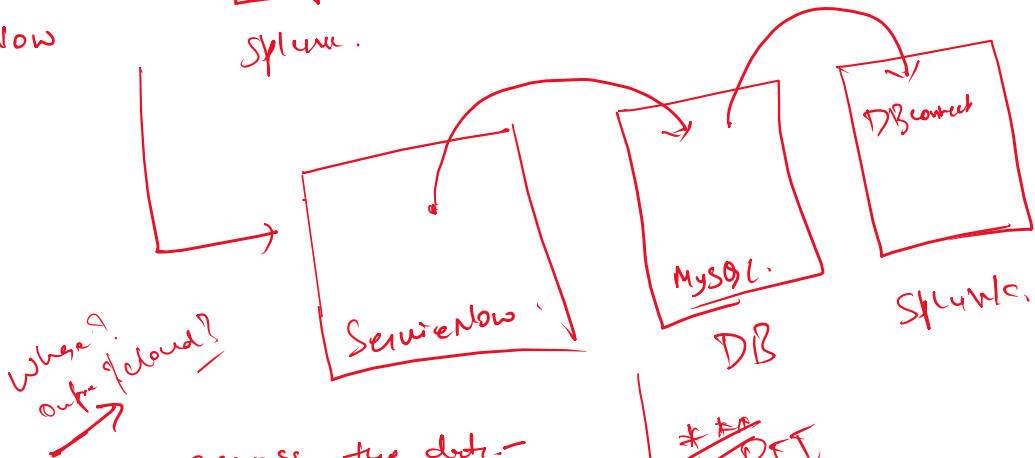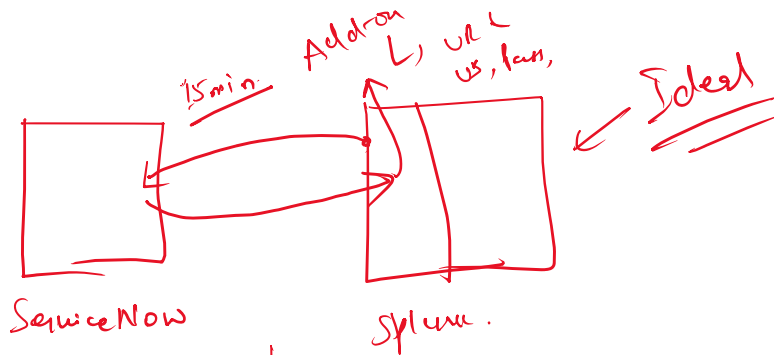

1. How can you access the data. - ~~***~~ PFI
 2. Format of data. - JSON, XML → Sample data
 3. Where can get data.
 4. ~~How long~~ Data retention in Splunk
 5. Data volume expected. Daily, (AM)
- What they want for the data?
- 10GB
- 100TB
- Splunk

2. Indexers -

Internal DB → Indexer

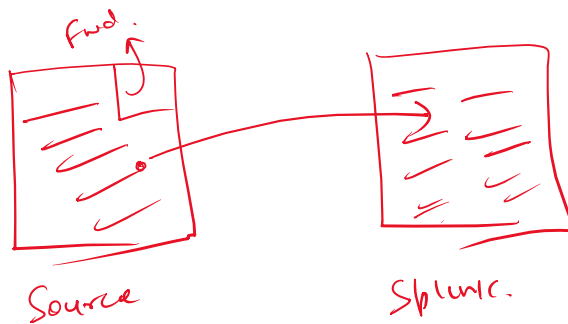


Internal DB
MongoDB


Source

Splunk

3. Search Heads

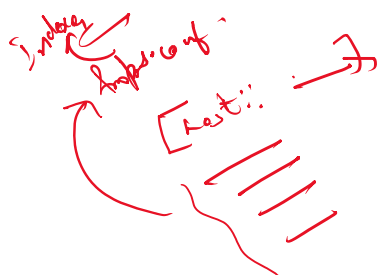



GUT → End user can create DB, report, Alert.

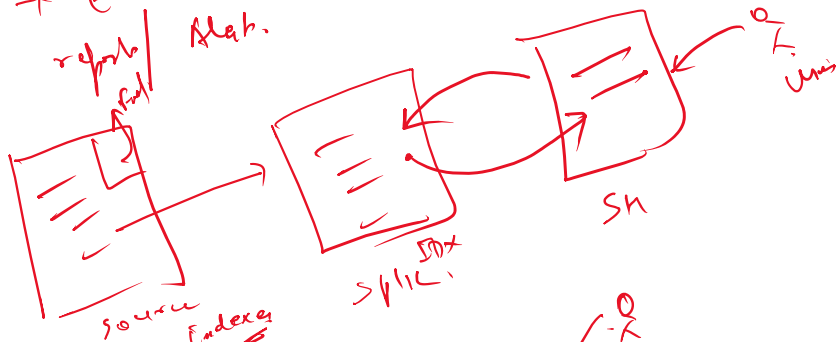

4. License Mark

Policy Agent

5 GB/day → 1 year.
→ \$ \$

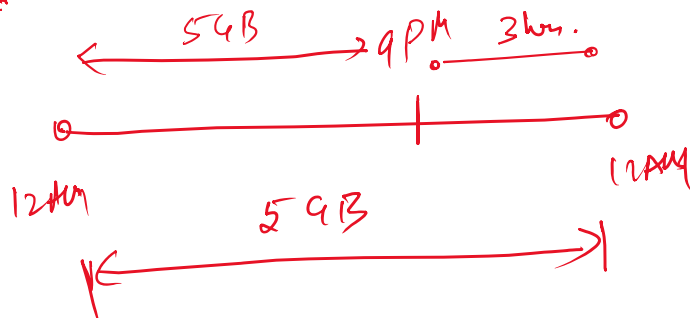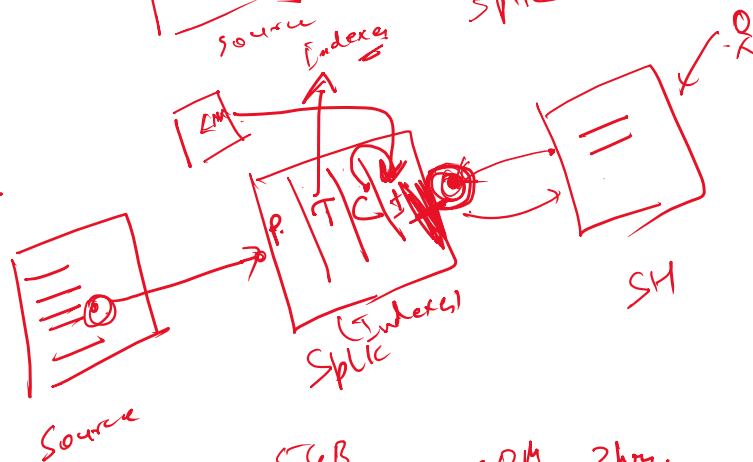


1. upfront payment

2. Indexing will continue.

3. Disable searching (no searching)
→ Dashboard
Alert
Report
→ Still for 3 hours.

VS***S
VS12***S
VS1134S

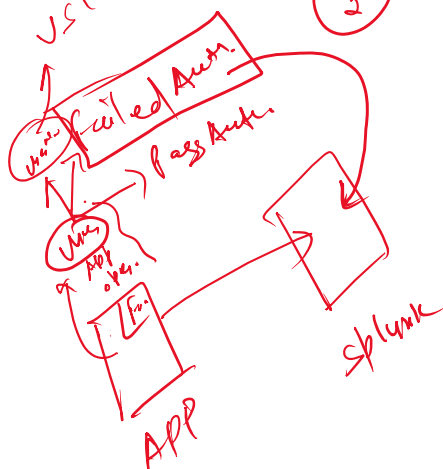

Parsy → Default → Splunk
Custom → user will define the rule.

Index

API




Indexer

Predefined

Default

Custom





LM will execute this data.

Reserved for the log generated from splunk app (-*)
-index, -audit, -introspection

License will be consumed.


License will be consumed.

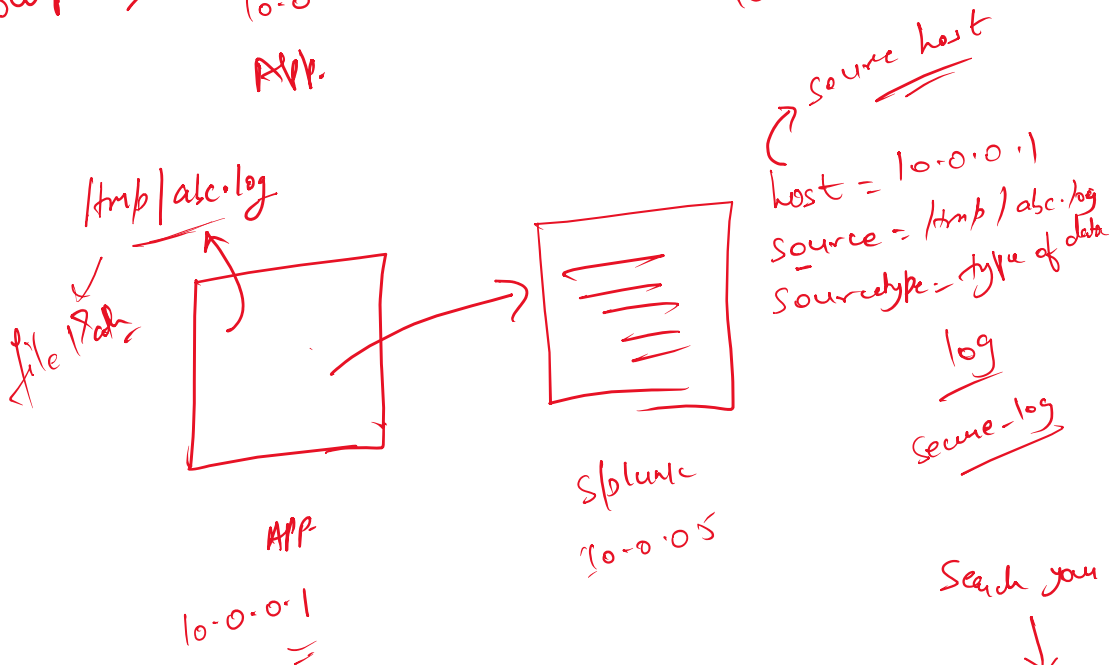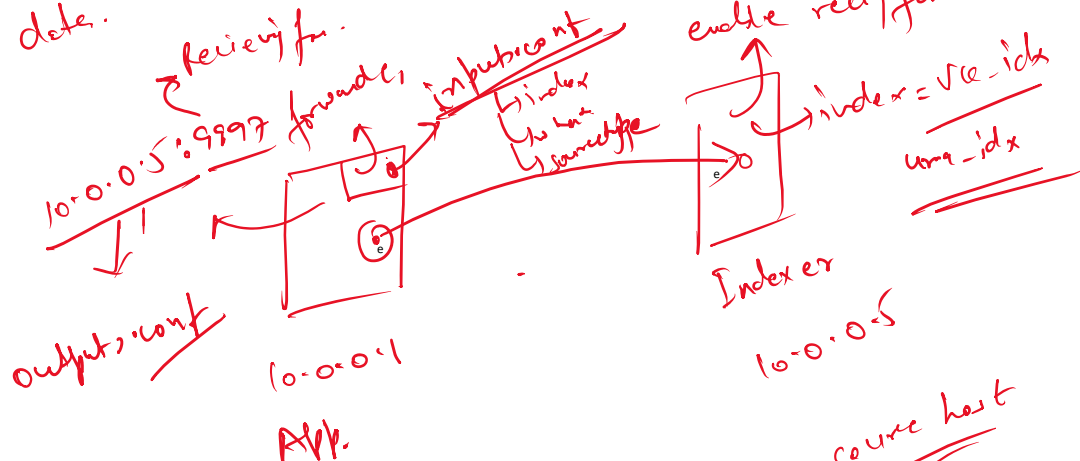

Search your data.

↓
Pull the events + field extraction


Fast Mode :-

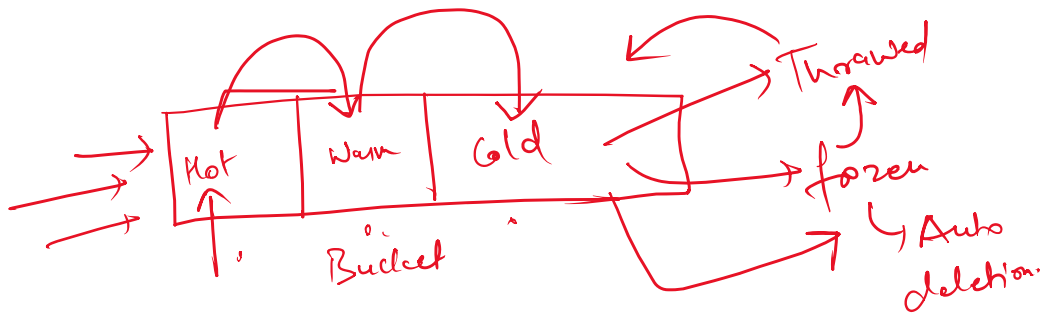

Movement of data

- ① Size of the Bucket
- ② Age of your data

- ① Size = 100 GB
 - ② Age = 7d
- Any one

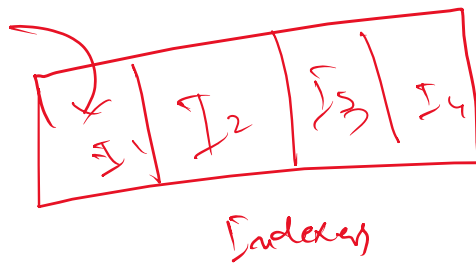

SPL (Search Processing Language)

- ① ~~table~~
- ② ~~rename~~
- ③ ~~stats~~
- ④ ~~eval~~
- ⑤ addcoltotal
- ⑥ addtotal
- ⑦ Visualization - chart, timechart, geo map, single value visualization

① Table - Format the output in the tabular way,

| table f1, f2, f3

② Rename - | table flickmeter | rename old-name AS new-name

1. vch 2. count BY f1

... not real + duplicate

(a) in

Search levels

③ Steps:-
① count → | Step count BT it.
② Avg → | Step avg (-)
③ List - catgors
④ values -
⑤ sum - | Step sum (-)

on basis of verified → duplicate
→ value
unique.

④ Eval:- Evaluation Purpose.

int
str
var

eval initialize variable
↓
① Calculation
② if-else
③ Case statement

eval
① kb = bytes / 1024

② if-else statement
if (a > b)
{ print(a);
}
else { print(b);
}
→ if (a > b, a, b) → false.
↓
condition true

③ Case statement:-
Switch (a):
{
 b(b):
 :
 :
}

Case (cond, "cond1", "cond2", "cond3", ...)

Switch (a) :
Switch (b) :
Switch (c) :
default :