

② Append

③ Append Col.

④ Search & where.

⑤ function - conversion.
date & time.

⑥ string
Comparison & Conditional
Informational


Statistical.
mathematical.
cryptographic.

⑦ Multivalue fields.

⑧ Transaction.


① Append:-

combine data from two different
index.

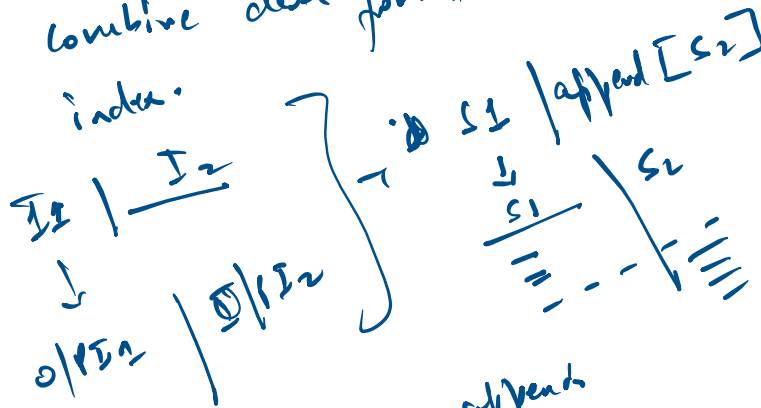

② Append:-

Heavy compound than append
S1 | append[S2]



③ Search & where:-

Search severity = 3

Compare value with
the field.

where severity to set > threshold.
↓
base two fields

When —————> compare function

Module 4 - Exploring eval Command Functions

Using conversion functions
Using data and time functions
Using string functions
Using comparison and conditional functions
Using informational functions
Using statistical functions
Using mathematical functions
Using cryptographic functions

→ if-else, case.
→ avg, sum, count
→ round

① Date & time funcⁿ


① strftime.

② strptime.

② Cryptographic funcⁿ:- md5, sha256, sha512

Transaction Command:- Categorize the events on the Basis of certain Category.

Start with → L
ends with → L

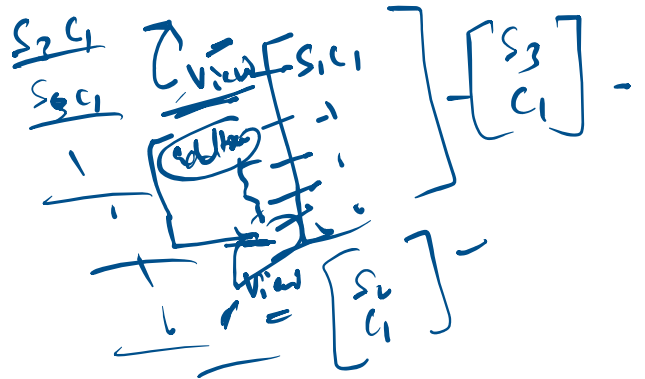

Transaction S2C1 line | Start with - address
ends with - packet.

② Multivalued:-

- ① Split
- ② mrcount

③ mindex

④ mjoin

⑤ mappend

- ⑥ mfilter
- ⑦ mvaluedep
- ⑧ msort
- ⑨ mfind

user = vivek

rol, admin, dev, train

rol
admin
dev
train

Knowledge object:-

Lower case
without space (" ")

Avoid Digib

FA	ET	Lookup
CF	max	
Tys	PLOT	

Basket

Calculated field:-

eval status =


Variable

eval → Variables

if (severity < 3, "High", "Low")
 sev = 1, 2 → High
 3, 4, 5 → Low
 → sev = 1, 2, 3 → High
 4, 5 → Low

Field Alias:-

Another Name
Field

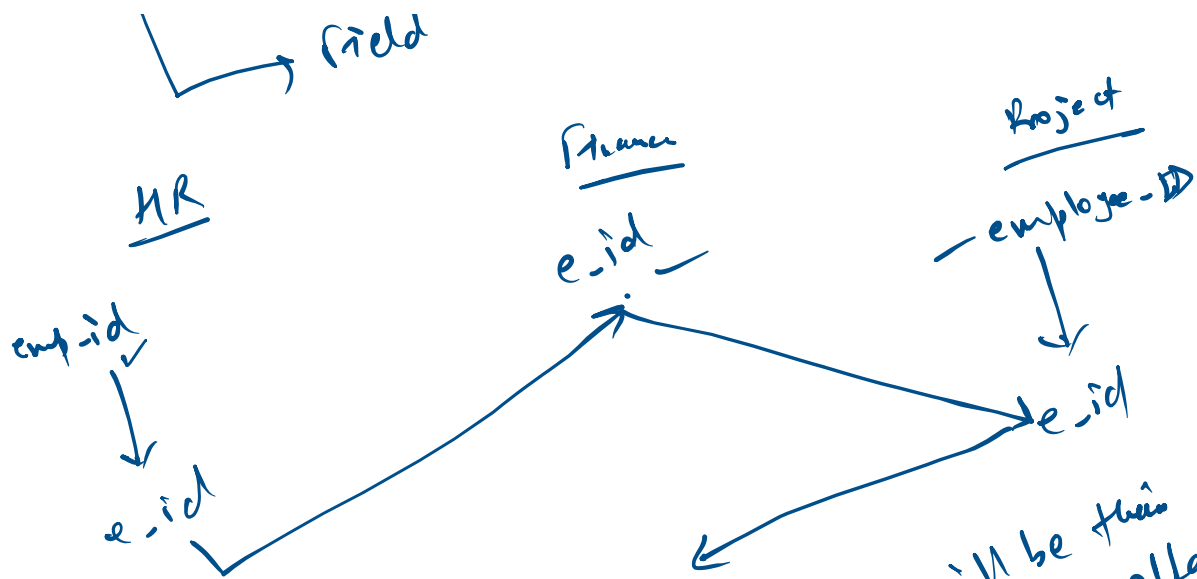

FA:- ① old field will be thin
 ② new field will be attached.
 FA=e.id

Tag:- way to categorize the data.
 Severity=1 → critical,

2 fields:-
 ① tag = critical.
 ② tag !! severity = critical

Event type - Categorization but on the event wise.

Macros:-
 function a(b,c) Argument
 {
 d = b+c;
 Print(d);
 } call

a(5,6) → 11
 a(-2,1) → -1

Macros:-
 SigArgs → NoArgs → No Args for a() → a → 7
 MultiArgs

$\downarrow$
 $d = 11$
 $a(7, 6)$
 $d = 15$
 $a(7, 6)$
 $d = -1$
 $\}$
 $\text{return } (d);$

$\downarrow$
 $\text{for } a(1)$
 $\}$
 $d = 7$