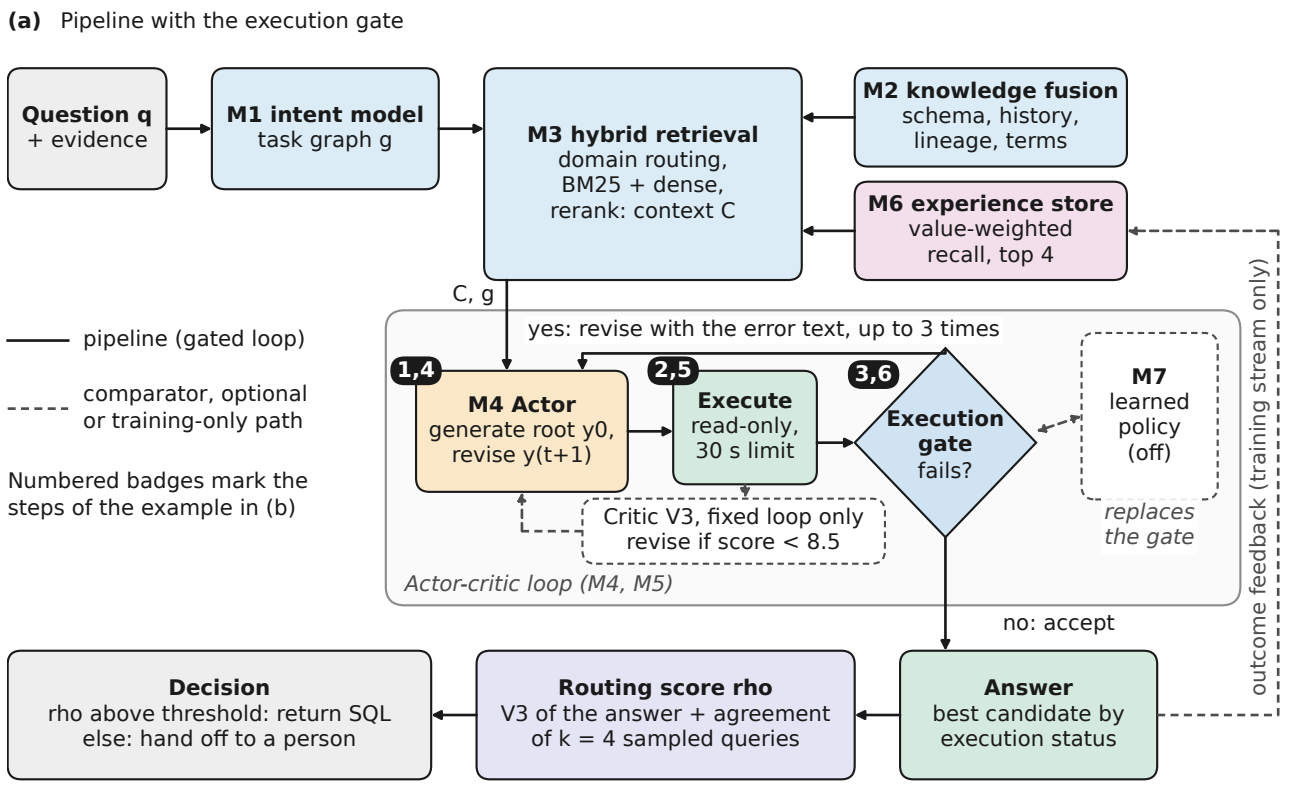


(b) Worked example: database law_episode, Qwen3.7-Flash, gated loop *tuning set*

Question: How many people did not enjoy the finale episode?

1 root query y0, 2 execute, 3 gate: fails

```
- SELECT COUNT(T1.person_id)
  FROM Vote AS T1
  INNER JOIN Episode AS T2
    ON T1.episode_id = T2.episode_id
  WHERE T1.stars = 1 AND T2.episode = 24
```

SQLite: no such column: T1.person_id → revise with this text

4 revision y1, 5 execute, 6 gate: passes

```
+ SELECT SUM(T1.votes)
  FROM Vote AS T1
  INNER JOIN Episode AS T2
    ON T1.episode_id = T2.episode_id
  WHERE T1.stars = 1 AND T2.episode = 24
```

1 row (1) = reference result → accept; EX = 1, 3 calls