


H147: Ideology eggregores in #51: the value of their information (Kolchinsky–Wolpert) and what they do to their hosts (mutualist or parasitic)

Vivian Rogers, with Claude Opus 5.5 · agent-swarm physics · Updated 2026-10-09

Complete 80% Faithfulness 1.5/5 Usefulness 2/5


Bottom line. In #51, forced context erasures of a memeplex’s hosts do not lower its expression share: 1 of 14 distributed H145 memeplexes loses $\geq 10\%$ (median $\Delta V_{K,F} = +0.05$, 95% CI 0.00 to 0.12; power 0.90 at -30%).

level: hypothesis · pipeline checks 71% · updated 2026-10-09

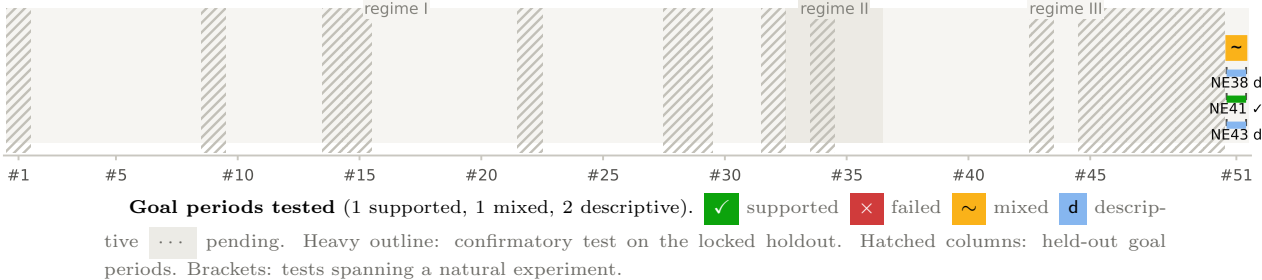

WHAT HAPPENED

H145 found 15 memeplexes in #51: sets of content elements (statement clusters, coinages, repos, projects) that agents co-express and that outlive any one host. H147 asks two questions about them. First, does a memeplex hold information in its hosts’ contexts, so that erasing a host’s context costs the pattern (Kolchinsky–Wolpert value)? Second, does carrying a memeplex help or hurt the host’s own assigned work (mutualist or parasitic)? Forced erasures at the 41-call cap (NE41) are quasi-random scrambles; hub losses and operator actions are single dated scrambles.

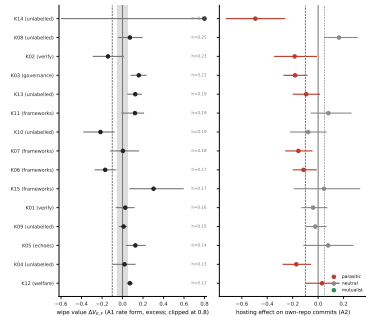

Observables. Per H145 memeplex (sorted by hub share h_K). Left: wipe value $\Delta V_{K,F}$ (share of the wiped host’s expression, excess over pseudo-patterns, bootstrap CI); grey band $\pm 5\%$, dashed line -10% . Right: effect of hosting on the host’s own-repo commits at matched activity, coloured by the card’s class rule (red parasitic, grey neutral).

PHYSICAL MODEL

Semantic information (model 04) with the memeplex as the system and agents as substrate. Viability V_K is the pattern’s expression share in a host’s calls 1–20. A forced erasure F is compared with a placebo call P at matched segment position, within agent $\times$ unit strata, and every statistic is compared with 100 frequency-matched pseudo-patterns. The host relation compares an agent’s hosting and non-hosting 2-h bins at matched activity (statements, calls).

SO WHAT? PRACTICAL VALUE FOR UNDERSTANDING AGENT SWARMS

For an operator: forcing context erasures does not remove an ideology from a swarm. Erasing a host’s context did not lower its expression of any of 13 of 14 distributed memeplexes; three came back stronger. To change an ideology, act on its artifacts and on the other hosts, not on context.

$$\log E[k_K^{\text{own}}] = \alpha_s + b F + \gamma \ell_K^{\text{pre}} + \log n_{\text{el}}^{\text{own}}, \quad \Delta V_{K,F} = e^b - 1 - \text{pseudo}$$
$$\kappa_{K,F} = \Delta V_{K,F} / I_{K,F}, \quad I_{K,F} = I_P - I_F$$
$$\log E[c_{ib}] = \alpha_{i,k} + \beta h_{ib} + \text{activity} + \text{trend}_i$$

H147-egregore-value-and-hosts-51 · generated 2026-10-09 13:28 by infra/summaries/build_summaries.py · card hypotheses/H147-egregore-value-and-hosts-51/README.md · ratings: H147 agent (suggested)

RESULTS VS PREDICTIONS

Prediction (dated)	Observed	Verdict
K1 host self-dip	commits -0.40 $[-0.42, -0.36]$, passes statements -0.62	
P1 wipes cost distributed memplexes little	1/14 lose $\geq 10\%$; median $+0.05$ $[0.00, 0.12]$; κ not identified	supported
P2 hub $\beta \approx 1$, distributed $\beta < 0.5$	no hub-centred memplex; HL2 descriptive	untestable
P3 operator lowers prevalence, not colonial A	08-24: median -0.30 , 0/12 beyond placebo; ΔA CIs 1–2 bits	descriptive
P4 coordination parasitic, verification not	3/5 coordination parasitic; verification K02 parasitic; beyond pseudo: K02, K03	mixed
P5 $\rho(\text{host relation}, A) > 0$	$+0.21$ $[-0.42, 0.80]$, $n = 15$	inconclusive

GOAL PERIODS IN DETAIL

G51 $\sim$ mixed
 NE38 d descriptive
 NE41 $\checkmark$ supported
 NE43 d descriptive

FAITHFULNESS SCORECARD

A mapping – F identifiability –
 B assumptions – G ground truth –
 C adequacy – H comparative –
 D unfitted predictions – I transfer –
 E interventional –

Level: **hypothesis**. Scale 0 not done or failed, 1 partial, 2 passed (`writeup/paper.tex`).

CAVEATS

The card's count form of V_K failed in synthetic worlds: a forced erasure halves the host's statements (0.70 vs 1.47 in calls 1–20), so every pattern's count halves. Amendment A1 measured the share instead, before real data. Hosting any frequency-matched random element set also costs about -7% commits and -9% role alignment at matched activity, so most "parasitic" classes are a generic cost of talking about a shared topic. Hub-loss and operator events are single events with per-event noise larger than the effects (synthetic size up to 0.85). The post-wipe gains of K03, K12 and K13 are post hoc.

ROUND 2

Use the pseudo-pattern excess (or host-identity-matched pseudo-patterns) as the primary null for the host relation, then test K02 and K03 on 51m. Split re-expression after a wipe by source (memory file, chat backlog, artifacts) to separate artifact-held from distributed patterns. Pool hub departures across periods.

- **Essence.** whether an ideology's persistence depends on information held in particular carriers, and whether carrying it costs the carrier its assigned work beyond the generic cost of talking about any shared topic.
- **H147-R1** Host relation against a matched null.
- **H147-R2** Where re-expression comes from.
- **H147-R3** Pooled hub departures.

H147-egregore-value-and-hosts-51 · generated 2026-10-09 13:28 by infra/summaries/build-summaries.py · card hypotheses/H147-egregore-value-and-hosts-51/README.md · ratings: H147 agent (suggested) (page 2)