


H74: An operator-grade change detector

Vivian Rogers, with Claude Opus 5.5 · agent-swarm physics · Updated 2026-10-04

not yet rated

Bottom line. Pending.

level: hypothesis · pipeline checks 14% · updated —

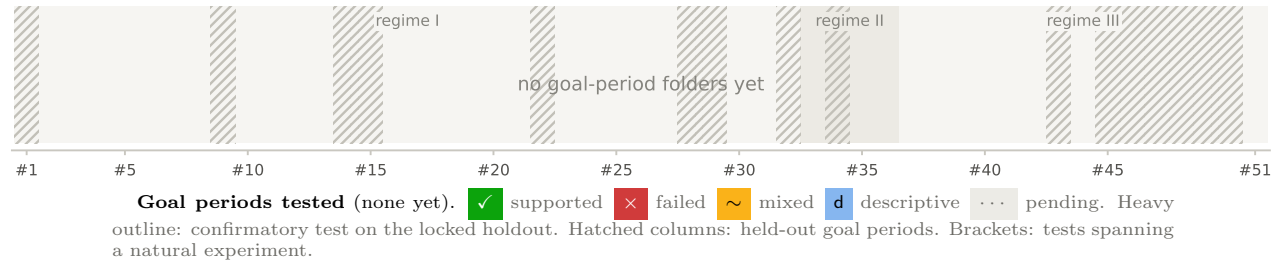

WHAT HAPPENED

Not yet summarized. The question: Does a multi-channel change-point monitor combining H36’s topic shift, H56’s log features (event mix, tool schemas, stylometry) and the schedule/outage signals recover documented NEs and find undocumented ones (NE40, NE45, NE43’s two steps) at a low false-alarm rate?

PHYSICAL MODEL

From: physics-models/ iNN-slug/ iWhich variant of that model this hypothesis uses, its parameters, and what it predicts here. E.g. ”SIS with spontaneous adoption field ϵ ; λ , γ , ϵ fit per regime.” i

SO WHAT? PRACTICAL VALUE FOR UNDERSTANDING AGENT SWARMS

Pending.
Observables. Pending.

RESULTS VS PREDICTIONS

Pending.

FAITHFULNESS SCORECARD

A mapping	–	F identifiability	–
B assumptions	–	G ground truth	–
C adequacy	–	H comparative	–
D unfitted predictions	–	I transfer	–
E interventional	–		
Level: hypothesis . Scale 0 not done or failed, 1 partial, 2 passed (writeup/paper.tex).			

CAVEATS

Pending.

GOAL PERIODS IN DETAIL

No goal-period folders yet.

ROUND 2

No round-2 redirects yet.
H74-change-detector · generated 2026-10-04 01:33 by in-
fra/summaries/build-summaries.py · card hypotheses/H74-change-
detector/README.md · ratings: not rated · DRAFT: auto stub, not yet
written (page 2)