


H20: Aging: day-to-day content autocorrelation depends on time since kickoff, not just the lag

Vivian Rogers, with Claude Opus 5.5 · agent-swarm physics · Updated 2026-10-03
(Dated:)

Complete 40% Faithfulness 1/5 Usefulness 1.5/5

Bottom line. LLM-swarm content shows no detectable aging at day resolution: after a few days' kickoff relaxation it decorrelates at an age-independent rate, and only a null calibrated to the low-dimensional fluctuation shape says so honestly.

Status: exploratory round 1 done (2026-10-03), mixed, leaning refuted. There is no aging in 29 non-holdout goal periods. The one strong age effect (#38) is a kickoff relaxation lasting about 4 active days, after which content is stationary. Observables, null and pr... (level: hypothesis · pipeline checks 100% · updated 2026-10-03)

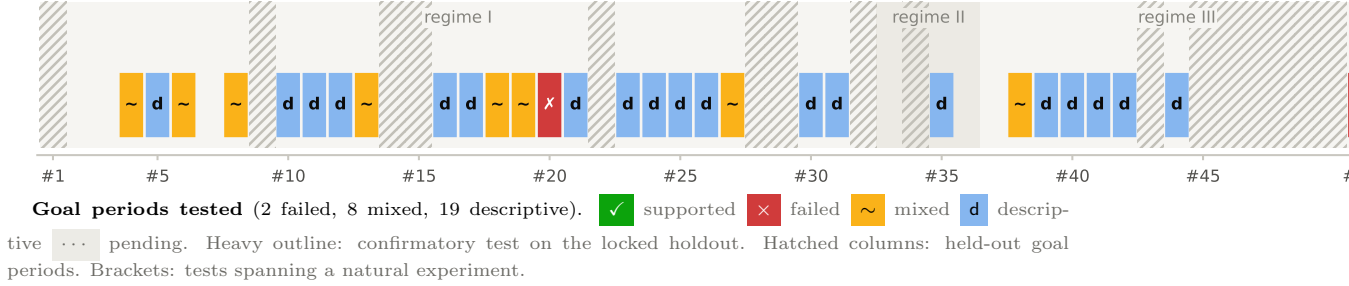

WHAT HAPPENED

We measured the two-time correlation $C(t_w + \tau, t_w)$ of each agent's day-mean content embedding (t_w = active days since kickoff) in 29 non-holdout goal periods. The aging slope A at fixed lag ($t_w \geq 2$) was tested against a fitted stationary swarm model. Synthetic check at village sampling: size 0.03–0.07, power 0.33–0.44 against $\mu = 0.5$ aging. The pre-registered isotropic null was 2–3 $\times$ too narrow on real data (content fluctuates in 5–12 of 32 dimensions); a post-hoc null with the fitted shape fixed it. **No aging:** random-effects A over long and medium goals is $+0.021 \pm 0.021$. The one strong effect (#38) is a kickoff relaxation: lag-1 C rises 0.66→0.87 in four active days, then stays flat. In #51, $\mu = 0.5$ aging is rejected. Holidays drive the short-week outliers. Holdout not run.

PHYSICAL MODEL


Models 01 (SK-type glassy aging) and 11 (vector spins). Spin: agent i 's day state $\bar{x}_{it}$, the mean of its unit-normalized, regime-whitened ($n = 32$) statement embeddings (own chat and plans); v_{it} is its sampling noise. q : plateau (style and goal content); c_0 : short-lag ceiling; τ_0 : relaxation time; μ : aging exponent of the Box-Cox clock s_μ ($\mu = 0$ stationary, $\mu = 1$ simple aging). Rival: a kickoff transient decaying in τ_q days. n_{eff} : dimension of the day-to-day fluctuations.

$$C(t, t') = \frac{\sum_i \bar{x}_{it} \cdot \bar{x}_{it'}}{\sqrt{\sum_i S_{it} \sum_i S_{it'}}}, \quad S_{it} = |\bar{x}_{it}|^2 - v_{it}$$

$$C(t_w + \tau, t_w) = q + (c_0 - q) e^{-\Delta s / \tau_0}$$

$$\Delta s = s_\mu(t_w + \tau) - s_\mu(t_w), \quad s_\mu(t) = \frac{t^{1-\mu} - 1}{1-\mu}$$

$$A = \partial C / \partial \ln t_w \big|_\tau, \quad \text{Var } C(t, t') \propto 1/n_{\text{eff}}$$

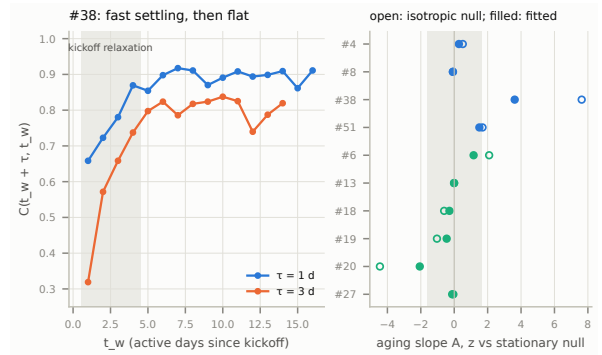

Observables. Left: in #38, the agent-averaged correlation between an agent's content on day t_w and on day $t_w + \tau$ climbs for four active days after the kickoff, then stays flat. A quench relaxes; the system does not slow with age. Right: the aging slope A as a z-score against the stationary null, for long (blue) and medium (aqua) goals. Open circles: the pre-registered isotropic null (too narrow). Filled: the null with the fitted fluctuation shape. Only #38 (up) and #20 (Thanksgiving, down) stand out.

**SO WHAT? PRACTICAL VALUE FOR
UNDERSTANDING AGENT SWARMS**

Mostly a negative result, mildly useful. An operator worried that a long-running swarm “rigidifies” as its goal ages can relax a little: at day resolution, content turnover does not slow in week three versus week one (weak aging is not excluded). The practical number is the settling

time after a big kickoff, about four active days, seen once (#38). The more transferable lesson is methodological: embedding similarity statistics on swarm logs need nulls with the empirical, low-dimensional fluctuation shape, or they are 2–3× overconfident. As physics, aging finds nothing to grip: daily re-prompting with a fixed goal acts like a strong pinning field.

H20-content-aging · generated 2026-10-03 17:54 by in-
fra/summaries/build-summaries.py · card hypotheses/H20-content-
aging/README.md · ratings: H20 agent (suggested)