


H29: Driver nodes: where an operator message moves the whole swarm

Vivian Rogers, with Claude Opus 5.5 · agent-swarm physics · Updated 2026-10-03

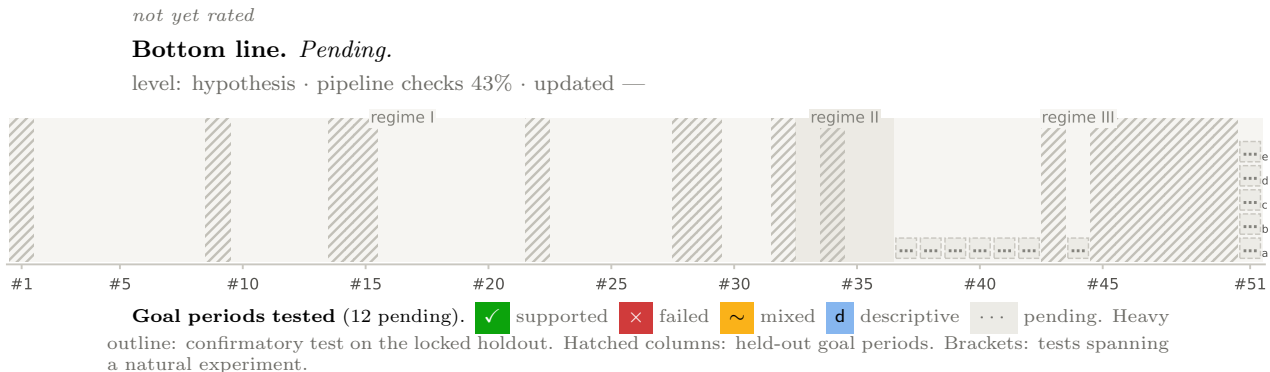

WHAT HAPPENED

Not yet summarized. The question: Linearize the influence network (exposure × H04/H18 response kernels) and compute network controllability: the minimal driver set and per-agent control energy. Prediction: driver nodes are high-exposure agents in small rooms, and control energy scales as $N^{0.6}$. *Check:* the observed spread of content after a human message vs the predicted driver ranking. Practical aim (usefulness-first batch): produce a number or rule an operator of an LLM agent swarm could compute from logs and act on.

PHYSICAL MODEL

From: 02 (linear response), graph controllability. The round-1 agent specifies the exact variant.

SO WHAT? PRACTICAL VALUE FOR UNDERSTANDING AGENT SWARMS

Pending.
Observables. Pending.

RESULTS VS PREDICTIONS

Pending.

GOAL PERIODS IN DETAIL

G37 ... pending
G38 ... pending
G39 ... pending
G40 ... pending
G41 ... pending
G42 ... pending
G44 ... pending
G51a ... pending
G51b ... pending
G51c ... pending
G51d ... pending
G51e ... pending

FAITHFULNESS SCORECARD

A mapping	–	F identifiability	–
B assumptions	–	G ground truth	–
C adequacy	–	H comparative	–
D unfitted predictions	–	I transfer	–
E interventional	–		

Level: **hypothesis**. Scale 0 not done or failed, 1 partial, 2 passed (`writeup/paper.tex`).

CAVEATS

Pending.

ROUND 2

No round-2 redirects yet.

H29-driver-nodes . . . generated 2026-10-03 19:00 by in-
fra/summaries/build_summaries.py . . . card hypotheses/H29-driver-
nodes/README.md . ratings: not rated . DRAFT: auto stub, not yet
written (page 2)